


Service Manual

Digital High Definition Plasma Television

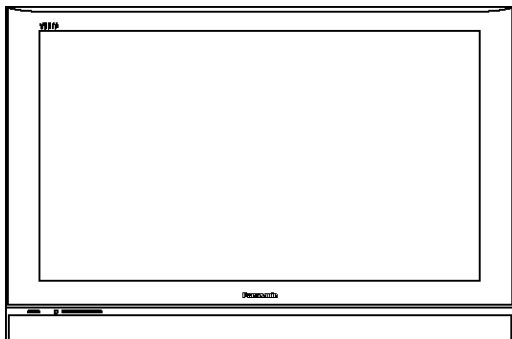

TH-37PX50U
TH-42PX50U
TH-50PX50U
 GP8DU Chassis

Specifications

Power Source	AC 120 V, 50/60 Hz		
Power Consumption			
Maximum	325 W (TX-37PX50U), 399 W (TH-42PX50U), 525 W (TH-50PX50U)		
Stand-by condition	0.6 W (with CableCARD™ : 18.0 W) (TX-37PX50U) 0.6 W (with CableCARD™ : 22.0 W) (TH-42PX50U) 0.6 W (with CableCARD™ : 22.0 W) (TH-50PX50U)		
Plasma Display panel	Drive method : AC type 37-inch , 16 : 9 aspect ratio (TX-37PX50U) Drive method : AC type 42-inch , 16 : 9 aspect ratio (TH-42PX50U) Drive method : AC type 50-inch , 16 : 9 aspect ratio (TH-50PX50U)		
Screen Size (W × H × diagonal)	32 ¹³ / ₆₄ " (818 mm) × 18 ⁵ / ₃₂ " (461 mm) × 36 ³¹ / ₃₂ " (939 mm) (TX-37PX50U) 36 ⁷ / ₃₂ " (920 mm) × 20 ²⁵ / ₆₄ " (518 mm) × 41 ⁹ / ₁₆ " (1056 mm) (TX-42PX50U) 43 ³⁵ / ₆₄ " (1106 mm) × 24 ³¹ / ₆₄ " (622 mm) × 49 ⁶¹ / ₆₄ " (1269 mm) (TX-50PX50U)		
Dimensions (W × H × D)	38 ⁷ / ₆₄ " (968 mm) × 25 ¹⁵ / ₆₄ " (641 mm) × 3 ⁵¹ / ₆₄ " (96.5 mm) (TX-37PX50U) 42 ³ / ₆₄ " (1068 mm) × 27 ³⁹ / ₆₄ " (701 mm) × 3 ⁵¹ / ₆₄ " (96.5 mm) (TX-42PX50U) 49 ³¹ / ₆₄ " (1257 mm) × 32 ³ / ₆₄ " (814 mm) × 3 ⁵¹ / ₆₄ " (96.5 mm) (TH-50PX50U)		
Mass (Weight)	66.14lb. (30kg) (TX-37PX50U), 76.06lb. (34.5kg) (TX-42PX50U), 99.21lb. (45kg) (TX-50PX50U)		
Channel Capability-ATSC/NTSC	VHF/ UHF : 2-69, CATV:1-135		
Sound			
Speaker	4 ²³ / ₃₂ " (120 mm) × 2 ²³ / ₆₄ " (60 mm) × 2 pcs, 6Ω		
Audio Output	16 W [8 W + 8 W] (10 % THD)		
FEATURES	3D Y/C FILTER	HDMI	Cable CARD™ Slot
	CLOSED CAPTION	V-Chip	
Accessories Supplied	Remote control: EUR7627Z60 F-type antenna adapter (5C-2V × 1) AA Battery × 2 Pedestal AC Cord Cable clamper × 2		
Operating Conditions	Temperature : 32 °F - 104 °F (0 ° - 40 °C)		

If you need more information on Computer and Electronic Repair, please visit these websites to improve yourself.

<http://www.fastrepairguide.com>


<http://www.protech2u.com>

<http://www.plasma-television-repair.com>

<http://www.lcd-television-repair.com>

Happy Repairing!!

Highly Recommended Repair Ebook:

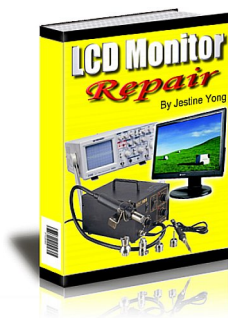


If you're a LCD Monitor repairer, then this is the best guide for you. Why? Because, the author revealed all his LCD Monitor Repairing secrets for you. I think, with just few Repair tips you learned from this guide you will get back your investment!

[Click Here to read](#) more.



This eBook will show you how to test the electronic component correctly and accurately. Some of you may say that I don't need this eBook because it is too simple! Do you know that, in fact there is lots of testing electronic components secrets I have learned from this guide? Do you know how to test a 'TRIAC' correctly and accurately? If you answer no then I guess you have to get this eBook. [Click Here to read more.](#)

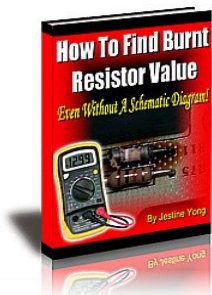

Are you tired of searching the service manuals to look for the value of a burnt resistor? If the answer is YES, then this eBook is a 'must have' guide for you. You can save a lot of time and be able to repair customer's Electronic equipment with burnt resistors in it.

[Click here to read more.](#)

Humidity : 20 % - 80 % (non-condensing)

Connection Terminals

AV INPUT 1- 2	VIDEO	1.0 Vp-p (75 Ω)
	(Phono Jack Type)	
	S-VIDEO	Y : 1.0 Vp-p (75 Ω), C : 0.286 Vp-p (75 Ω)
	(Mini DIN 4-pin)	
AV PROG. OUT	AUDIO L-R	0.5 Vrms
	(Phono Jack Type × 2)	
	VIDEO	1.0 Vp-p (75 Ω)
	(Phono Jack Type)	
COMPONENT VIDEO INPUT1-2	AUDIO L-R	0.5 Vrms
	(Phono Jack Type × 2)	
	Y	1.0 Vp-p (including synchronization)
	PB / PR	± 0.35 Vp-p
HDMI	AUDIO L-R	0.5 Vrms
	(Phono Jack Type × 2)	
	HDMI type A Connector	
	AUDIO L-R	0.5 Vrms
DIGITAL AUDIO OUT	(Phono Jack Type × 2)	
	PCM / Dolby Digital, Fiber Optic	

Note:

Design and Specifications are subject change without notice.

Weight and Dimensions shown are approximate.

**WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

CONTENTS

	Page		Page
1 Applicable signals	6	6.14. Remove the SU-Board(50inch)	15
2 Safety Precautions	6	6.15. Remove the SD-Board(37inch)	15
2.1. General Guidelines	6	6.16. Remove the SD-Board(42inch)	16
3 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices	7	6.17. Remove the SD-Board(50inch)	16
4 About lead free solder (PbF)	8	6.18. Remove the SC-Board(37, 42inch)	17
5 Service Hint	9	6.19. Remove the SC-Board(50inch)	17
5.1. TH-37, 42PX50U	9	6.20. Remove the SS2-Board(42, 50inch)	17
5.2. TH-50PX50U	10	6.21. Remove the SS3-Board(42, 50inch)	17
6 Plasma panel replacement method	11	6.22. Remove the SS-Board(37, 42inch)	18
6.1. Remove the Back cover.	11	6.23. Remove the SS-Board(50inch)	18
6.2. Remove the P-Board.	11	6.24. Remove the Fan	18
6.3. Remove the PB-Board	11	6.25. Remove the C1-Board(37, 42inch)	19
6.4. Remove the D-Board	11	6.26. Remove the C2-Board(37, 42inch)	19
6.5. Remove the rear terminal cover	12	6.27. Remove the C1-Board(50inch)	19
6.6. Remove the metal frame	12	6.28. Remove the C2-Board(50inch)	19
6.7. Remove the DT-Board and DV-Board	12	6.29. Remove the C3-Board(50inch)	20
6.8. Remove the DG-Board	13	6.30. Remove the Speaker L, R	20
6.9. Remove the H-Board	13	6.31. Remove the stand brackets.	20
6.10. Remove the PA-Board	13	6.32. Remove the C3-Board(37, 42inch)	20
6.11. Remove the Z-Board	13	6.33. Remove the C4-Board(37, 42inch)	21
6.12. Remove the SU-Board(37inch)	14	6.34. Remove the C4-Board(50inch)	21
6.13. Remove the SU-Board(42inch)	14	6.35. Remove the C5-Board(50inch)	21
		6.36. Remove the C6-Board(50inch)	21

6.37. Remove the K-Board	22	12.20. C4-Board (42inch)	79
6.38. Remove the S-Board	22	12.21. C1-Board (50inch)	80
6.39. Remove the Plasma panel section from the Front frame (glass)	22	12.22. C2-Board (50inch)	81
6.40. Replace the plasma panel (finished).	23	12.23. C3-Board (50inch)	82
7 Location of Lead Wiring	24	12.24. C4-Board (50inch)	83
7.1. Lead of Wiring (1)	24	12.25. C5-Board (50inch)	84
7.2. Lead of Wiring (2)	25	12.26. C6-Board (50inch)	85
7.3. Lead of Wiring (3)	26	12.27. SC-Board (37inch)	86
7.4. Lead of Wiring (4)	27	12.28. SC-Board (42inch)	89
7.5. Lead of Wiring (5)	28	12.29. SC-Board (50inch)	92
7.6. Lead of Wiring (6)	29	12.30. SU-Board (37inch)	95
7.7. Lead of Wiring (7)	30	12.31. SU-Board (42inch)	96
7.8. Lead of Wiring (8)	31	12.32. SU-Board (50inch)	97
7.9. Lead of Wiring (9)	32	12.33. SD-Board (37inch)	98
7.10. Lead of Wiring (10)	33	12.34. SD-Board (42inch)	99
8 Self-check Function	34	12.35. SD-Board (50inch)	100
8.1. How to access	34	12.36. SS-Board (37inch)	101
8.2. Power LED Blinking timing chart	35	12.37. SS, SS2 and SS3-Board (42inch)	103
8.3. No Power	36	12.38. SS, SS2 and SS3-Board (50inch)	105
8.4. No Picture	37	12.39. K and S-Board	107
8.5. Local screen failure	38	13 Block and Schematic Diagram	109
9 Serviceman Mode	39	13.1. Schematic Diagram Notes	109
9.1. How to enter into Serviceman Mode	39	13.2. Main Block Diagram (37inch)	110
9.2. Cancellation	39	13.3. Main Block Diagram (42inch)	111
9.3. Contents of adjustment mode	39	13.4. Main Block Diagram (50inch)	112
9.4. Option	40	13.5. P-Board Block Diagram (37inch)	113
10 Adjustment Procedure	41	13.6. P-Board (1 of 6) Schematic Diagram (37inch)	114
10.1. Driver Set-up	41	13.7. P-Board (2 of 6) Schematic Diagram (37inch)	115
10.2. Initialization Pulse Adjust	42	13.8. P-Board (3 of 6) Schematic Diagram (37inch)	116
10.3. P.C.B. (Printed Circuit Board) exchange	43	13.9. P-Board (4 of 6) Schematic Diagram (37inch)	117
10.4. Adjustment Volume Location	44	13.10. P-Board (5 of 6) Schematic Diagram (37inch)	118
10.5. Test Point Location	45	13.11. P-Board (6 of 6) Schematic Diagram (37inch)	119
11 Hotel mode	46	13.12. P-Board Block Diagram (42inch)	120
12 Conductor View	47	13.13. P-Board (1 of 2) Schematic Diagram (42inch)	121
12.1. P-Board (37inch)	47	13.14. P-Board (2 of 2) Schematic Diagram (42inch)	122
12.2. P-Board (42inch)	50	13.15. P-Board Block Diagram (50inch)	123
12.3. P-Board (50inch)	53	13.16. P-Board (1 of 2) Schematic Diagram (50inch)	124
12.4. PA-Board	56	13.17. P-Board (2 of 2) Schematic Diagram (50inch)	125
12.5. PB-Board	57	13.18. PA and PB Board Block Diagram	126
12.6. H-Board	58	13.19. PA-Board Schematic Diagram	127
12.7. DT-Board	60	13.20. PB-Board Schematic Diagram	128
12.8. DV-Board	62	13.21. H, K, S and Z-Board Block Diagram	129
12.9. DG-Board	63	13.22. H-Board (1 of 3) Schematic Diagram	130
12.10. Z-Board	65	13.23. H-Board (2 of 3) Schematic Diagram	131
12.11. D-Board (37, 42inch)	66	13.24. H-Board (3 of 3) Schematic Diagram	132
12.12. D-Board (50inch)	69	13.25. Z-Board Schematic Diagram	133
12.13. C1-Board (37inch)	72	13.26. K and S-Board Schematic Diagram	134
12.14. C2-Board (37inch)	73	13.27. DV-Board Block Diagram	135
12.15. C3-Board (37inch)	74	13.28. DV-Board Schematic Diagram	136
12.16. C4-Board (37inch)	75	13.29. DT-Board Block Diagram	137
12.17. C1-Board (42inch)	76	13.30. DT-Board (1 of 5) Schematic Diagram	138
12.18. C2-Board (42inch)	77	13.31. DT-Board (2 of 5) Schematic Diagram	139
12.19. C3-Board (42inch)	78	13.32. DT-Board (3 of 5) Schematic Diagram	140
		13.33. DT-Board (4 of 5) Schematic Diagram	141

13.34. DT-Board (5 of 5) Schematic Diagram	142	13.88. SC-Board (1 of 2) Schematic Diagram (37inch)	196
13.35. DG-Board (1 of 2) Block Diagram	143	13.89. SC-Board (2 of 2) Schematic Diagram (37inch)	197
13.36. DG-Board (2 of 2) Block Diagram	144	13.90. SC-Board Block Diagram (42inch)	198
13.37. DG-Board (1 of 11) Schematic Diagram	145	13.91. SC-Board (1 of 2) Schematic Diagram (42inch)	199
13.38. DG-Board (2 of 11) Schematic Diagram	146	13.92. SC-Board (2 of 2) Schematic Diagram (42inch)	200
13.39. DG-Board (3 of 11) Schematic Diagram	147	13.93. SC-Board Block Diagram (50inch)	201
13.40. DG-Board (4 of 11) Schematic Diagram	148	13.94. SC-Board (1 of 2) Schematic Diagram (50inch)	202
13.41. DG-Board (5 of 11) Schematic Diagram	149	13.95. SC-Board (2 of 2) Schematic Diagram (50inch)	203
13.42. DG-Board (6 of 11) Schematic Diagram	150	13.96. SU-Board Block Diagram (37inch)	204
13.43. DG-Board (7 of 11) Schematic Diagram	151	13.97. SU-Board (1 of 2) Schematic Diagram (37inch)	205
13.44. DG-Board (8 of 11) Schematic Diagram	152	13.98. SU-Board (2 of 2) Schematic Diagram (37inch)	206
13.45. DG-Board (9 of 11) Schematic Diagram	153	13.99. SU-Board Block Diagram (42, 50inch)	207
13.46. DG-Board (10 of 11) Schematic Diagram	154	13.100. SU-Board (1 of 2) Schematic Diagram (42inch)	208
13.47. DG-Board (11 of 11) Schematic Diagram	155	13.101. SU-Board (2 of 2) Schematic Diagram (42inch)	209
13.48. D-Board Block Diagram (37, 42inch)	156	13.102. SU-Board (1 of 2) Schematic Diagram (50inch)	210
13.49. D-Board Block Diagram (50inch)	157	13.103. SU-Board (2 of 2) Schematic Diagram (50inch)	211
13.50. D-Board (1 of 6) Schematic Diagram	158	13.104. SD-Board Block Diagram (37inch)	212
13.51. D-Board (2 of 6) Schematic Diagram	159	13.105. SD-Board (1 of 2) Schematic Diagram (37inch)	213
13.52. D-Board (3 of 6) Schematic Diagram	160	13.106. SD-Board (2 of 2) Schematic Diagram (37inch)	214
13.53. D-Board (4 of 6) Schematic Diagram	161	13.107. SD-Board Block Diagram (42, 50inch)	215
13.54. D-Board (5 of 6) Schematic Diagram	162	13.108. SD-Board (1 of 2) Schematic Diagram (42inch)	216
13.55. D-Board (6 of 6) Schematic Diagram	163	13.109. SD-Board (2 of 2) Schematic Diagram (42inch)	217
13.56. C1, C2, C3 and C4-Board Block Diagram (37, 42inch) ..	164	13.110. SD-Board (1 of 2) Schematic Diagram (50inch)	218
13.57. C1-Board (1 of 2) Schematic Diagram (37inch)	165	13.111. SD-Board (2 of 2) Schematic Diagram (50inch)	219
13.58. C1-Board (2 of 2) Schematic Diagram (37inch)	166	13.112. SS-Board Block Diagram (37inch)	220
13.59. C2-Board (1 of 2) Schematic Diagram (37inch)	167	13.113. SS-Board Schematic Diagram (37inch)	221
13.60. C2-Board (2 of 2) Schematic Diagram (37inch)	168	13.114. SS, SS2 and SS3-Board Block Diagram (42inch)	222
13.61. C3-Board (1 of 2) Schematic Diagram (37inch)	169	13.115. SS, SS2 and SS3-Board Schematic Diagram (42inch)	223
13.62. C3-Board (2 of 2) Schematic Diagram (37inch)	170	13.116. SS, SS2 and SS3-Board Block Diagram (50inch)	224
13.63. C4-Board (1 of 2) Schematic Diagram (37inch)	171	13.117:SS-Board (1 of 2), SS2 and SS3 Schematic Diagram (50inch)	225
13.64. C4-Board (2 of 2) Schematic Diagram (37inch)	172	13.118. SS-Board (2 of 2) Schematic Diagram (50inch)	226
13.65. C1-Board (1 of 2) Schematic Diagram (42inch)	173	14 Parts Location & Mechanical Replacement Parts List	227
13.66. C1-Board (2 of 2) Schematic Diagram (42inch)	174	14.1. Parts Location	227
13.67. C2-Board (1 of 2) Schematic Diagram (42inch)	175	14.2. Pcaking Exploded Views (1)	228
13.68. C2-Board (2 of 2) Schematic Diagram (42inch)	176	14.3. Pcaking Exploded Views (2)	229
13.69. C3-Board (1 of 2) Schematic Diagram (42inch)	177		
13.70. C3-Board (2 of 2) Schematic Diagram (42inch)	178		
13.71. C4-Board (1 of 2) Schematic Diagram (42inch)	179		
13.72. C4-Board (2 of 2) Schematic Diagram (42inch)	180		
13.73. C1, C2,C5 and C6-Board Block Diagram (50inch)	181		
13.74. C3 and C4-Board Block Diagram (50inch)	182		
13.75. C1-Board (1 of 2) Schematic Diagram (50inch)	183		
13.76. C1-Board (2 of 2) Schematic Diagram (50inch)	184		
13.77. C2-Board (1 of 2) Schematic Diagram (50inch)	185		
13.78. C2-Board (2 of 2) Schematic Diagram (50inch)	186		
13.79. C3-Board (1 of 2) Schematic Diagram (50inch)	187		
13.80. C3-Board (2 of 2) Schematic Diagram (50inch)	188		
13.81. C4-Board (1 of 2) Schematic Diagram (50inch)	189		
13.82. C4-Board (2 of 2) Schematic Diagram (50inch)	190		
13.83. C5-Board (1 of 2) Schematic Diagram (50inch)	191		
13.84. C5-Board (2 of 2) Schematic Diagram (50inch)	192		
13.85. C6-Board (1 of 2) Schematic Diagram (50inch)	193		
13.86. C6-Board (2 of 2) Schematic Diagram (50inch)	194		
13.87. SC-Board Block Diagram (37inch)	195		

14.4. Pcaking Exploded Views (3)	230	15.2. Electrical Replacement Parts List (TH-37PX50U)	234
14.5. Mechanical Replacement Parts List	231	15.3. Electrical Replacement Parts List (TH-42PX50U)	262
15 Electrical Replacement Parts List	233	15.4. Electrical Replacement Parts List (TH-50PX50U)	289
15.1. Replacement Parts List Notes	233		

1 Applicable signals

VIDEO input

	signal name	horizontal frequency(kHz)	vertical frequency(Hz)
1	NTSC	15.73	59.94

Applicable input signals (* mark)

	signal name	horizontal frequency(kHz)	vertical frequency(Hz)	COMPONENT	HDMI
1	525 (480) /60i	15.73	59.94	*	*
2	525 (480) /60p	31.47	59.94	*	*
3	750 (720) /60p	45.00	59.94	*	*
4	1,125 (1,080) /60i	33.75	59.94	*	*

Note: Signals without above specification may not be displayed properly.

2 Safety Precautions

2.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

2.1.1. Leakage Current Cold Check

1. Unplug the AC cord and connect a jumper between the two prongs on the plug.
2. Measure the resistance value, with an ohmmeter, between the jumpered AC plug and each exposed metallic cabinet part on the equipment such as screwheads, connectors, control shafts, etc. When the exposed metallic part has a return path to the chassis, the reading should be between 1M Ω and 5.2M Ω .

When the exposed metal does not have a return path to the chassis, the reading must be ∞ .

2.1.2. Leakage Current Hot Check (See Figure 1.)

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a 1.5k Ω , 10 watts resistor, in parallel with a 0.15 μ F capacitors, between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use an AC voltmeter, with 1000 ohms/volt or more sensitivity, to measure the potential across the resistor.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reverse the AC plug in the AC outlet and repeat each of the above measurements.
6. The potential at any point should not exceed 0.75 volts RMS. A leakage current tester (Simpson Model 229 or equivalent) may be used to make the hot checks, leakage current must not exceed 1/2 milliamp. In case a measurement is outside of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

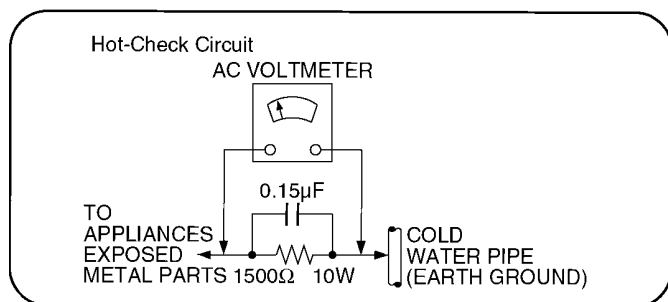


Figure 1

3 Prevention of Electro Static Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "anti-static (ESD protected)" can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

IMPORTANT SAFETY NOTICE

There are special components used in this equipment which are important for safety. These parts are marked by $\triangle$ in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

4 About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).

That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.


PCBs manufactured using lead free solder will have the PbF within a leaf Symbol  stamped on the back of PCB.

Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).




If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.

- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

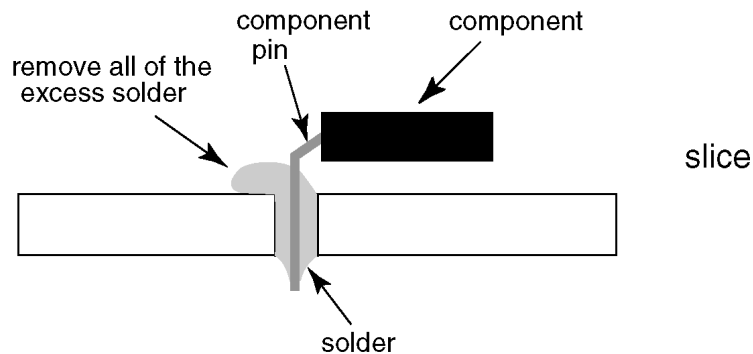

Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.





0.3mm X 100g	0.6mm X 100g	1.0mm X 100g
		

5 Service Hint


5.1. TH-37, 42PX50U

Stand the Unit used for Pedestal

Remove the Back Cover

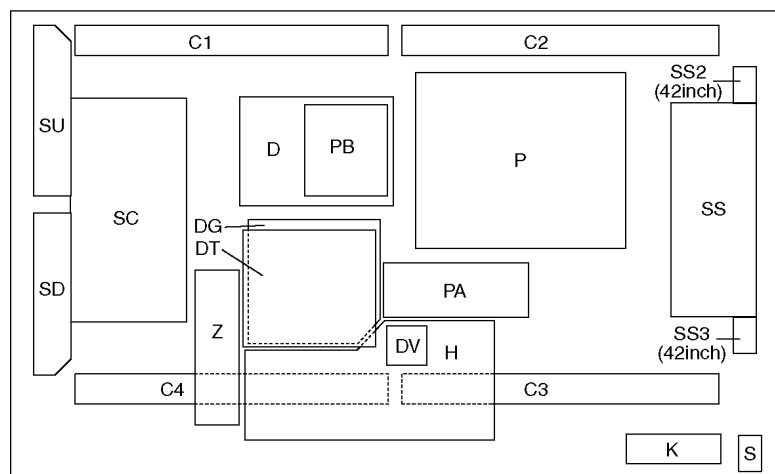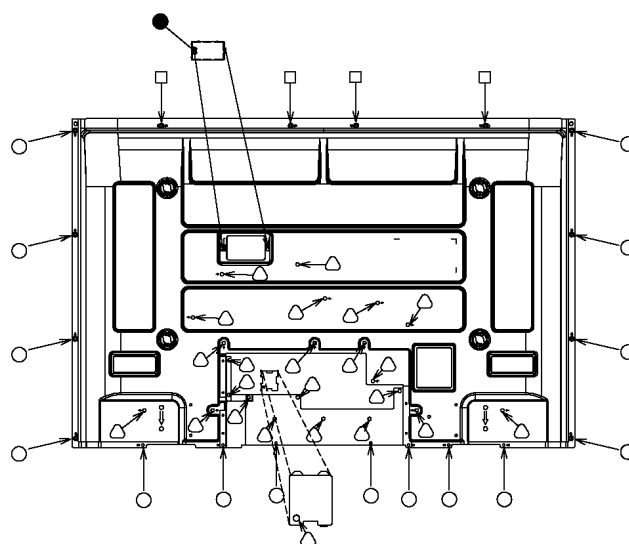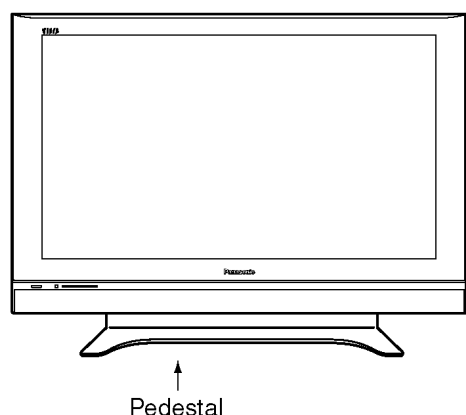

Remove:
15 screws (O) XTB4+15AFJK
1 screw (●) XTB4+12GFJK
4 screws (□) THEL0439
23 screws (Δ) THEL0429




Service Position

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Up Left)
PA	DC-DC Converter, Power SOS	C2	Data Driver (Up Right)
PB	Audio Power, Fan Control	C3	Data Driver (Down Right)
H	AV Terminal, AV Switch	C4	Data Driver (Down Left)
DT	ATSC Interface	SC	Scan Drive
DV	HDMI Interface None serviceable. DV-Board should be exchanged for service.	SU	Scan out (Up)
DG	Digital Signal Processor	SD	Scan out (Down)
Z	Speaker out, Audio AMP	SS	Sustain Drive
D	Format Converter, Plasma AI Processor	SS2	Sustain Connector (Up) (42inch only)
		SS3	Sustain Connector (Down) (42inch only)
		K	Remote receiver, Keyscan
		S	Power Switch




5.2. TH-50PX50U

Stand the Unit used for Pedestal


Remove the Back Cover

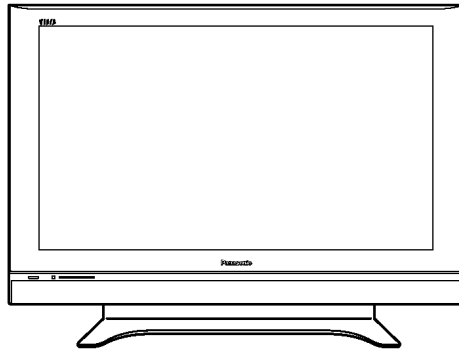

Pedestal

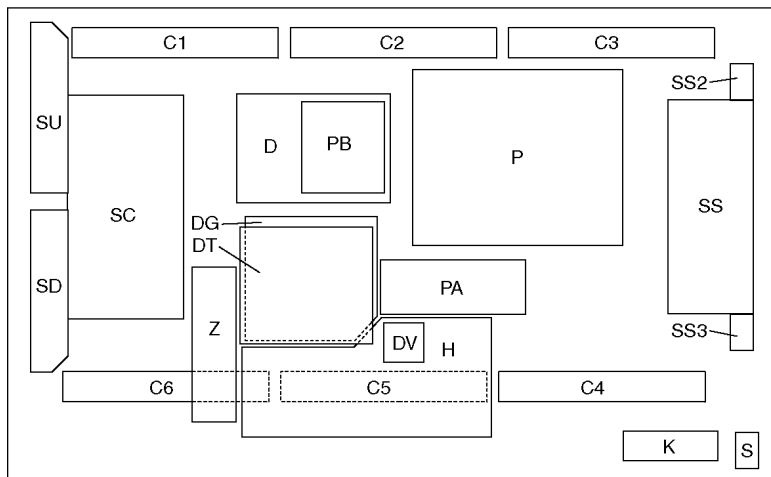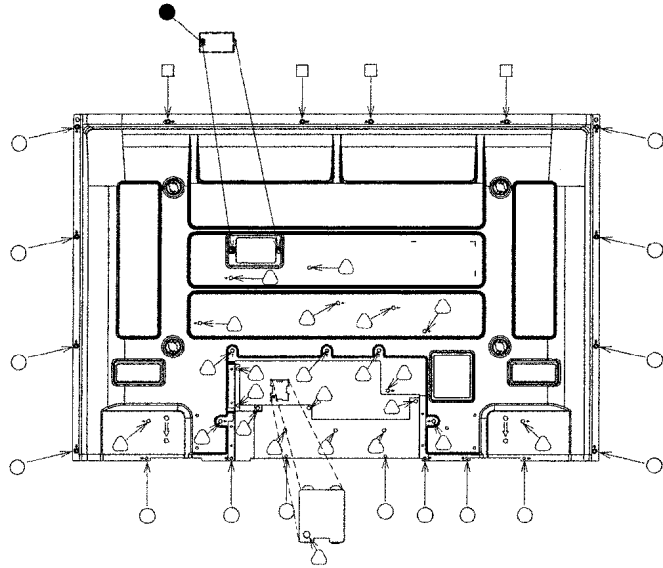

Remove:
 15 screws (O) XTB4+15AFJK
 1 screw (●) XTB4+12GFJK
 4 screws (□) THEL0439
 23 screws (Δ) THEL0429



Service Position

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Up Left)
PA	DC-DC Converter, Power SOS	C2	Data Driver (Up Center)
PB	Audio Power, Fan Control	C3	Data Driver (Up Right)
H	AV Terminal, AV Switch	C4	Data Driver (Down Right)
DT	ATSC Interface	C5	Data Driver (Down Center)
DV	HDMI Interface None serviceable. DV-Board should be exchanged for service.	C6	Data Driver (Down Left)
DG	Digital Signal Processor	SC	Scan Drive
Z	Speaker out, Audio AMP	SU	Scan out (Up)
D	Format Converter, Plasma AI Processor	SD	Scan out (Down)
		SS	Sustain Drive
		SS2	Sustain Connector (Up)
		SS3	Sustain Connector (Down)
		K	Remote receiver, Keyscan
		S	Power Switch

6 Plasma panel replacement method

6.1. Remove the Back cover.


1. See Service hint (Section 5).

6.2. Remove the P-Board.

Caution:


To remove P.C.B., wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Disconnect the couplers (P2, P5, P9, P10, P11, P12, P23, P25 and P30).
2. Remove the screws (×5 ➡) and remove the P-Board.

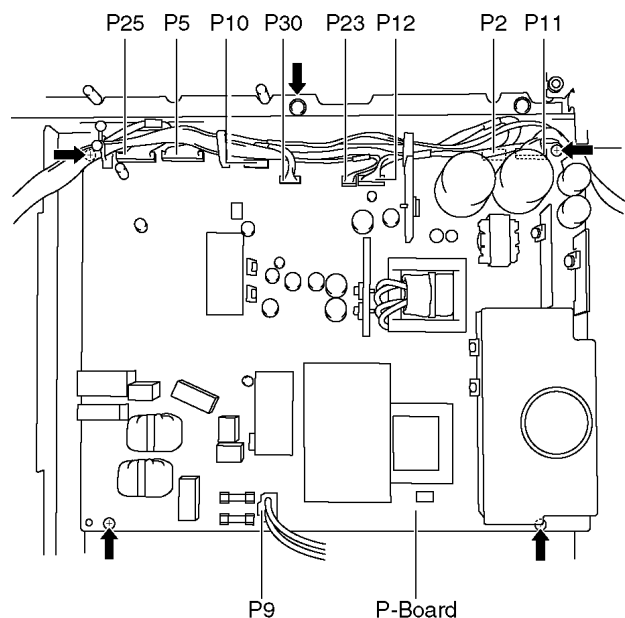


6.3. Remove the PB-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (PB5, PB7, PB30, PB33 and PB34).
3. Remove the screws (×3 ➡) and remove the PB-Board metal frame.
4. Remove the screws (× 4 ➡) and remove the PB-Board.

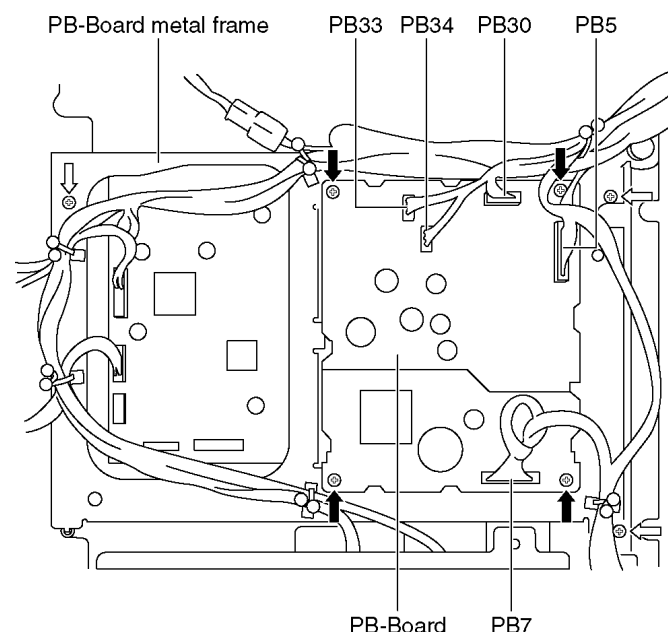


6.4. Remove the D-Board

1. Remove the PB-Board.
2. Disconnect the couplers (D3, D5, D20 and D25) and
3. Disconnect the flexible cables (D33 and D34).
4. Remove the screws (×4 ➡) and remove the D-Board.

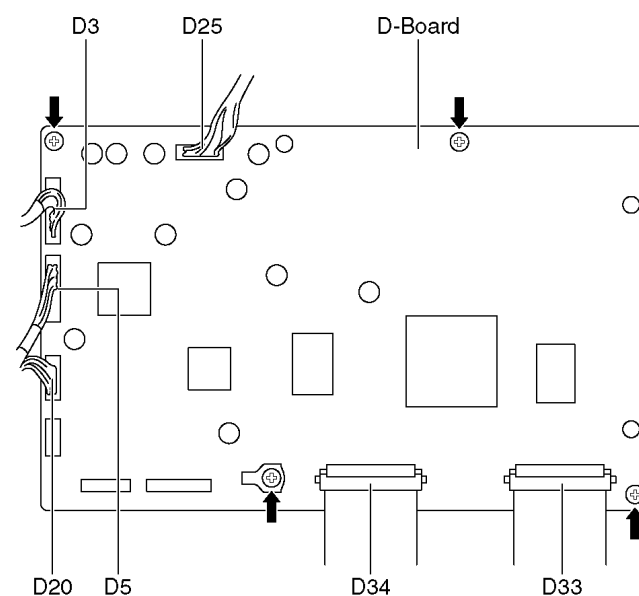


6.5. Remove the rear terminal cover

1. Remove the screws (×4 ➡).
2. Remove the rear terminal cover.

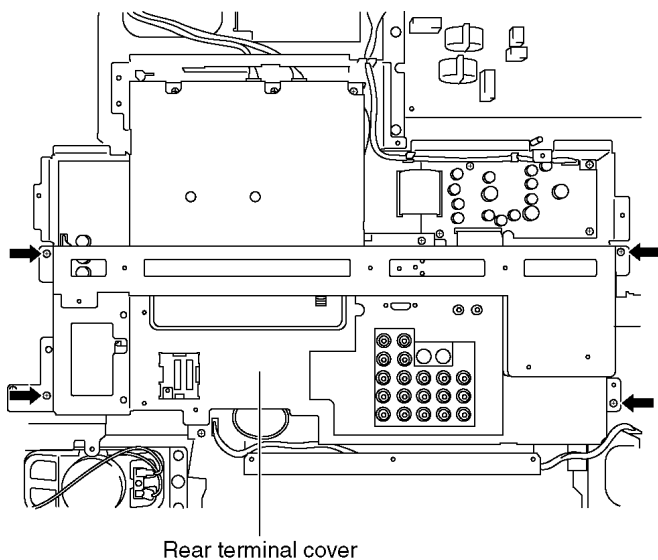


6.6. Remove the metal frame

1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (D3, D5, H7, P10 and PB7) and relay connector (SP-L and SP-R).
3. Remove the screws (×4 ➡) remove the metal frame.

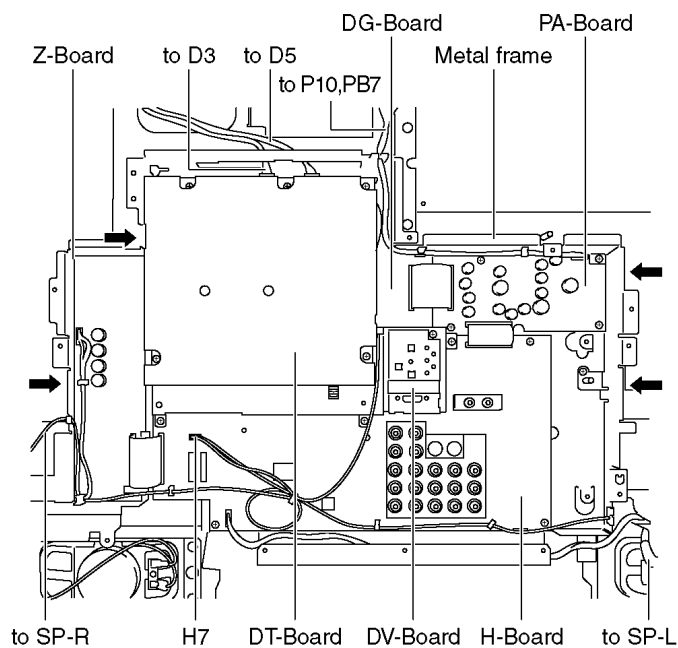


6.7. Remove the DT-Board and DV-Board

1. Unlock the cable clampers to free the cable.
2. Remove the screws (×5 ➡).
3. Remove the DT-Board and DV-Board unit.
(Be careful the couplers (DV15 and DT22) when remove the DT-Board and DV-Board unit.)

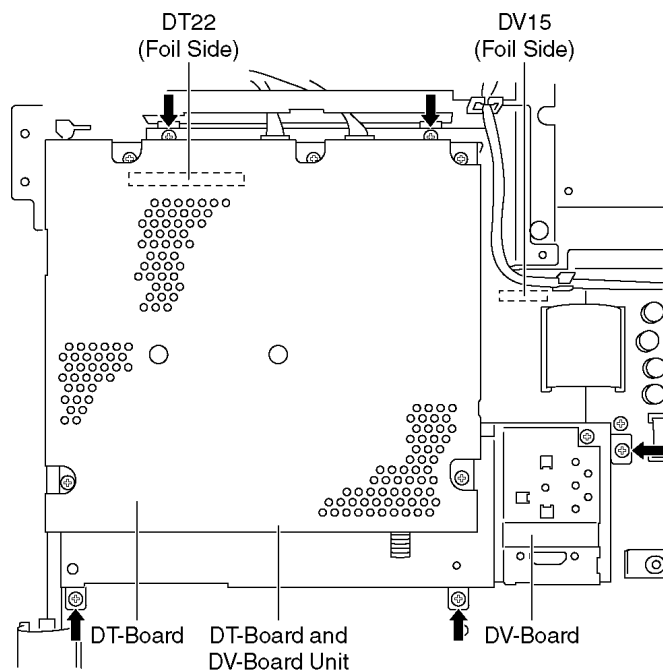


4. Remove the screws (×1 ➡) and remove the DV-Board.
5. Remove the screws (×2 ➡) and Remove the screws (×5 ➡).
6. Remove the DT-Board metal cover and remove the DT-Board.

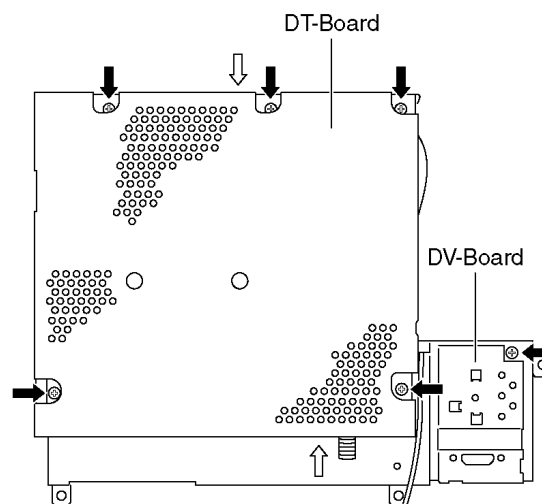


6.8. Remove the DG-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (DG3 and DG5).
3. Disconnect the flexible cables (DG1, DG2 and DG20).
4. Remove the screws (×2 ➡) and remove the DG-Board.

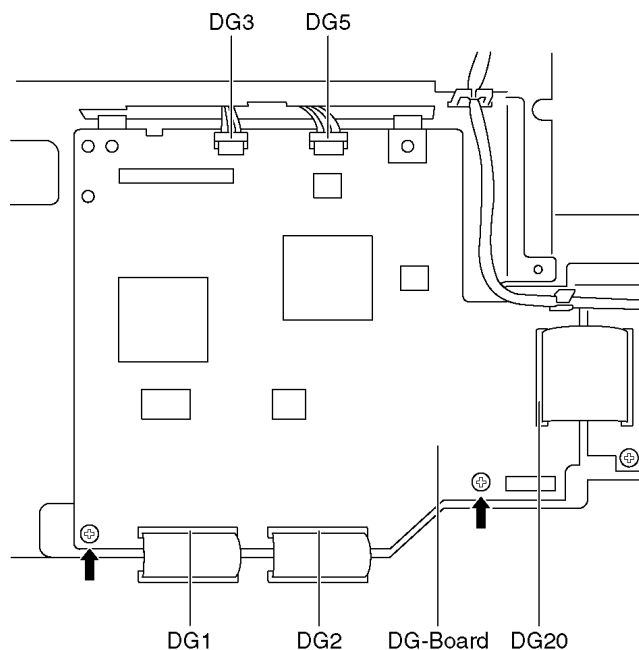


6.9. Remove the H-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the coupler (H7).
3. Disconnect the flexible cables (H1, H2, H30 and H50).
4. Remove the screws (×4 ➡) and remove the H-Board.

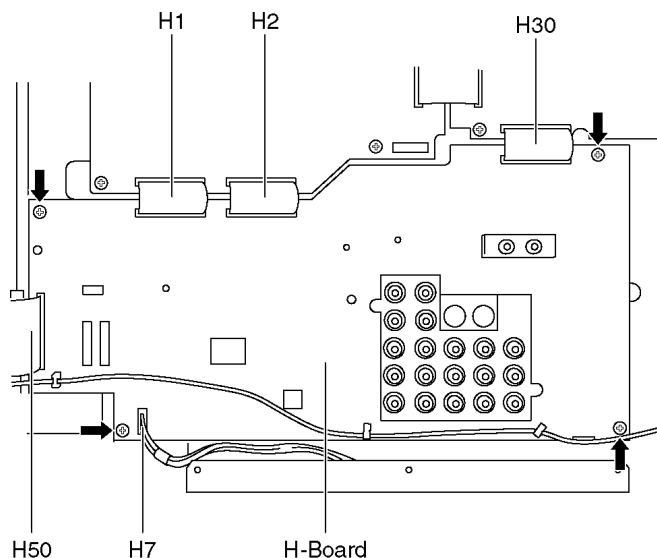


6.10. Remove the PA-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (PA7 and PA10).
3. Disconnect the flexible cables (PA20 and PA30).
4. Remove the screws (×4 ➡) and remove the PA-Board.

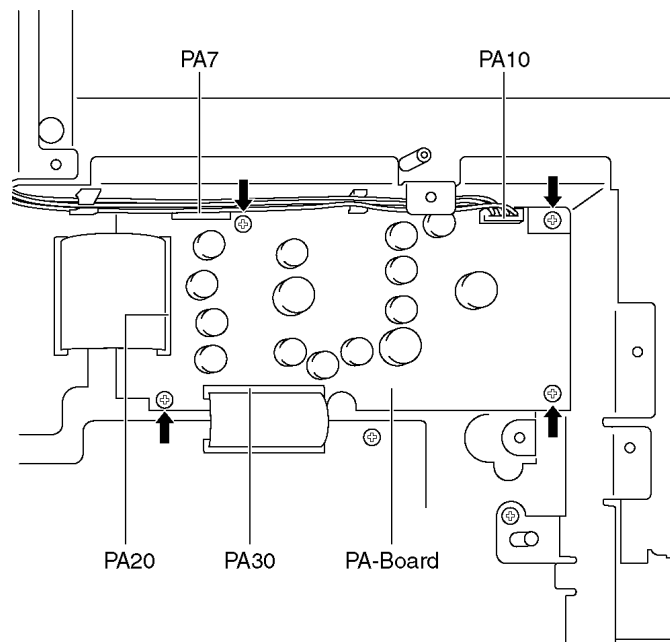


6.11. Remove the Z-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the coupler (Z2).
3. Disconnect the flexible cable (Z50).
4. Remove the screws (×2 ➡) and remove the Z-Board.

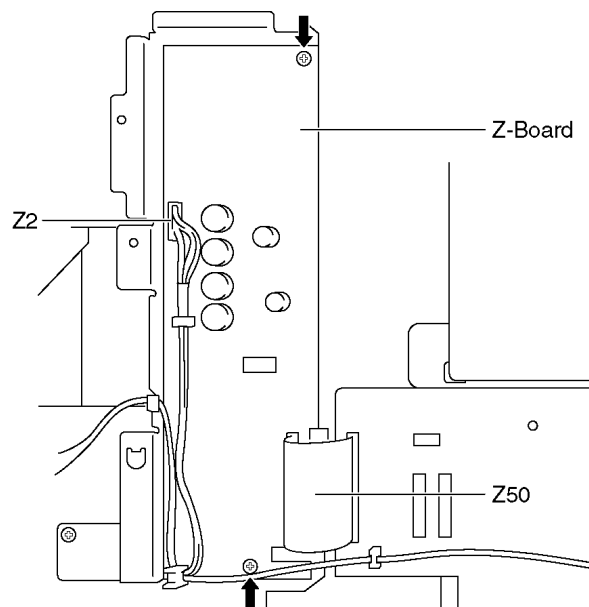


6.12. Remove the SU-Board (37inch)

1. Remove the screws (×2 ➡).
2. Slide the SU-Board to the left to disconnect from a coupler (SC41 - SU41) on the SC-Board and disconnect a bridge connector (SU45 or SC45).

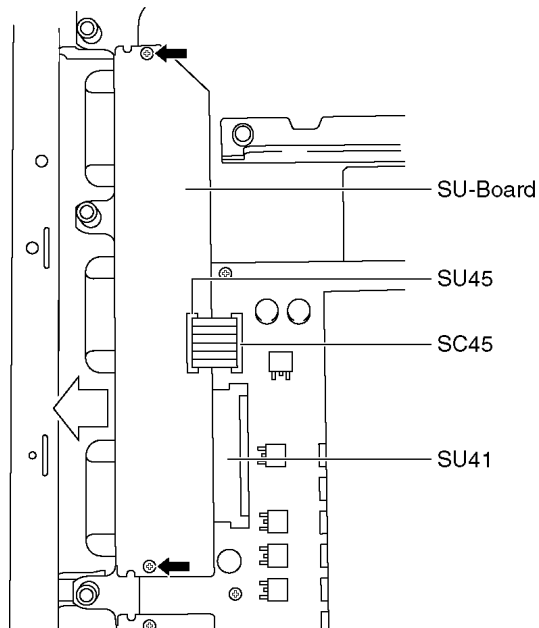


3. Disconnect the flexible cables (SU1, SU2, SU3) connected to the SU-Board, and remove the SU-Board.

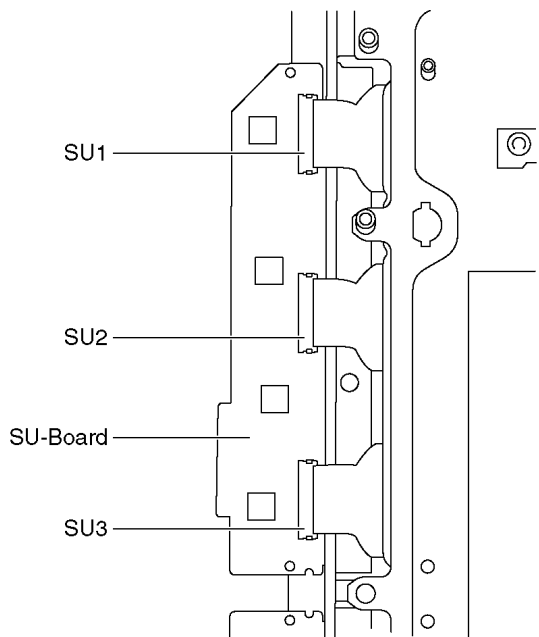


6.13. Remove the SU-Board (42inch)

1. Remove the screws (×2 ➡).
2. Slide the SU-Board to the left to disconnect from a coupler (SC41 - SU41) on the SC-Board and remove a coupler (SU45 or SC45).

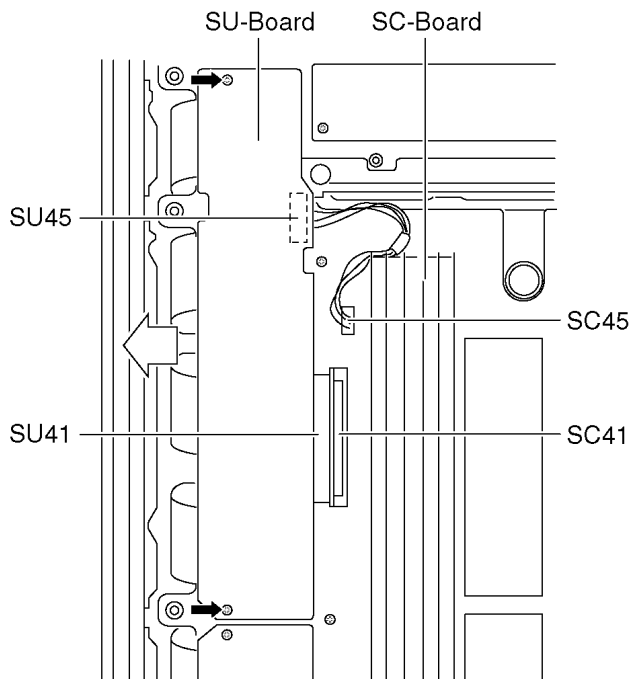


3. Remove the flexible cables (SU1, SU2, SU3, SU4) connected to the SU-Board, and remove the SU-Board.

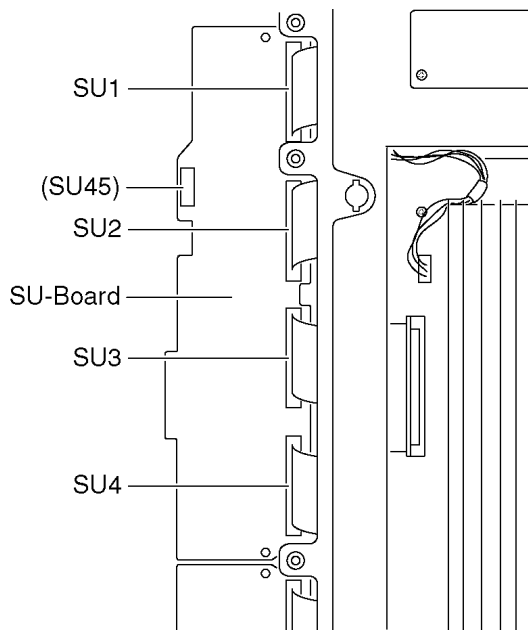


6.14. Remove the SU-Board (50inch)

1. Remove the screws (×3 ➡).
2. Slide the SU-Board to the left to disconnect from a coupler (SC41 - SU41) on the SC-Board and remove a coupler (SU45 or SC45).

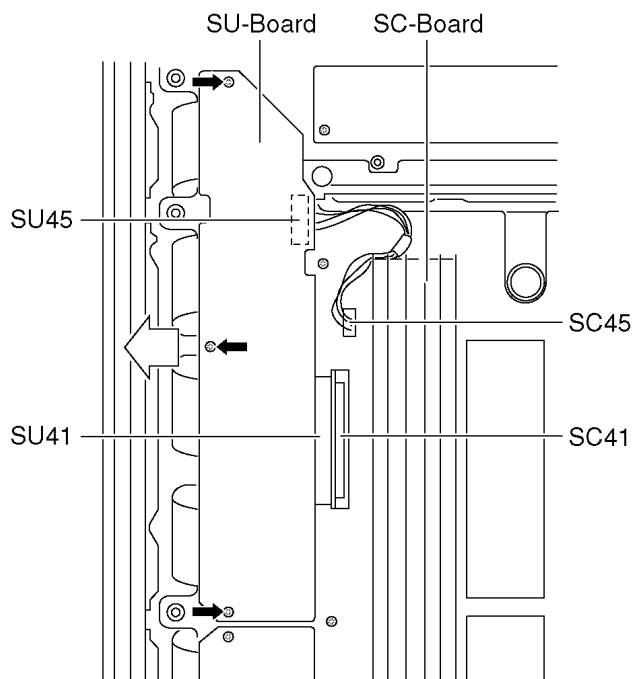


3. Remove the flexible cables (SU1, SU2, SU3, SU4) connected to the SU-Board, and remove the SU-Board.

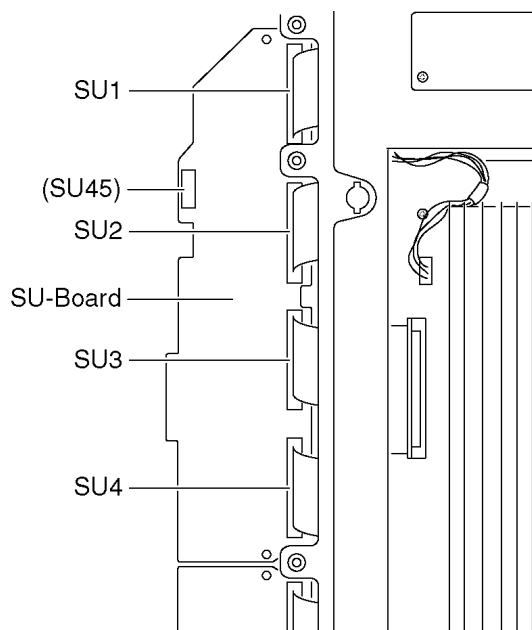


6.15. Remove the SD-Board (37inch)

1. Remove the screws (×2 ➡).
2. Slide the SD-Board to the left to disconnect from a coupler (SC42 - SD42) on the SC-Board and disconnect a bridge connector (SD46 or SC46).

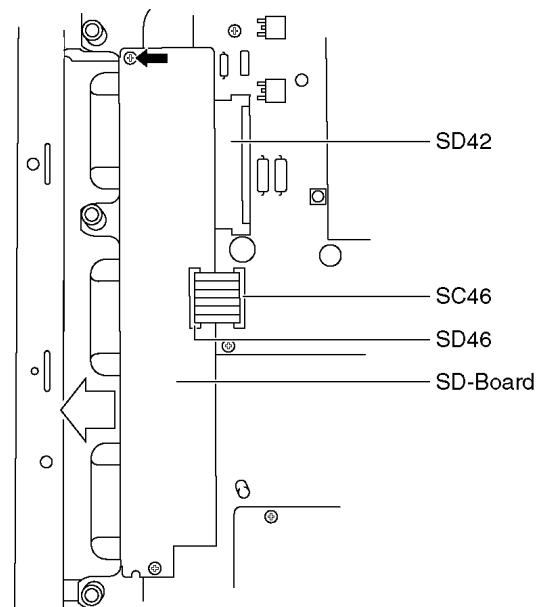


3. Disconnect the flexible cables (SD1, SD2, SD3) connected to the SU-Board, and remove the SD-Board.

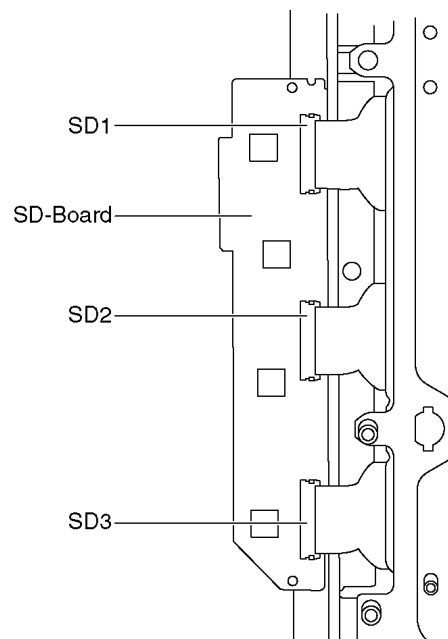


6.16. Remove the SD-Board (42inch)

1. Remove the screws (×2 ➡).
2. Slide the SD-Board to the left to disconnect from a coupler (SC42 - SD42) on the SC-Board and remove a coupler (SD46 or SC46).

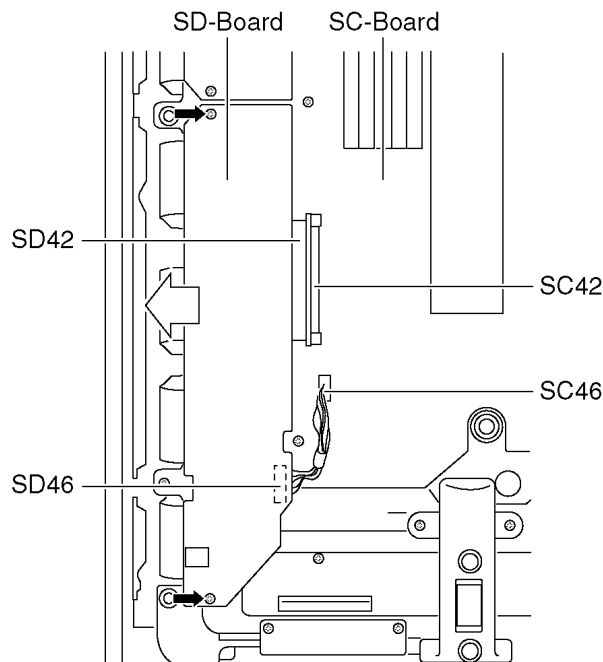


3. Remove the flexible cables (SD1, SD2, SD3, SD4) connected to the SD-Board, and remove the SD-Board.

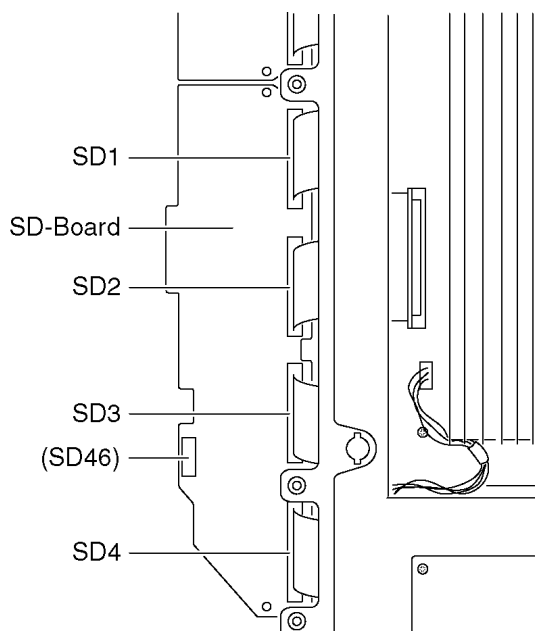


6.17. Remove the SD-Board (50inch)

1. Remove the screws (×3 ➡).
2. Slide the SD-Board to the left to disconnect from a coupler (SC42 - SD42) on the SC-Board and remove a coupler (SD46 or SC46).

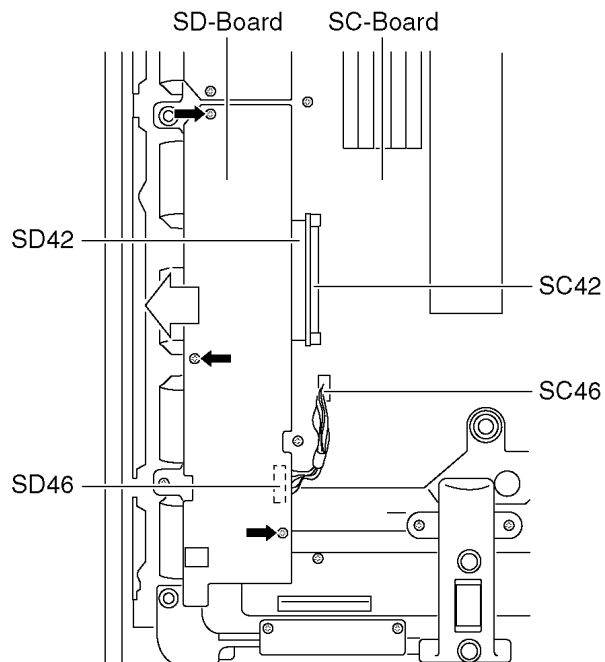


3. Remove the flexible cables (SD1, SD2, SD3, SD4) connected to the SD-Board, and remove the SD-Board.

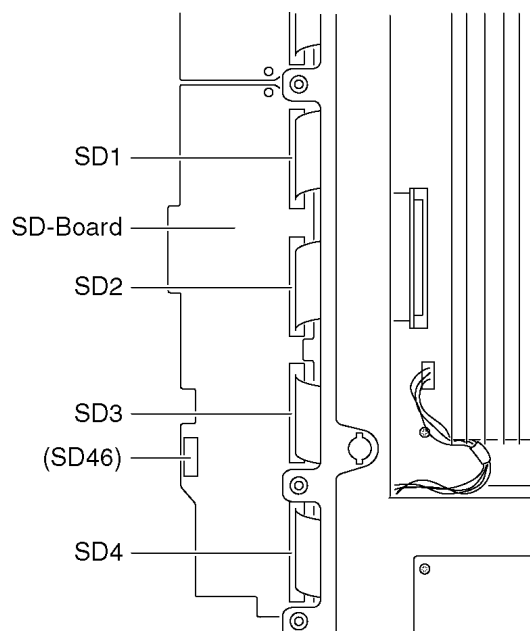


6.18. Remove the SC-Board (37, 42inch)

1. Disconnect the couplers (SC2, SC20, SC23).
2. Remove the screws (×6 ➡) and remove the SC-Board.

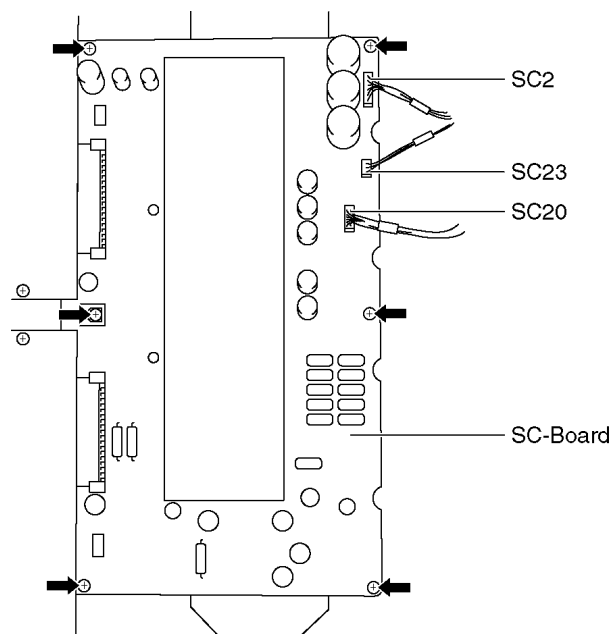


6.19. Remove the SC-Board (50inch)

1. Disconnect the couplers (SC2, SC20, SC23)
2. Remove the screws (×9 ➡) and remove the SC-Board.

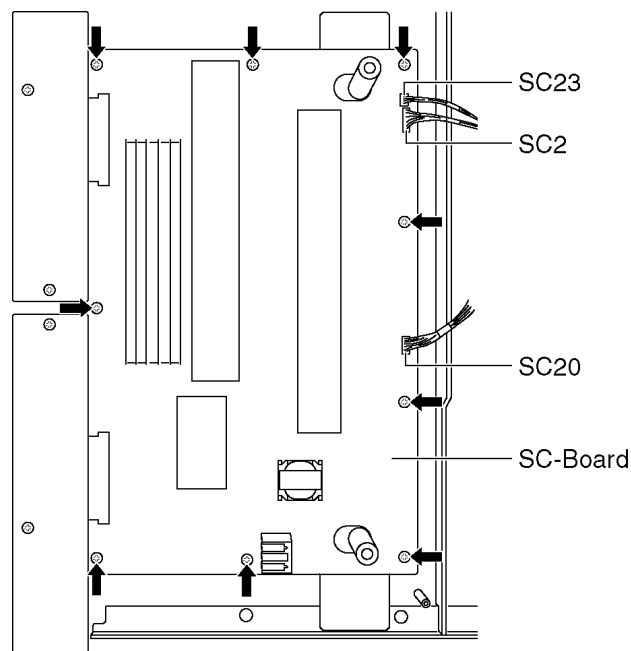


6.20. Remove the SS2-Board (42, 50inch)

1. Disconnect the coupler (SS23) and disconnect the flexible cable (SS55).
2. Remove the screws (×2 ➡) and remove the SS2-Board.

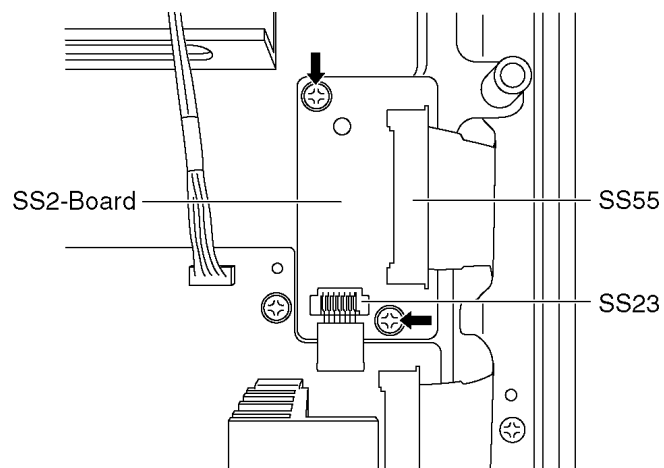


6.21. Remove the SS3-Board (42, 50inch)

1. Disconnect the coupler (SS22) and disconnect the flexible cable (SS56).
2. Remove the screws (×2 ➡) and remove the SS3-Board.

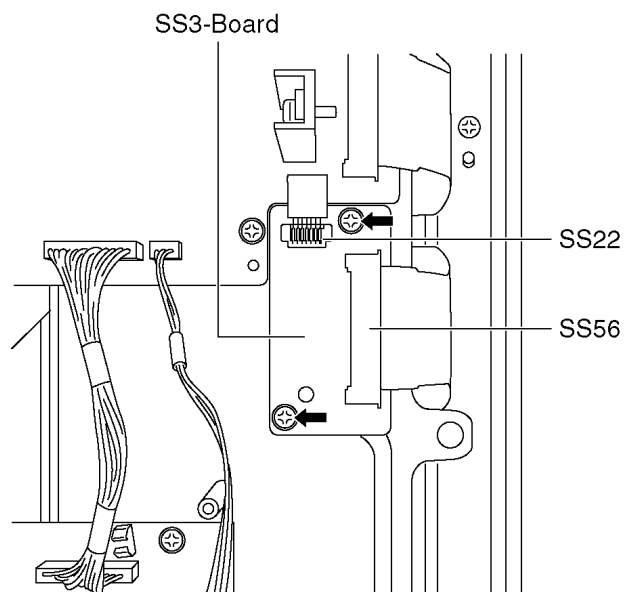


6.22. Remove the SS-Board (37, 42inch)

1. Remove the SS2-Board and SS3-Board (42inch).
2. Disconnect the couplers (SS11, SS12, SS24, SS32 and SS34).
3. Disconnect the flexible cables (SS51, SS52, SS53 and SS54).
4. Remove the screws (×6 ➡), and remove the SS-Board.

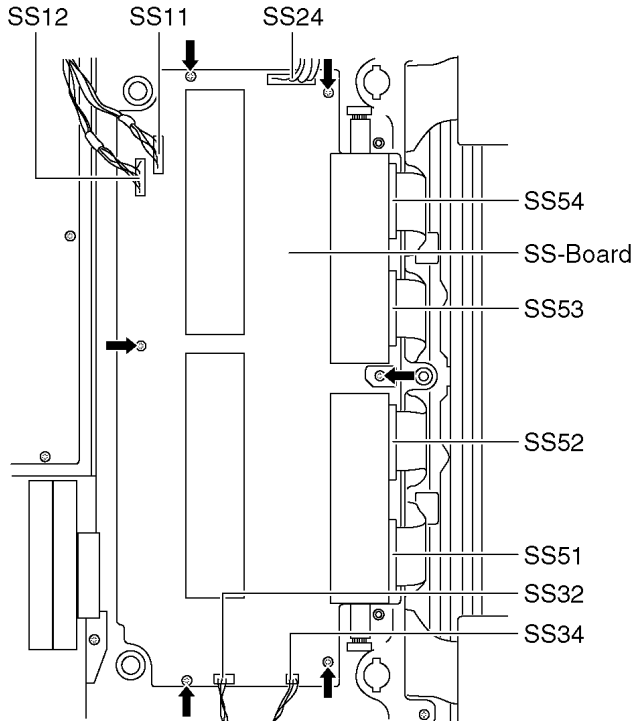


6.23. Remove the SS-Board (50inch)

1. Remove the SS2-Board and SS3-Board.
2. Disconnect the couplers (SS11, SS12, SS34, SS35, SS42 and SS44).
3. Disconnect the flexible cables (SS51, SS52, SS53 and SS54).
4. Remove the screws (×7 ➡) and remove the SS-Board.

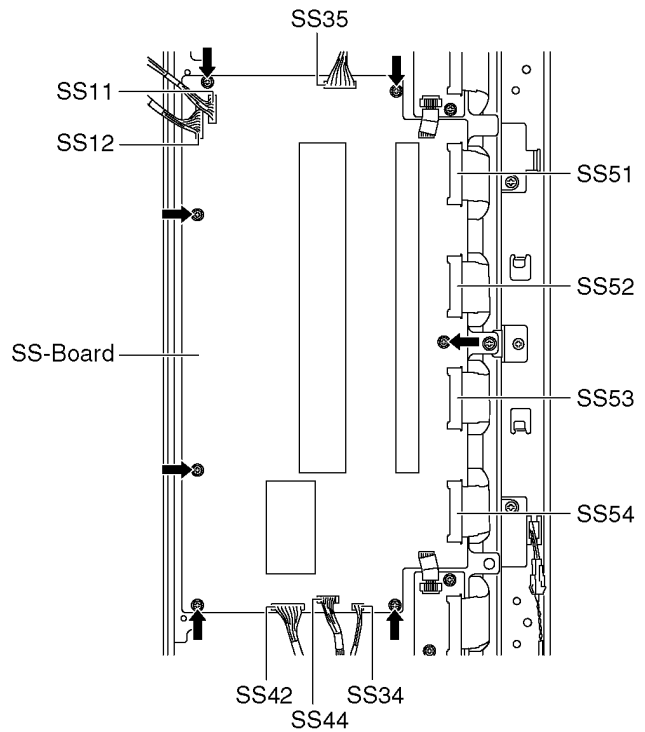


6.24. Remove the Fan

1. Remove the screws (×3 ➡ each) remove the fan and disconnect the relay coupler.

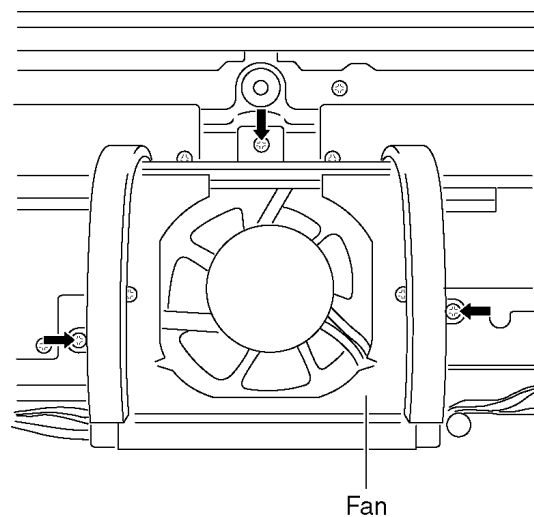

6.25. Remove the C1-Board (37, 42inch)


1. Remove the fan .
2. Disconnect the flexible cable holder fastening screws (×8 ➡) and disconnect the flexible cables (CA1 ~ CA4).

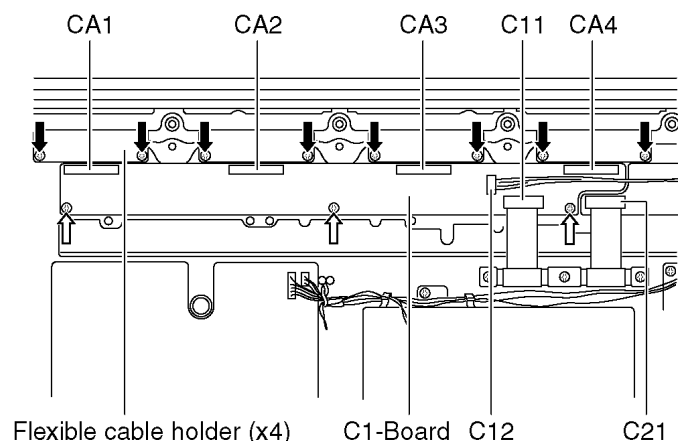

3. Disconnect the flexible cables (C11) and disconnect the coupler (C12) .
4. Remove the screws (×3 ➡) and remove the C1-Board.


6.26. Remove the C2-Board (37, 42inch)

1. Remove the fan.
2. Disconnect the flexible cable holder fastening screws (×8 ➡) and remove the flexible cables (CA5 ~ CA8).
3. Disconnect the flexible cable (C21).
4. Remove the screws (×3 ➡), the couplers (C22, C32) and remove the C2-Board.

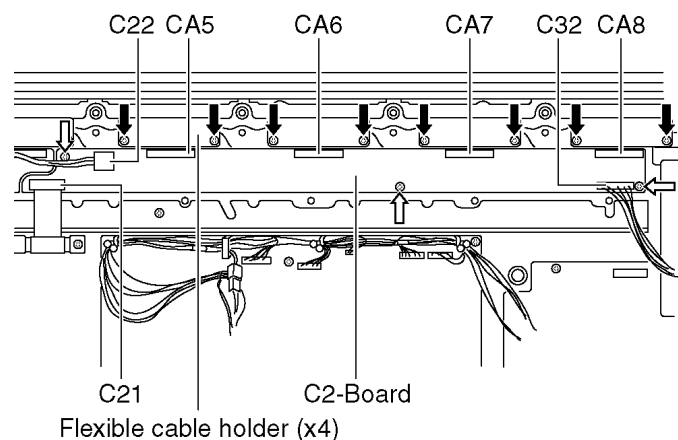


6.27. Remove the C1-Board (50inch)

1. Remove the fan.
2. Remove the flexible cables holder fastening screws (×6 ➡) and disconnect the flexible cables (CA1~CA3).
3. Disconnect the flexible cable (C10) and disconnect the coupler (C11).
4. Remove the screw (×5 ➡) and remove the C1-Board.

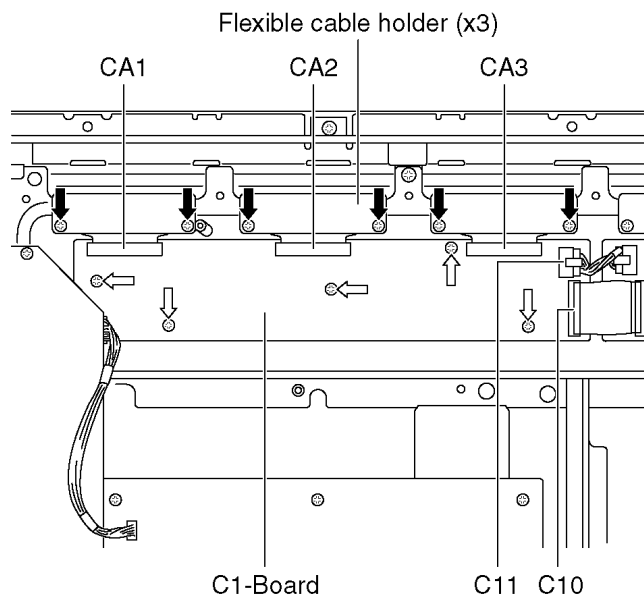


6.28. Remove the C2-Board (50inch)

1. Remove the fan.
2. Remove the flexible cables holder fastening screws (×8 ➡) and disconnect the flexible cables (CA4~CA7).
3. Disconnect the Flexible cables (C20, C21, C24, C25) and disconnect the couplers (C22, C23).
4. Remove the screws (×5 ➡) and remove the C2-Board.

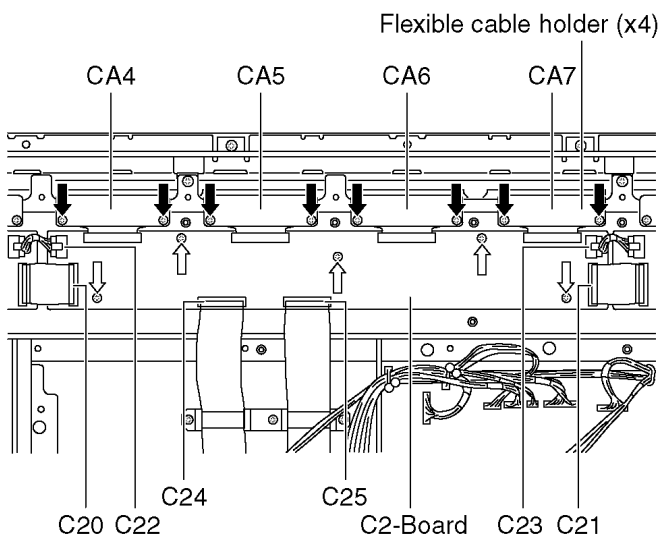


6.29. Remove the C3-Board (50inch)

1. Remove the fan.
2. Remove the flexible cables holder fastening screws (×8 ➡) and disconnect the flexible cables (CA8~CA11).
3. Disconnect the flexible cable (C31) and disconnect the couplers (C33, C35).
4. Remove the screws (×5 ⇨) and remove the C3-Board.

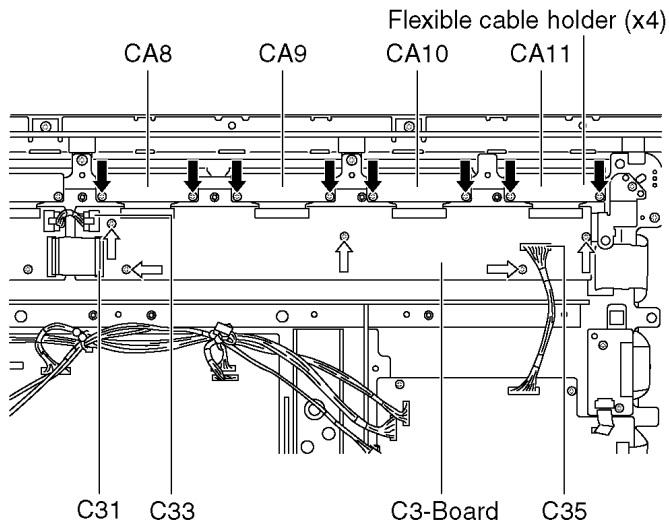


6.30. Remove the Speaker L, R

1. Remove the screw (×8 ➡) and disconnect the relay connector L, R.
2. Remove the Speaker L, R.

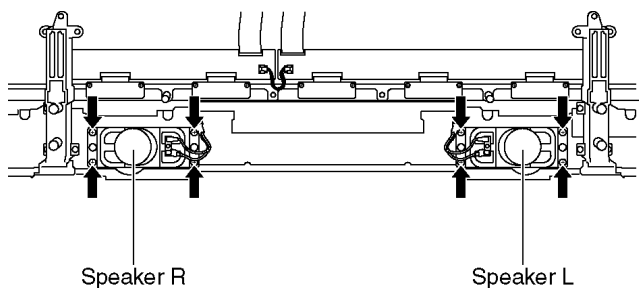


6.31. Remove the stand brackets.

1. Remove the plasma panel section from the servicing stand and lay on a flat surface such as a table (covered), with the plasma panel surface facing downward.
Spread a soft cloth or similar on the table for protection, so the panel surface is not scratched.
2. Remove the stand bracket (left, right) fastening screws (×4 each) and remove the stand brackets (left, right).

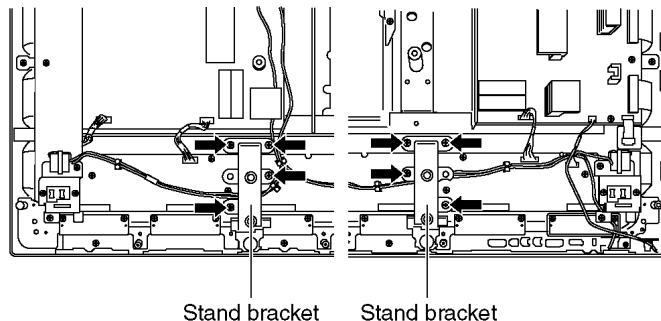


6.32. Remove the C3-Board (37, 42inch)

1. Remove the flexible cable holder fastening screws (×8), and disconnect the flexible cables (CB5, CB6, CB7, CB8).
2. Disconnect the couplers (C33, C42, C44), and disconnect the flexible cables (C31).
3. Remove the screws (×3 ⇨), and remove the C3-Board.

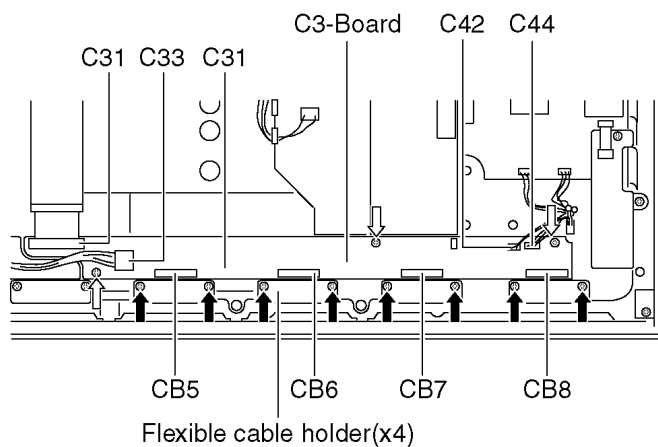


6.33. Remove the C4-Board (37, 42inch)

1. Remove the flexible cable holder fastening screws (×8 ➡) and disconnect the flexible cables (CB1, CB2, CB3).
2. Disconnect the coupler (C43) and disconnect the flexible cables (C41).
3. Remove the screws (×3 ➡), and remove the C4-Board.

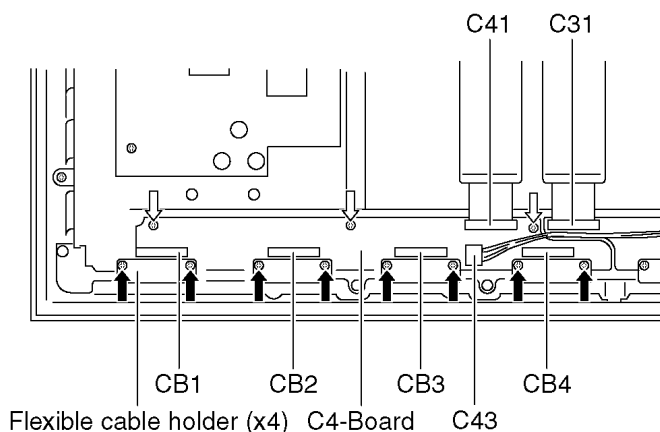


6.34. Remove the C4-Board (50inch)

1. Remove the flexible cables holder fastening screws (×8 ➡) and disconnect the flexible cables (CB8~CB11).
2. Release the speaker cables from clampers.
3. Disconnect the flexible cables (C41) and disconnect the couplers (C42, C43, C44).
4. Remove the screws (×5 ➡) and remove the C4-Board.

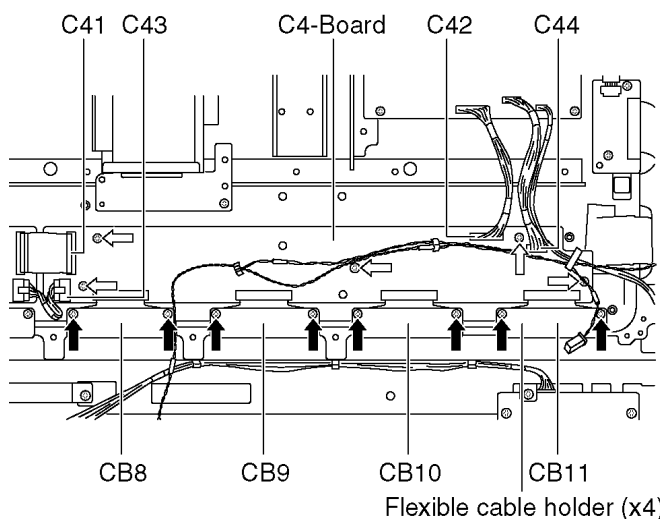


6.35. Remove the C5-Board (50inch)

1. Remove the flexible cables holder fastening screws (×8 ➡) and disconnect the flexible cables (CB4~CB7).
2. Release the speaker cables from clampers.
3. Disconnect the flexible cables (C50, C51, C54, C55) and disconnect the couplers (C52, C53).
4. Remove the screws (×5 ➡) and remove the C5-Board.

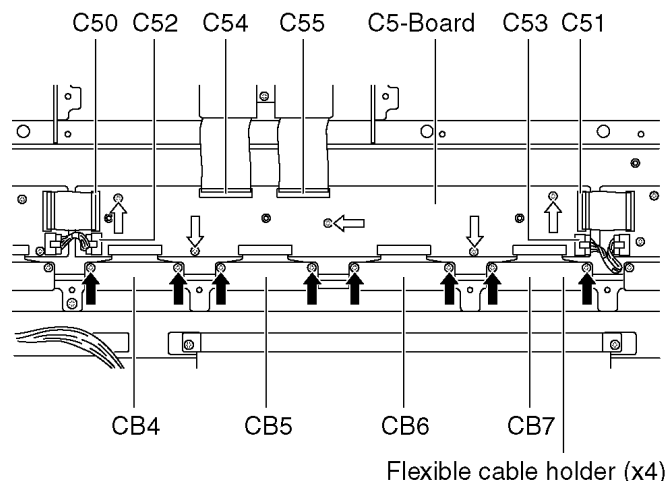


6.36. Remove the C6-Board (50inch)

1. Remove the flexible cables holder fastening screws (×6 ➡) and disconnect the flexible cables (CB1~CB3).
2. Release the speaker cables from clampers.
3. Disconnect the flexible cables (C60) and disconnect the coupler (C61).
4. Remove the screws (×5 ➡) and remove the C6-Board.

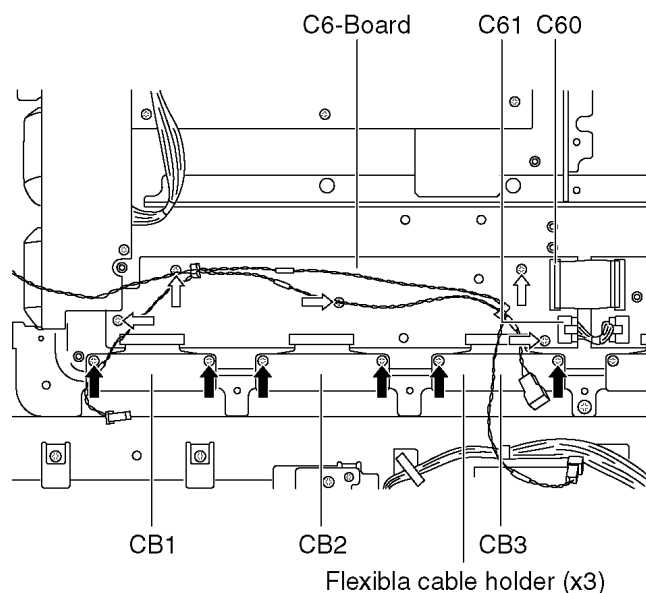


6.37. Remove the K-Board

1. Unlock the cable claspers to free the cable.
2. Disconnect the couplers (H7 and SS34).
3. Remove the screws (×3 ➡) and remove the K-Board.

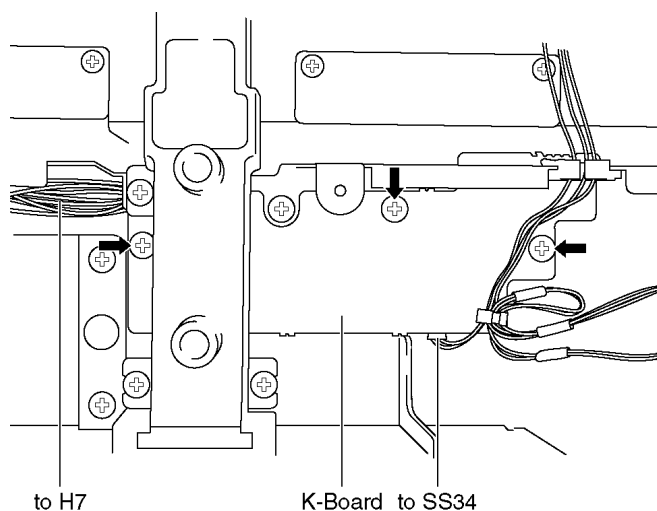


6.38. Remove the S-Board

1. Remove the screw (×2 ➡) and remove the S-Board unit.

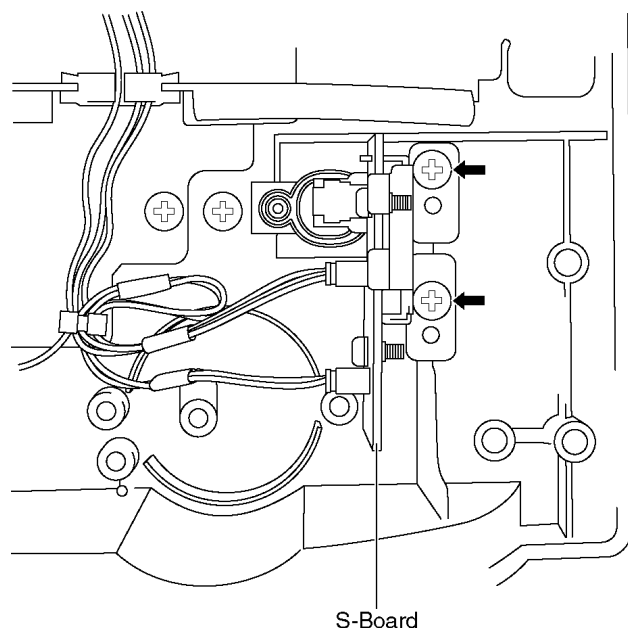


2. Unlock the cable claspers to free the cable.
3. Disconnect the couplers (S1 and S2).
4. Remove the screws (×2 ➡) and remove the S-Board.

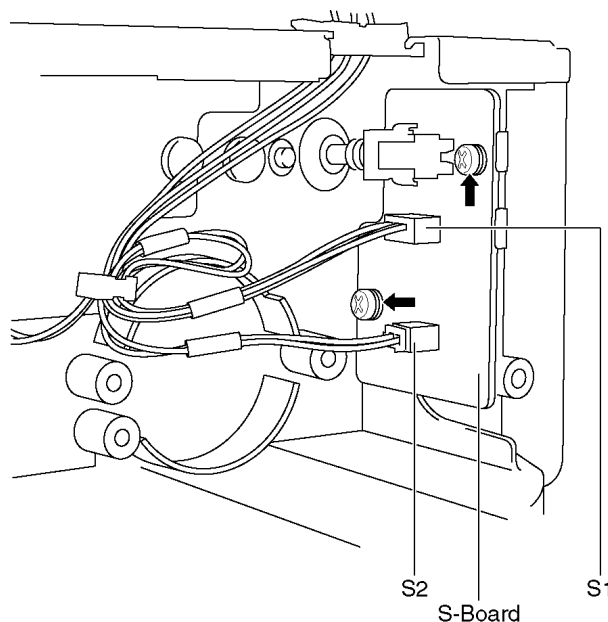


6.39. Remove the Plasma panel section from the Front frame (glass)

1. Remove the front frame and the plasma panel fastening screw (×8 ➡).
2. Remove the front frame and the stand brackets fastening screw (×6 ➡).

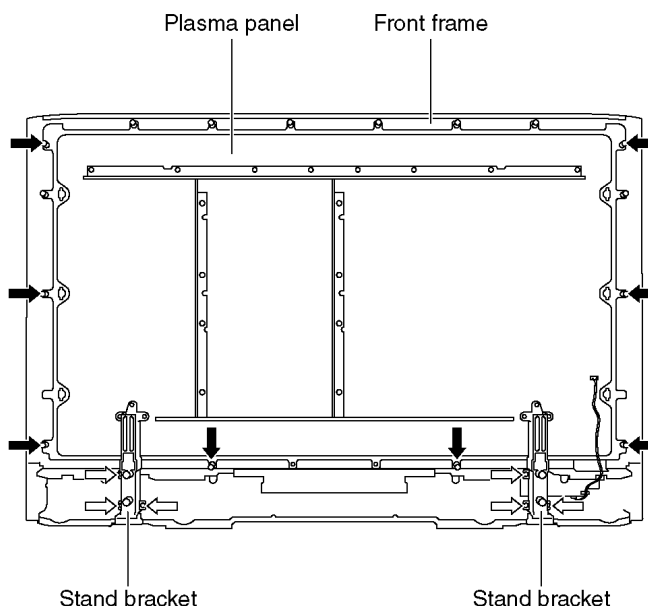

3. For leaving the plasma panel from the front frame, pull the bottom of the front frame forward, lift, and remove.

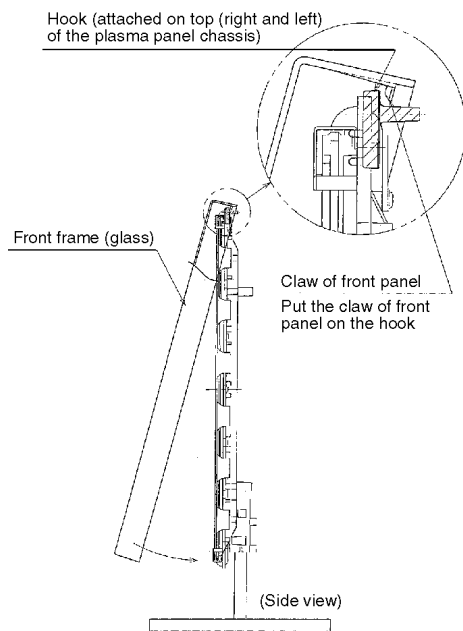

6.40. Replace the plasma panel (finished).


1. Place the new plasma panel (finished) on the flat surface of the table (covered by a soft cloth), with the plasma panel surface facing downward.
2. Attach the C1-Board and the C2-Board, connect the flexible cables (×7) from the Plasma panel to the C1-Board and C2-Board, and fix the flexible cable holders.
3. Attach the Hooks (left, right) and fit the stand brackets (left, right) to the new plasma panel.
4. Place the plasma panel section on the servicing stand.
5. Attach the front frame and the each P.C.Board and so on, to the new plasma panel.

*** When fitting the front frame, be careful not to allow any debris, dust or handling residues to remain between the front glass and plasma panel.**

7 Location of Lead Wiring

7.1. Lead of Wiring (1)

TH-37PX50U

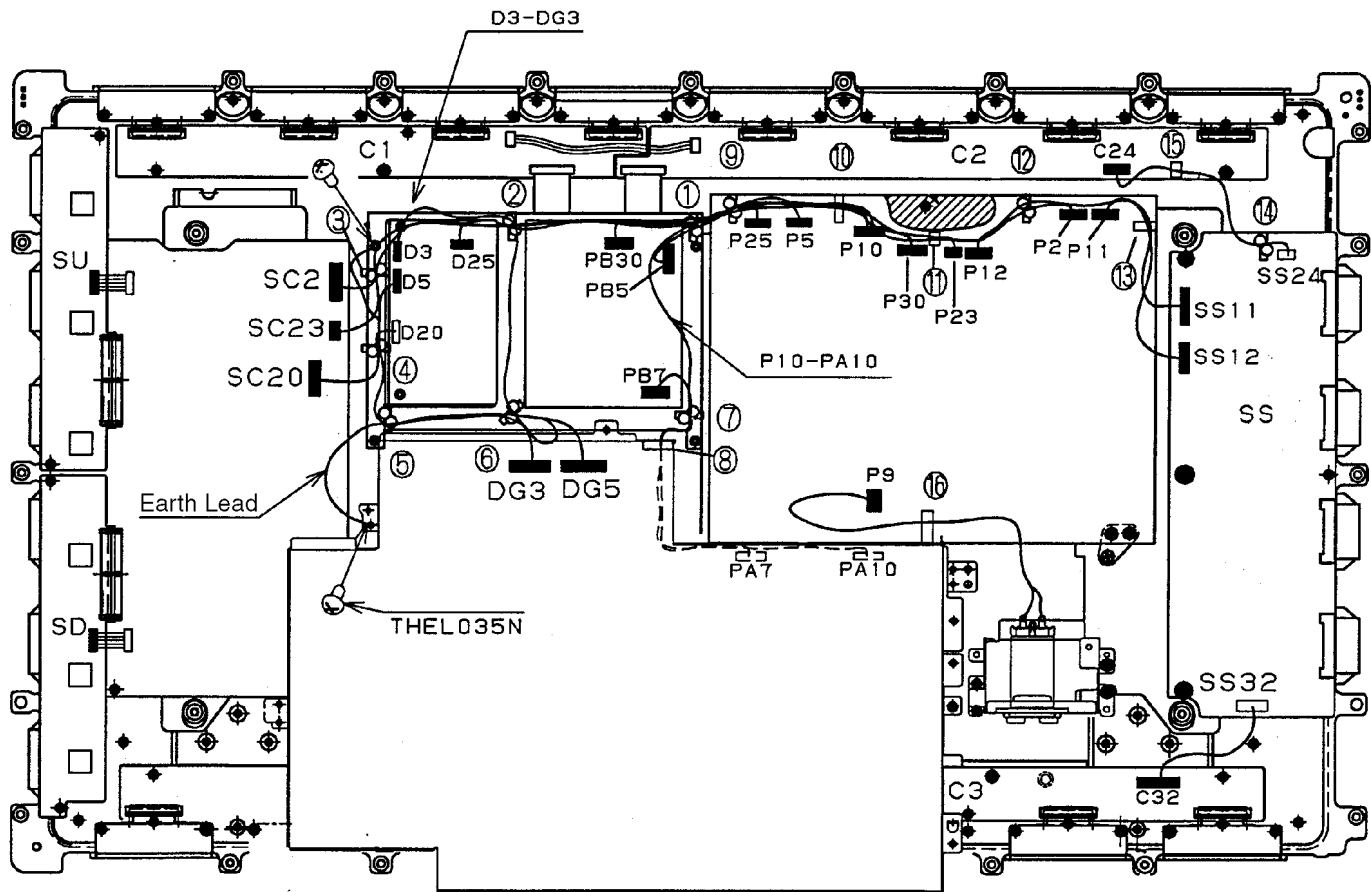

7.2. Lead of Wiring (2)

TH-37PX50U

Connector Connection :

P2,P5,P9,P10,P11,P12,P23,P25,P30,

D3,D5,D25

PB5,PB7,PB30,

SC2,SC20,SC23,

SS11,SS12,


DG3,DG5,

C24,C32

CON : No. — CON : No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮	⑯
SC2 — P2	○	○	○						○	○	○	○				
SC23 — P23	○	○	○						○	○	○					
SC20 — D20				○												
DG3 — D3		○				○										
DG5 — D5 TUNER EARTH				○	○	○										
					○	○										
D25 — P25	○	○							○							
PB5 — P5	○								○							
PA7 — PB7							○	○								
PA10 — P10	○						○	○	○	○						
PB30 — P30	○								○	○						
SS11 — P11													○			
SS12 — P12												○	○			
AC INLET — P9																○
SS24 — C24														○	○	

7.3. Lead of Wiring (3)

TH-42PX50U

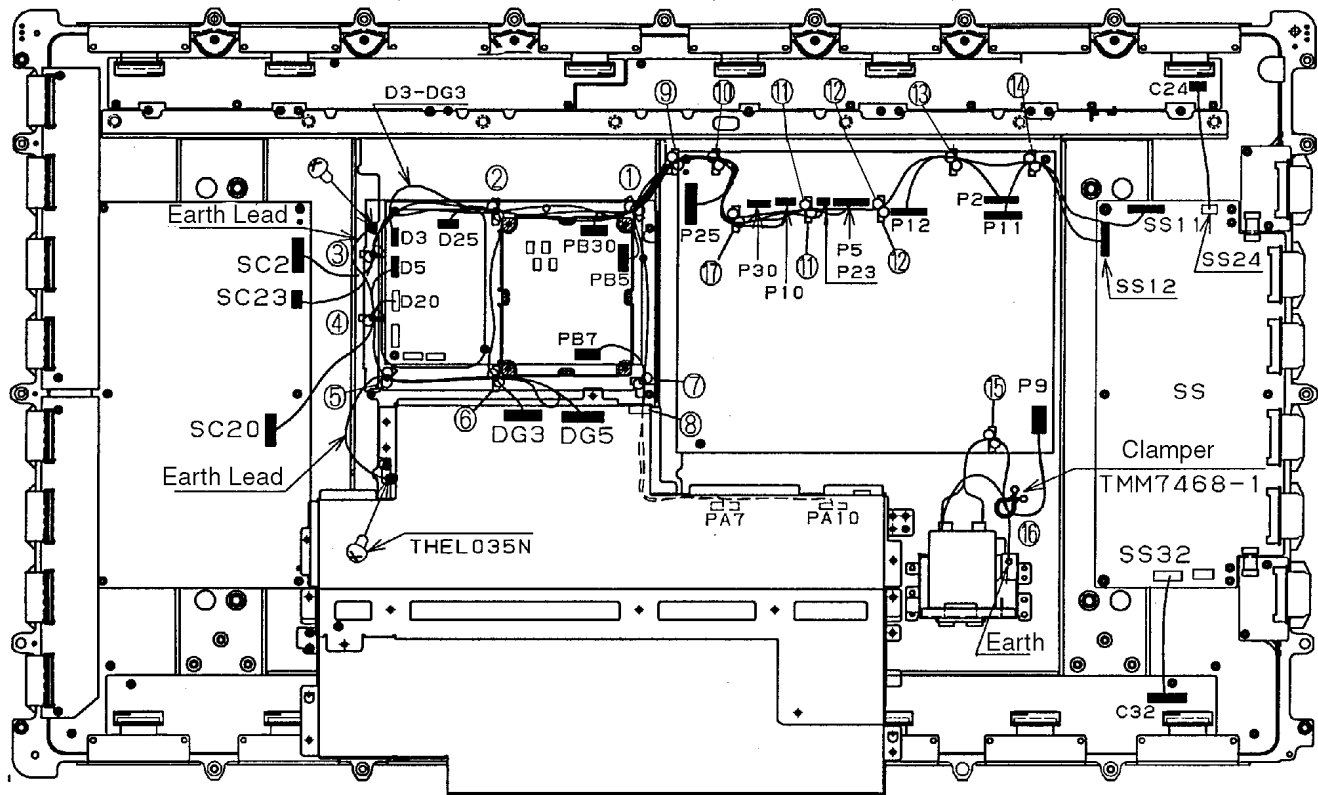

7.4. Lead of Wiring (4)

TH-42PX50U

Connector Connection:

P2,P5,P9,P10,P11,P12,P23,P25,P30,

D3,D5,D25

PB5,PB7,PB30,

SC2,SC20,SC23,

SS11,SS12,


DG3,DG5,

C24,C32

CON : No. — CON : No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭	⑮	⑯	⑰
SC2 — P2	○	○							○	○	○	○	○				○
SC23 — P23	○	○							○	○	○						○
SC20 — D20				○													
DG3 — D3		○				○											
DG5 — D5 TUNER EARTH				○	○	○											
					○	○											
D25 — P25	○	○							○	○							
PB5 — P5	○								○	○	○						○
PA7 — PB7							○	○									
PA10 — P10	○						○	○	○	○							○
SS11 — P11														○			
SS12 — P12													○	○			
AC INLET — P9															○	○	
PB30 — P30	○								○	○							○

7.5. Lead of Wiring (5)

TH-50PX50U

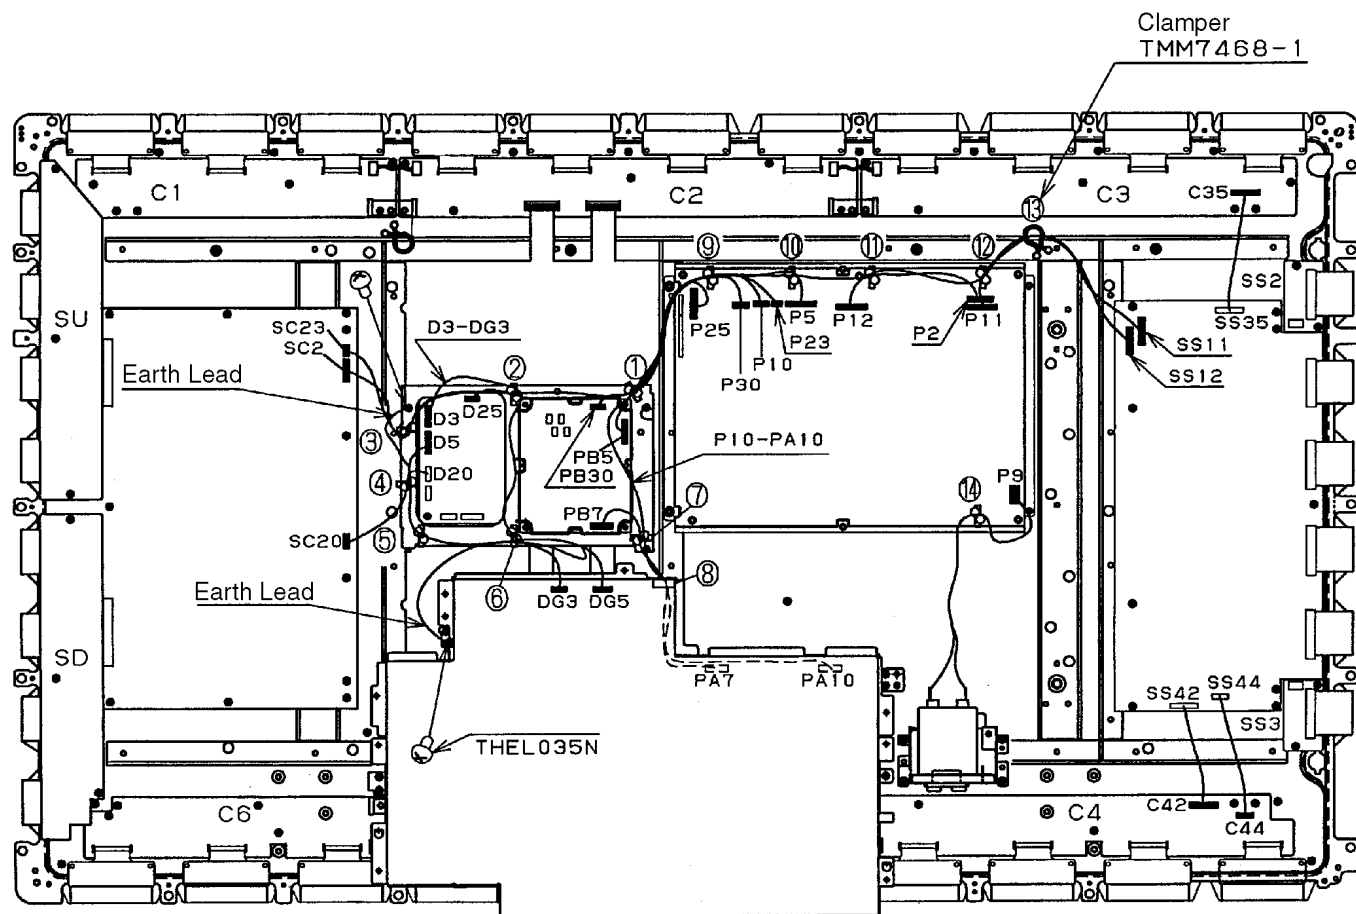

7.6. Lead of Wiring (6)

TH-50PX50U

Connector Connection :

P2,P5,P9,P10,P11,P12,P23,P25,P30,

D3,D5,D25

PB5,PB7,PB30,

SC2,SC20,SC23,


SS11,SS12,

DG3,DG5,

C35,C42,C44

CON : No. — CON : No.	①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭
SC2 — P2	○	○	○						○	○	○			
SC23 — P23	○	○	○						○					
SC20 — D20				○										
DG3 — D3		○				○								
DG5 — D5 TUNER EARTH				○	○	○								
						○								
D25 — P25	○	○												
PB5 — P5	○								○	○				
PA7 — PB7							○	○						
PA10 — P10	○						○	○	○					
SS11 — P11												○	○	
SS12 — P12											○	○	○	
PB30 — P30	○								○					
AC INLET — P9														○

7.7. Lead of Wiring (7)

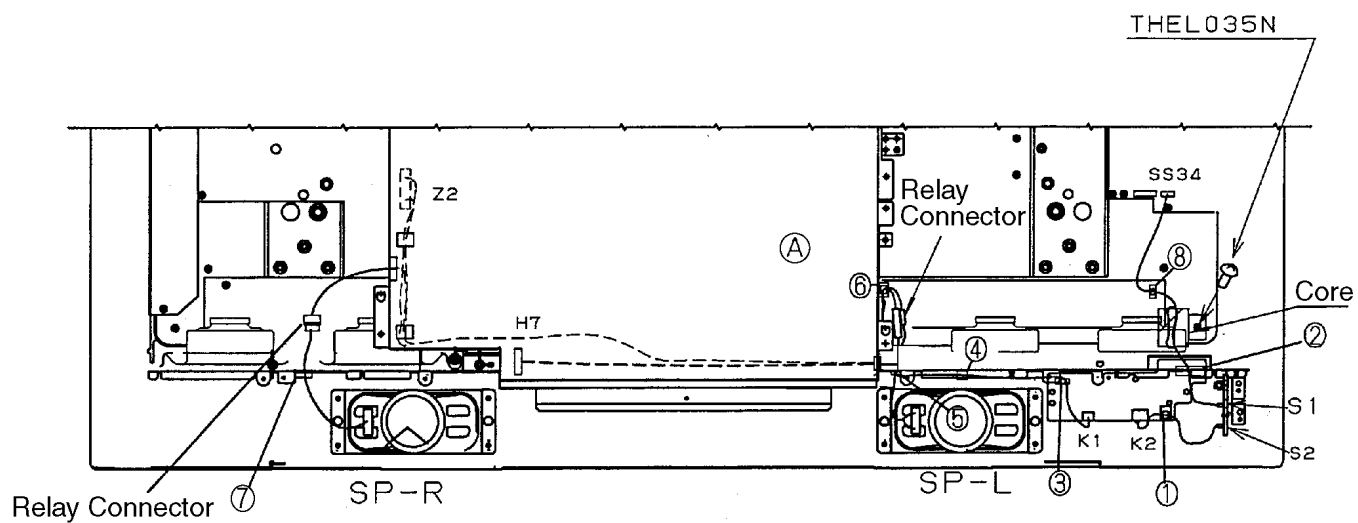


CON:NO.	CON:NO.	①	②	③	④	⑤	⑥	⑦	⑧
S1	SS34		○						○
K1	H7			○	○	○	○		
SP L	Z2					○	○		
SP R	Z2							○	
S2	K2	○							

Connector Connection ; SS34, Relay Connector

7.8. Lead of Wiring (8)

TH-37PX50U

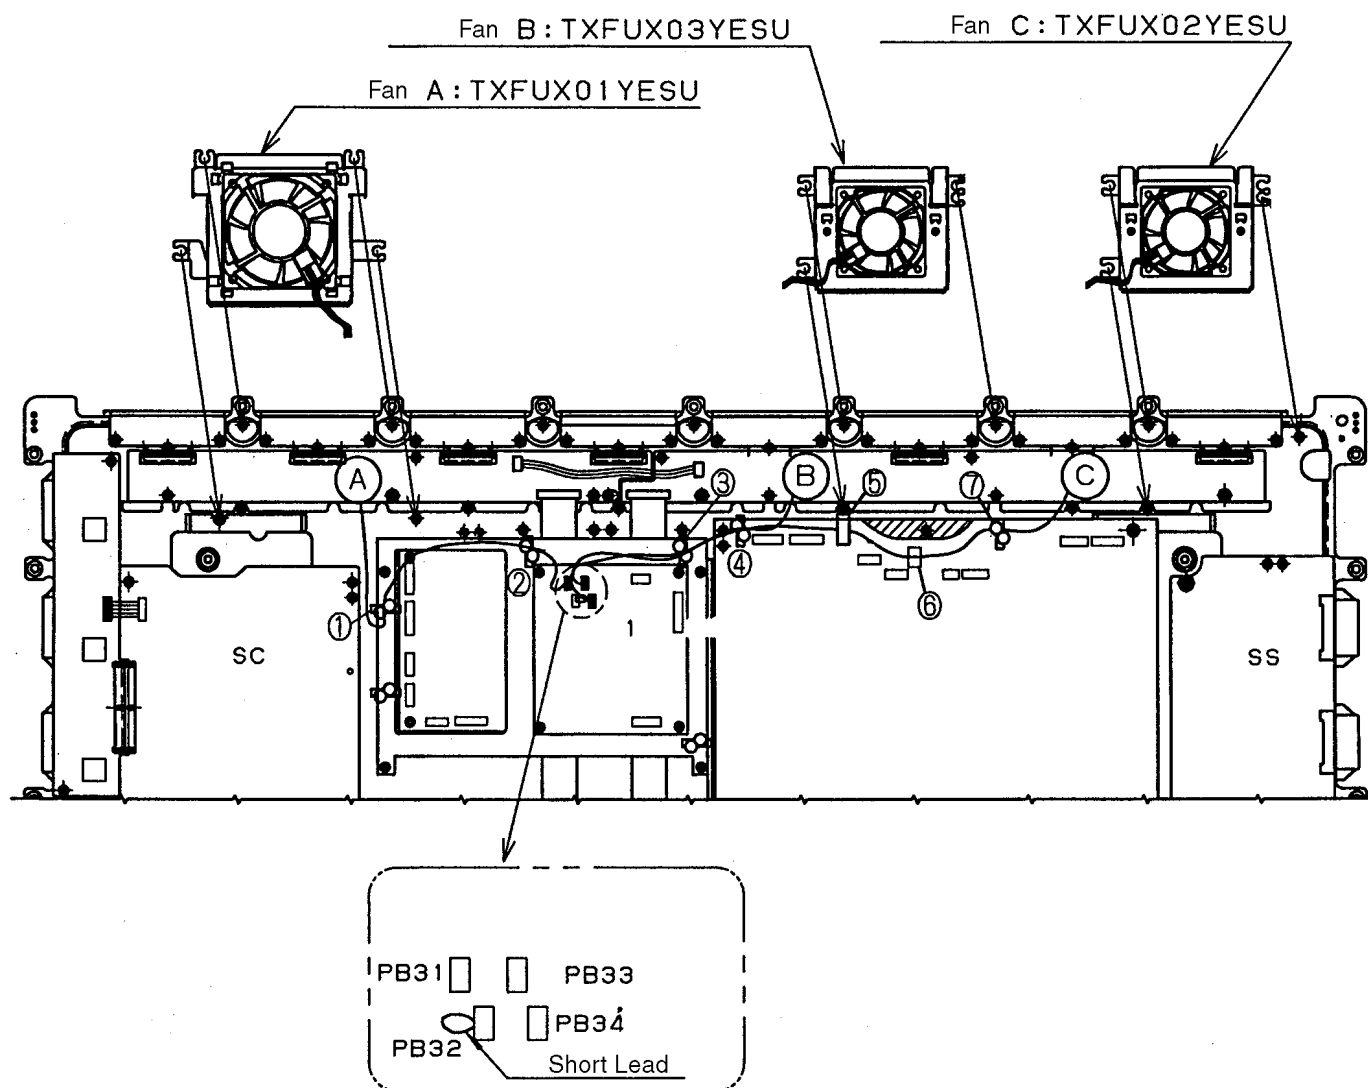


Connector Connection :
PB31,PB33,PB34

CON : No. — CON : No.	①	②	③	④	⑤	⑥	⑦
FAN A — PB31	○	○					
FAN B — PB33			○	○			
FAN C — PB34			○	○	○	○	○


7.9. Lead of Wiring (9)

TH-42PX50U

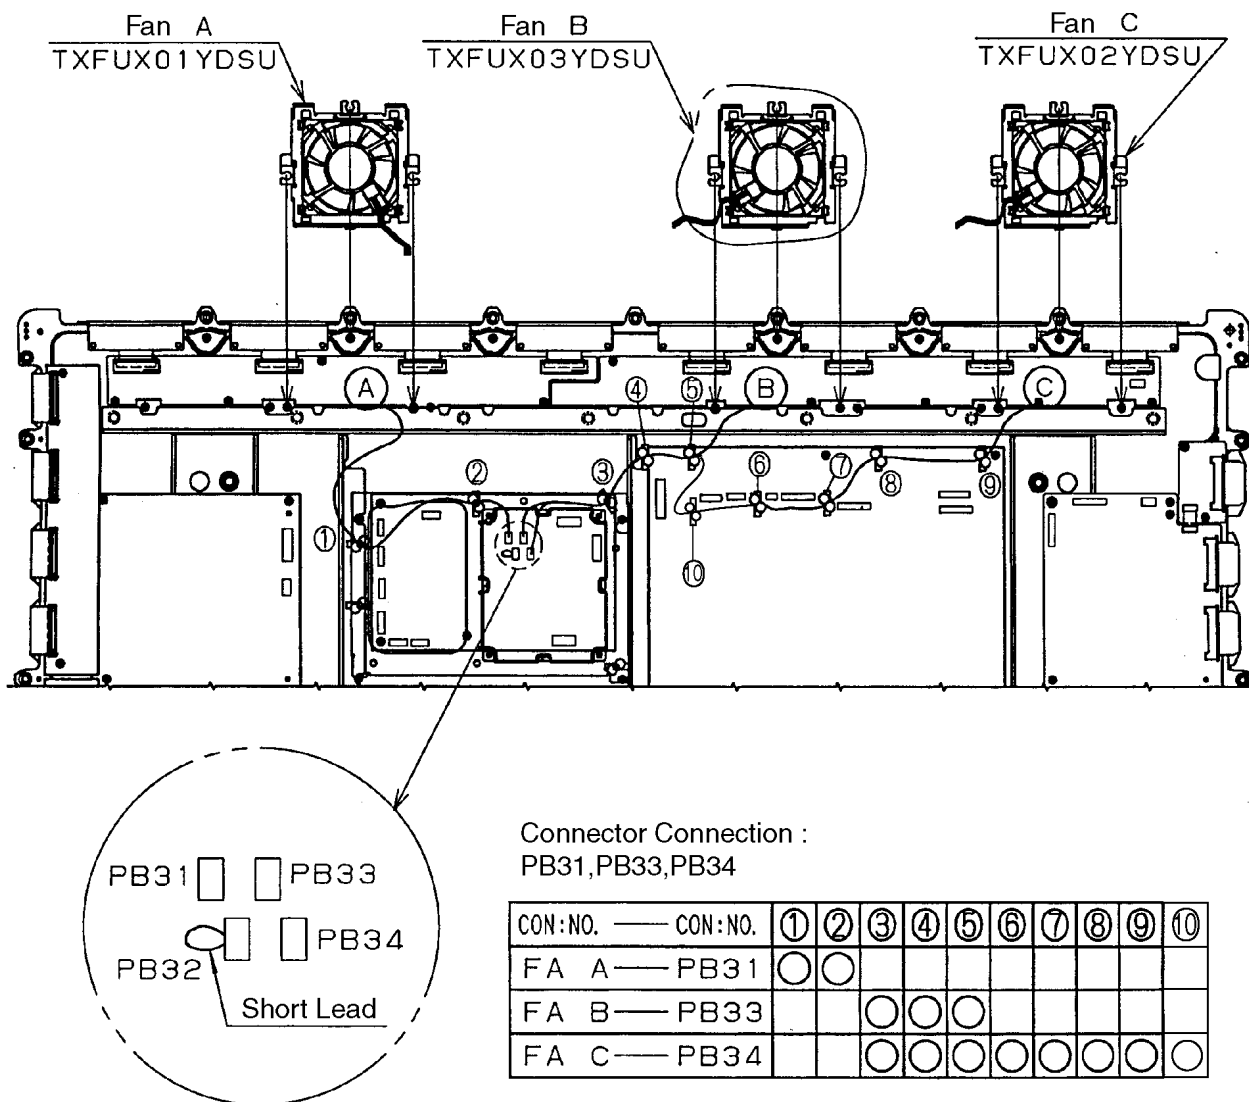

7.10. Lead of Wiring (10)

TH-50PX50U

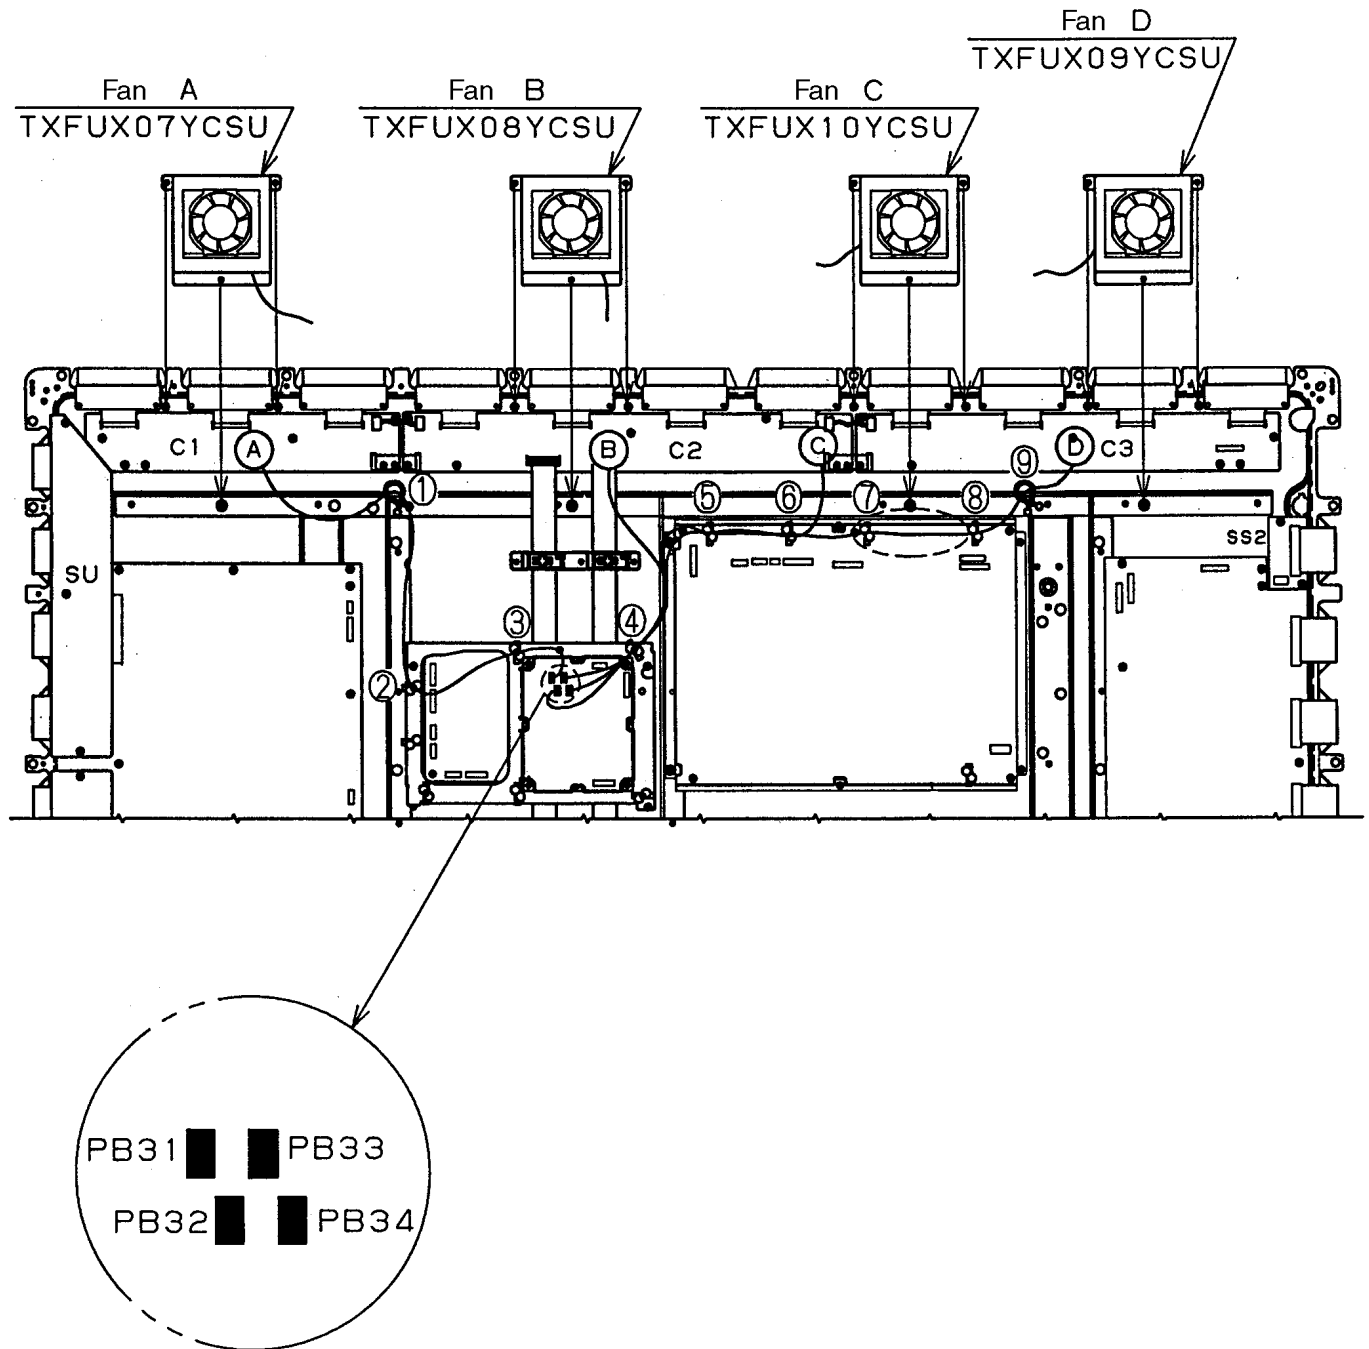

Connector Connection :
PB31,PB32,PB33,PB34

CON : No. — CON : No.	1	2	3	4	5	6	7	8	9
FA A — PB31	○	○	○						
FA B — PB33				○					
FA C — PB32				○	○	○			
FA D — PB34				○	○	○	○	○	○

8 Self-check Function

When symptoms like “the power fails sometimes” or “sometimes there is no picture and/or sound” can not be confirmed at the time of servicing, the self-check function can be used to confirm the occurrence and to find the defective circuit.

In case of “power failure”, flashing of the “POWER” indication (red) at the front of the unit can be used to narrow down the +B line.

8.1. How to access

8.1.1. Access

Produce TV reception screen and, while pressing [VOLUME-] button on the main unit, press [SLEEP] button on the remote controller unit simultaneously.

8.1.2. Exit

When the AC code is pulled out and opened, the display returns to the normal screen.

8.1.3. Screen display

SELF CHECK TZ1 . ***** - *****

UV	OK	DT1	OK	DT2	OK
SND	OK	AVSWV	OK	AVSWA	OK
ADV	OK	GC4P	OK	HDMI	OK
MEM	OK	RTC	OK	PANEL	OK

SOS:1
DT ERR INCH*****



Copyright 2005 Matsushita
Electric Industrial Co., Ltd.

It displays it only in abnormal circumstances.

Display	Ref.No.	Description	Board
UV	TU8200	TV Tuner	DT-Board
DT1	IC8240	HD SL PEAKS_LITE	DT-Board
DT2	IC8240	HD SL PEAKS_LITE	DT-Board
SND	IC2608	BBE VIVA	H-Board
AVSWV	IC2602	VIDEO SW	H-Board
AVSWA	IC2605	AUDIO SW	H-Board
ADV	IC4018	10bit A/D	DG-Board
GC4P	IC4026	GC4PRO	DG-Board
HDMI	IC5003	HDMI I/F RECEIVER	DV-Board
MEM	IC4008	EEPROM	DG-Board
RTC	IC4024	CLOCK GEN	DG-Board
PANEL	IC9300	Display Processor	D-Board

8.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.

Blinking Times	Blinking timing	Contents & Check point
1		No particular check point 12V SOS 3.3V SOS
4		Power SOS
5		5V SOS
6		Scan Driver (SC Energy recovery circuit)
7		Scan Driver (SC floating voltage area)
8		SUS Driver (SS Energy recovery circuit)
9		Model code SOS (Incorrect PCB)
10		Tuner SOS (No power for tuner)
11		Fan SOS
12		Sound SOS

3. Remarks

Above Fan function is operated during the fans are installed.


8.3. No Power

First check point


There are following 2 states of No Power indication by power LED.

1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 8.2.)

1. No lit

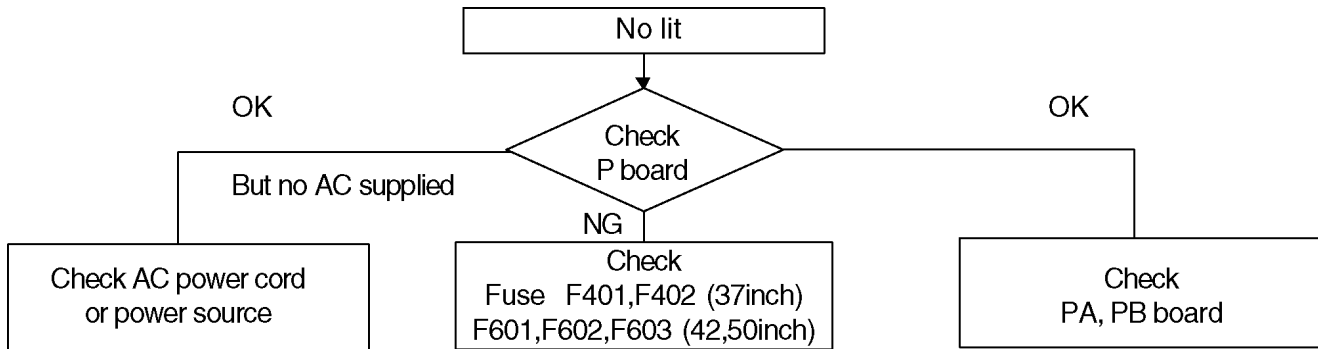


8.4. No Picture

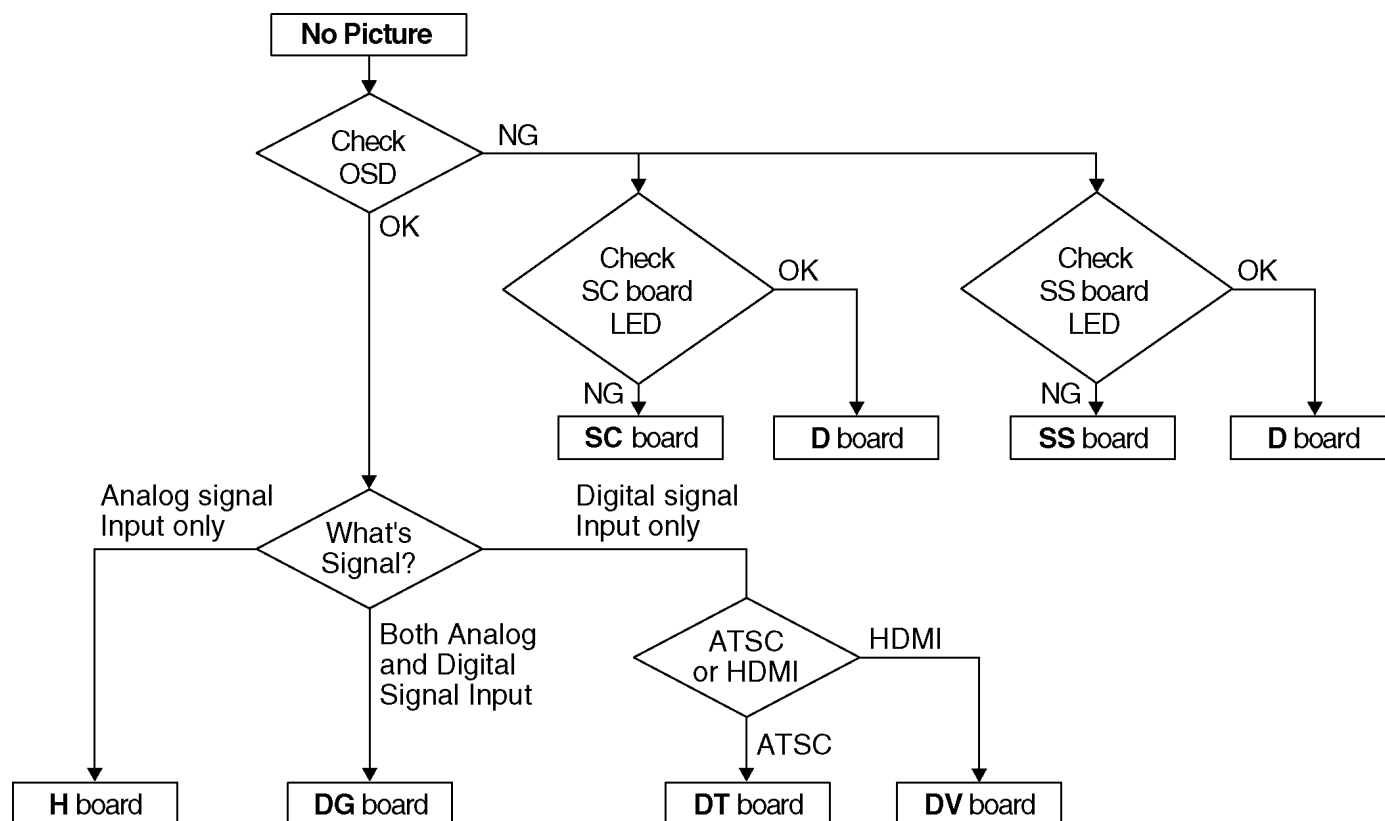


Drive circuits LED indicator

<TH-37PX50U>




SC-Board

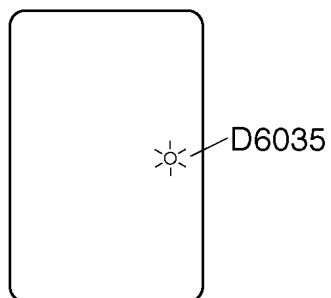


SS-Board

<TH-42PX50U>

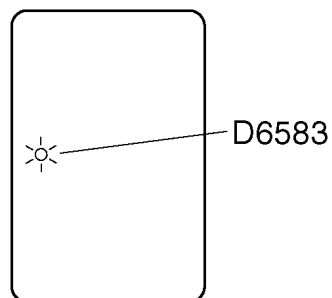


SC-Board

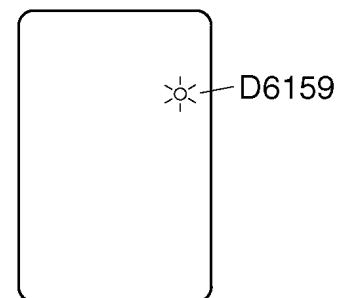


SS-Board

<TH-50PX50U>

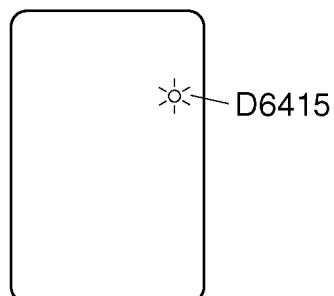

SC-Board

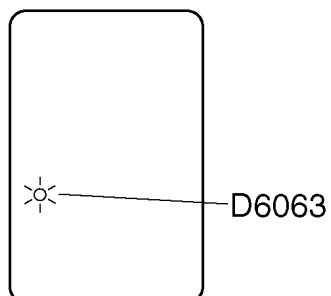


SS-Board

8.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1, 2 is the possible defect P.C.B. for each local area.


TH-37, 42PX50U

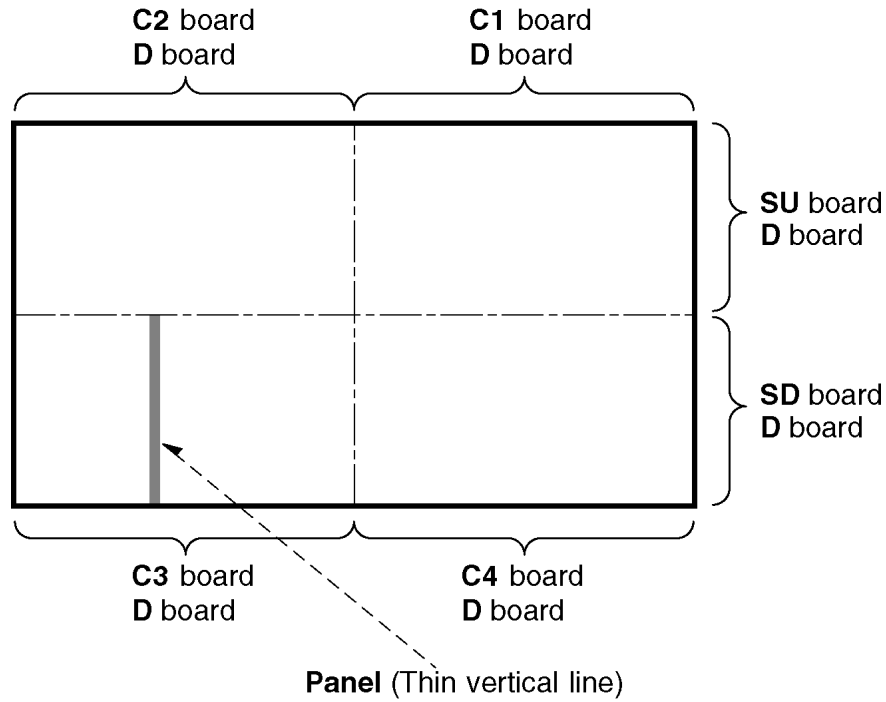

<Local screen failure chart>

Fig-1

TH-50PX50U

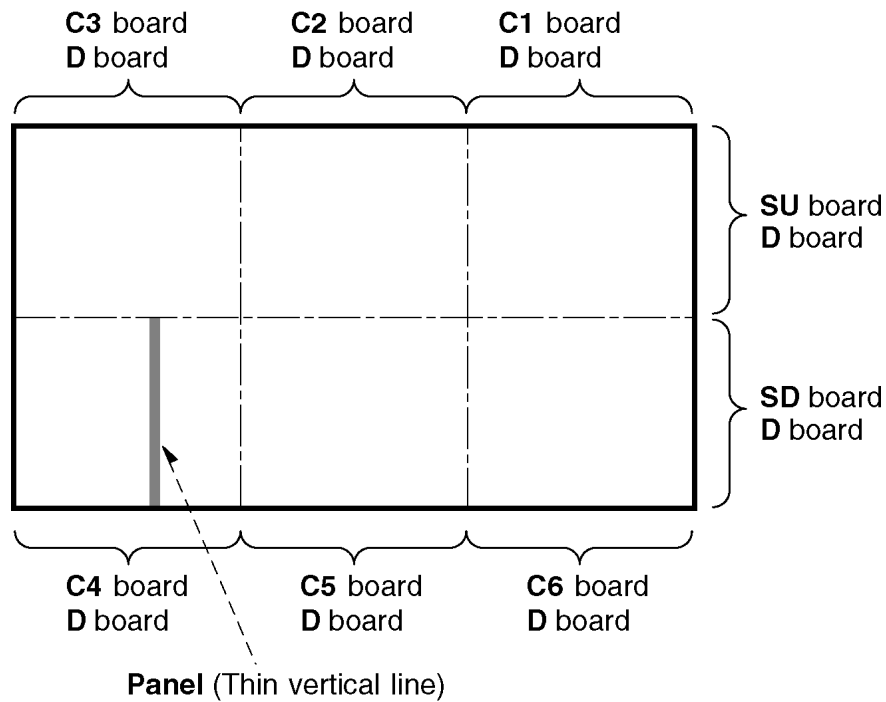

<Local screen failure chart>

Fig-2

9 Serviceman Mode

9.1. How to enter into Serviceman Mode

While pressing [VOLUME-◀] button of the main unit, press [RECALL] button of the remote control three times in a row (within 2 seconds).

9.1.1. Adjustment method.....Use the remote control.

“1” button...Main items Selection in forward direction

“2” button...Main items Selection in reverse direction

“3” button...Sub items Selection in forward direction

“4” button...Sub items Selection in reverse direction

“VOL” button...Value of sub items change in forward direction (▶), in reverse direction (◀)

INTERCAT2001
PCT-ADJ
OPTION
RM-SET
STB-CAS

1-2: Toggle ADJ item
3-4: Toggle SUB item

9.2. Cancellation


Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

9.3. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample Data
PCT-ADJ	PICTUER	22D
	PICTUER2	200
	COLOR	30
	TINT	0
	S-BRT	800
	RFAGC1	74
	AGC-ADJ1	FIX
	RFAGC2	74
	AGC-ADJ2	FIX
OPTION	BOOT	SD
	OPT00	1
	ANT-POW	OFF
	POF-SET	NORMAL
	STB-SEC	SEC
	EMGCY	OFF
	CLK-ADJ	80
	EEP COPY	ALL
RM-SET	COPY	ALL
STB-CAS	-	-

9.4. Option

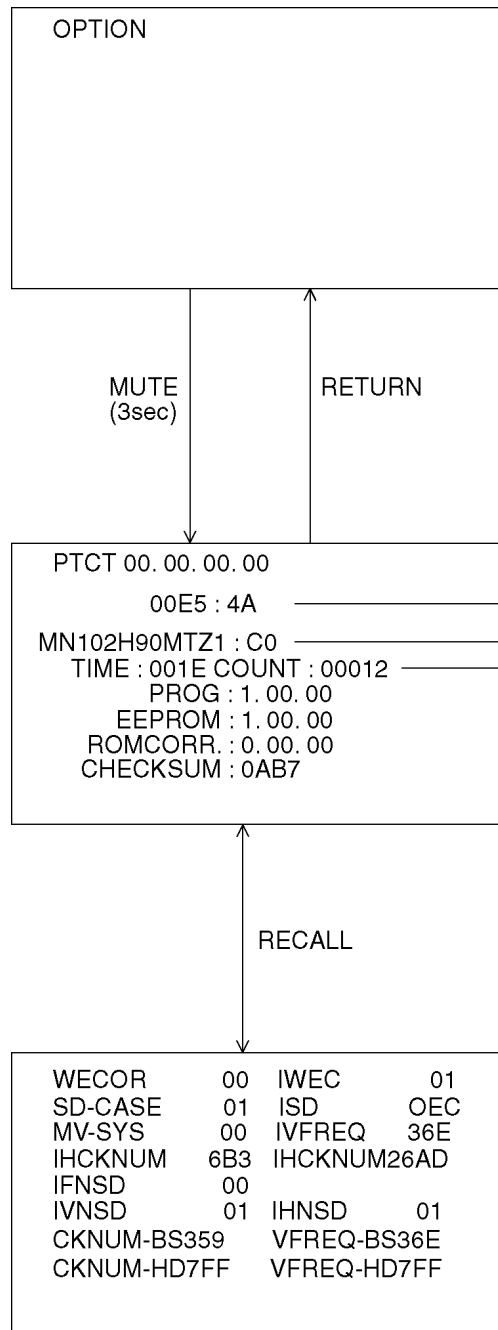

Select "OPTION" in Service man Mode.

EEPROM ADDRESS : EEPROM value

ROM Part.No. : ROM CORR.Check SUM

TIME : Power on time(hexadecimal number)

COUNT : ON Count

PROG : Soft Ver.

EEPROM : EEPROM Ver.

ROMCORR. : ROMCORR Ver.

CHECKSUM : Soft check SUM

"3" button EEPROM address low digits increment

"4" button EEPROM address low digits decrement

"5" button EEPROM address upper digits increment

"6" button EEPROM data read

"VOL" button Value of sub items change in forward direction(▶),
in reverse direction(◀).

10 Adjustment Procedure

10.1. Driver Set-up

10.1.1. Item / Preparation

1. Input an APL 100 % white signal.
2. Set the picture controls: -
Picture mode: Normal
White balance: Cool
Aspect: 16:9

10.1.2. Adjustments

Adjust driver section voltages referring the panel data on the panel data label.

TH-37PX50U

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	187V $\pm$ 2V	R628 (P)	*
Ve	TPVE (SS)	160V $\pm$ 1V	VR6045 (SS)	*
Vset	TPVSET (SC)	240V $\pm$ 7V	Fixed	
Vad	TPVAD (SC)	-105V $\pm$ 1V	VR6503 (SC)	
Vscn	TPVSCN (SC)	Vad + 130V $\pm$ 4V	Fixed	
Vda	TPVDA (SS)	70V $\pm$ 1V	R665 (P)	
PFC	C448 (+)(-)	395V $\pm$ 0.5V	R443 (P)	
Vdat	C555 (+)(-)	73V $\pm$ 0.1V	R665 (P)	load current : 0.4A
Vlow	TPVsus	178V $\pm$ 0.5V	R661 (P)	load current : 1.3A

*See the Panel label.

TH-50PX50U

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	176V $\pm$ 2V	VR351 (P)	*
Ve	TPVE (SS)	150V $\pm$ 1V	VR6250 (SS)	*
Vset	TPVSET (SC)	225V $\pm$ 7V	Fixed	
Vad	TPVAD (SC)	-90V $\pm$ 1V	VR6801 (SC)	
Vscn	TPVSCN (SC)	Vad + 130V $\pm$ 4V	Fixed	
Vda	TPVDA (SS)	75V $\pm$ 1V	Fixed	
Vdat	P12_pin2,5	75V $\pm$ 0.1V	Fixed	


*See the Panel label.

TH-42PX50U

Name	Test Point	Voltage	Volume	Remarks
Vsus	TPVSUS (SS)	188V $\pm$ 2V	VR351(P)	*
Ve	TPVE (SS)	160V $\pm$ 1V	VR6145 (SS)	*
Vset	TPVSET (SC)	240V $\pm$ 7V	Fixed	
Vad	TPVAD (SC)	-105V $\pm$ 1V	VR6477 (SC)	
Vscn	TPVSCN (SC)	Vad + 130V $\pm$ 4V	Fixed	
Vda	TPVDA (SS)	70V $\pm$ 1V	Fixed	
Vdat	P12_pin2,5	70V $\pm$ 0.1V	Fixed	

*See the Panel label.

Panel Label information

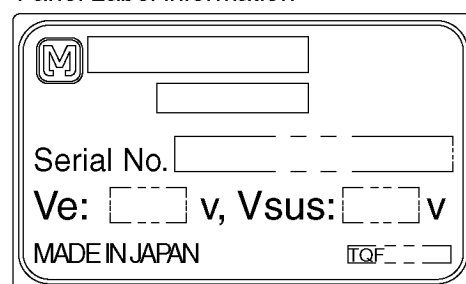

Adjustment voltage

10.2. Initialization Pulse Adjust

1. Input a Cross hatch signal.


2. Set the picture controls: -

Picture mode: Normal

White balance: Cool

Adjust the indicated test point for the specified wave form.

	Test point	Volume	Level	Remark
T1	TPSC1 (SC)	---	10 + 10 / -5 μ Sec	TH-37PX50U
		---	10 + 10 / -5 μ Sec	TH-42PX50U
		---	20 $\pm$ 15 μ Sec	TH-50PX50U
T2	TPSS1 (SS)	VR6505 (SC)	210 $\pm$ 10 μ Sec	TH-37PX50U
		VR6557 (SC)	210 $\pm$ 10 μ Sec	TH-42PX50U
		VR6602 (SC)	155 $\pm$ 10 μ Sec	TH-50PX50U

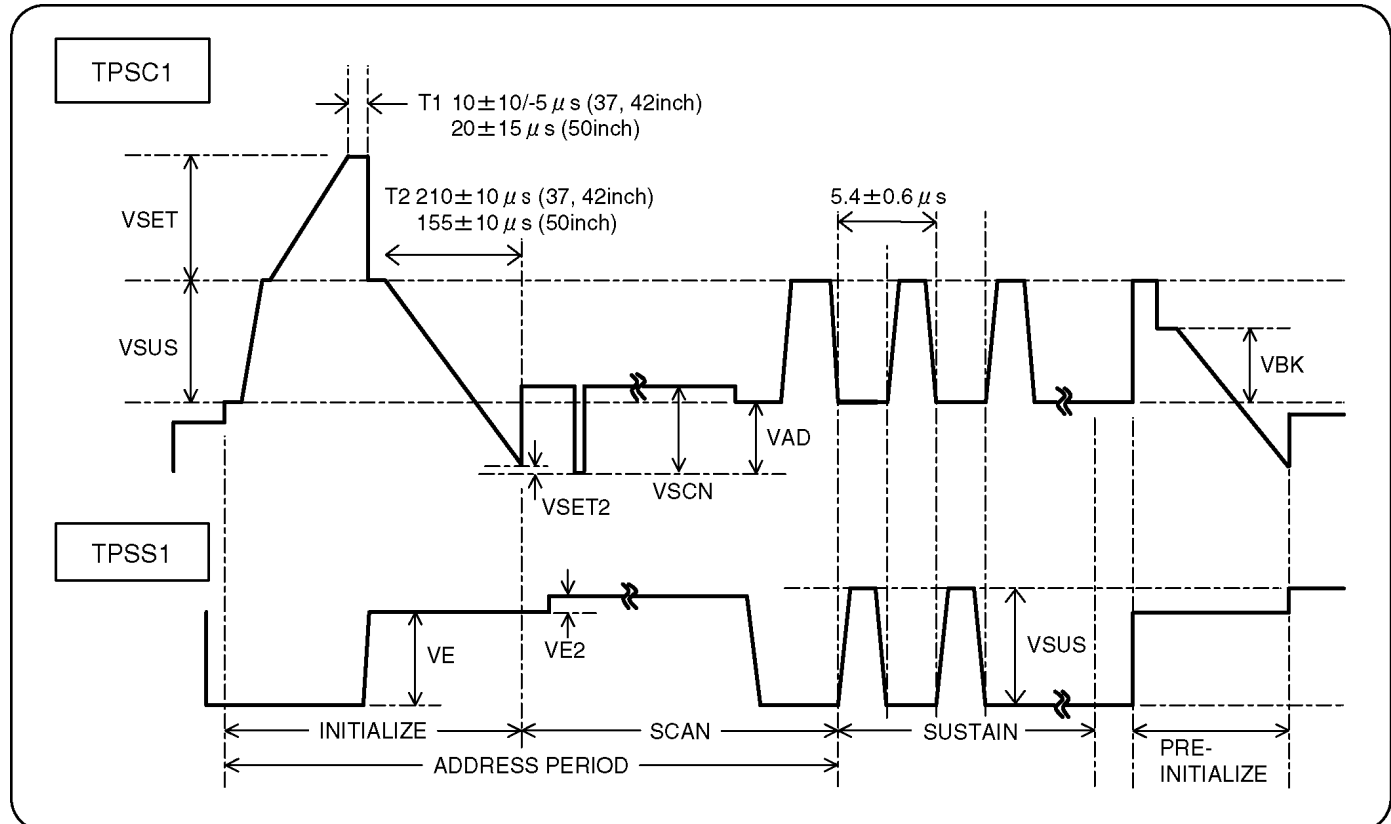

10.3. P.C.B. (Printed Circuit Board) exchange

10.3.1. Caution

1. To remove P.C.B. , wait 1 minute after power was off for discharge from electrolysis capacitors.

10.3.2. Quick adjustment after P.C.B. exchange

TH-37PX50U

P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	187V $\pm$ 2V	R628 (P)	*
	Vda	TPVDA (SS)	70V $\pm$ 1V	R665 (P)	
	PFC	C488 (+) (-) (P)	395V $\pm$ 0.5V	R443 (P)	
	Vdat	C555 (+) (-) (P)	73V $\pm$ 0.1V	R665 (P)	load current : 0.4A
	Vlow	TPVSUS (SS)	178V $\pm$ 0.5V	R661 (P)	load current : 1.3A
SC Board	Vad	TPVAD (SC)	-105V $\pm$ 1V	VR6503 (SC)	
	Vset	TPVSET (SC)	240V $\pm$ 7V	Fixed	
	Vscn	TPVSCN (SC)	Vad + 130 $\pm$ 4V	Fixed	
SS Board	Ve	TPVE (SS)	160V $\pm$ 1V	VR6045 (SS)	*
D, DG Board White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals					

*See the Panel label.

TH-42PX50U

P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	188V $\pm$ 2V	R351 (P)	*
	Vda	TPVDA (SS)	70V $\pm$ 1V	Fixed	
	Vdat	P12_2,5pin (P)	70V $\pm$ 0.1V	Fixed	
SC Board	Vad	TPVAD (SC)	-105V $\pm$ 1V	VR6477(SC)	
	Vset	TPVSET (SC)	240V $\pm$ 7V	Fixed	
	Vscn	TPVSCN (SC)	Vad + 130 $\pm$ 4V	Fixed	
SS Board	Ve	TPVE (SS)	160V $\pm$ 1V	VR6145 (SS)	*
D, DG Board White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals					

*See the Panel label.


TH-50PX50U

P.C.B.	Name	Test Point	Voltage	Volume	Remarks
P Board	Vsus	TPVSUS (SS)	176V $\pm$ 2V	VR351 (P)	*
	Vda	TPVDA (SS)	75V $\pm$ 1V	Fixed	
	Vdat	P12_2,5pin (P)	75V $\pm$ 0.1V	Fixed	
SC Board	Vad	TPVAD (SC)	-90V $\pm$ 1V	VR6801(SC)	
	Vset	TPVSET (SC)	225V $\pm$ 7V	Fixed	
	Vscn	TPVSCN (SC)	Vad + 130 $\pm$ 4V	Fixed	
SS Board	Ve	TPVE (SS)	150V $\pm$ 1V	VR6250 (SS)	*
D, DG Board White blance, Pedestal and Sub brightness for NTSC, PAL, HD, PC and 625i signals					


*See the Panel label.

10.4. Adjustment Volume Location


TH-37PX50U

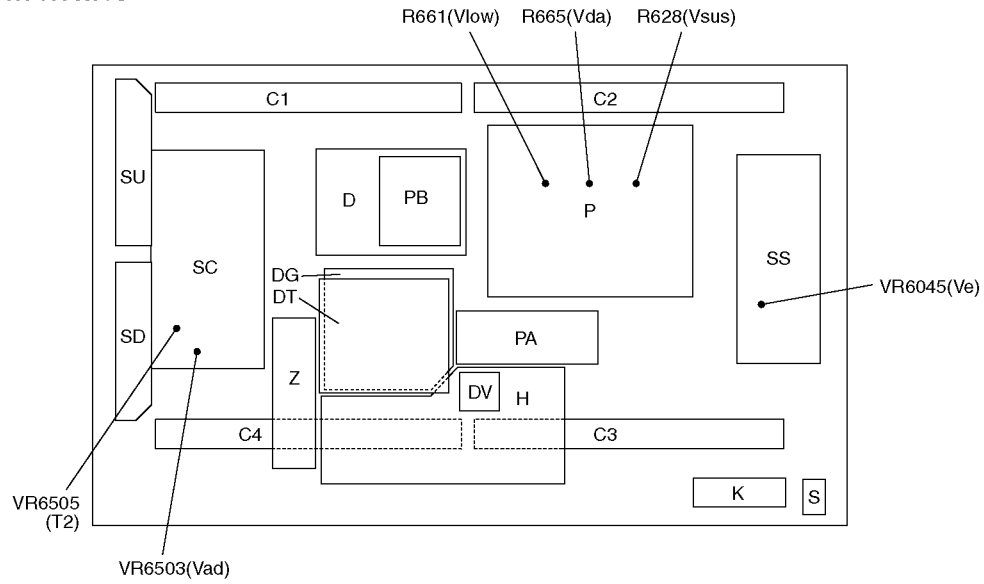

TH-42PX50U

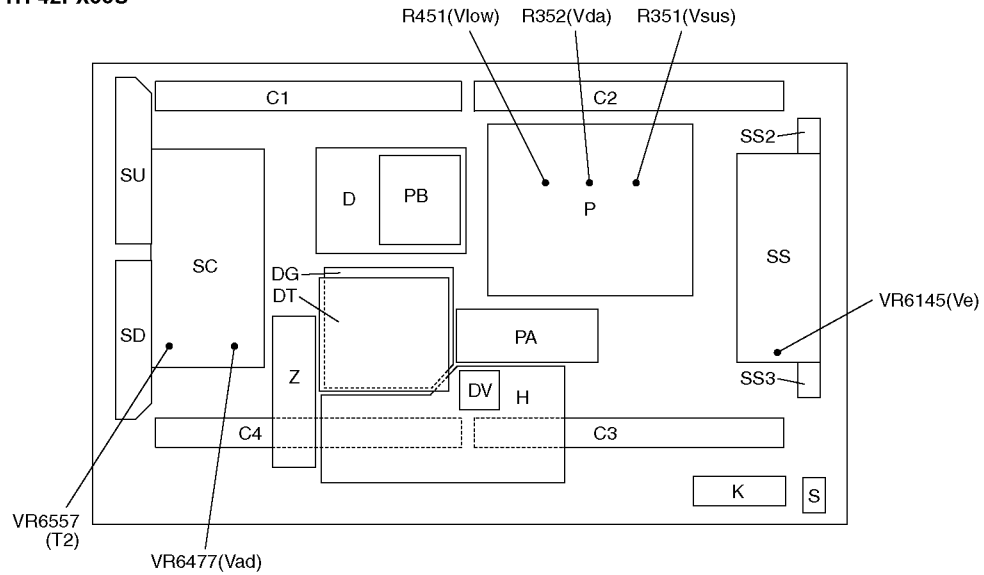


TH-50PX50U

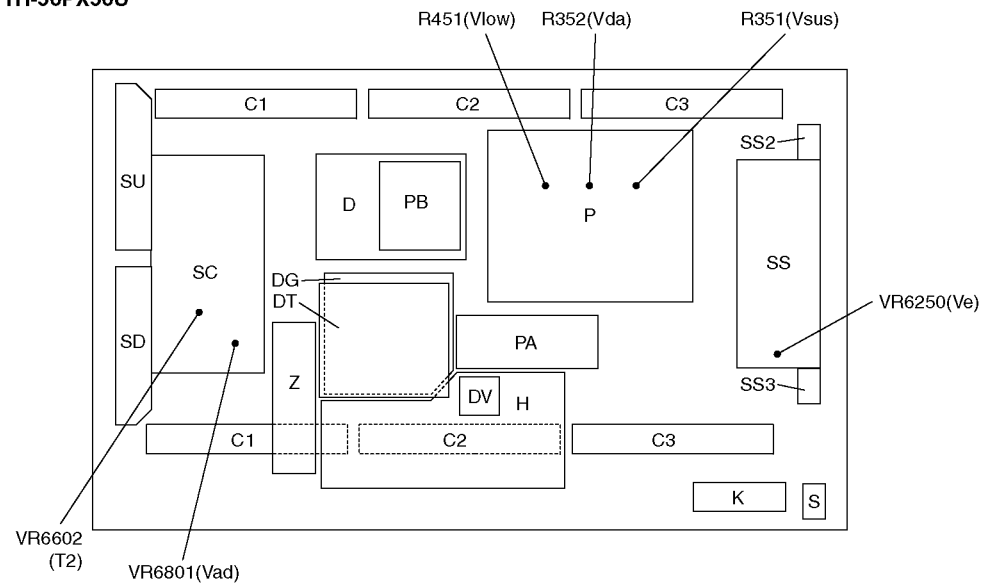


10.5. Test Point Location


TH-37PX50U

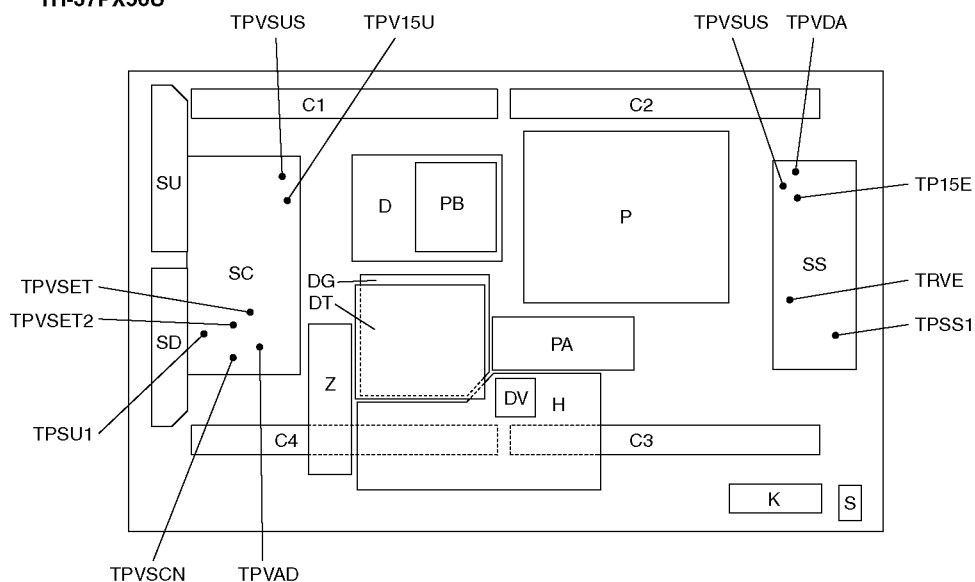

TH-42PX50U

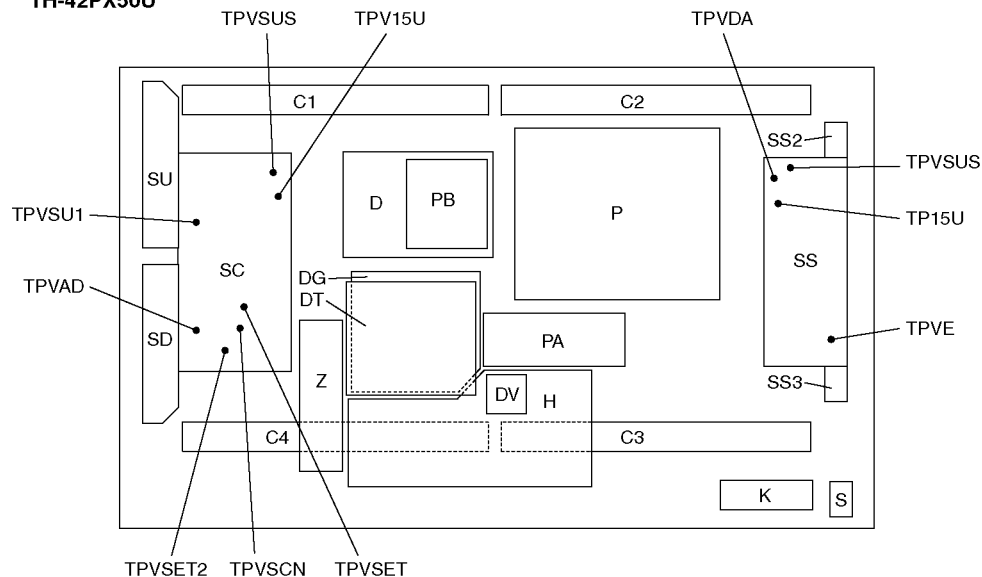

TH-50PX50U

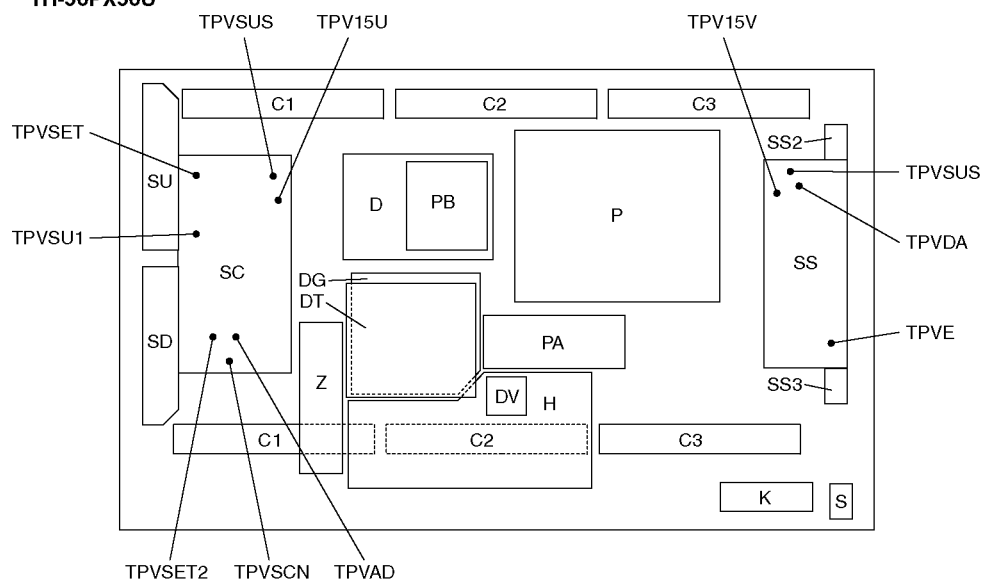


11 Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command

- Enter to the Service Mode.
- Press MUTE button on remote control. Hold few seconds.
- Press the ch "UP" or "Down" button and Vol. "UP" or "Down" button to Set the data of EEPROM(ADDRESS 1584) to 01.

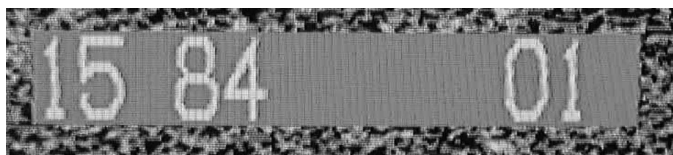

Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

It can be made Hotel mode.

3. Exit command

- First, set the data of EEPROM (ADDRESS 1584) to 00.



Next, Push the Power switch(button) off/on the set(the remote control) to turn the set off/on.

Then, it is no longer hotel mode.

4. Access command to the Hotel mode setup menu

- Prerequisite : It is conditions that the data of EEPROM(ADDRESS 1584) is 01.

In order to display the Hotel mode setup menu, please enter the following command (within 2 second).

[TV] : Vol. "Down" + [REMOTE] : TV/VIDEO (3 times)

Then, the Hotel mode setup menu is displayed.

Hotel Mode		back
Mode	ON	▷
Input	RF	▷
Channel	101-1	▷
Volume	20	▷
Vol. Max	30	▷
OSD Ctrl	Pattern1	▷
FP Ctrl	Pattern1	▷
Pow Ctrl	ON	▷

5. Explain the Hotel mode setup menu

CAUTION

This setup is not valid, unless data of EEPROM


(ADDRESS 1584) will be 01, even if each settings were done.


item	Function
Mode	Select hotel mode ON/OFF
Input	Select input signal modes. Set this signal, each time power is switched on. Selection: Off/RF/COMP1/COMP2/HDMI1/HDMI2/VID EO1/VIDEO2 • Off: give priority to a last memory.
Channel	Select channel when input signal is RF. Set the channel, each time power is switched on. Selection:0 to Last setting value
Volume	Adjust output Volume. Set this volume, each time power is switched on. If the value of InitVol is changed, volume will change. However, priority is given to a last memory when InitVol is Off. When "InitVol" is larger than "MaxVol", make "InitVol" and "MaxVol" the same. Selection/Range: Off/0 to 63 • Off: give priority to a last memory
Vol. Max	Adjust maximum volume. Set this max. volume, each time power is switched on. When "MaxVol" is smaller than "InitVol", make "MaxVol" and "InitVol" the same, if "InitVol" is not Off. Range: 0 to 63
OSD Ctrl	Restrict the OSD. Restrict the OSD, each time power is switched on. Selection:Off: altogether valid. Pattern1: restrict the OSD.
FP Ctrl	Select flont key conditions. Set this condition, each time power is switched on. Selection: Off/Pattern1/All • Off: altogether valid • Pattern: restrict input selection • All: altogether invalid.
Pow Ctrl	Select power on control when AC power on. Off: Power on in the state of last. ON: Power on when AC power on.

12 Conductor View

12.1. P-Board (37inch)

P-BOARD (FOIL SIDE)
TNPA3570AB

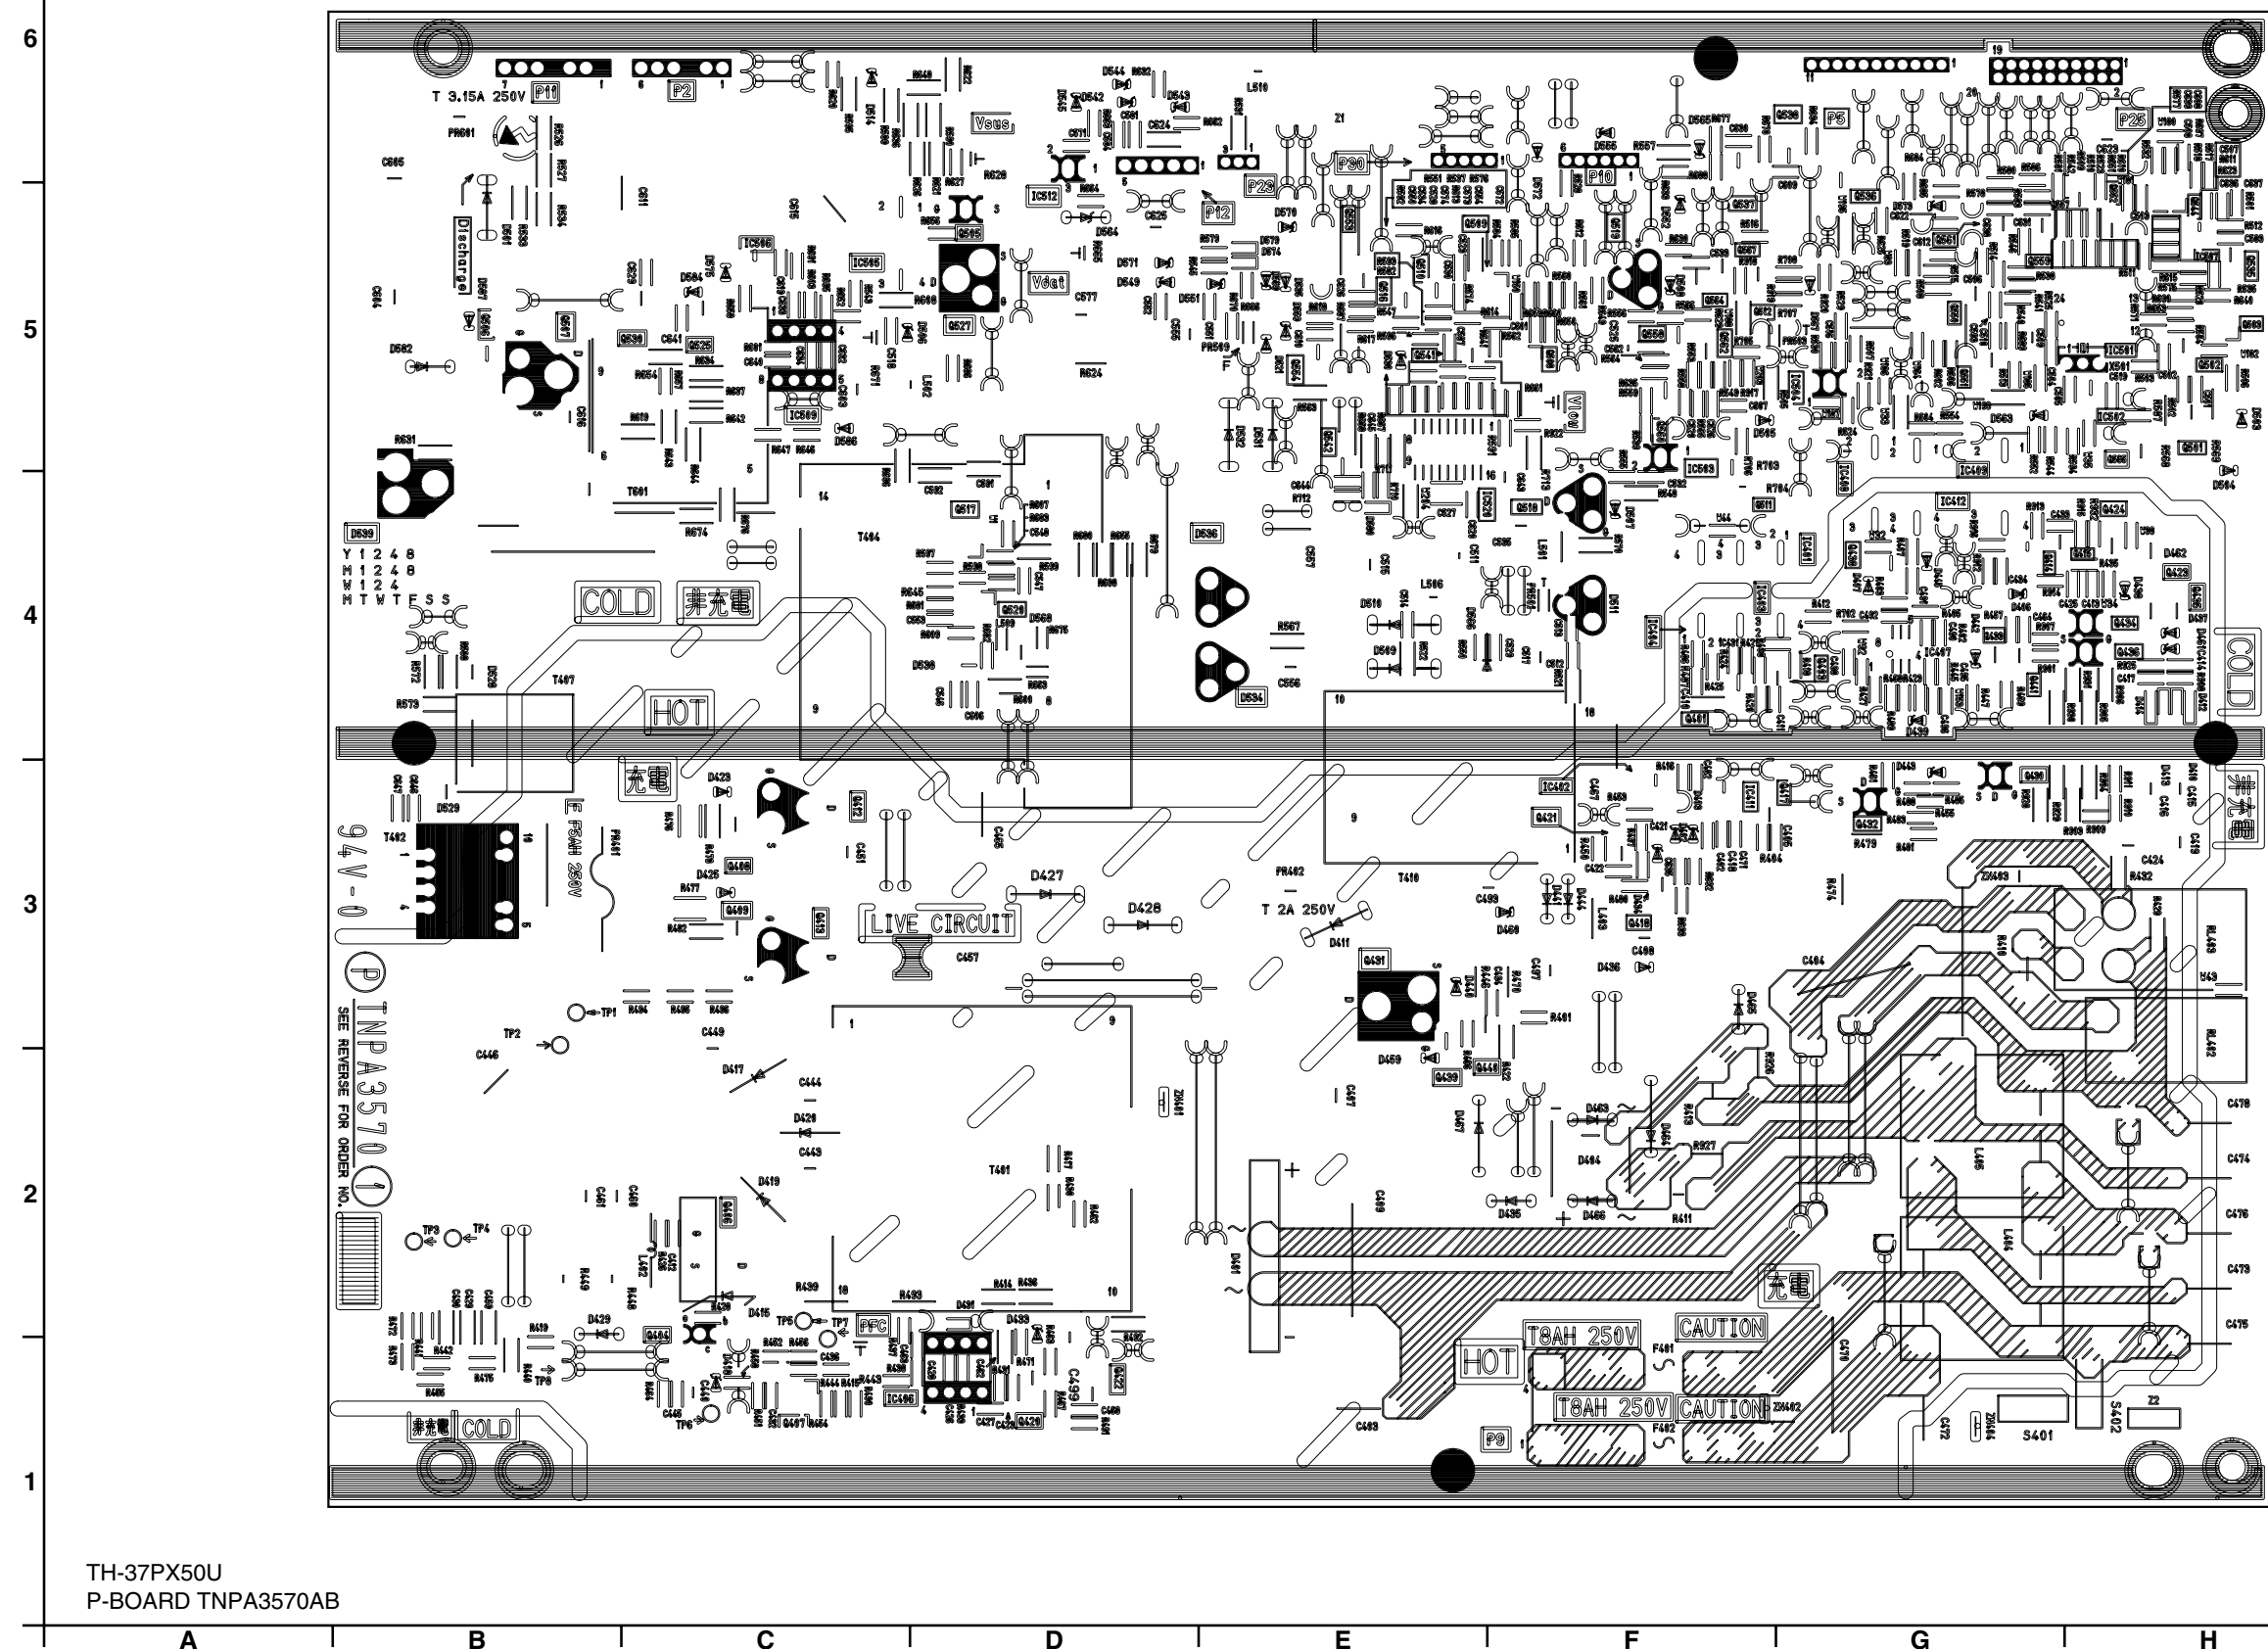

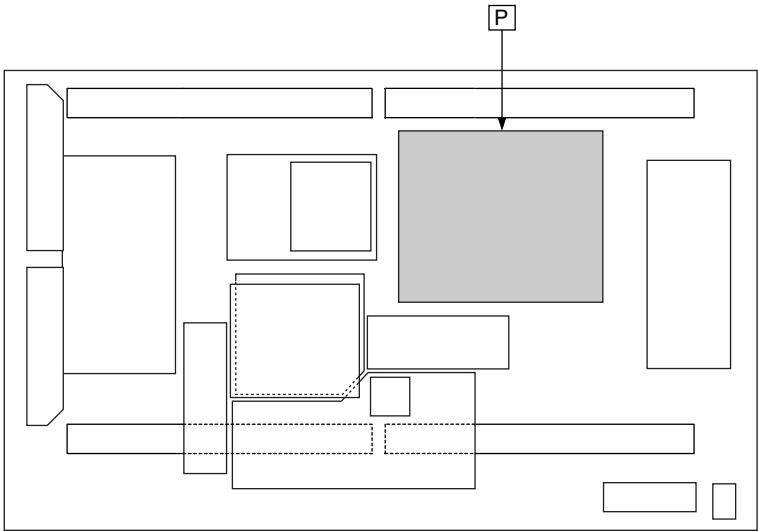

Parts Location


P-BOARD (FOIL SIDE)							
IC		TRANSISTOR		Q441	G-4	Q553	E-5
IC401	G-4	Q401	F-4	Q501	H-5	Q554	E-5
IC402	F-3	Q403	G-4	Q502	H-5	Q557	G-5
IC403	F-4	Q404	C-2	Q503	H-5	Q558	F-5
IC404	F-4	Q406	C-2	Q505	D-5	Q559	G-5
IC406	D-1	Q407	C-1	Q506	B-5	Q560	F-5
IC407	G-4	Q408	C-3	Q507	B-5	Q561	G-5
IC408	G-4	Q409	C-3	Q508	F-5	Q562	F-5
IC409	G-5	Q412	C-3	Q509	E-5	Q564	F-5
IC411	F-3	Q413	C-3	Q510	E-5	Q565	H-5
IC412	G-4	Q414	G-4	Q511	F-4	Q567	F-5
IC431	F-4	Q415	H-4	Q512	F-5	TP	
IC501	H-5	Q417	G-3	Q516	E-5		
IC502	H-5	Q418	F-3	Q517	D-4	TP1	B-3
IC503	F-5	Q420	D-1	Q518	F-4	TP2	B-3
IC504	G-5	Q421	F-3	Q519	F-5	TP3	B-2
IC505	C-5	Q422	D-1	Q520	D-4	TP4	B-2
IC506	C-5	Q423	H-4	Q525	C-5	TP5	C-2
IC507	H-5	Q424	H-4	Q527	D-5	TP6	C-1
IC509	C-5	Q430	G-3	Q530	C-5	TP7	C-1
IC512	D-6	Q431	E-3	Q535	H-5	TP8	B-1
IC520	E-5	Q432	G-3	Q536	G-5		
		Q433	G-4	Q537	F-5		
		Q434	H-4	Q538	G-6		
		Q435	H-4	Q541	E-5		
		Q436	H-4	Q542	E-5		
		Q438	G-4	Q544	H-5		
		Q439	E-2	Q550	G-5		
		Q440	E-2	Q551	G-5		
				Q552	H-5		

TH-37PX50U
P-BOARD PARTS LOCATION

Parts Location

P-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC406	F-1	Q404	G-1
IC503	D-5	Q406	G-2
IC504	C-5	Q412	G-3
IC509	G-5	Q413	G-3
IC512	F-6	Q430	B-3
		Q431	D-3
		Q432	C-3
		Q434	B-4
		Q436	B-4
		Q505	F-5
		Q507	G-5
		Q518	D-4
		Q519	D-5
		Q527	F-5


TH-37PX50U
P-BOARD PARTS LOCATION

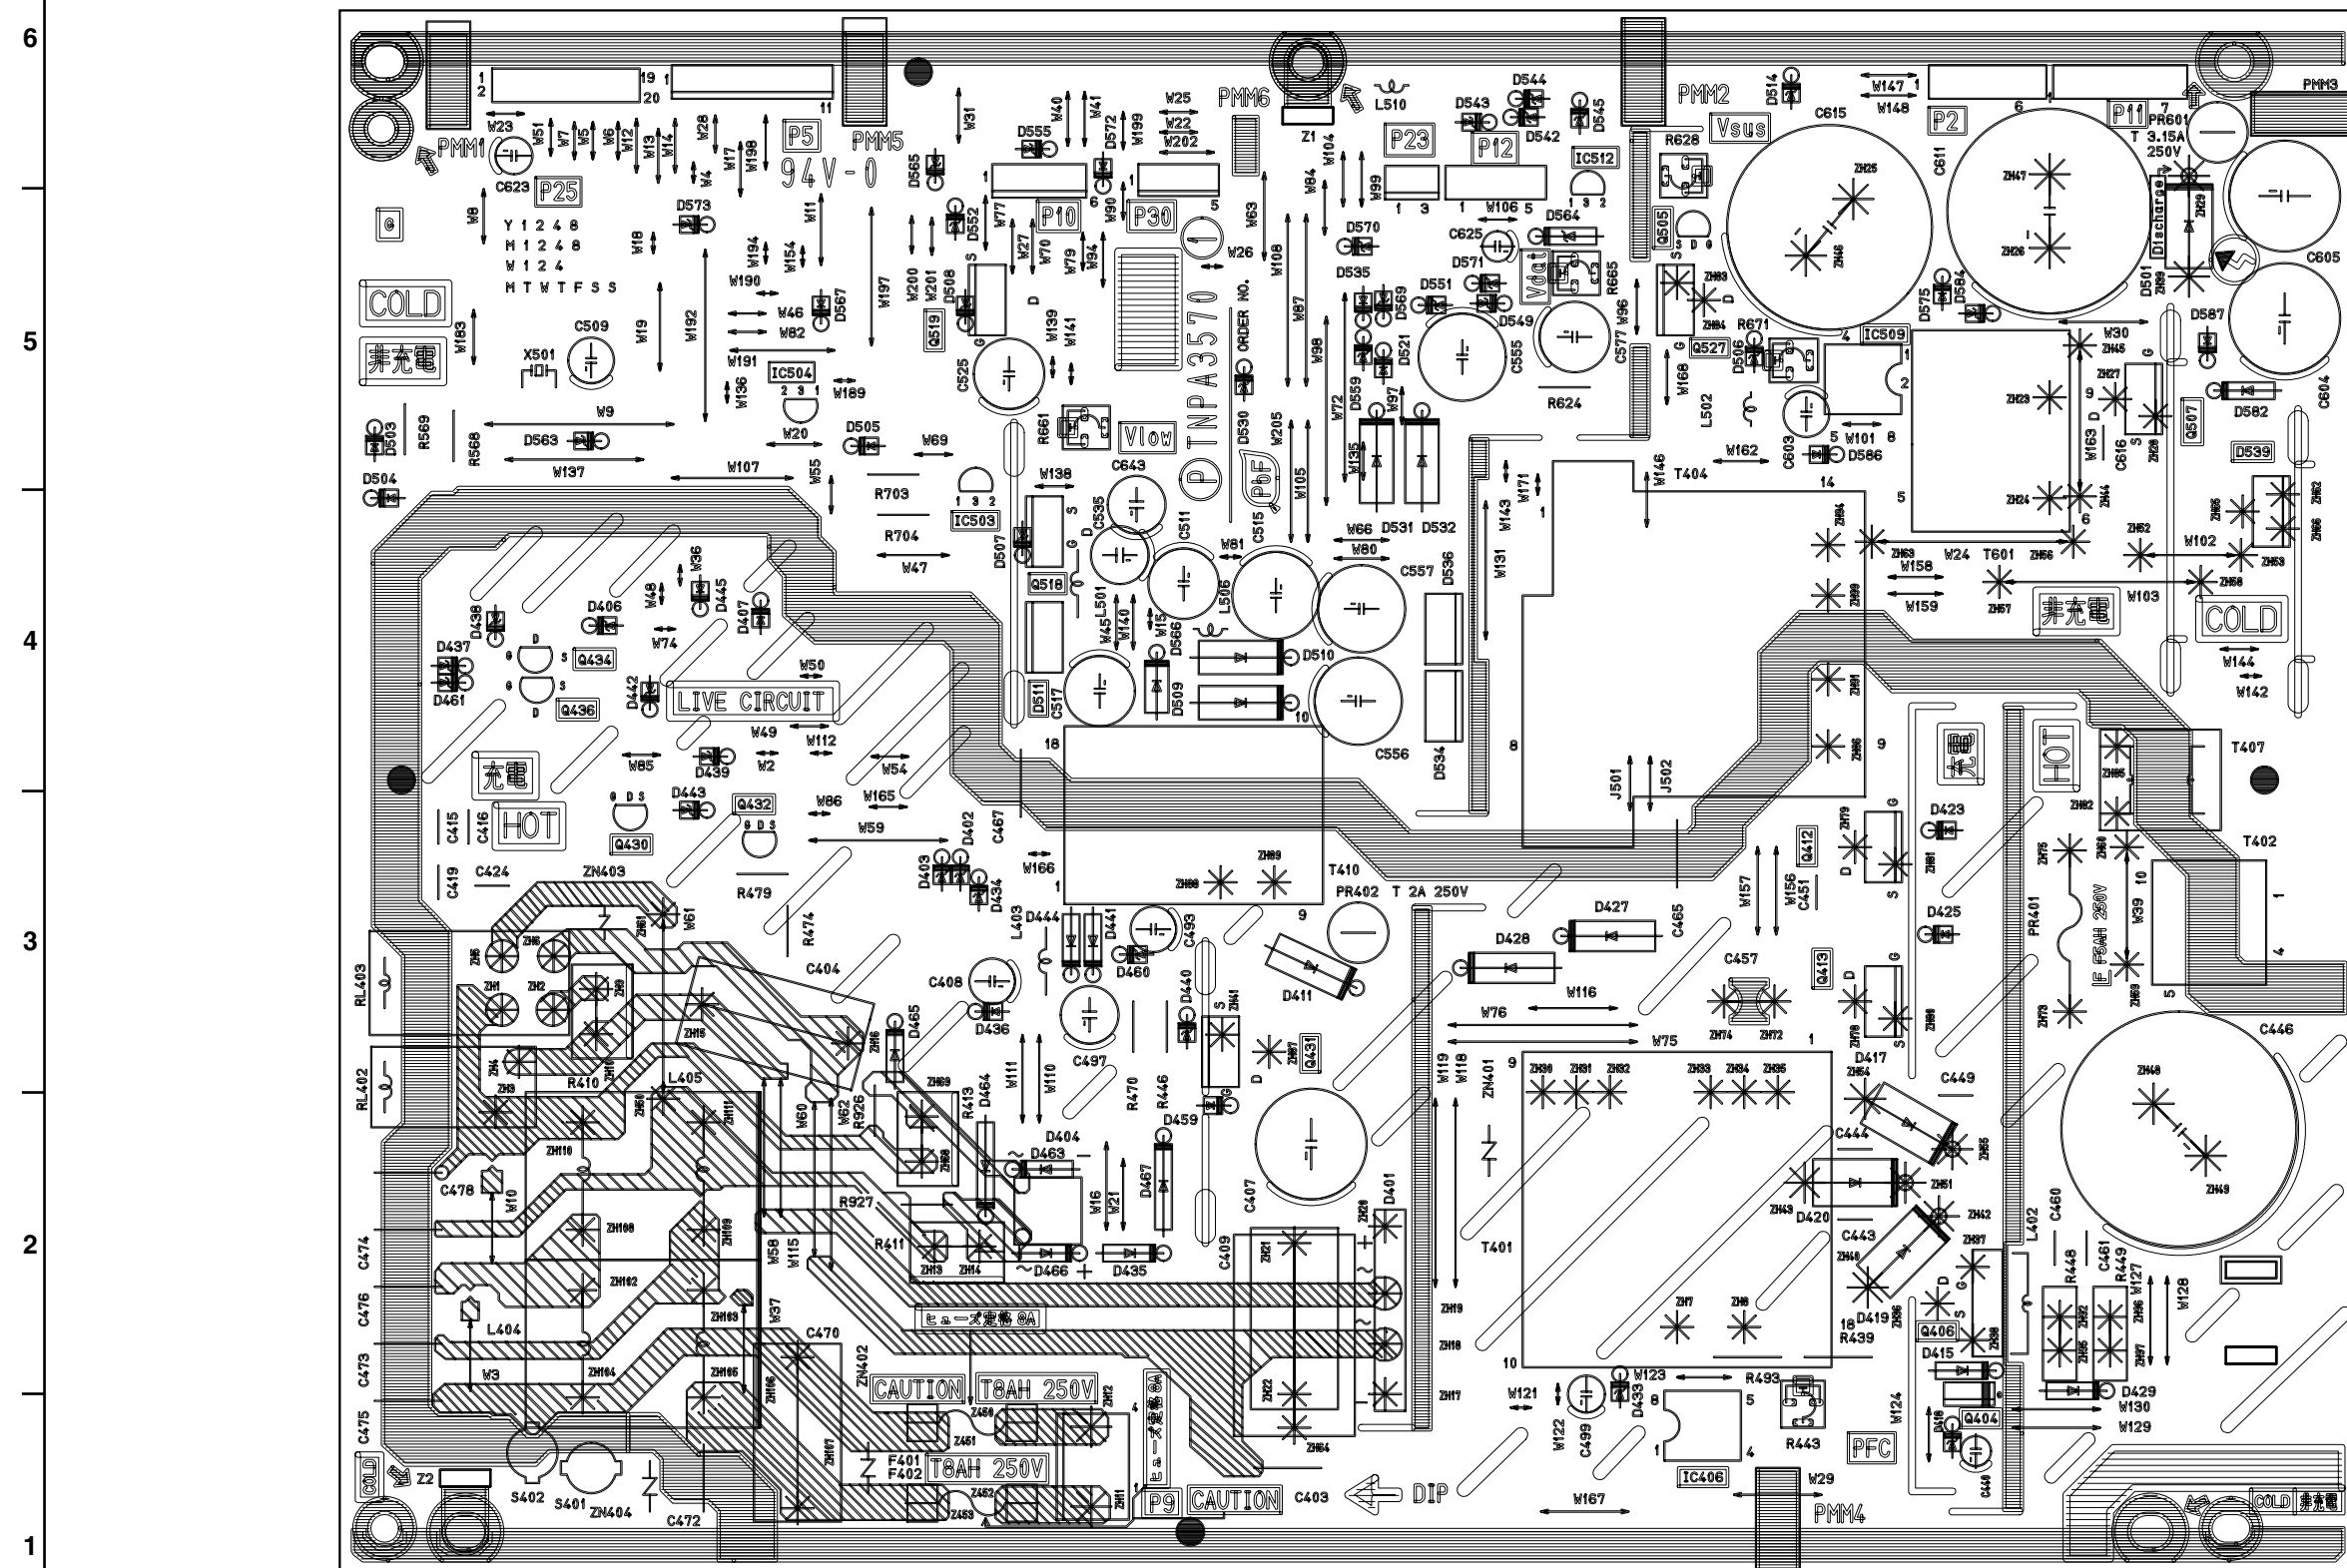

TH-37PX50U
P-BOARD TNPA3570AB


12.2. P-Board (42inch)

P-BOARD (FOIL SIDE)
ETXMM563MDK

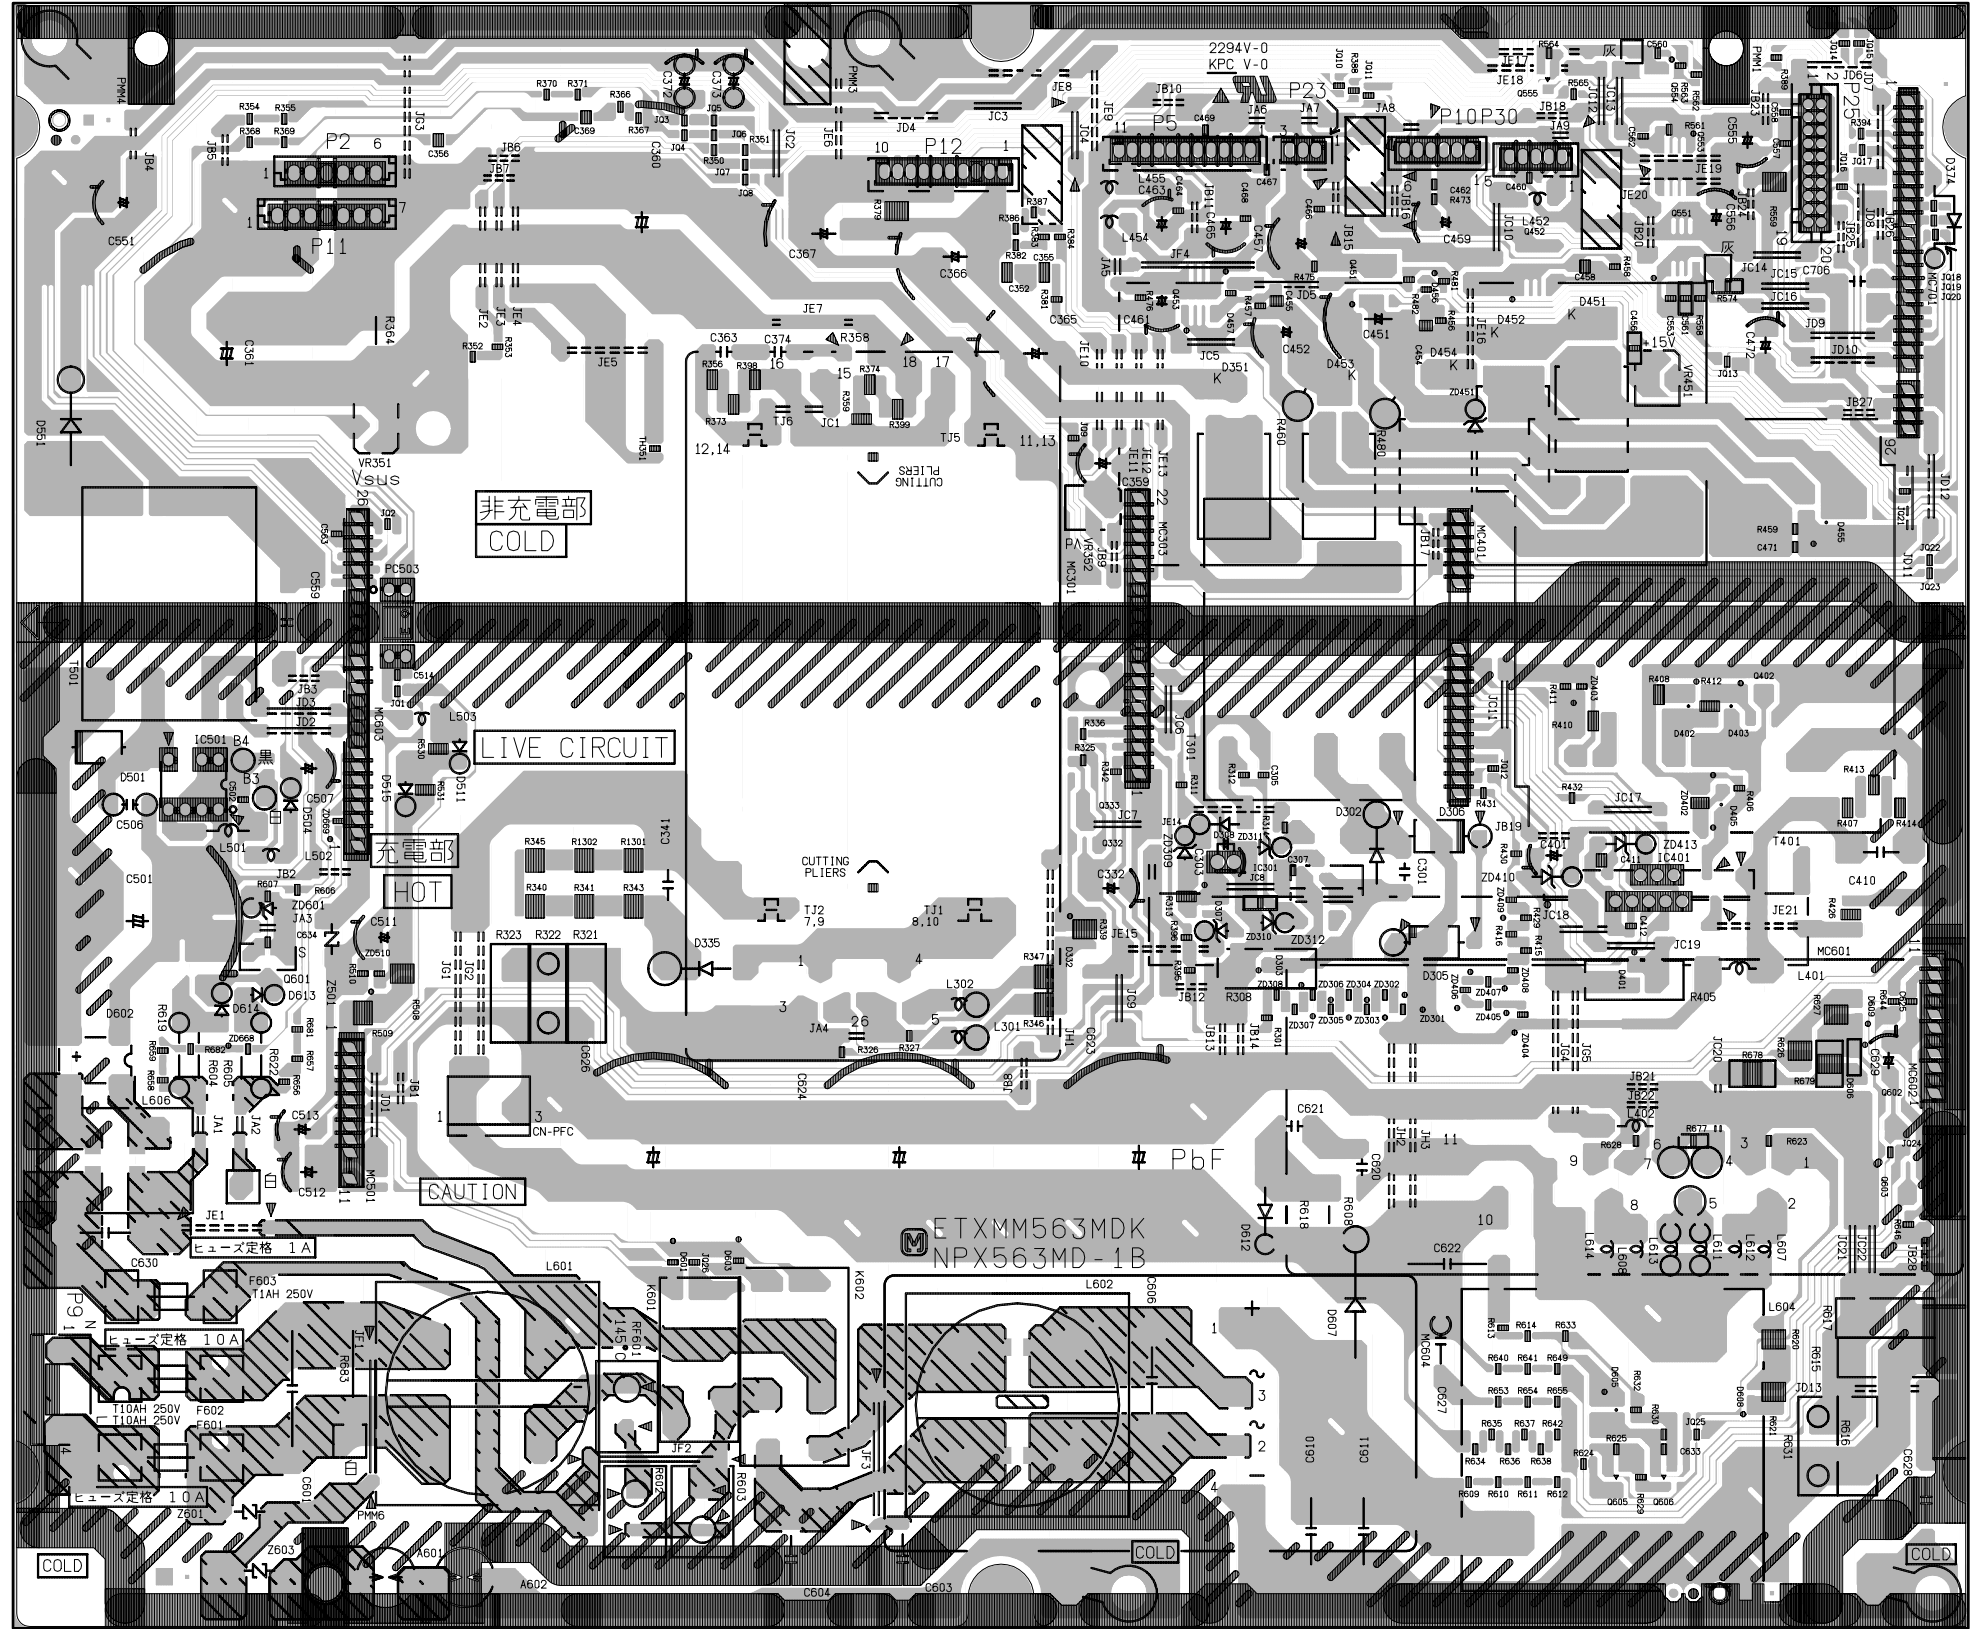

TH-42PX50U
P-BOARD ETXMM563MDK

TH-42PX50U
P-BOARD ETXMM563MDK

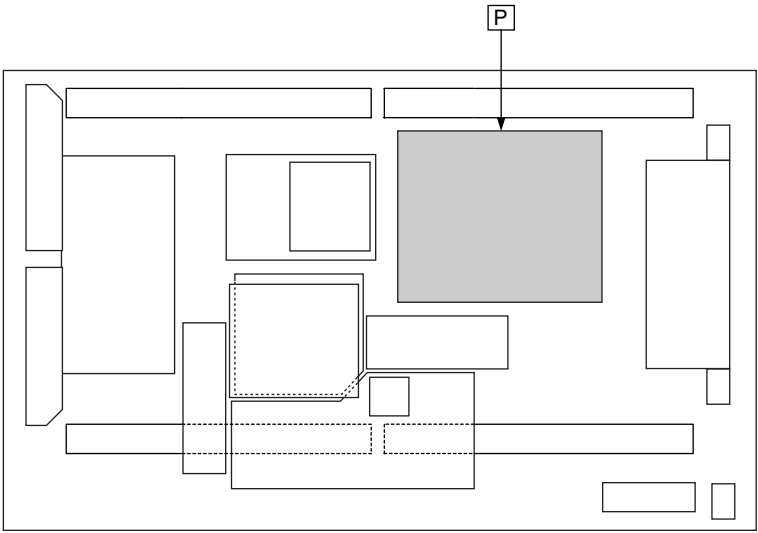

Parts Location

P-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC301	E-3	Q332	E-3
IC401	G-3	Q333	E-3
IC501	B-3	Q402	G-4
MC301	D-4	Q451	F-5
MC303	E-4	Q453	E-5
MC401	F-4	Q551	G-5
MC501	B-2	Q554	G-6
MC601	G-2	Q555	F-6
MC602	H-3	Q555	G-6
MC603	C-4	Q602	H-3
MC604	E-1	Q603	H-2
MC701	H-5	Q605	G-1
		Q606	G-1


TH-42PX50U
P-BOARD PARTS LOCATION

Parts Location

P-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC301	C-3	Q601	G-3
IC401	B-3		
IC501	G-3		
MC301	E-4		
MC303	D-4		
MC401	C-4		
MC501	G-2		
MC601	B-2		
MC602	A-3		
MC603	G-4		
MC604	D-1		
MC701	A-5		

TH-42PX50U
P-BOARD PARTS LOCATION


P-BOARD (COMPONENT SIDE)
ETXMM563MDK

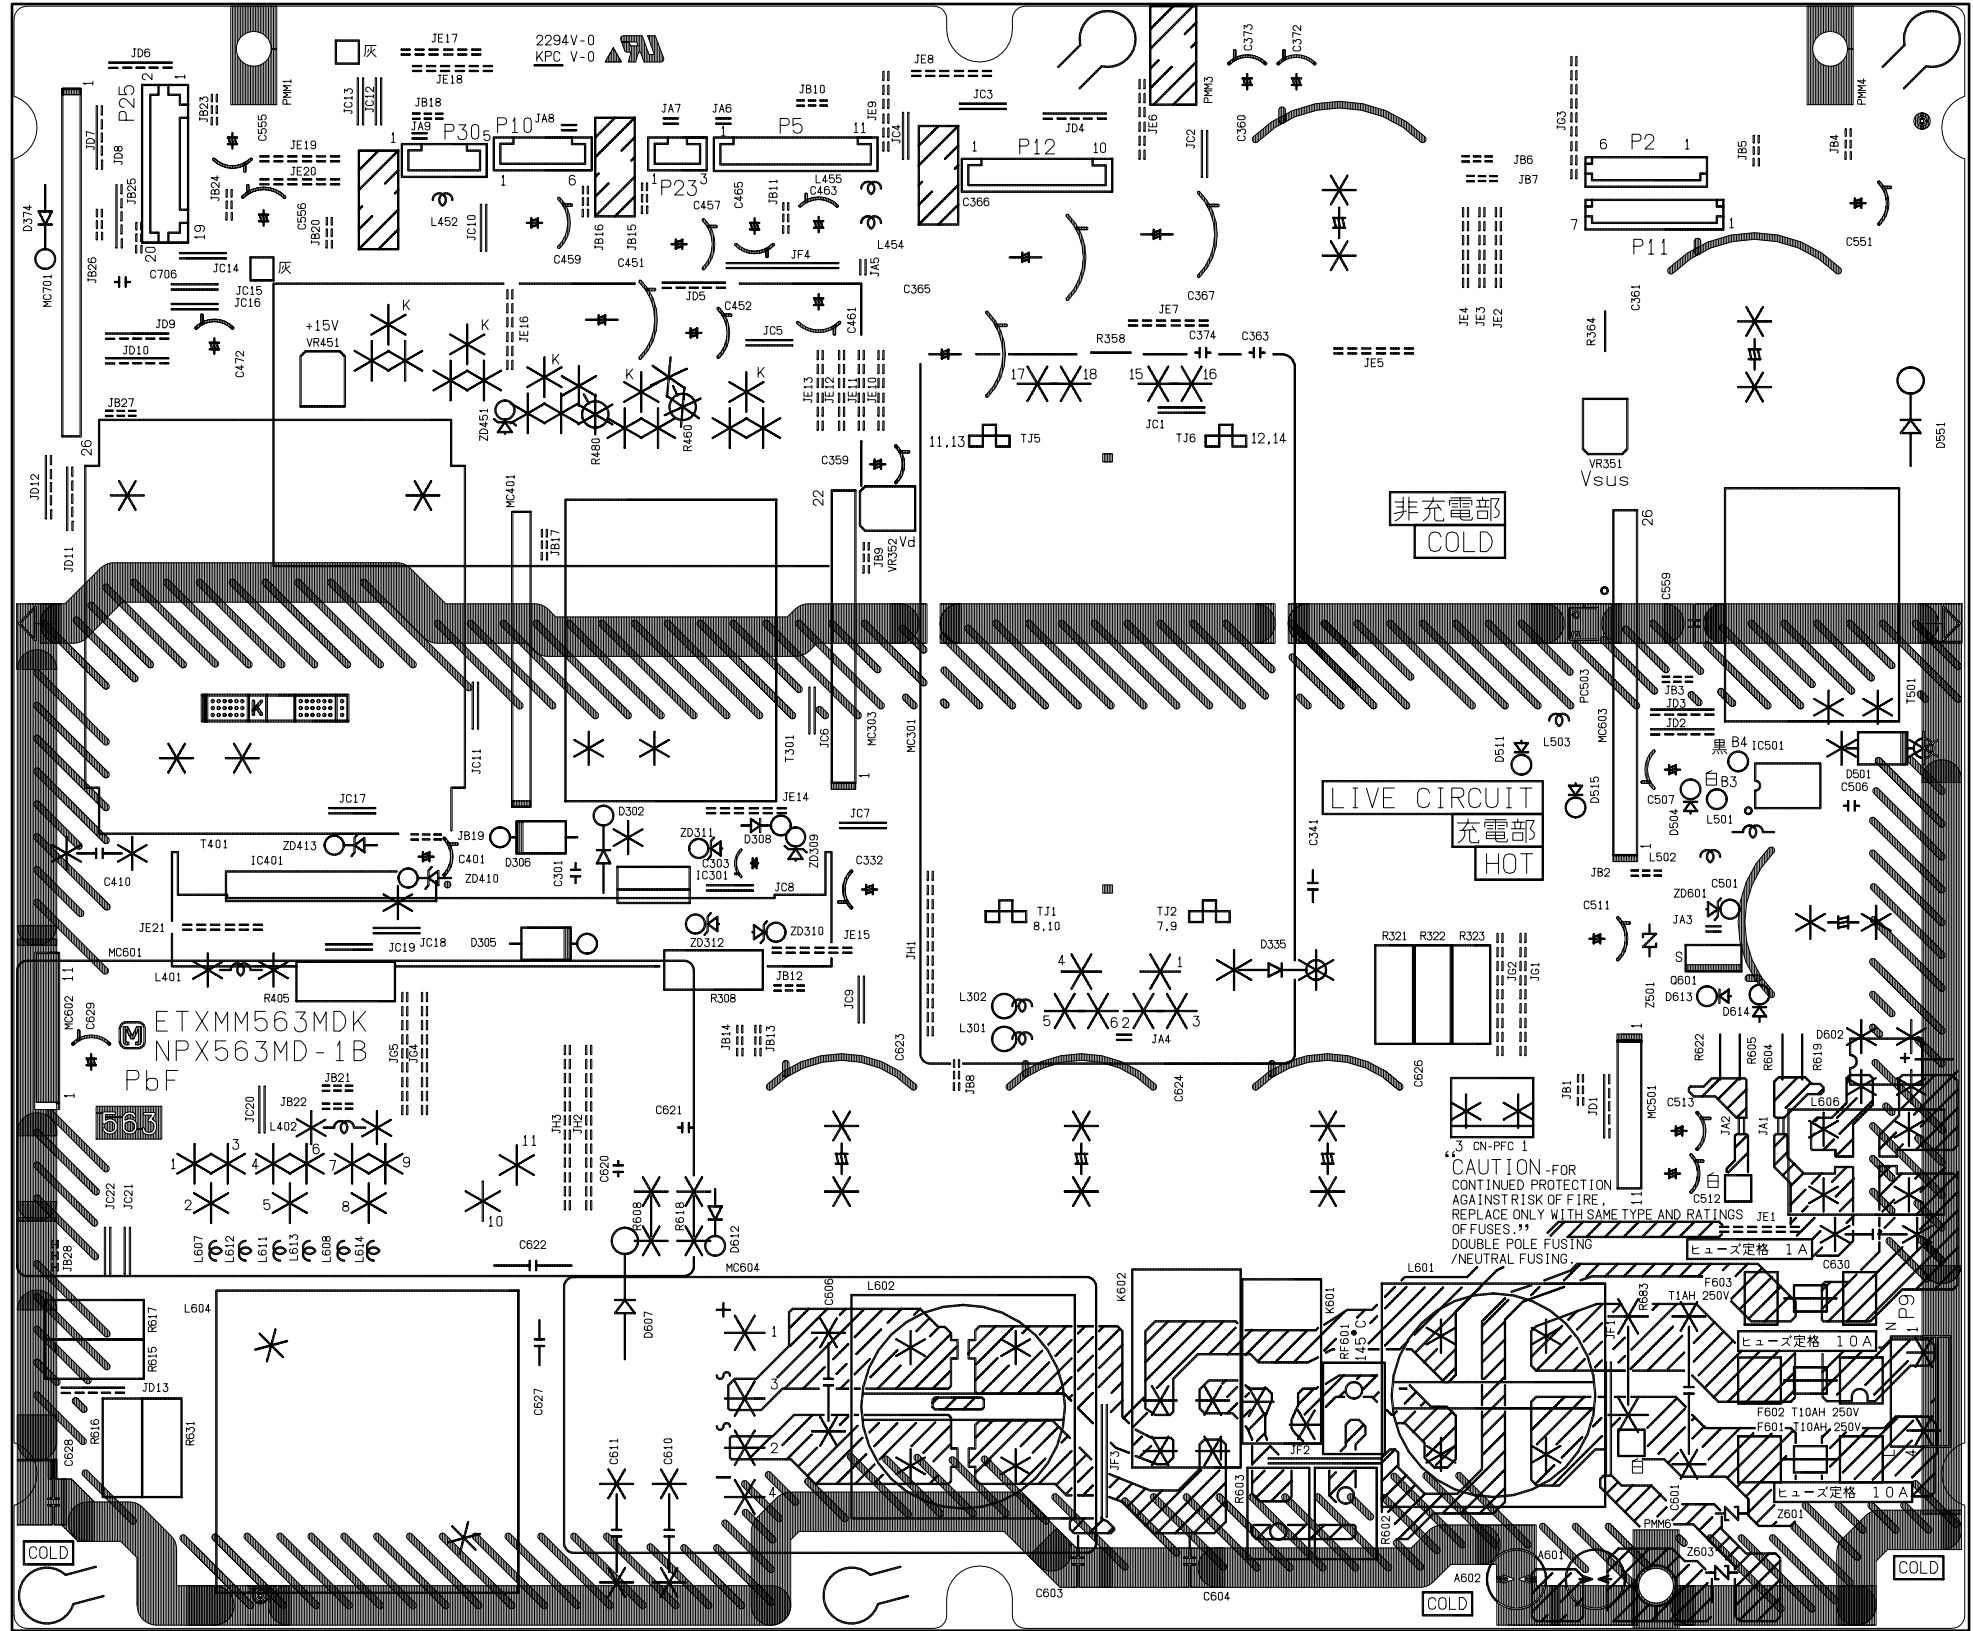


TH-42PX50U
P-BOARD ETXMM563MDK

TH-42PX50U
P-BOARD ETXMM563MDK

12.3. P-Board (50inch)

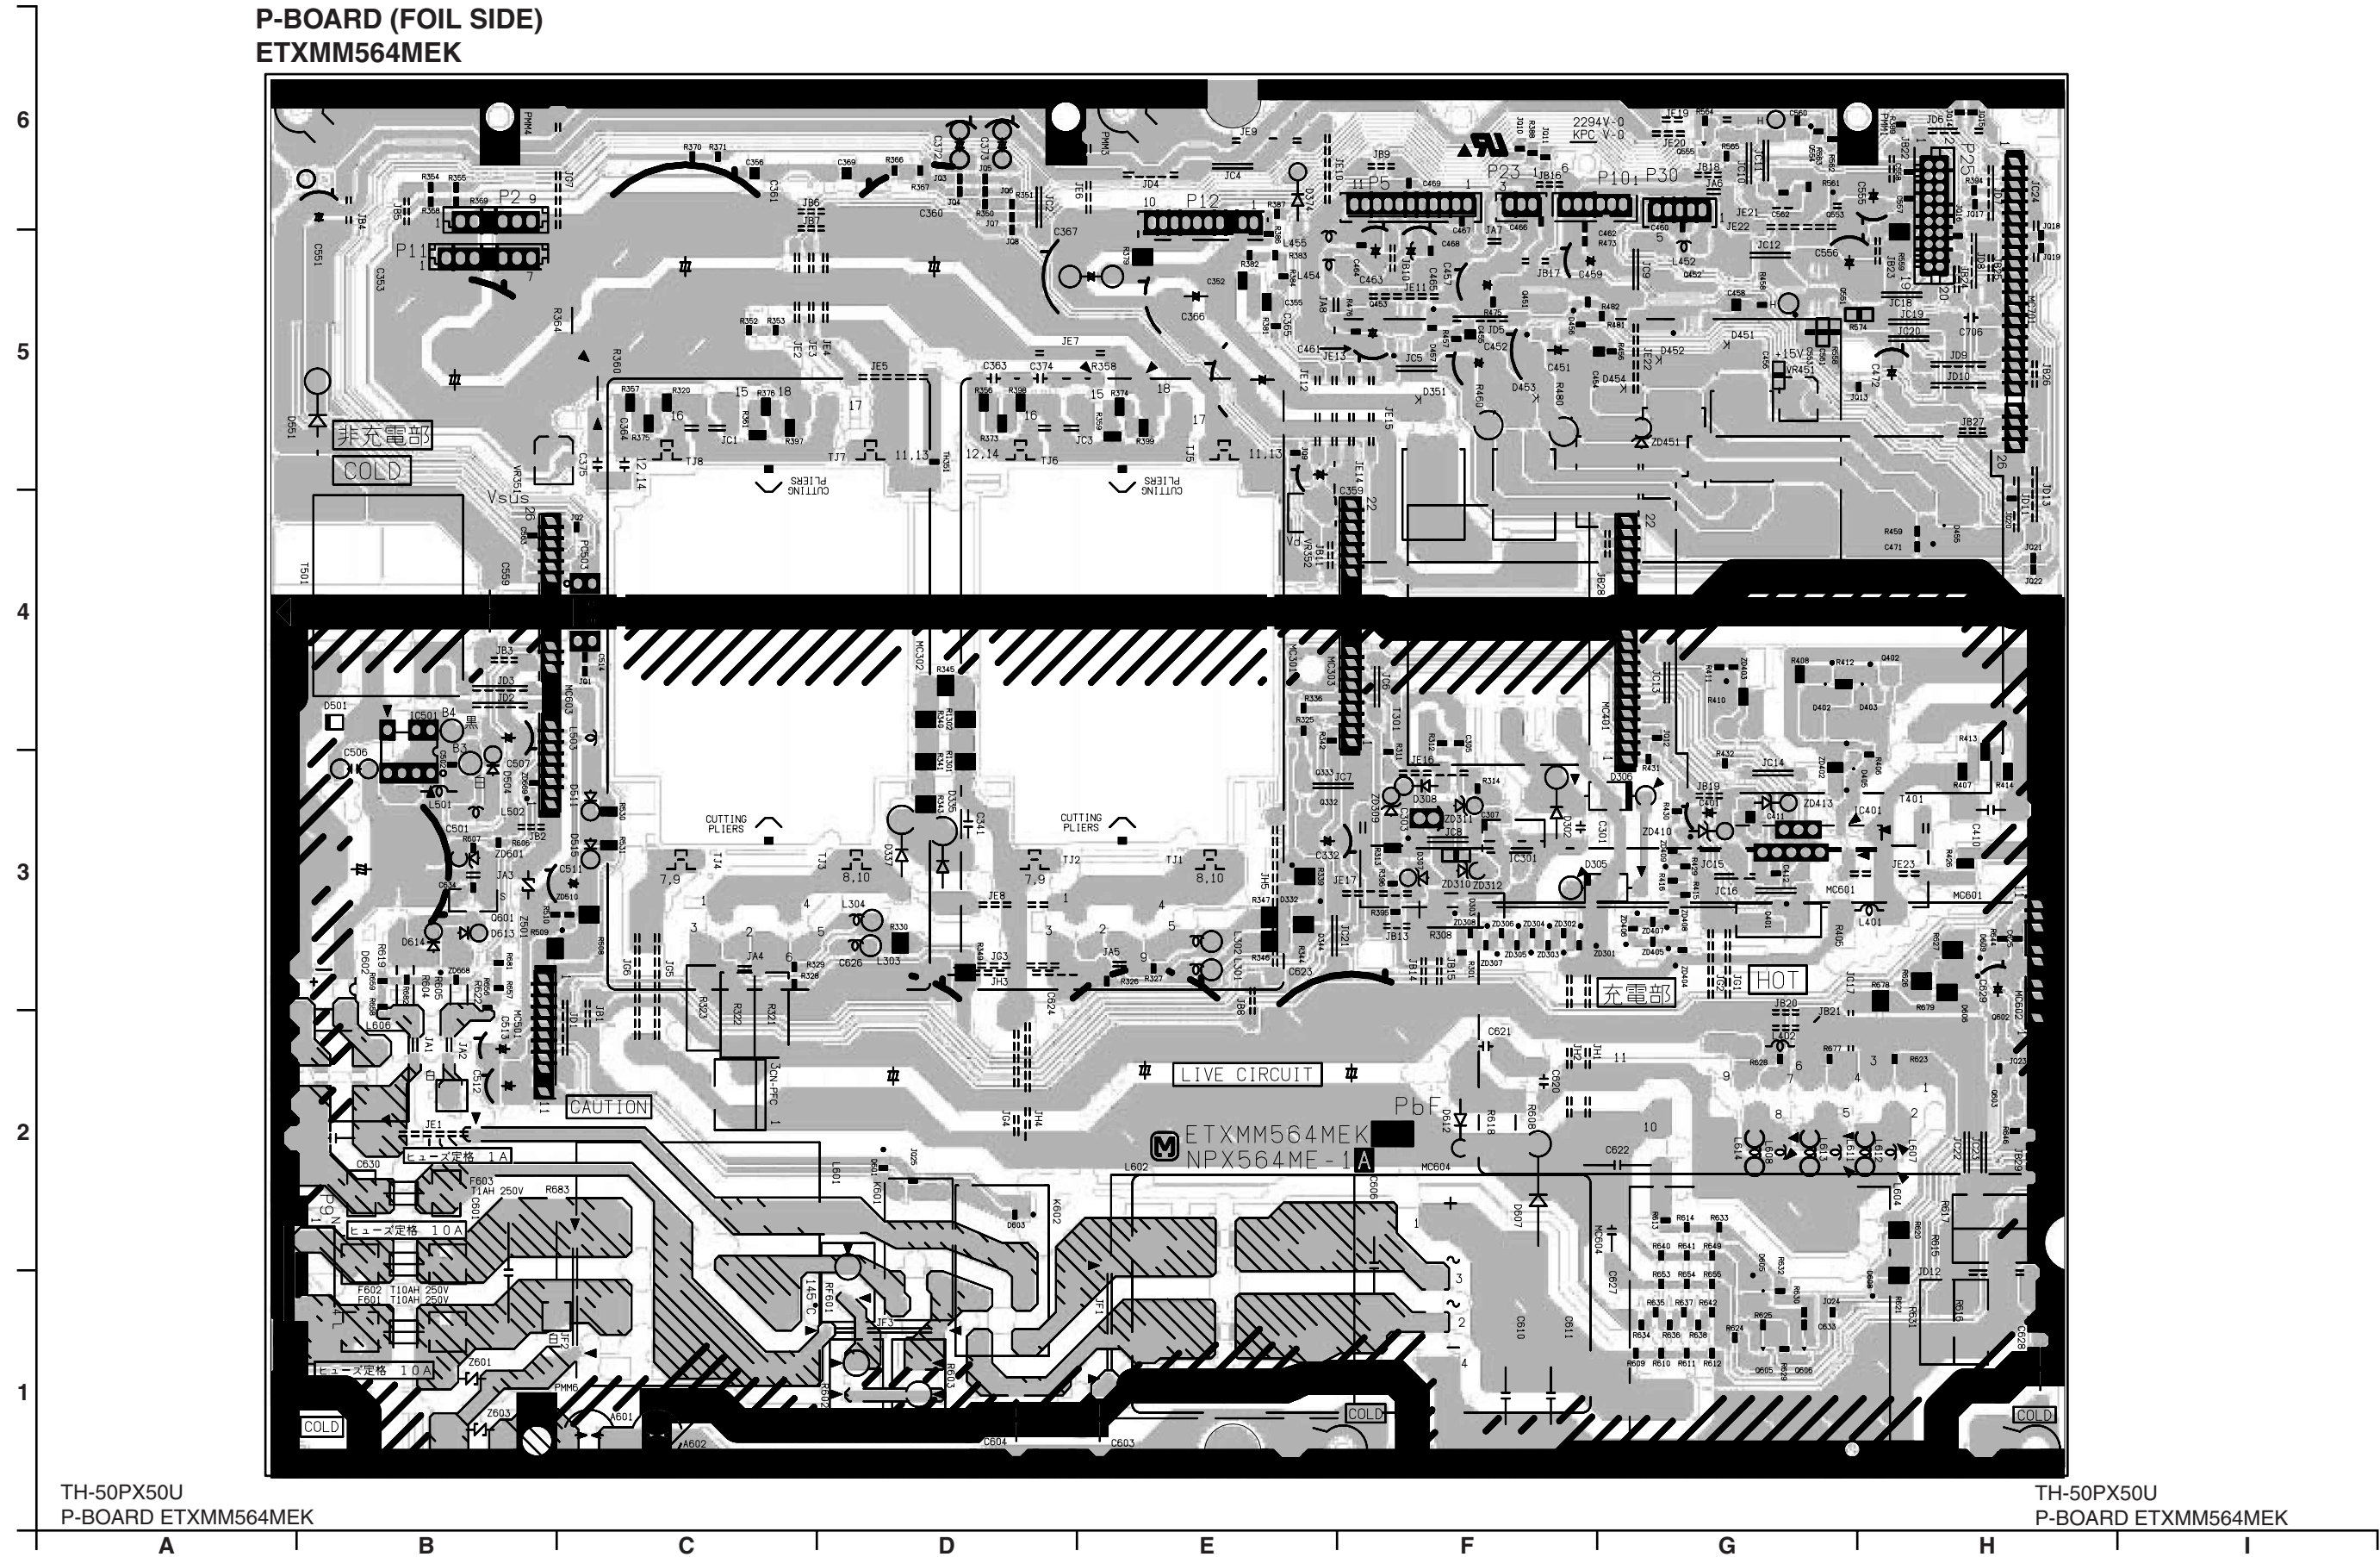

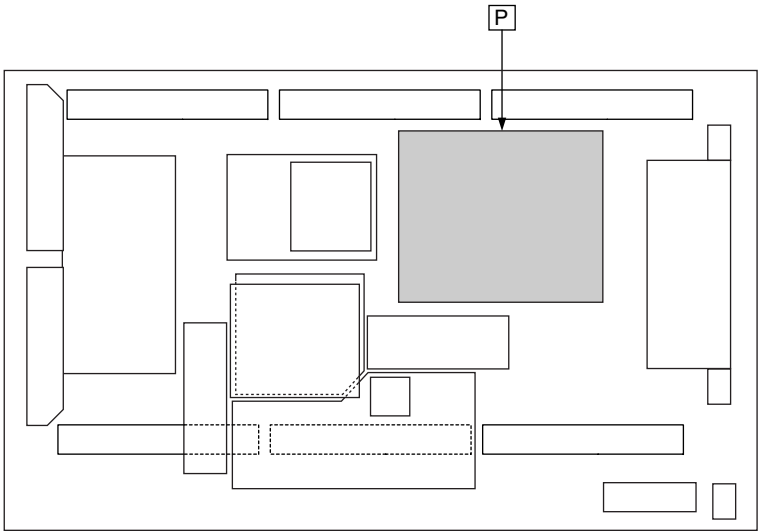

Parts Location

P-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC301	F-3	Q332	E-3
IC401	G-3	Q333	E-3
IC501	B-3	Q402	H-4
MC301	E-4	Q451	F-5
MC302	C-4	Q452	G-5
MC303	F-4	Q453	F-5
MC401	G-4	Q551	G-5
MC501	B-2	Q553	G-6
MC601	G-2	Q554	G-6
MC602	G-2	Q555	G-6
MC603	B-4	Q601	B-3
MC604	F-1	Q602	H-3
MC701	H-5	Q603	H-2
		Q605	G-1
		Q606	G-1


Parts Location

P-BOARD (COMPONENT SIDE)			
IC		TRANSISTOR	
IC301	D-3	Q601	H-3
IC401	C-3		
IC501	H-3		
MC301	E-4		
MC302	G-4		
MC303	D-4		
MC401	C-4		
MC501	G-2		
MC601	C-2		
MC602	C-2		
MC603	G-4		
MC604	D-1		
MC701	B-5		

TH-50PX50U
P-BOARD PARTS LOCATION


TH-50PX50U
P-BOARD PARTS LOCATION

P-BOARD (COMPONENT SIDE)
ETXMM564MEK

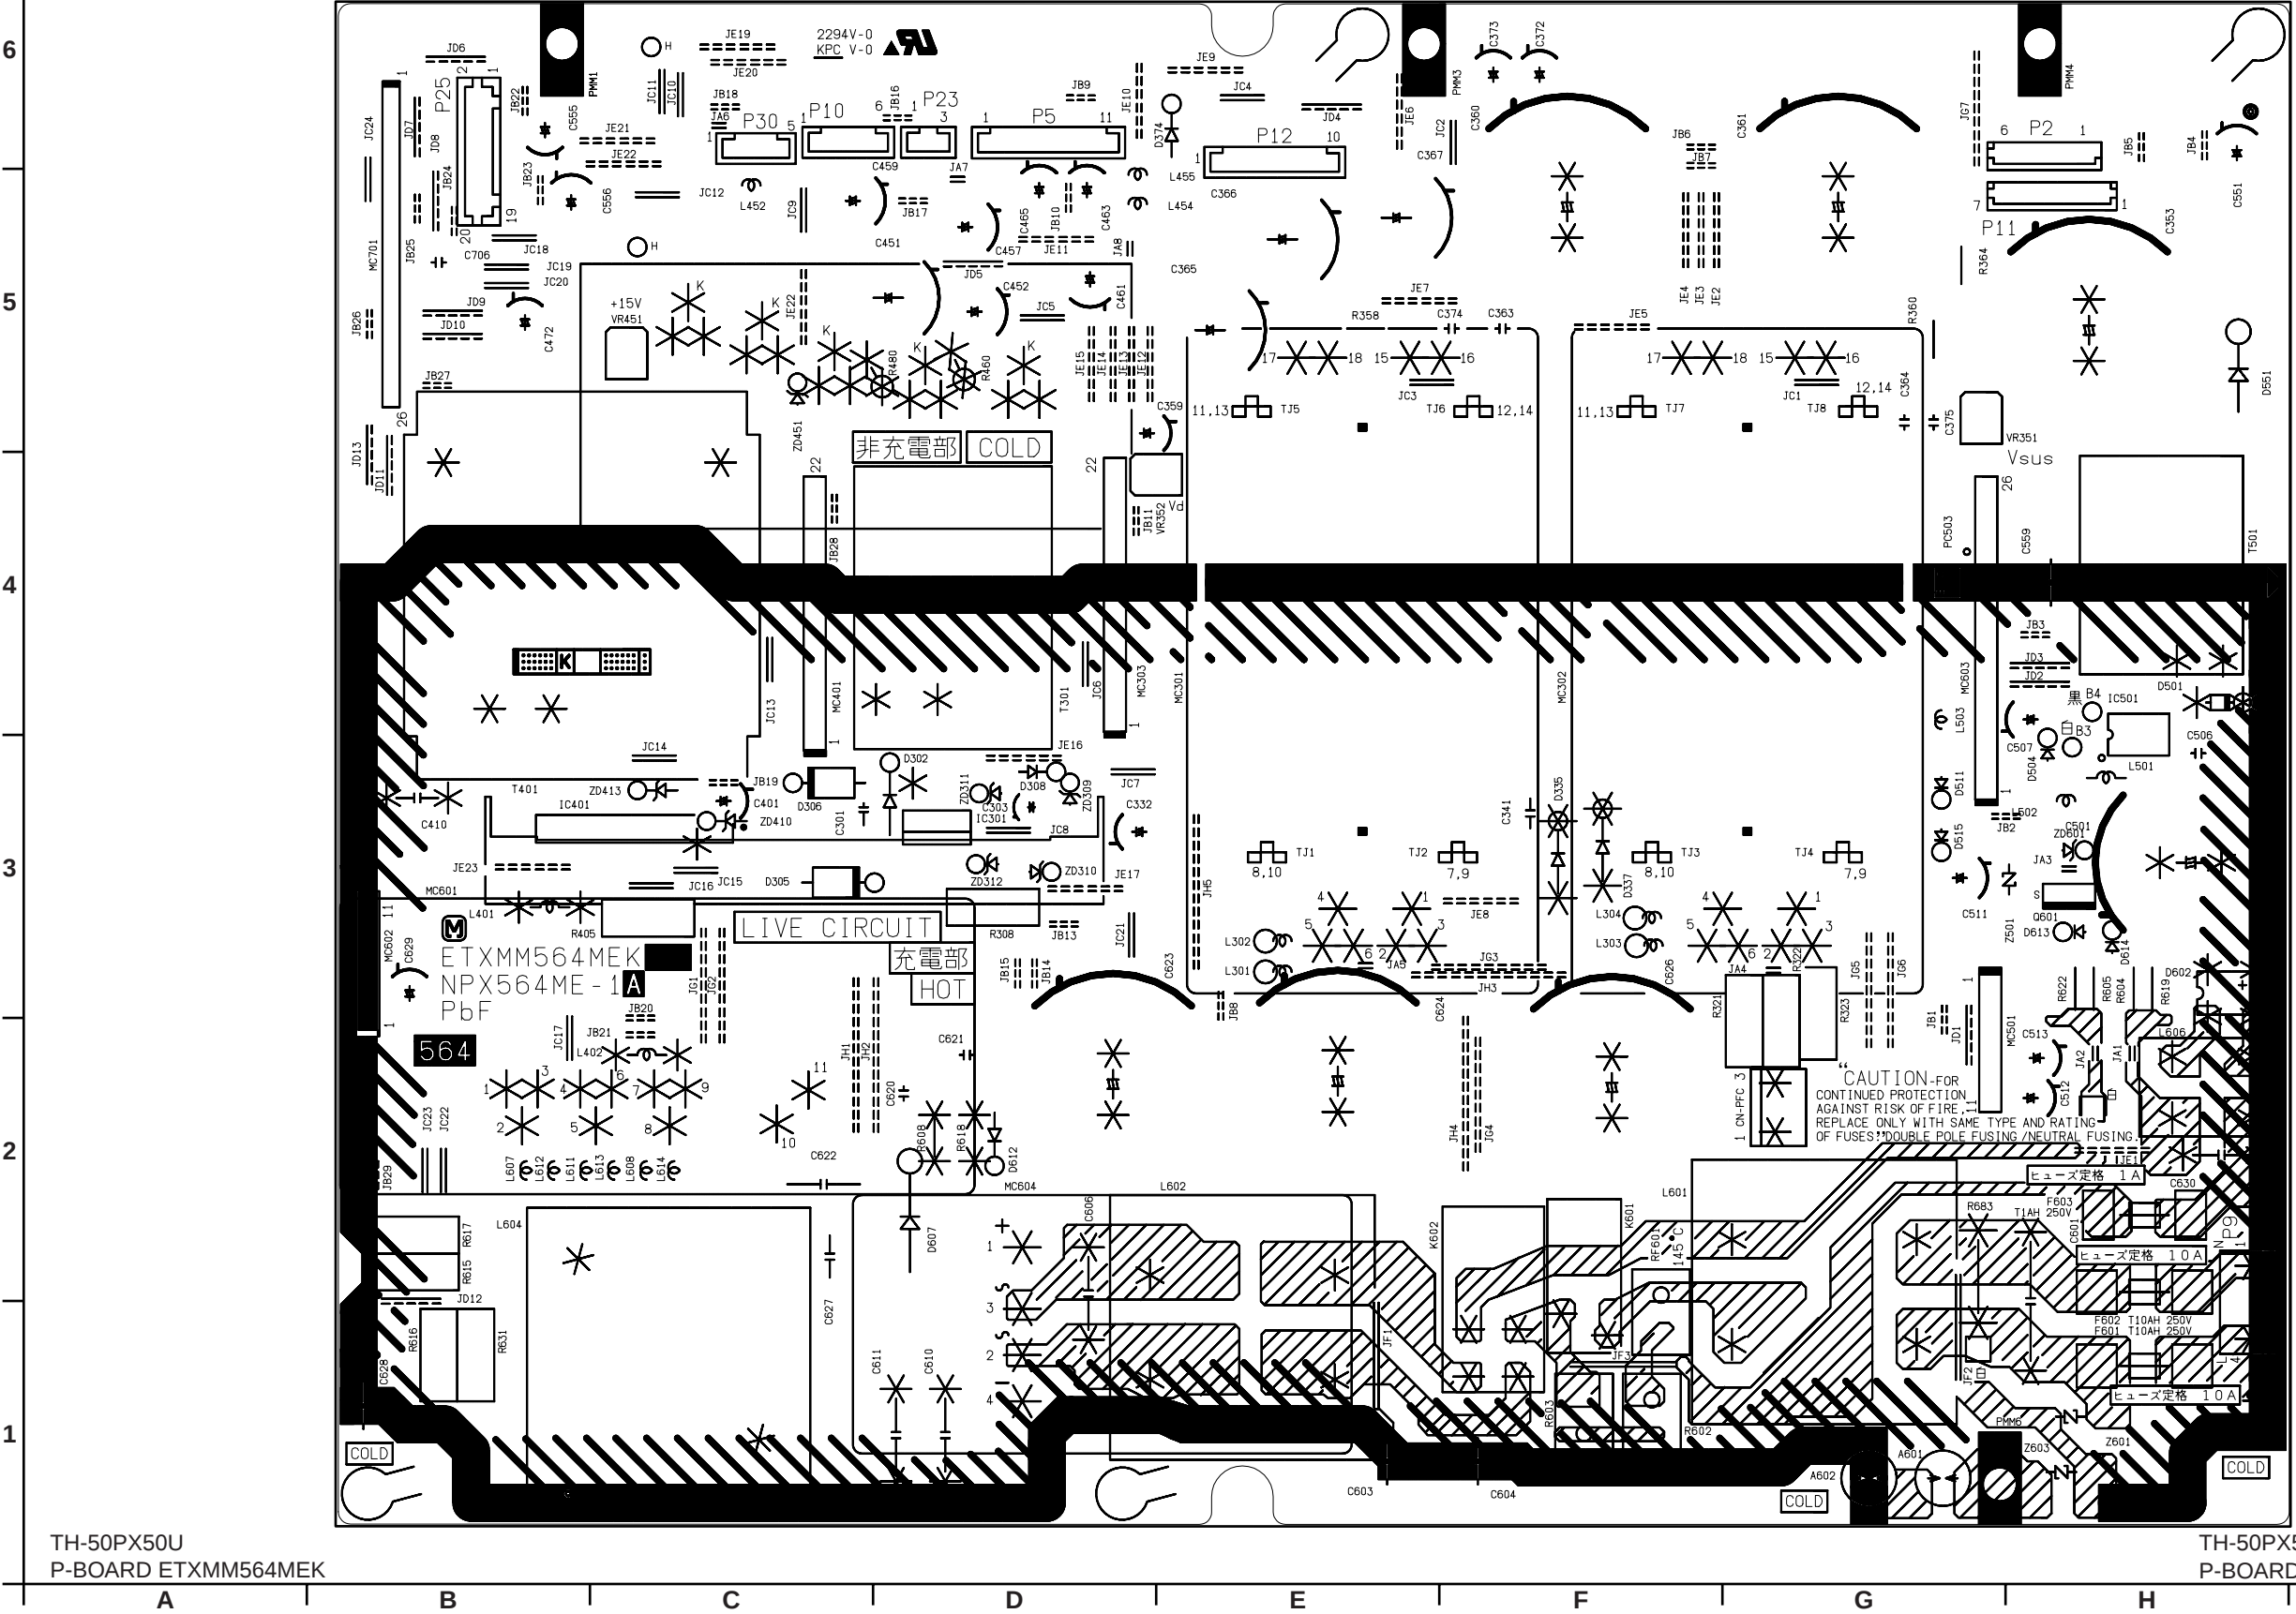

TH-50PX50U
P-BOARD ETXMM564MEK

TH-50PX50U
P-BOARD ETXMM564MEK




Parts Location

PA-BOARD			
IC		TP	
IC5601	B-2	TP5601	C-4
IC5602	D-2	TP5603	C-5
IC5603	E-2	TP5604	C-4
TRANSISTOR		TP5605	C-5
		TP5608	C-5
Q5601	C-2	TP5609	C-5
Q5602	D-5	TP5621	C-5
Q5603	A-2	TP16V	E-5
Q5604	E-1	TP30V	E-5
Q5605	2	TPB5V	E-4
Q5606	A-2	TPM25V	E-5
Q5607	C-5	TPM33V	E-5
Q5609	E-1	TPM5V	E-5
Q5610	E-1	TPM9V	E-5
Q5612	A-2	TPS12V	E-5
Q5613	D-1	TPS33V	E-5
Q5614	E-3	TPS5V	E-4
Q5641	E-1	TPS9V	E-5
Q5642	B-1	TPW12V	E-4
Q5643	E-1		
Q5644	D-1		


PB-BOARD			
IC		TP	
IC5801	F-1	TP5801	H-4
IC5802	G-4	TP5802	H-3
IC5803	H-1	TP5803	F-3
		TP5804	H-4
		TP5808	H-3

12.6. H-Board

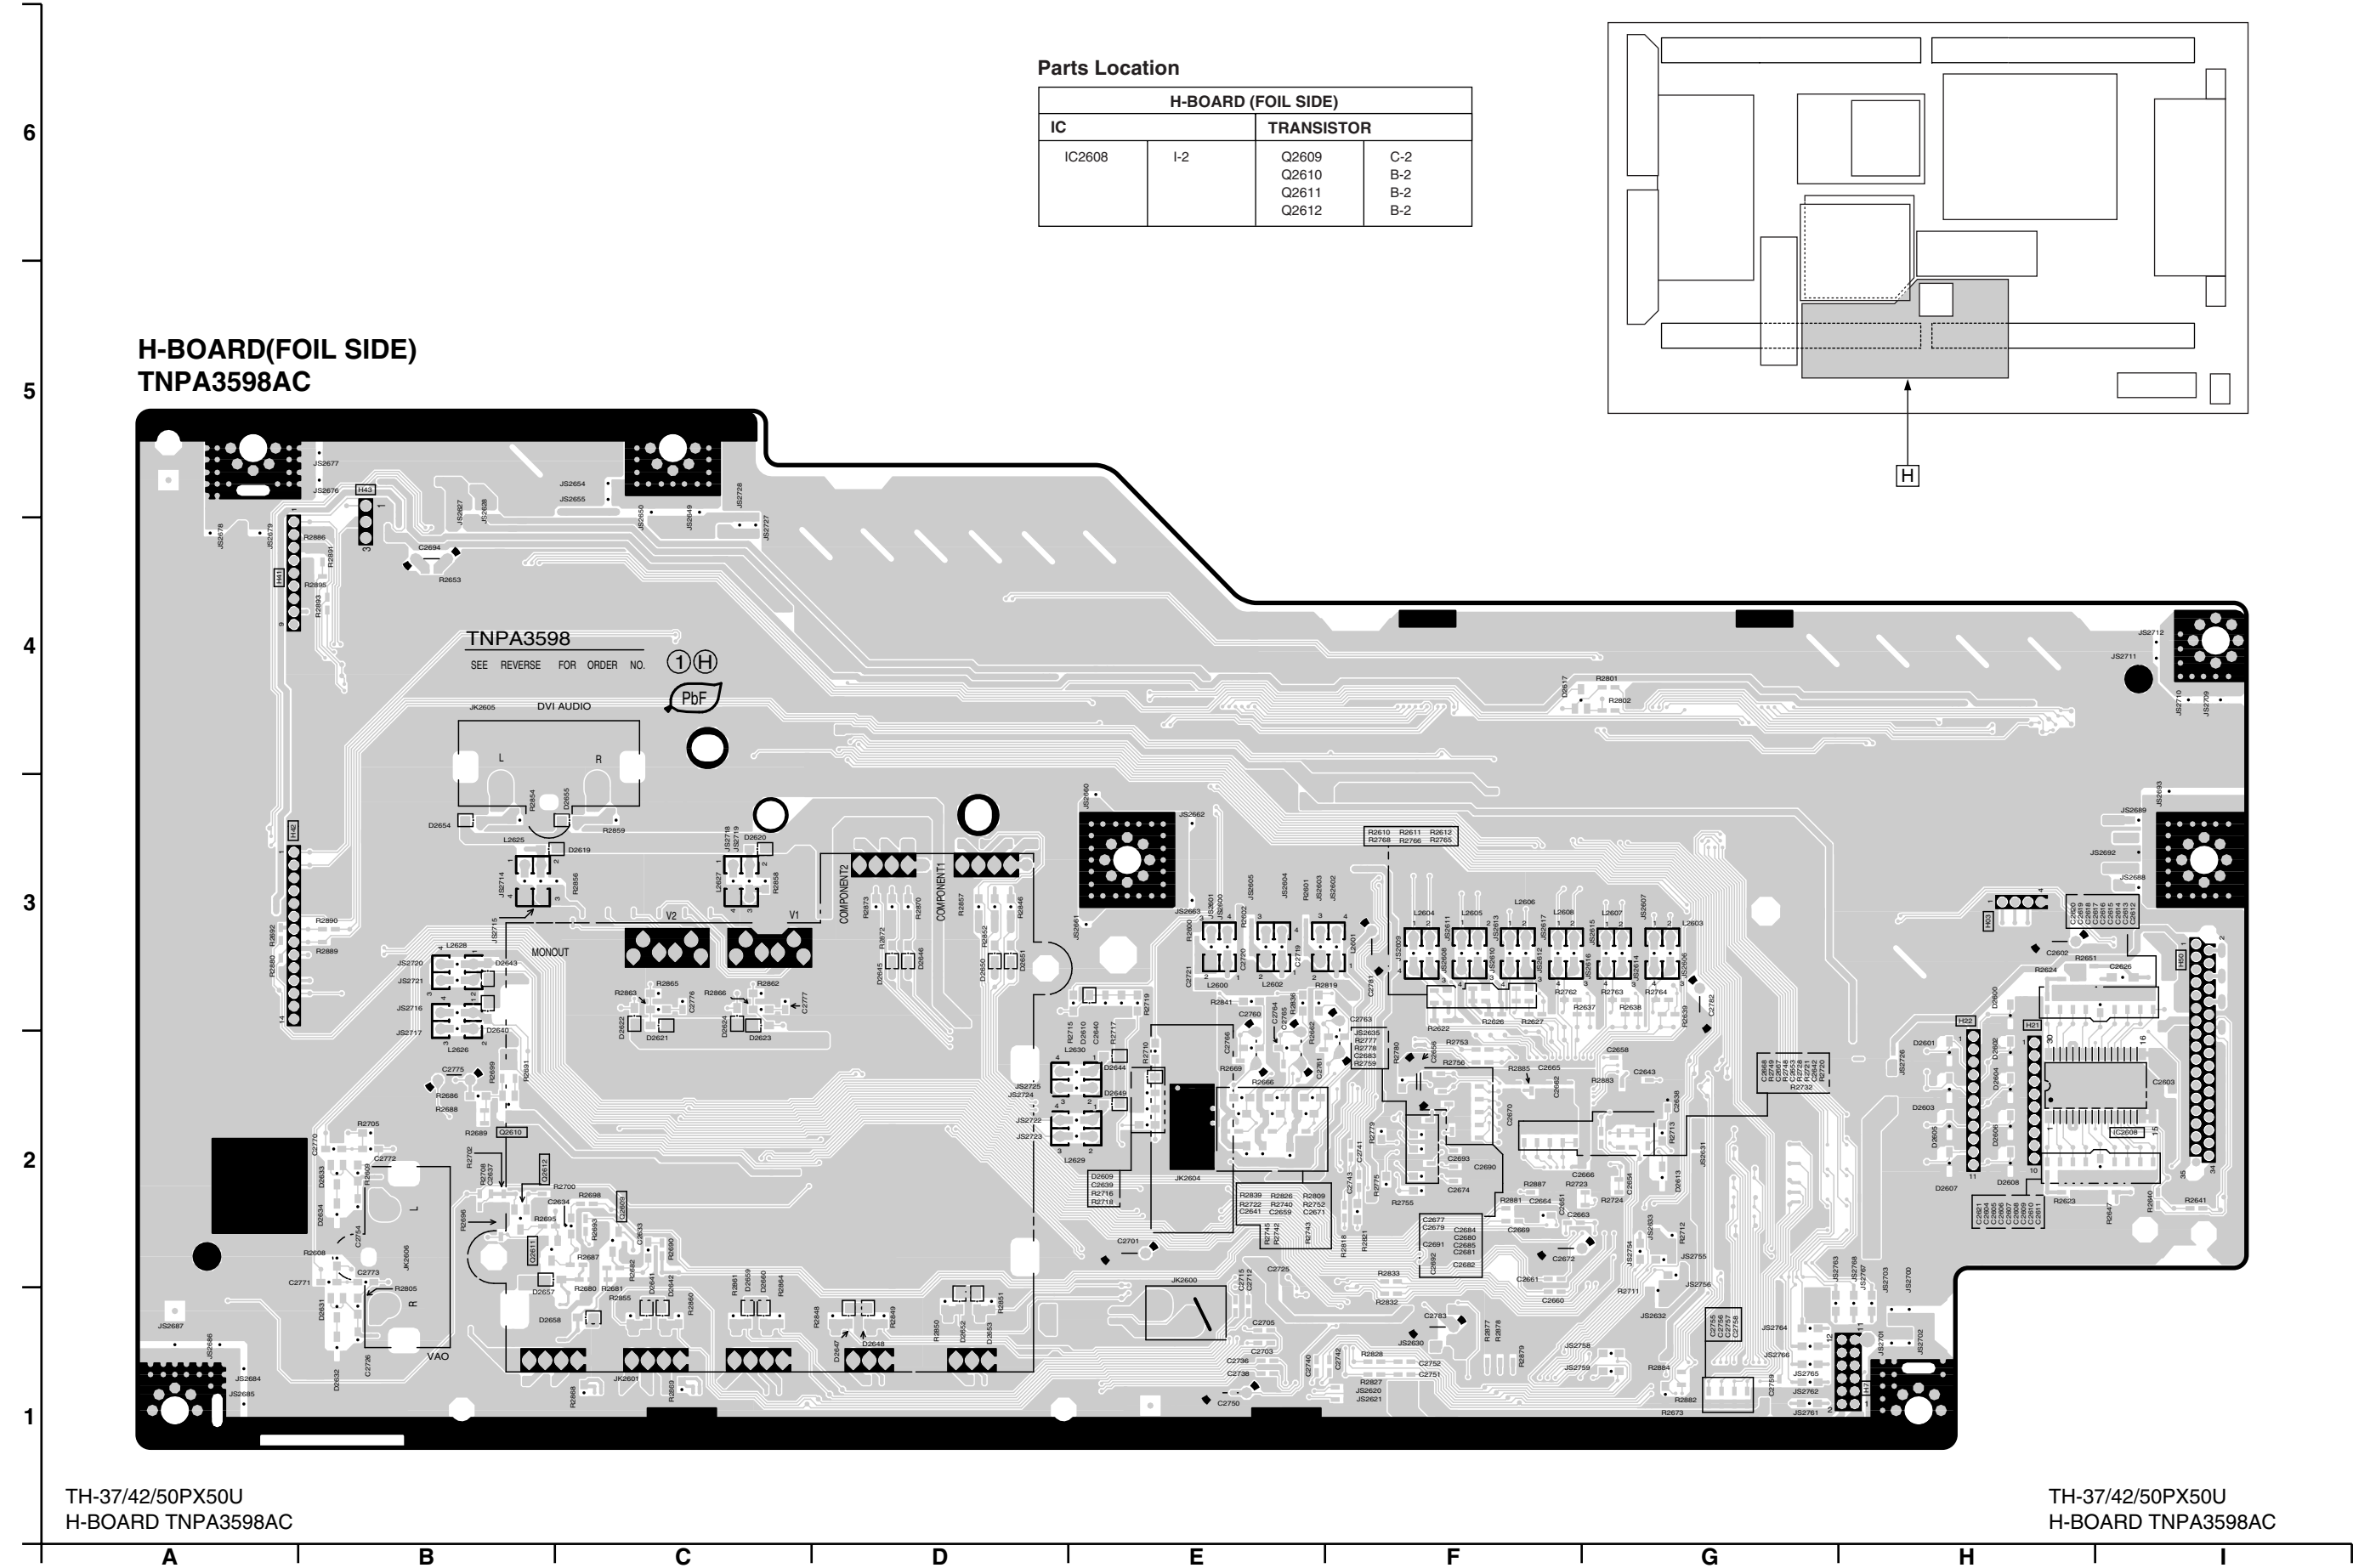


Parts Location

H-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR			
IC2602	D-2	Q2600	D-3	Q2616	H-2
IC2605	D-2	Q2601	D-3	Q2617	H-1
IC2607	E-4	Q2602	D-3	Q2618	B-3
		Q2603	D-3	Q2619	A-3
		Q2604	D-3	Q2620	D-3
		Q2605	C-3	Q2621	D-3
		Q2606	C-3	Q2622	D-3
		Q2608	C-3	Q2623	E-3
		Q2610	B-3	Q2624	H-4
		Q2615	I-2	Q2625	I-3

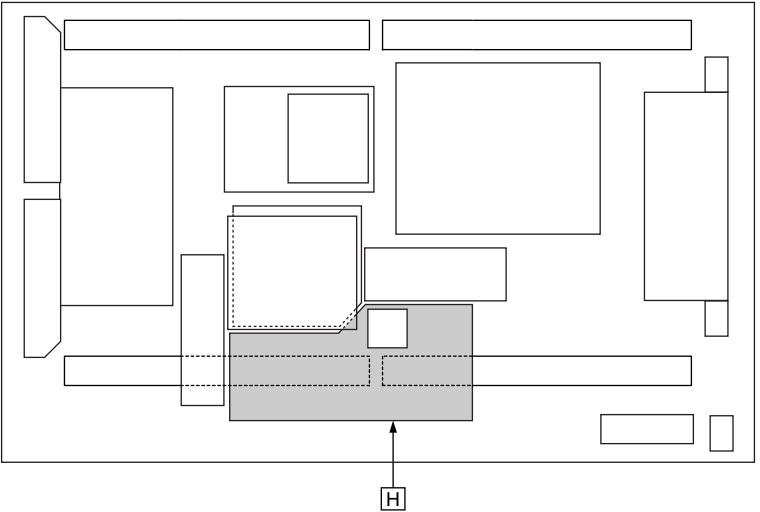

H-BOARD(COMPONENT SIDE)
TNPA3598AC

6
5
4
3
2
1

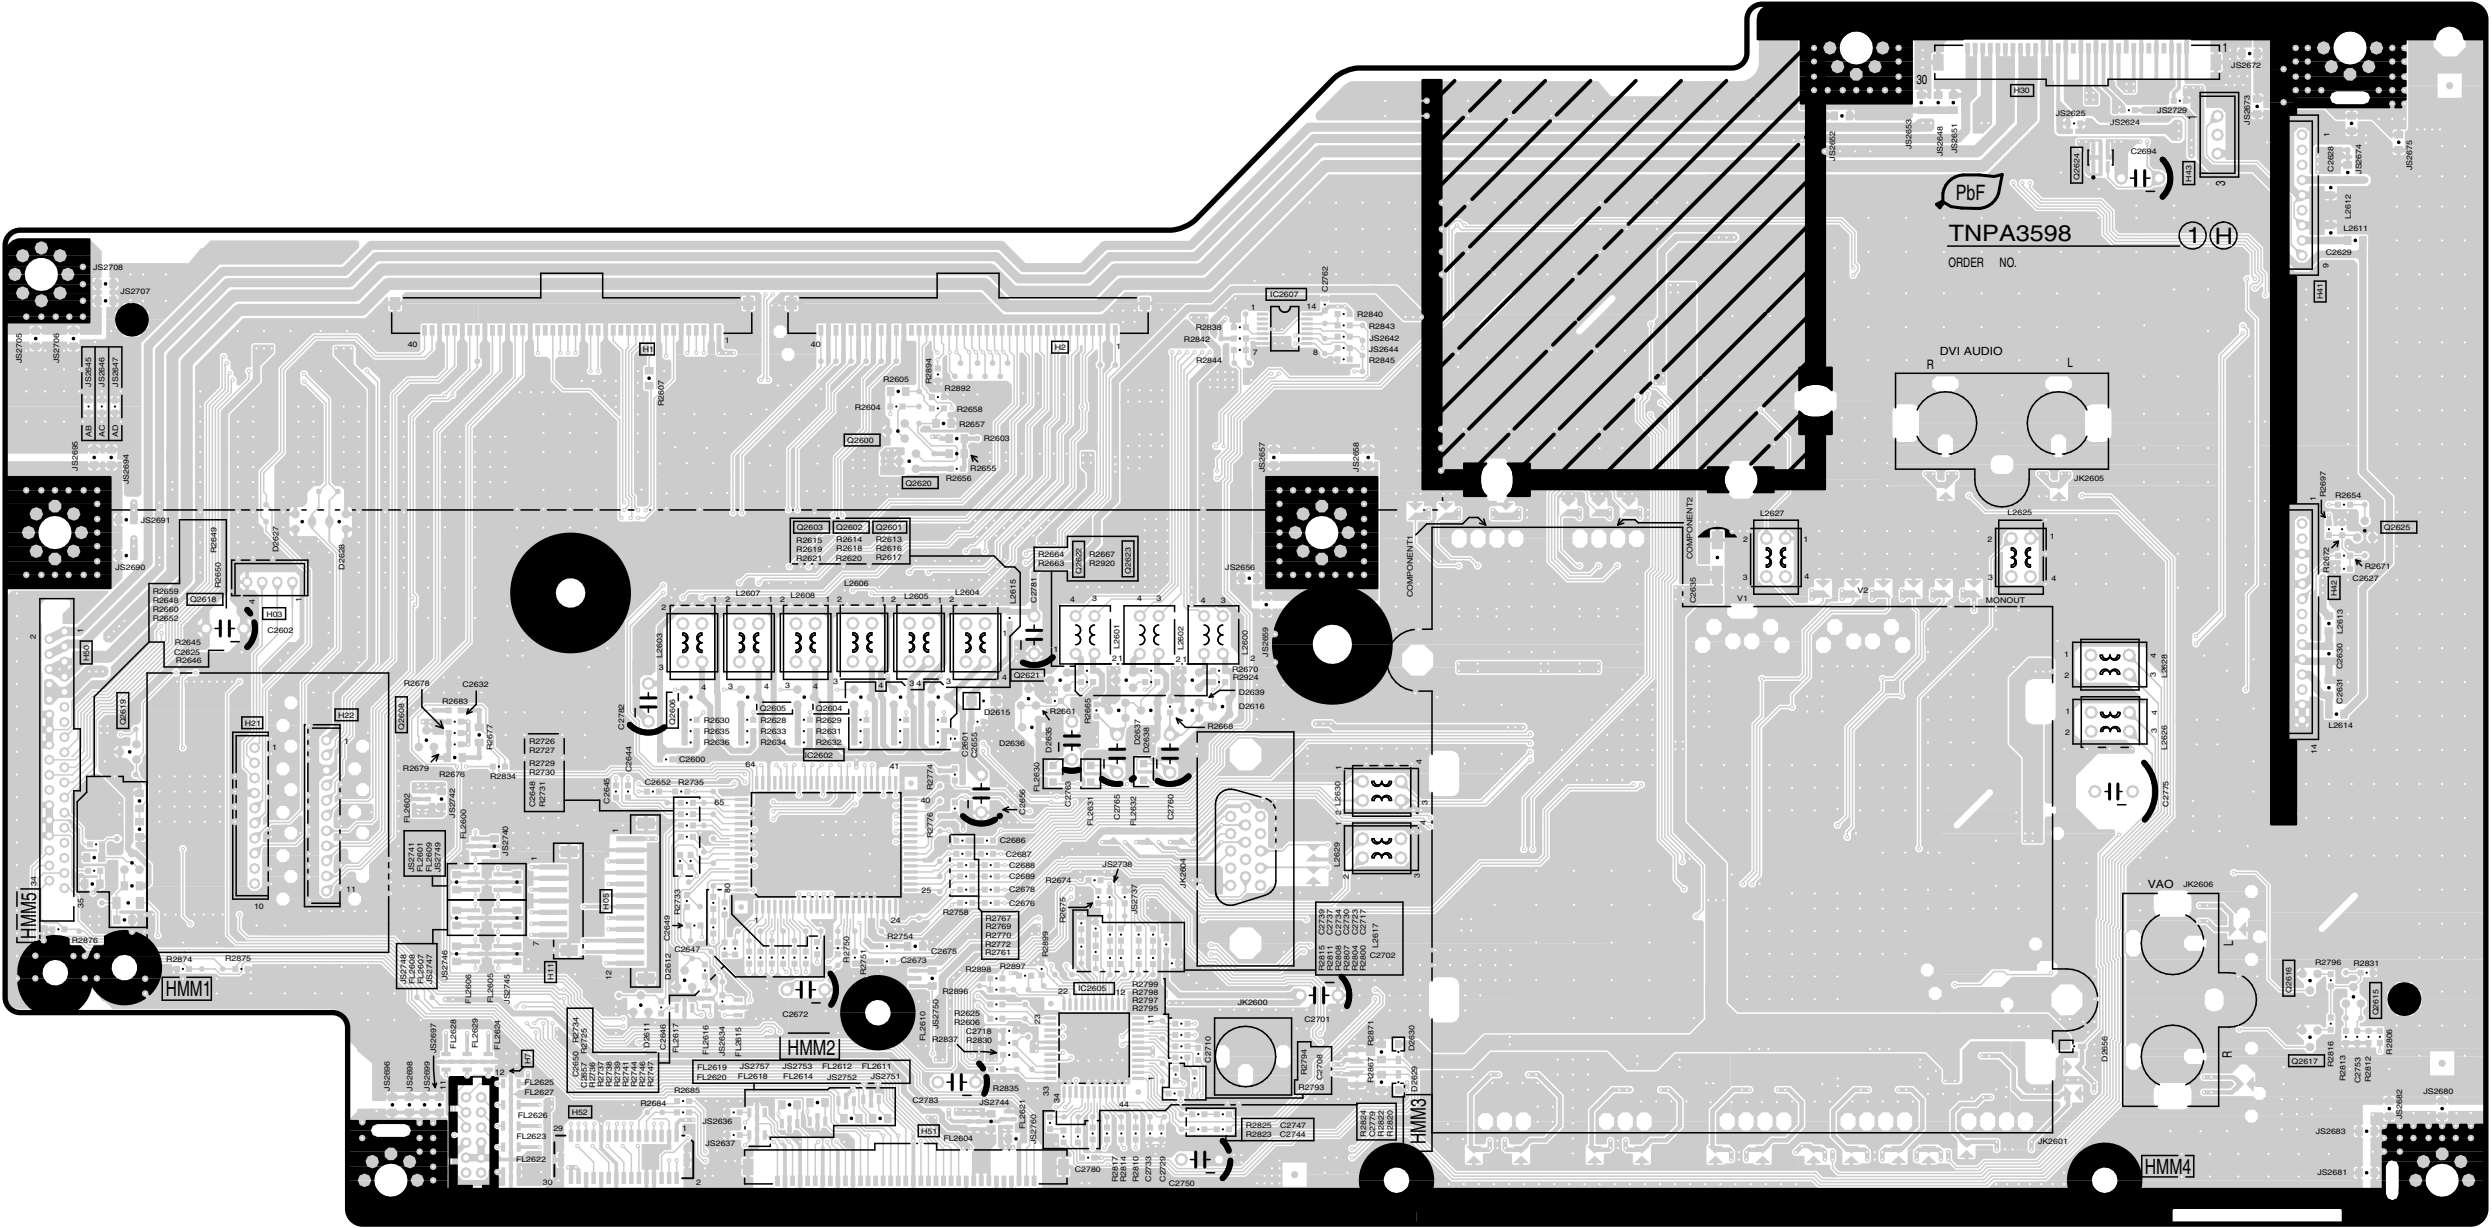

TH-37/42/50PX50U
H-BOARD TNPA3598AC

TH-37/42/50PX50U
H-BOARD TNPA3598AC

A B C D E F G H I

6



5

4

3



2

1

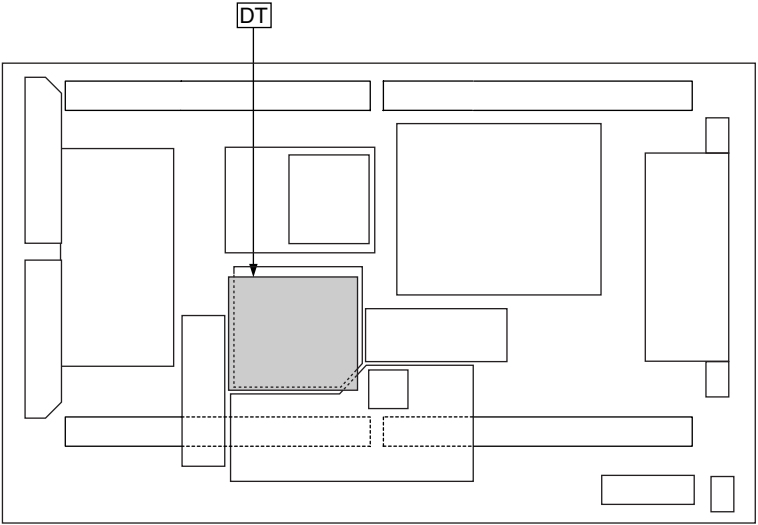

DT-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC8010	E-5	Q8200	B-1
IC8202	C-5	Q8201	D-6
IC8203	C-4	Q8202	A-6
IC8204	C-4	Q8203	B-4
IC8206	C-4	Q8204	B-4
IC8207	E-6	Q8206	B-4
IC8208	B-6	Q8209	D-4
IC8209	A-6	Q8216	E-4
IC8211	D-6	Q8223	E-2
IC8212	B-4	Q8224	E-2
IC8213	B-4	Q8225	D-3
IC8214	A-4	Q8226	E-4
IC8216	B-3		
IC8219	B-2		
IC8220	B-2		
IC8221	C-2		
IC8223	D-3		
IC8224	C-2		
IC8230	E-4		
IC8232	E-3		
IC8235	D-6		
IC8241	E-2		
IC8242	E-1		
IC8243	B-3		
IC8245	B-6		

TH-37/42/50PX50U
DT-BOARD TNAG146

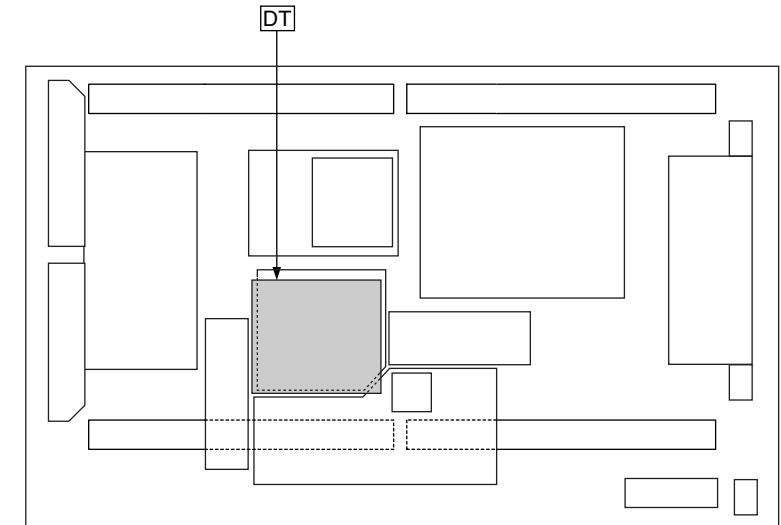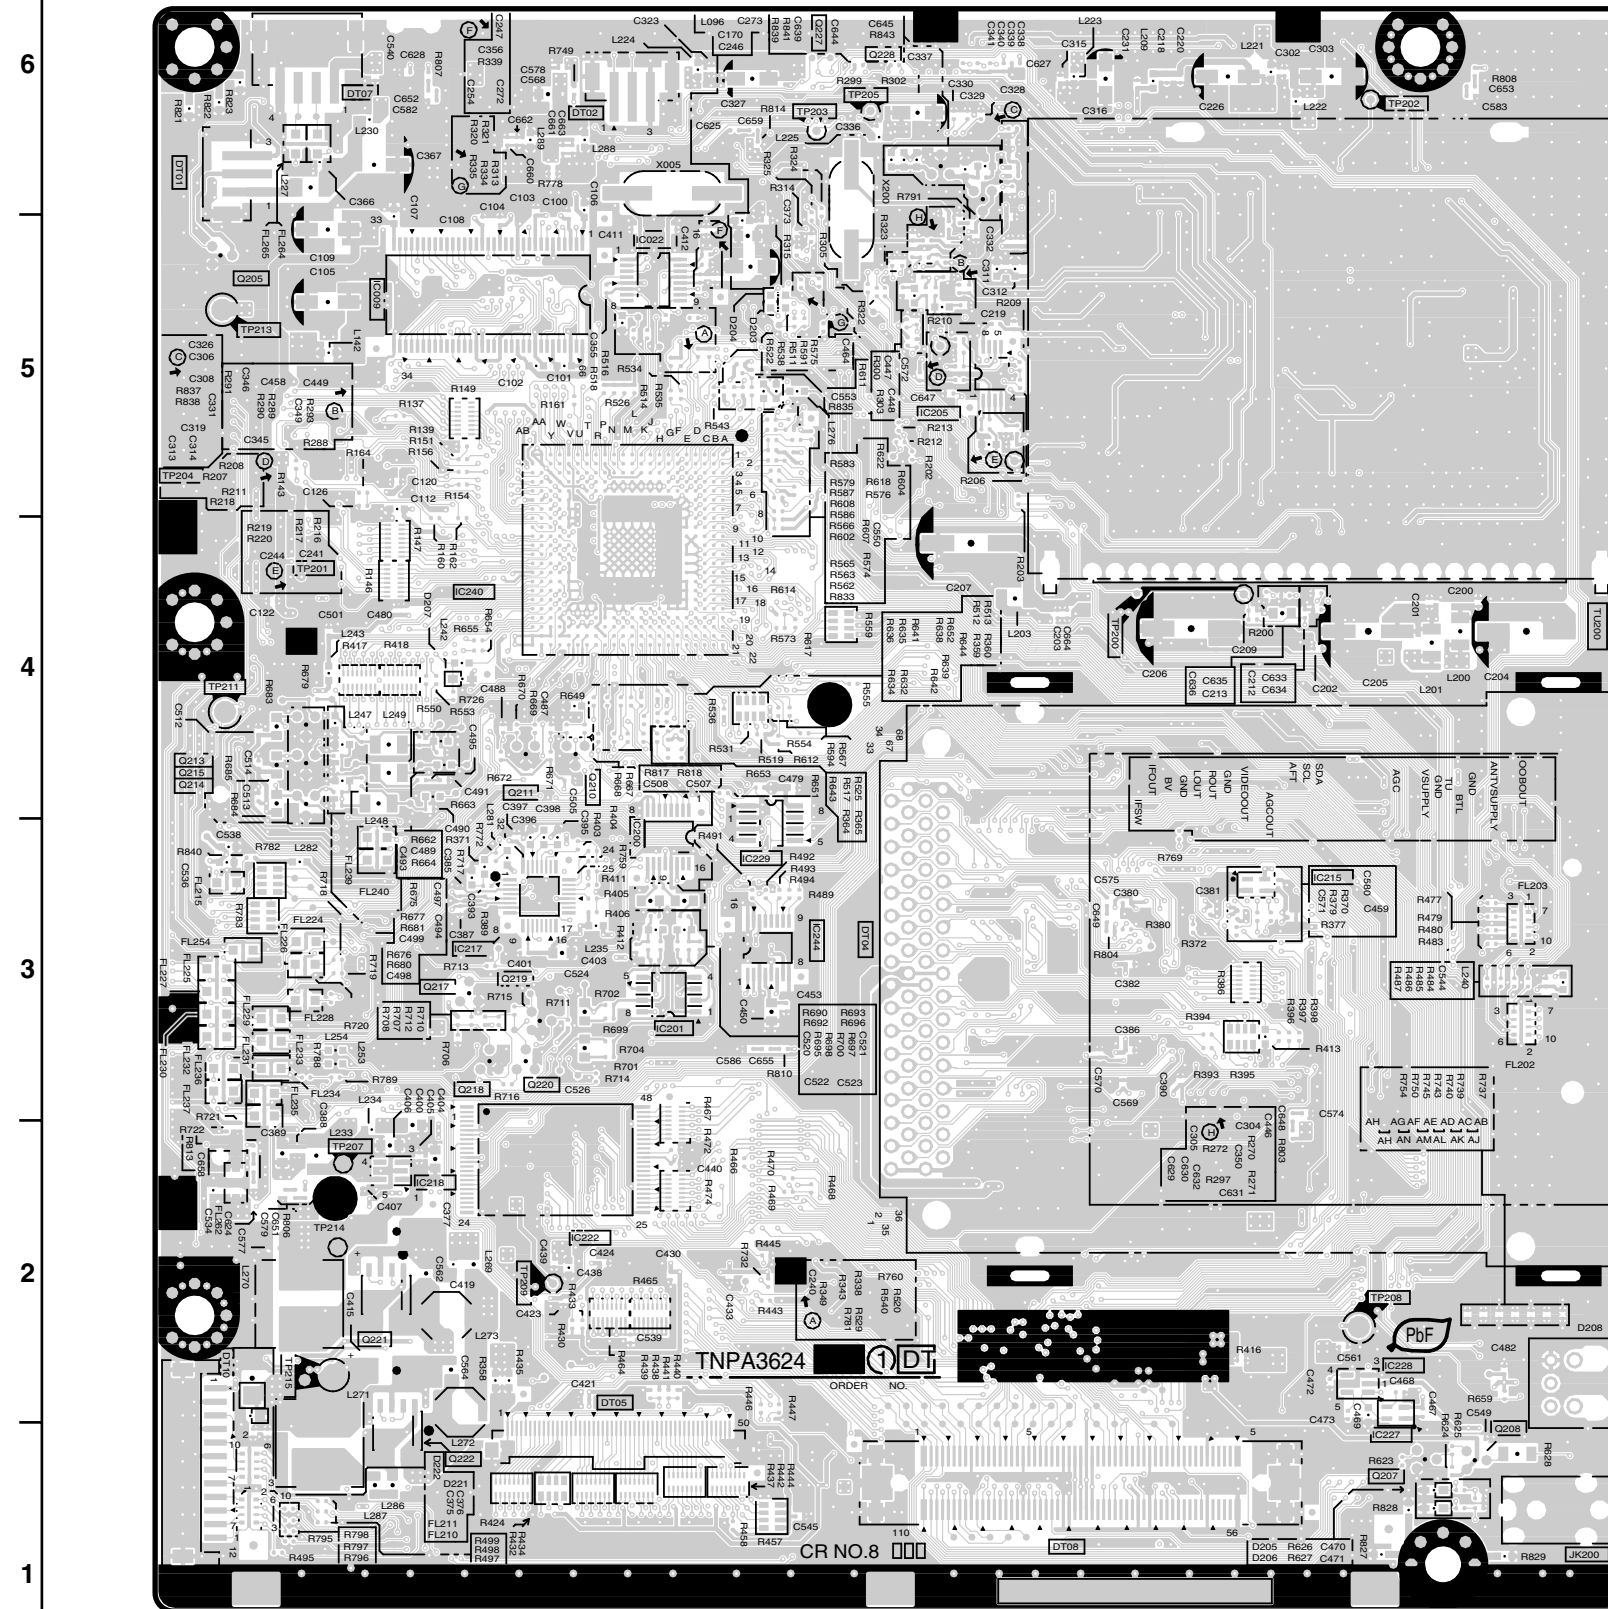DT-BOARD(COMPONENT SIDE)
TNAG146

Parts Location

DT-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TP	
IC8009	B-5	Q8205	A-5	TP8200	D-4
IC8022	C-5	Q8207	E-1	TP8201	D-4
IC8200	B-3	Q8208	E-1	TP8202	E-6
IC8201	C-3	Q8210	B-4	TP8203	C-6
IC8205	C-5	Q8211	B-4	TP8205	C-6
IC8215	E-3	Q8213	A-4	TP8207	A-2
IC8217	B-3	Q8214	A-4	TP8208	E-2
IC8218	B-2	Q8215	A-4	TP8209	B-2
IC8222	B-2	Q8217	B-3	TP8211	A-4
IC8227	E-1	Q8218	B-3	TP8213	A-5
IC8228	E-2	Q8219	B-3	TP8215	B-1
IC8229	C-3	Q8220	B-3		
IC8240	B-4	Q8221	B-2		
IC8244	C-3	Q8222	B-1		
		Q8227	C-6		
		Q8228	C-6		

TH-37/42/50PX50U
DT-BOARD TNAG146


TH-37/42/50PX50U
DT-BOARD TNAG146

12.8. DV-Board


THIS IS FOR REFERENCE USE ONLY.
THIS MUST BE REPLACED WITH
AN EXCHANGE BOARD ONLY.

Parts Location


DV-BOARD			
IC		TRANSISTOR	
IC5003	F-2	Q5001	B-3
IC5015	B-3	Q5002	C-2
IC5016	H-2	Q5003	C-2
IC5017	G-1	Q5004	G-1
		Q5020	F-1

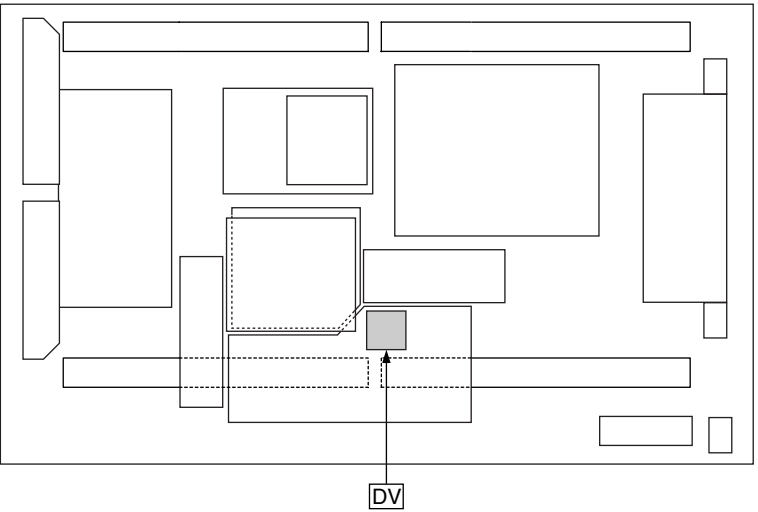

DV-BOARD(FOIL SIDE)
TNPA3626


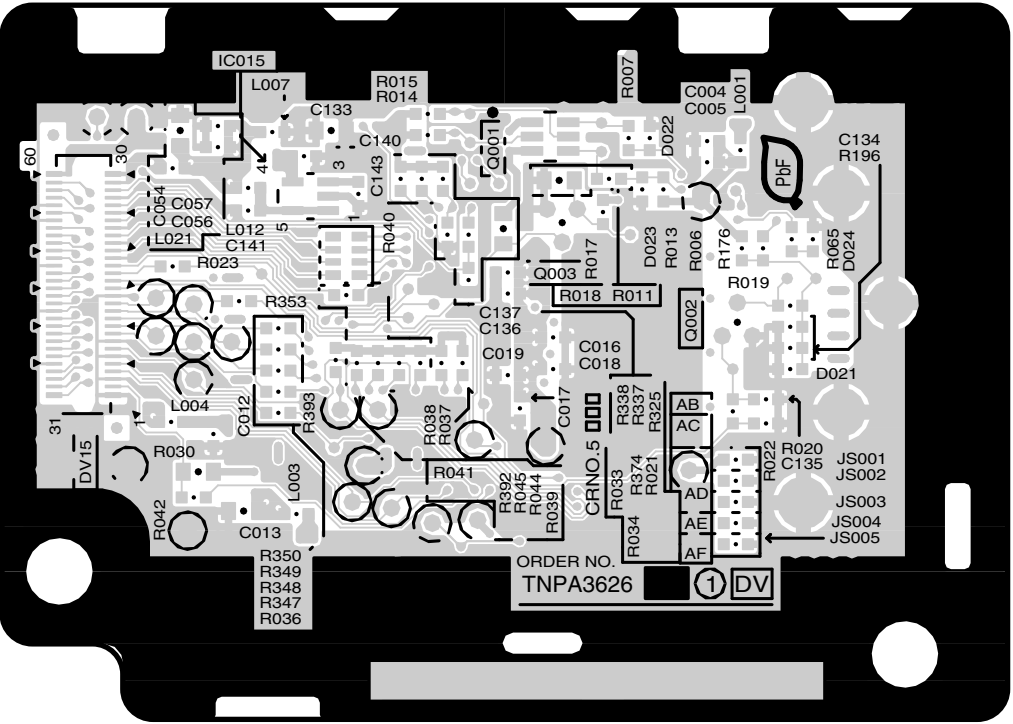


DV-BOARD(COMPONENT SIDE)
TNPA3626

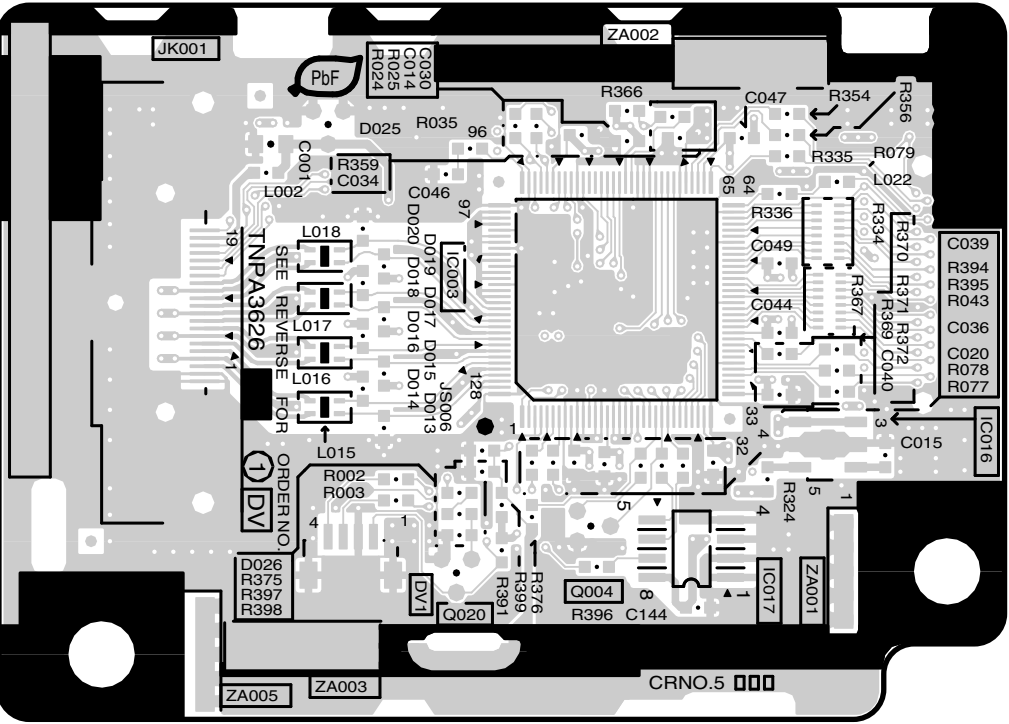

12.9. DG-Board

DG-BOARD(FOIL SIDE)
TNPA3625AE (37inch)
TNPA3625AC (42inch)
TNPA3625AD (50inch)

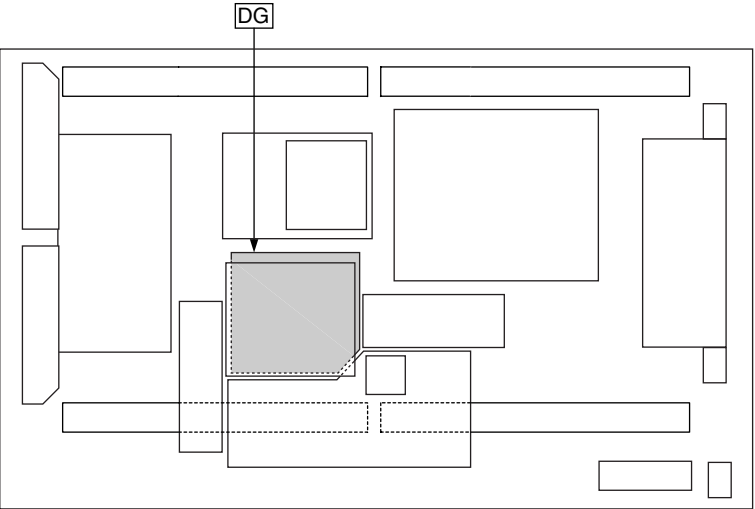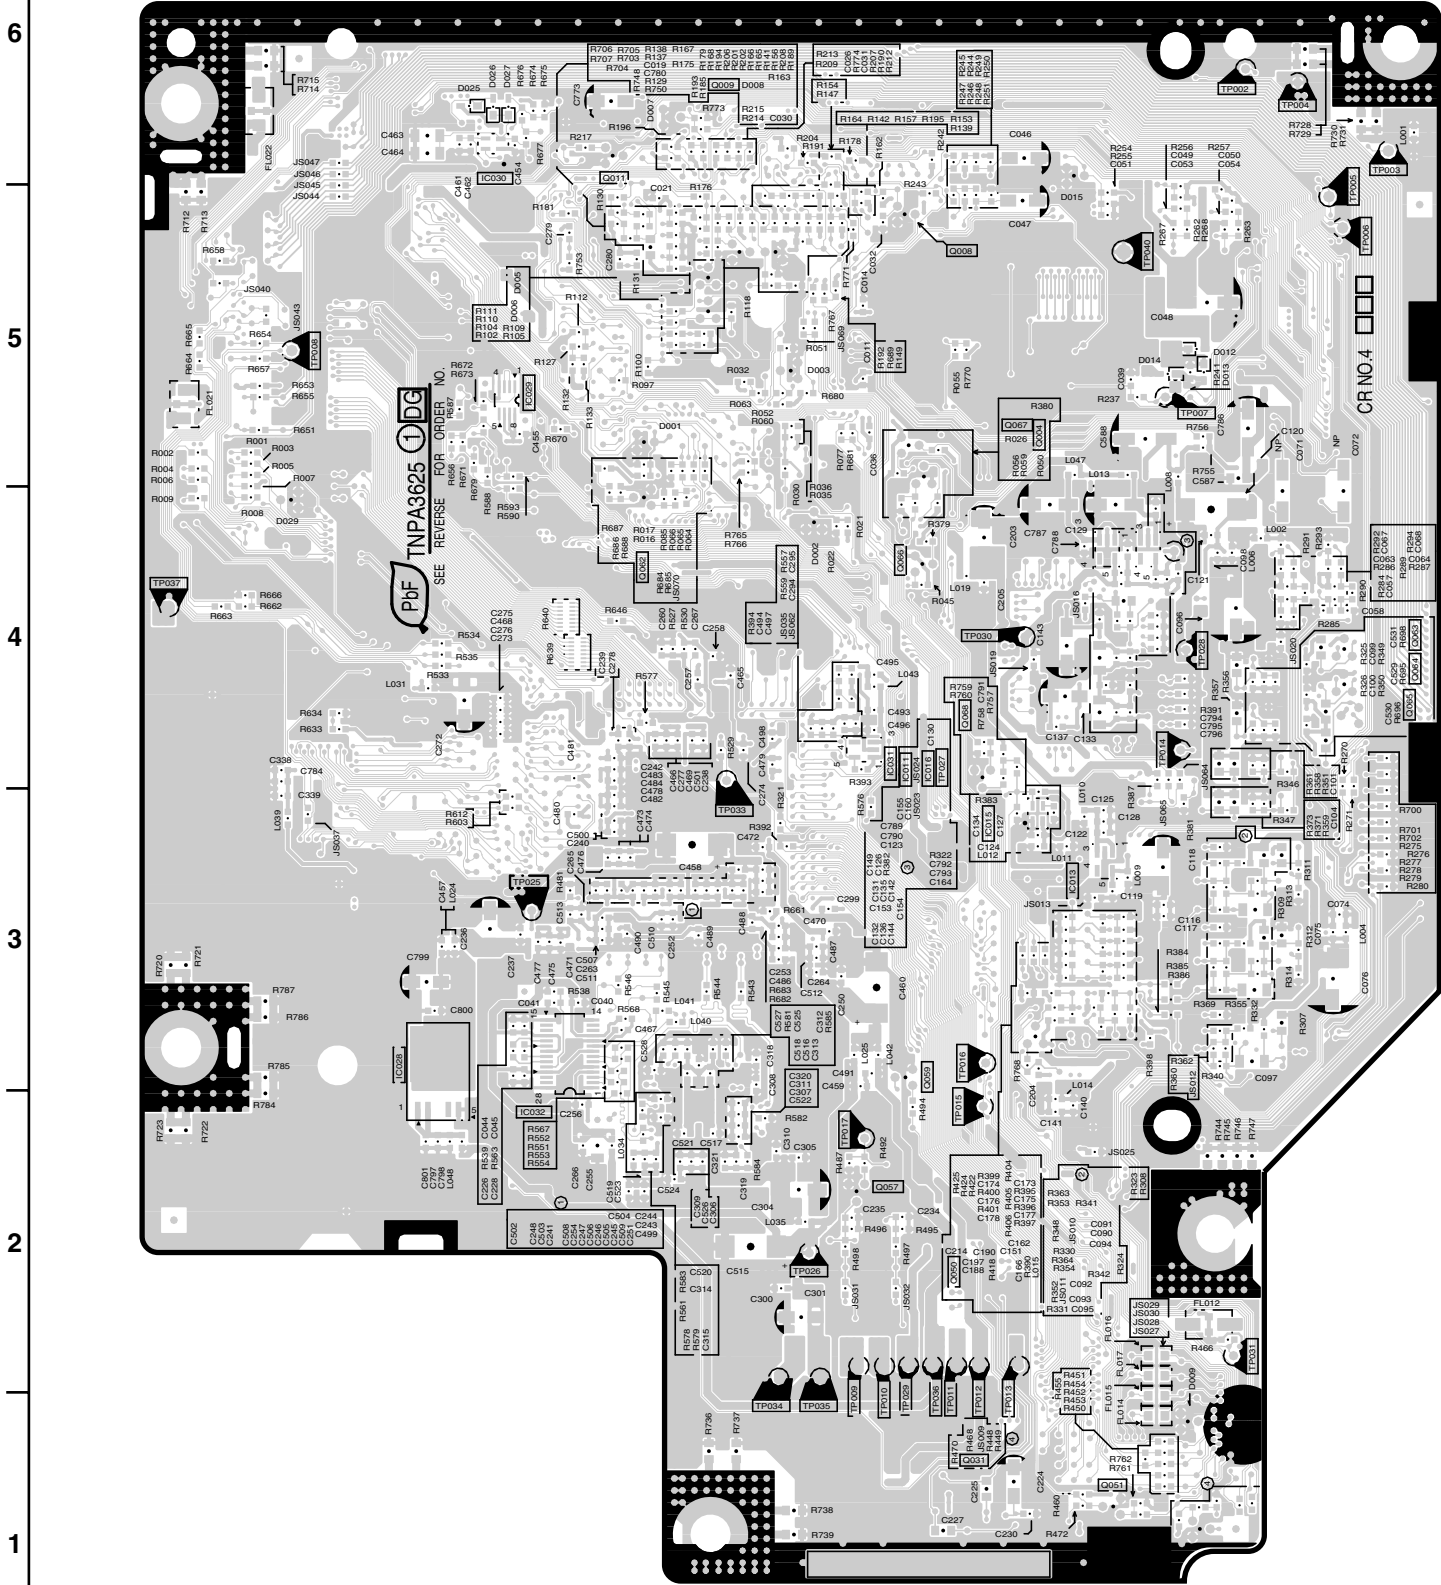

Parts Location

DG-BOARD (FOIL SIDE)					
IC		TRANSISTOR		TP	
IC4011	C-4	Q4004	D-5	TP4002	E-6
IC4013	D-3	Q4008	D-5	TP4003	E-5
IC4015	D-3	Q4009	C-6	TP4004	E-6
IC4016	C-4	Q4011	B-6	TP4005	E-5
IC4028	B-3	Q4031	D-1	TP4006	E-5
IC4029	B-5	Q4050	D-2	TP4007	D-5
IC4030	B-6	Q4051	D-1	TP4008	A-5
IC4031	C-4	Q4057	C-2	TP4009	C-1
IC4032	B-2	Q4059	C-3	TP4010	C-1
		Q4062	C-4	TP4011	D-1
		Q4063	E-4	TP4012	D-1
		Q4064	E-4	TP4013	D-1
		Q4065	E-4	TP4014	D-4
		Q4066	C-4	TP4015	D-2
		Q4067	D-5	TP4016	D-2
		Q4068	D-4	TP4017	C-2
				TP4025	B-3
				TP4026	C-2
				TP4028	D-4
				TP4029	C-1
				TP4030	D-4
				TP4031	D-1
				TP4033	C-3
				TP4034	C-1
				TP4035	C-1
				TP4036	C-1
				TP4037	A-4
				TP4040	D-5

TH-37PX50U
DG-BOARD TNPA3625AE



TH-42PX50U
DG-BOARD TNPA3625AC

TH-50PX50U
DG-BOARD TNPA3625AD

TH-37PX50U
DG-BOARD TNPA3625AE

TH-42PX50U
DG-BOARD TNPA3625AC

TH-50PX50U
DG-BOARD TNPA3625AD

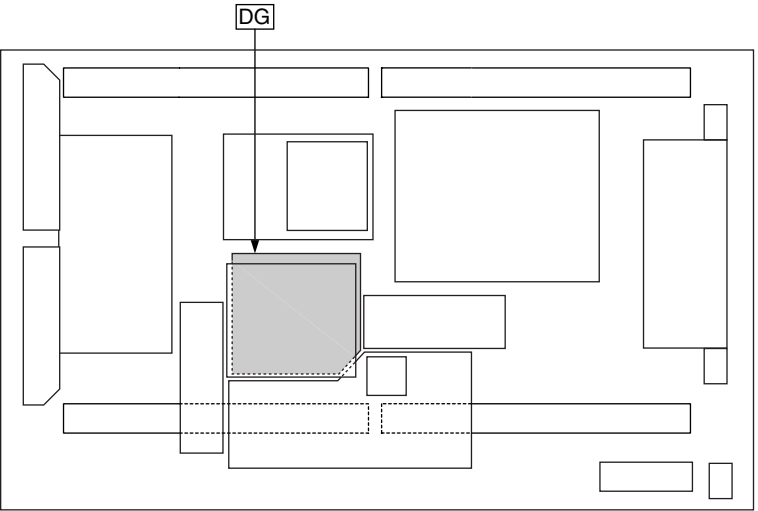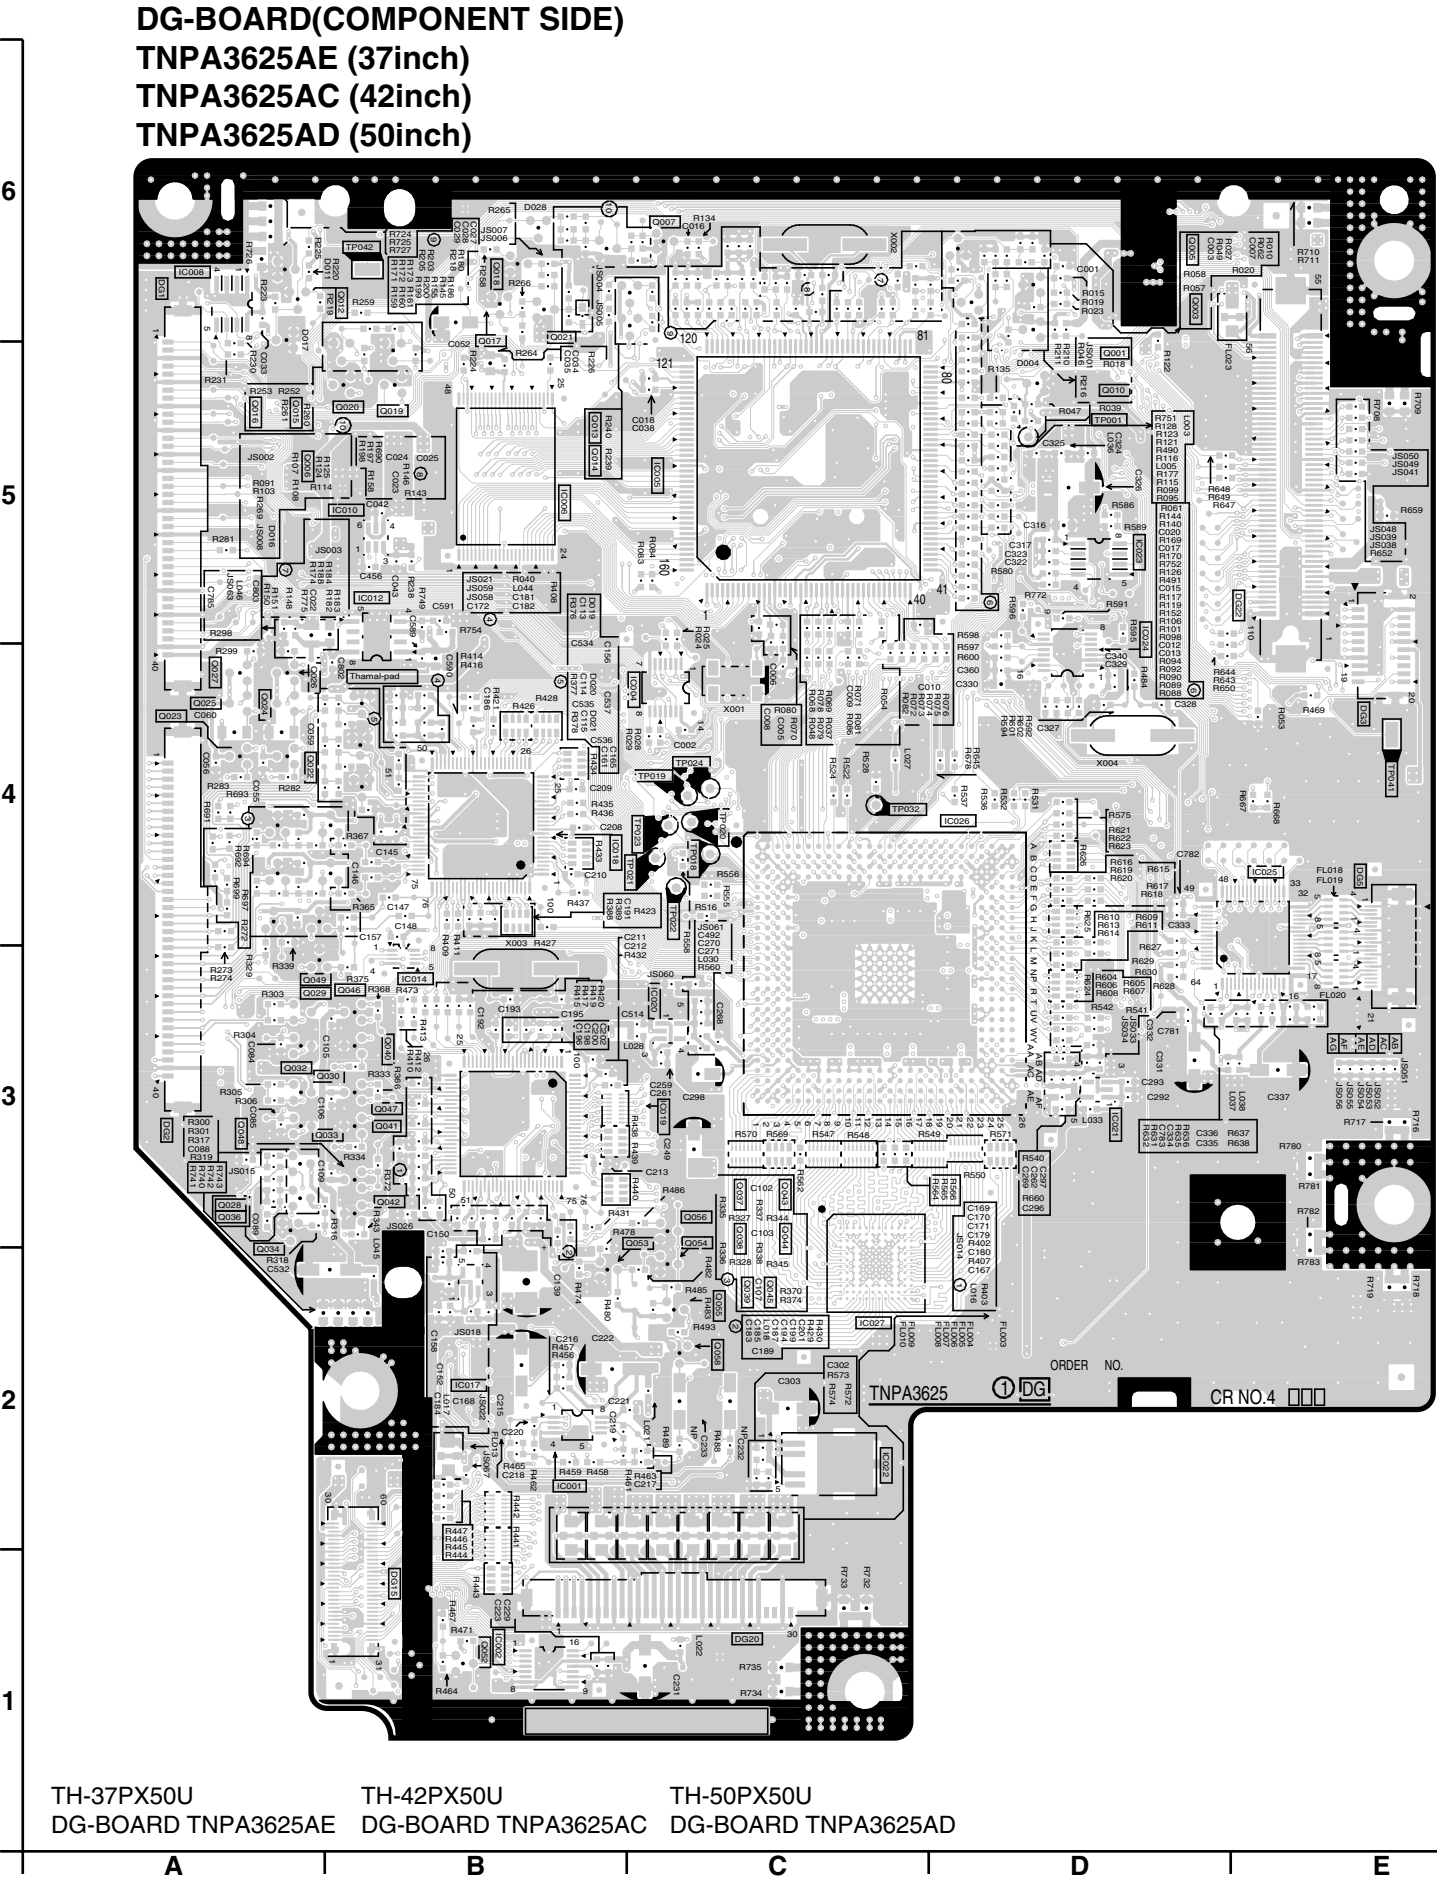

Parts Location

DG-BRD (COMPONENT SIDE)							
IC		TRANSISTOR		Q4030		TP	
IC4001	B-2	Q4001	D-5	Q4030	A-3	TP4018	C-4
IC4002	B-1	Q4003	D-6	Q4032	B-3	TP4019	C-4
IC4004	C-4	Q4005	D-6	Q4033	A-2	TP4020	C-4
IC4005	C-5	Q4006	A-5	Q4034	A-3	TP4021	C-4
IC4006	B-5	Q4007	C-6	Q4037	C-3	TP4022	C-4
IC4008	A-6	Q4010	D-5	Q4038	C-3	TP4023	C-4
IC4010	B-5	Q4012	B-6	Q4039	B-3	TP4024	C-4
IC4012	B-5	Q4013	B-5	Q4040	B-3	TP4032	C-4
IC4014	B-3	Q4014	B-5	Q4041	B-3	TP4041	E-4
IC4017	B-2	Q4015	A-5	Q4042	B-3	TP4042	B-6
IC4018	B-4	Q4016	A-5	Q4043	C-3		
IC4019	C-3	Q4017	B-6	Q4044	C-3		
IC4020	C-3	Q4018	B-6	Q4045	C-2		
IC4021	D-3	Q4019	B-5	Q4046	B-3		
IC4022	C-2	Q4020	B-5	Q4047	B-3		
IC4023	D-5	Q4021	B-6	Q4048	A-3		
IC4024	D-5	Q4022	A-4	Q4049	A-3		
IC4025	E-4	Q4023	A-4	Q4052	B-1		
IC4026	D-4	Q4024	A-4	Q4053	C-3		
IC4027	C-2	Q4025	A-4	Q4054	C-3		
		Q4026	A-4	Q4055	C-2		
		Q4027	A-4	Q4056	C-3		
		Q4028	A-3	Q4058	C-2		
		Q4029	A-3				



12.10. Z-Board

Z-BOARD (FOIL SIDE)
TNPA3621AB

6

5

4

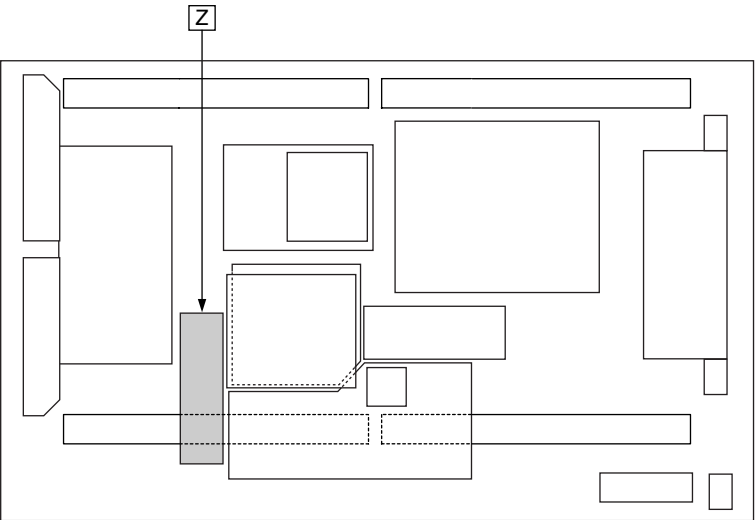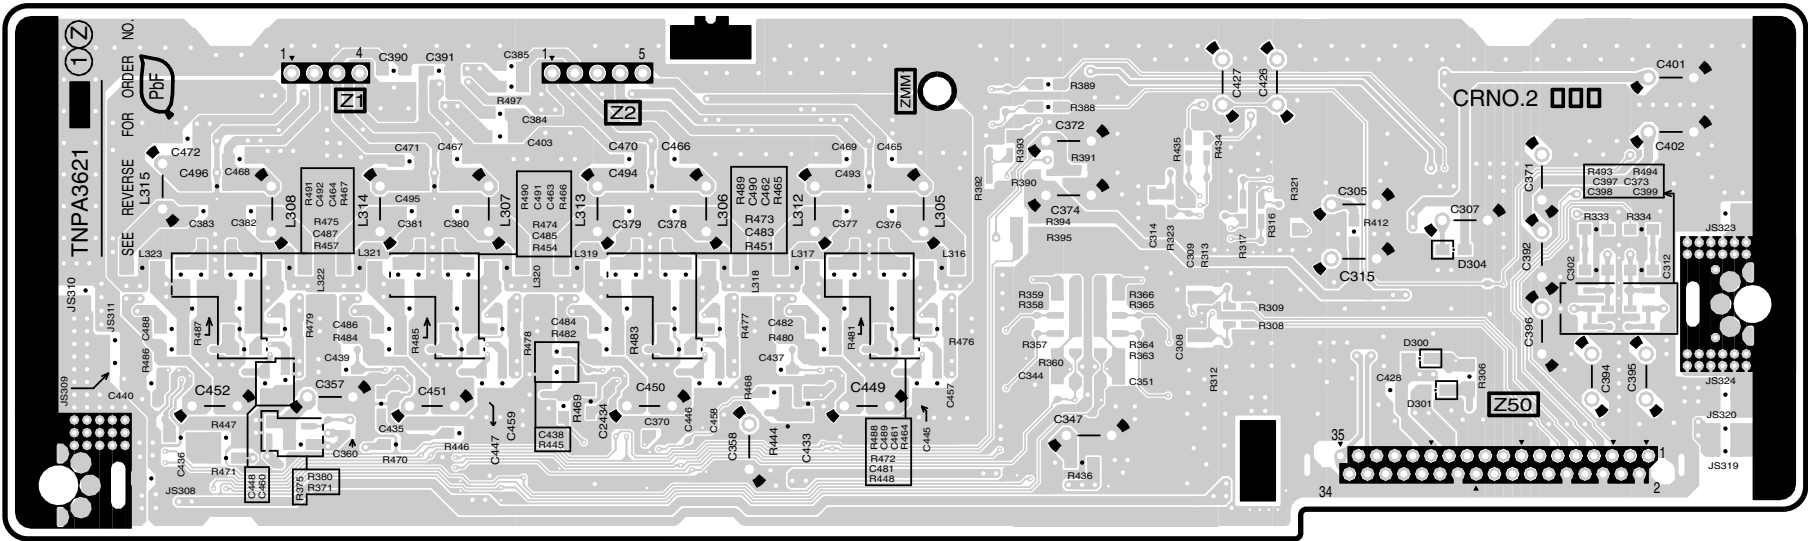


Z-BOARD (COMPONENT SIDE)
TNPA3621AB

3

2

1

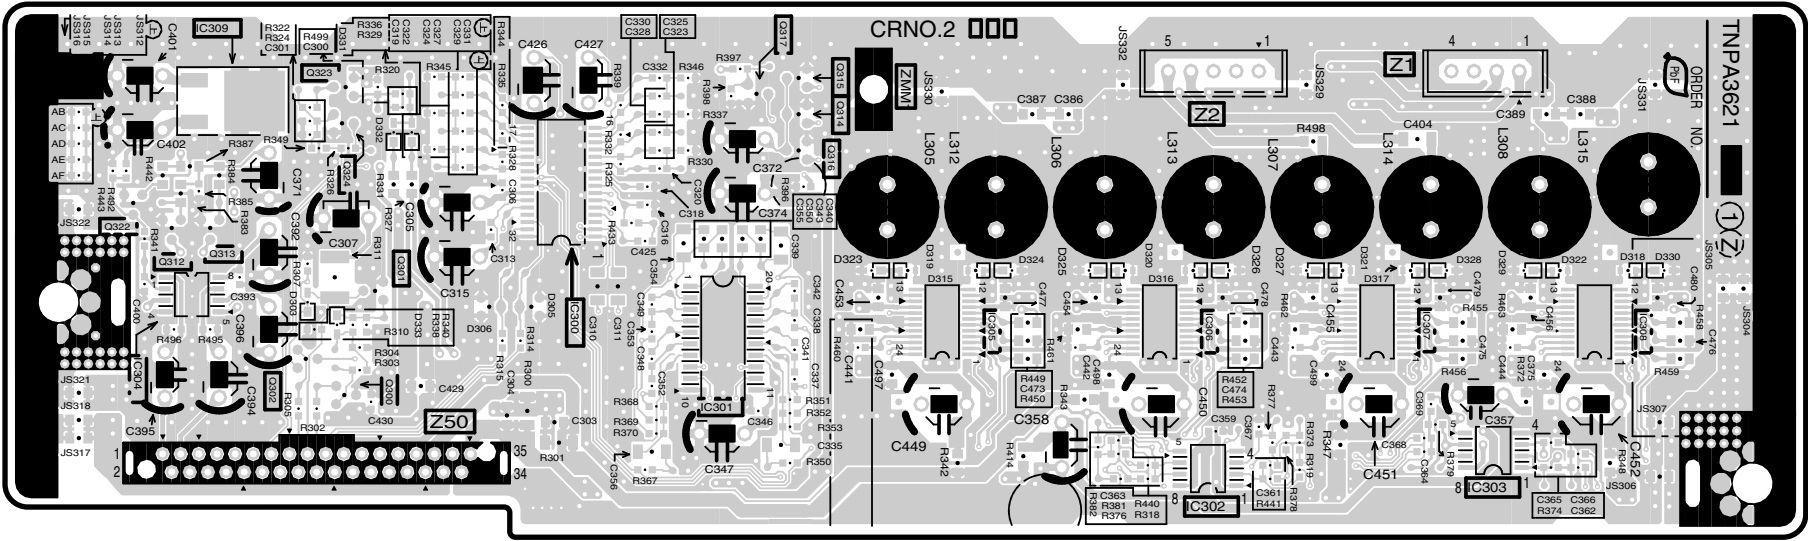



Parts Location

Z-BOARD			
IC		TRANSISTOR	
IC2300	C-2	Q2300	B-2
IC2301	C-2	Q2301	B-2
IC2302	E-2	Q2302	B-2
IC2303	F-2	Q2312	A-2
IC2304	A-2	Q2313	B-2
IC2305	D-2	Q2314	D-3
IC2306	E-2	Q2315	D-3
IC2307	E-2	Q2316	D-3
IC2308	F-2	Q2317	C-3
IC2309	A-3	Q2322	A-2
		Q2323	B-3
		Q2324	B-3

TH-37/42/50PX50U
Z-BOARD TNPA3621AB

TH-37/42/50PX50U
Z-BOARD TNPA3621AB



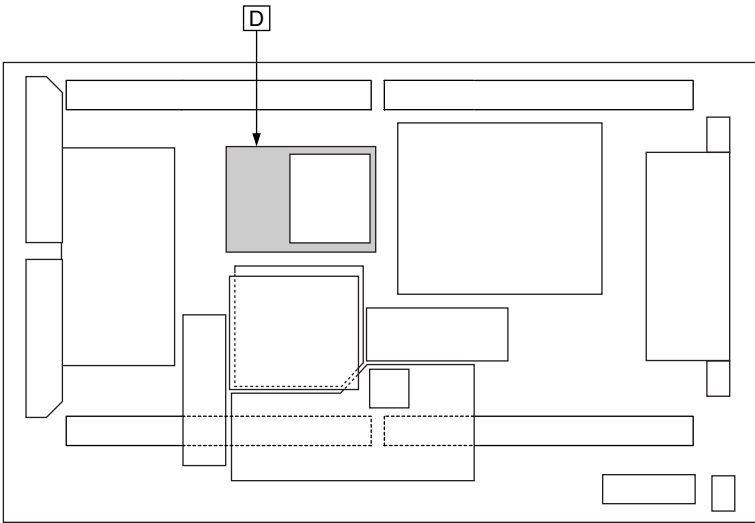


Parts Location

D-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC9004	F-2	Q9000	H-5
IC9301	B-3	Q9001	H-5
IC9702	D-5	Q9002	H-5
		Q9003	H-5
		Q9004	H-5
		Q9005	H-1
		Q9010	H-1
		Q9700	C-6
		Q9800	C-5
		Q9801	D-6
		Q9900	D-1

Parts Location

D-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TP	
IC9001	B-1	Q9008	C-3	TP9013	B-1
IC9003	C-2	Q9009	C-3	TP9300	F-4
IC9005	B-3	Q9011	B-2	TP9301	F-4
IC9006	A-2	Q9012	B-3		
IC9007	A-2	Q9013	B-3		
IC9008	B-5	Q9020	B-2		
IC9200	H-4	Q9021	B-2		
IC9300	G-2	Q9022	B-3		
IC9302	E-2	Q9023	B-3		
IC9303	G-2	Q9500	C-3		
IC9500	B-4	Q9701	E-5		
IC9502	C-2	Q9702	G-5		
IC9503	C-2	Q9703	F-5		
IC9504	C-5	Q9704	F-5		
IC9700	D-5	Q9901	G-1		

D-BOARD(COMPONENT SIDE)
TZTNP010YES (37inch)
TZTNP010YDS (42inch)

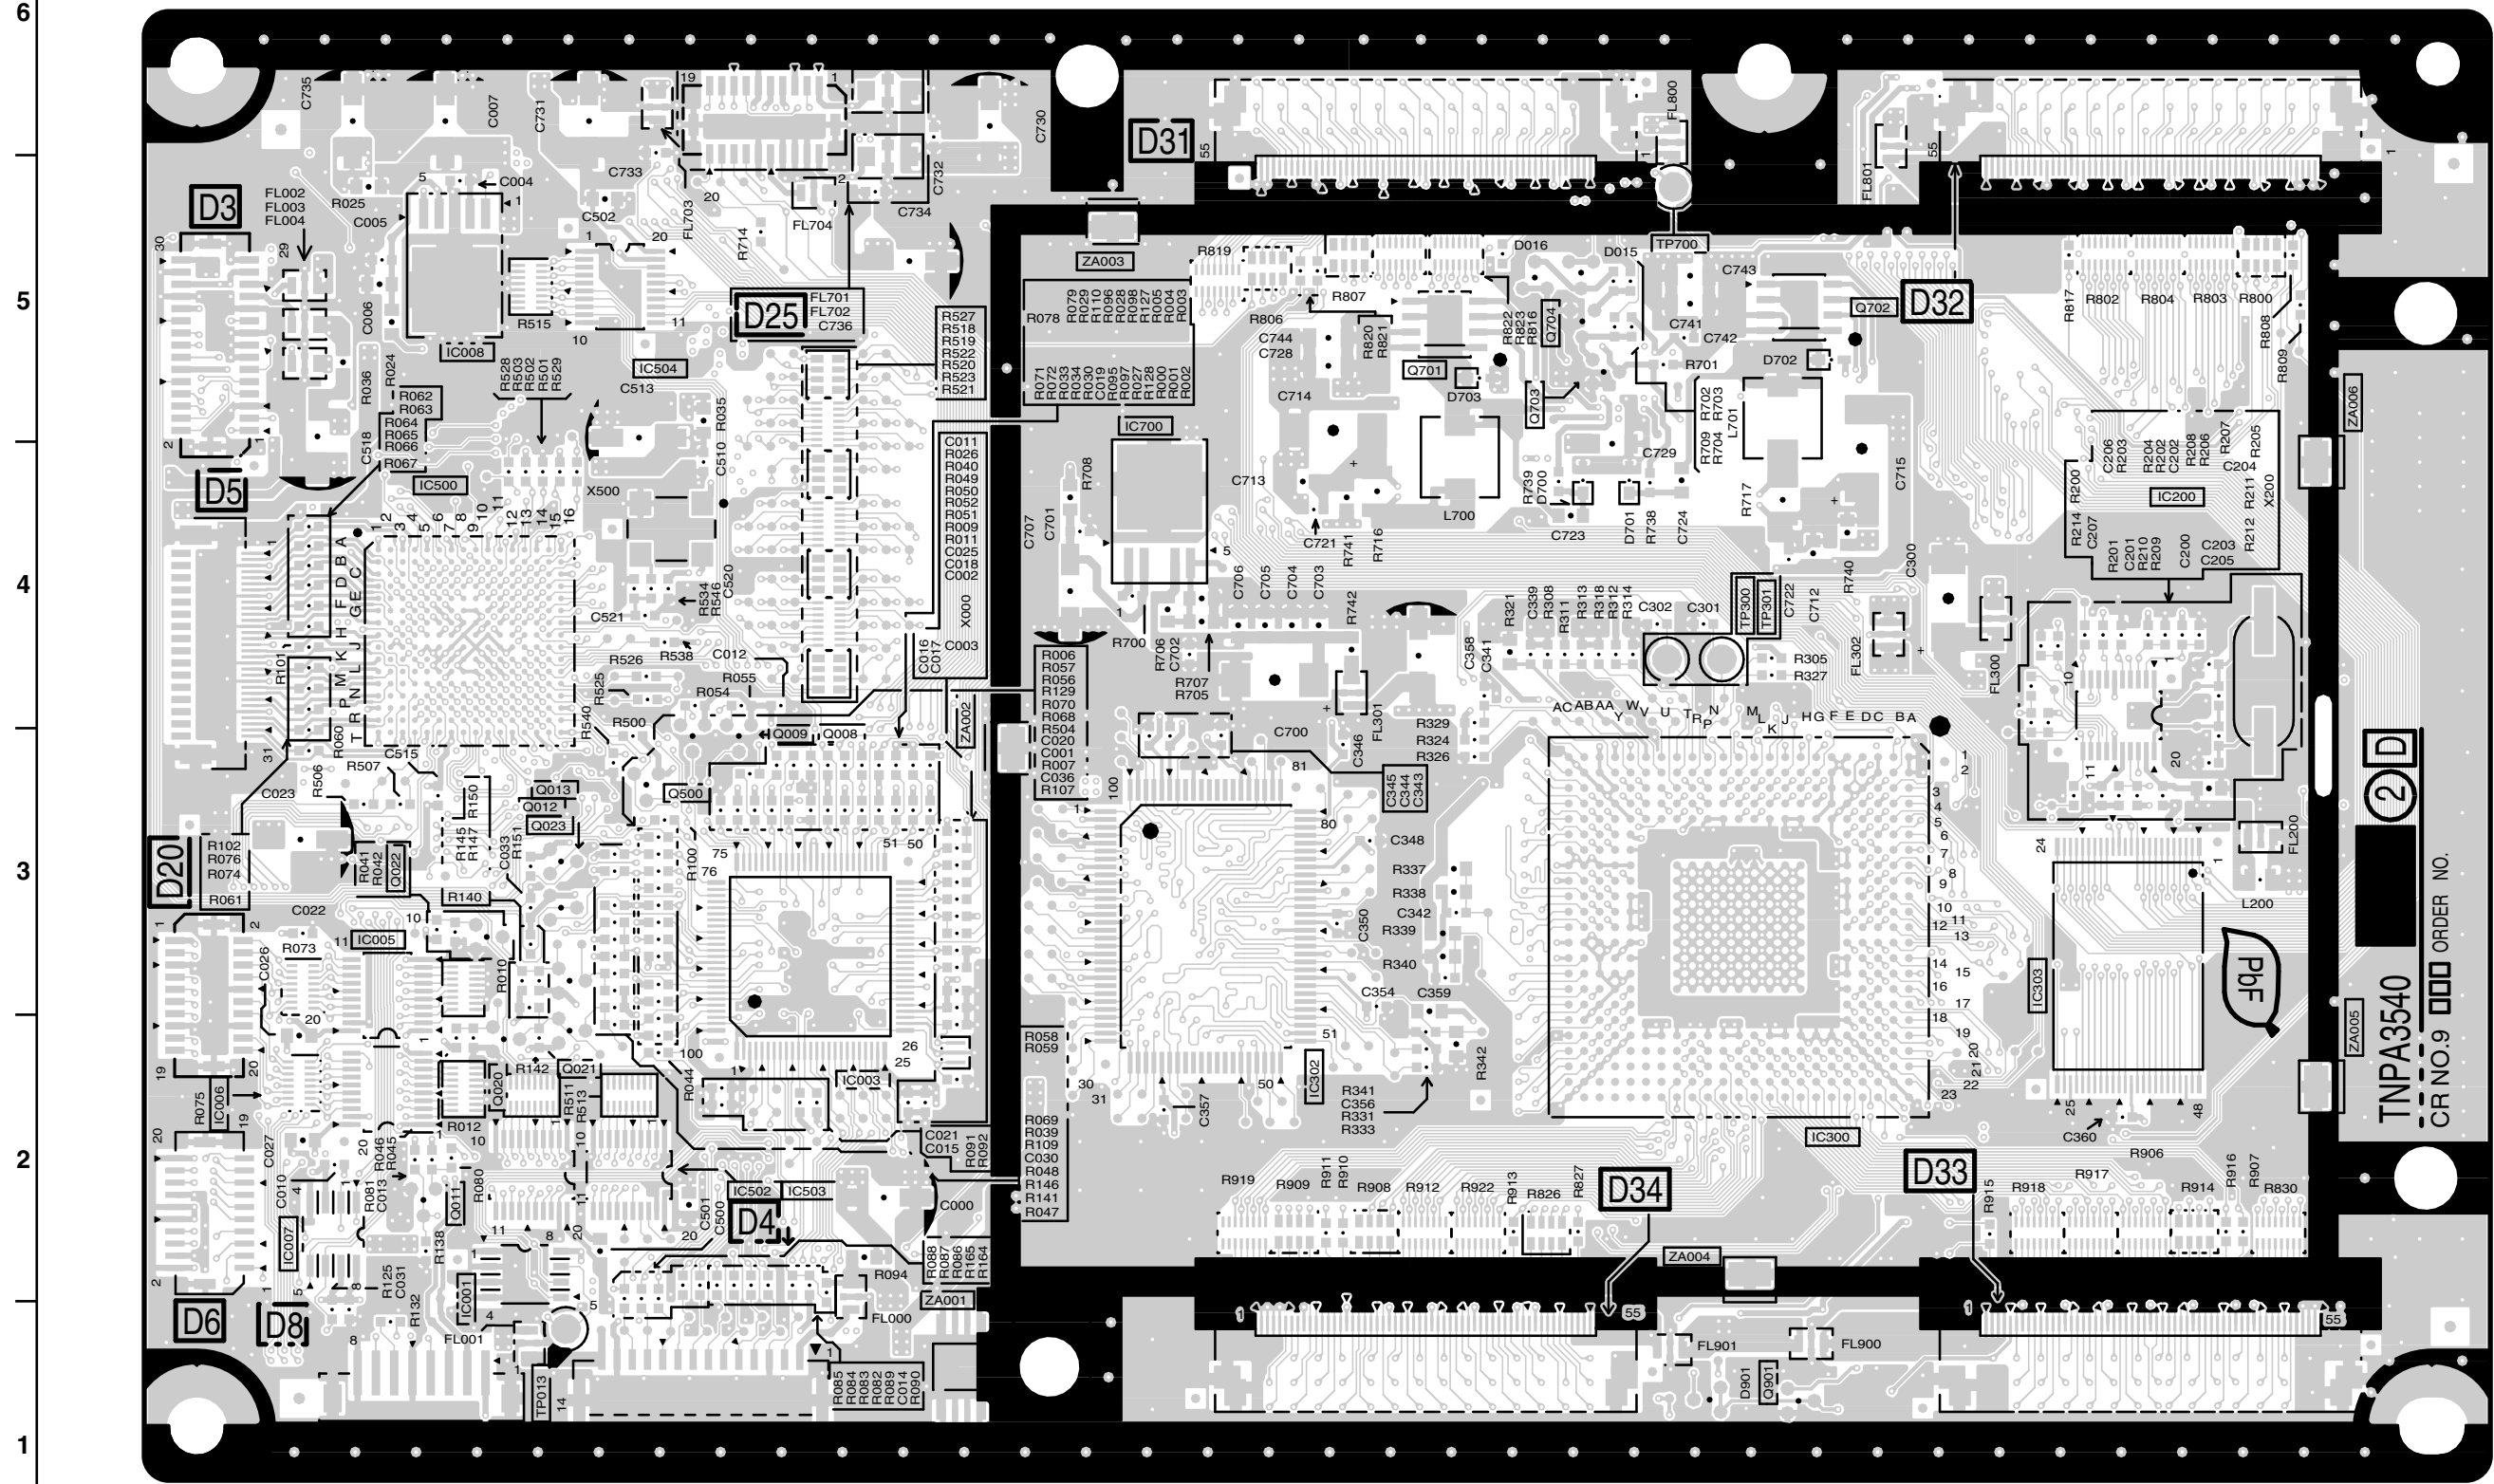

TH-37PX50U
D-BOARD TZTNP010YES


TH-42PX50U
D-BOARD TZTNP010YDS

TH-37PX50U
D-BOARD TZTNP010YES

TH-42PX50U
D-BOARD TZTNP010YDS


12.12. D-Board (50inch)

D-BOARD (FOIL SIDE)
TZTNP010YCS

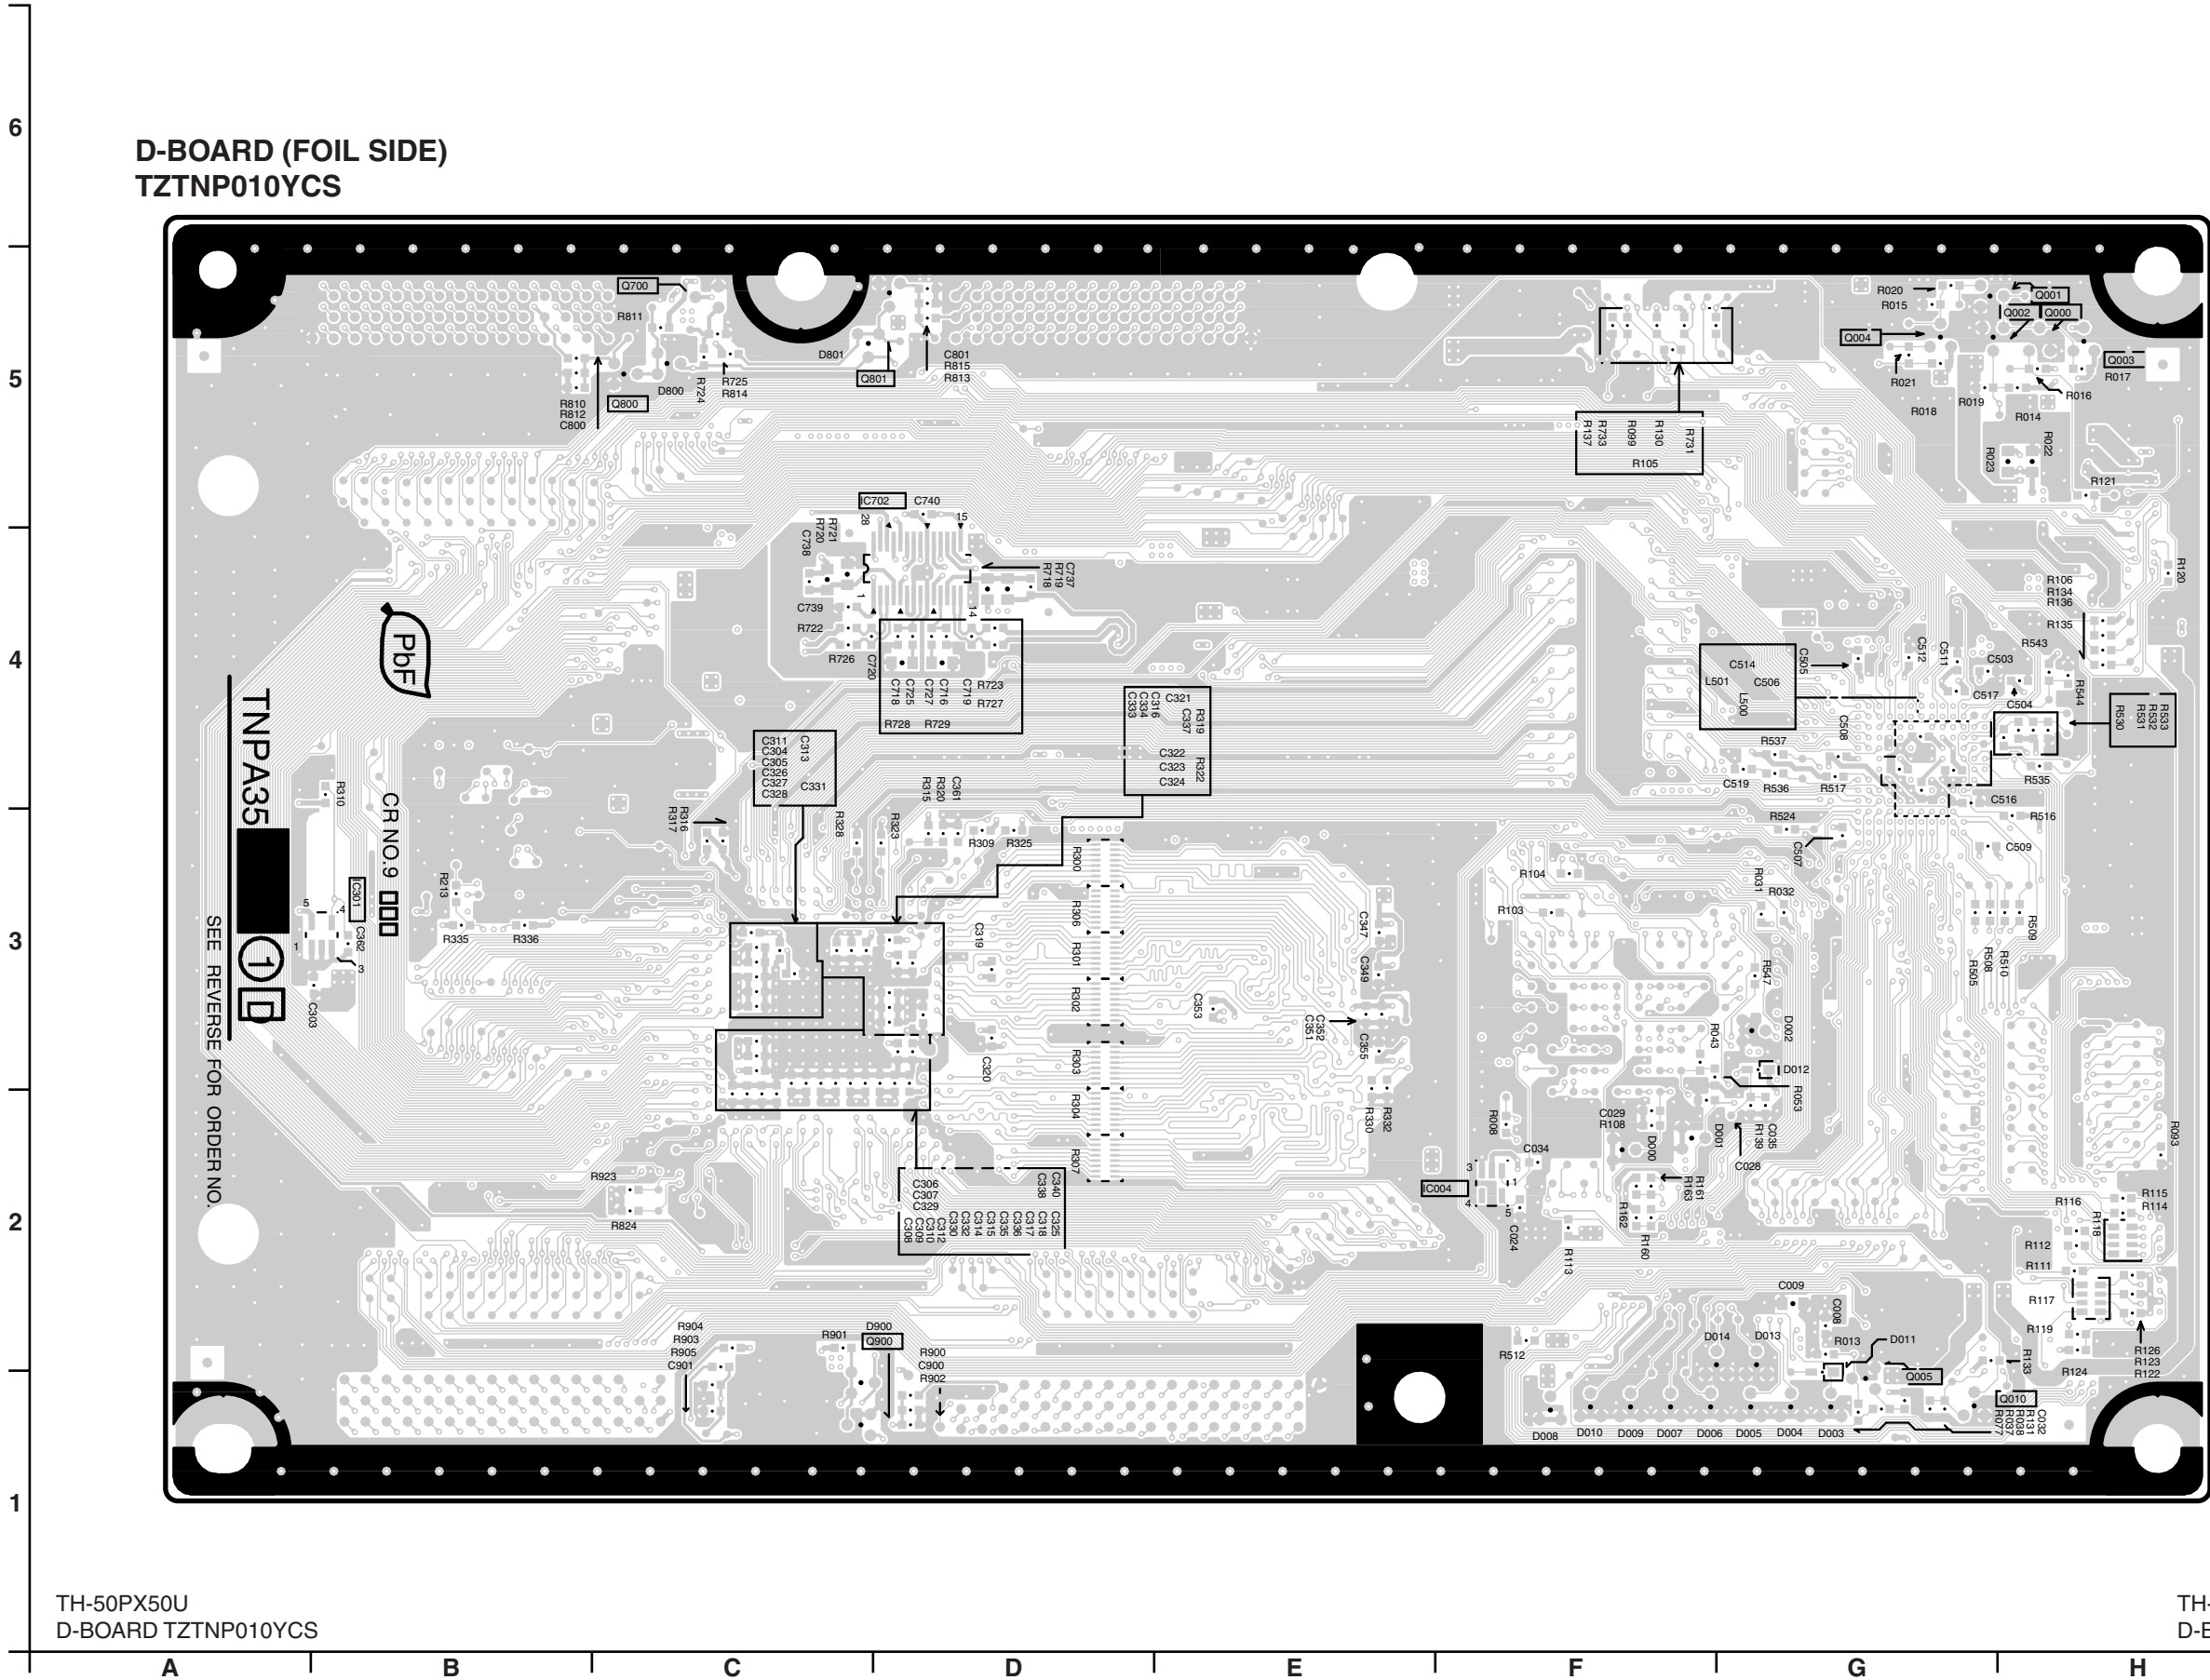

TH-50PX50U
D-BOARD TZTNP010YCS

TH-50PX50U
D-BOARD TZTNP010YCS

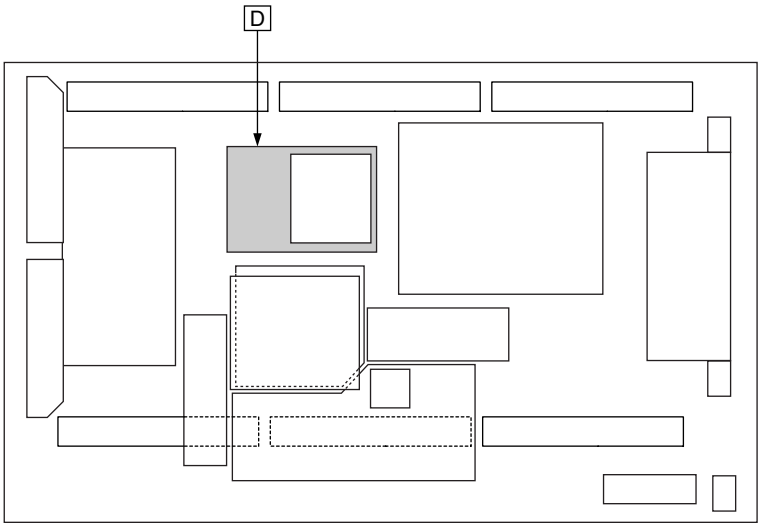


Parts Location

D-BOARD (FOIL SIDE)			
IC		TRANSISTOR	
IC9004 IC9301 IC9702	F-2 B-3 D-4	Q9000	H-5
		Q9001	H-5
		Q9002	H-5
		Q9003	H-5
		Q9004	G-5
		Q9005	G-2
		Q9010	G-1
		Q9700	C-5
		Q9800	C-5
		Q9801	D-5
		Q9900	D-1

Parts Location

D-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TP	
IC9001	B-2	Q9008	C-3	TP9013	B-2
IC9003	C-3	Q9009	C-3	TP9300	F-4
IC9005	B-3	Q9011	B-2	TP9301	F-4
IC9006	B-2	Q9012	B-3	TP9700	F-5
IC9007	B-2	Q9013	B-3		
IC9008	B-5	Q9020	B-2		
IC9200	G-3	Q9021	B-2		
IC9300	F-3	Q9022	B-3		
IC9302	D-3	Q9023	B-3		
IC9303	G-3	Q9500	C-3		
IC9500	B-4	Q9701	E-4		
IC9502	C-2	Q9702	F-5		
IC9503	C-2	Q9703	E-4		
IC9504	B-5	Q9704	E-5		
IC9700	D-4	Q9901	F-1		


D-BOARD (COMPONENT SIDE)
TZTNP010YCS (50inch)

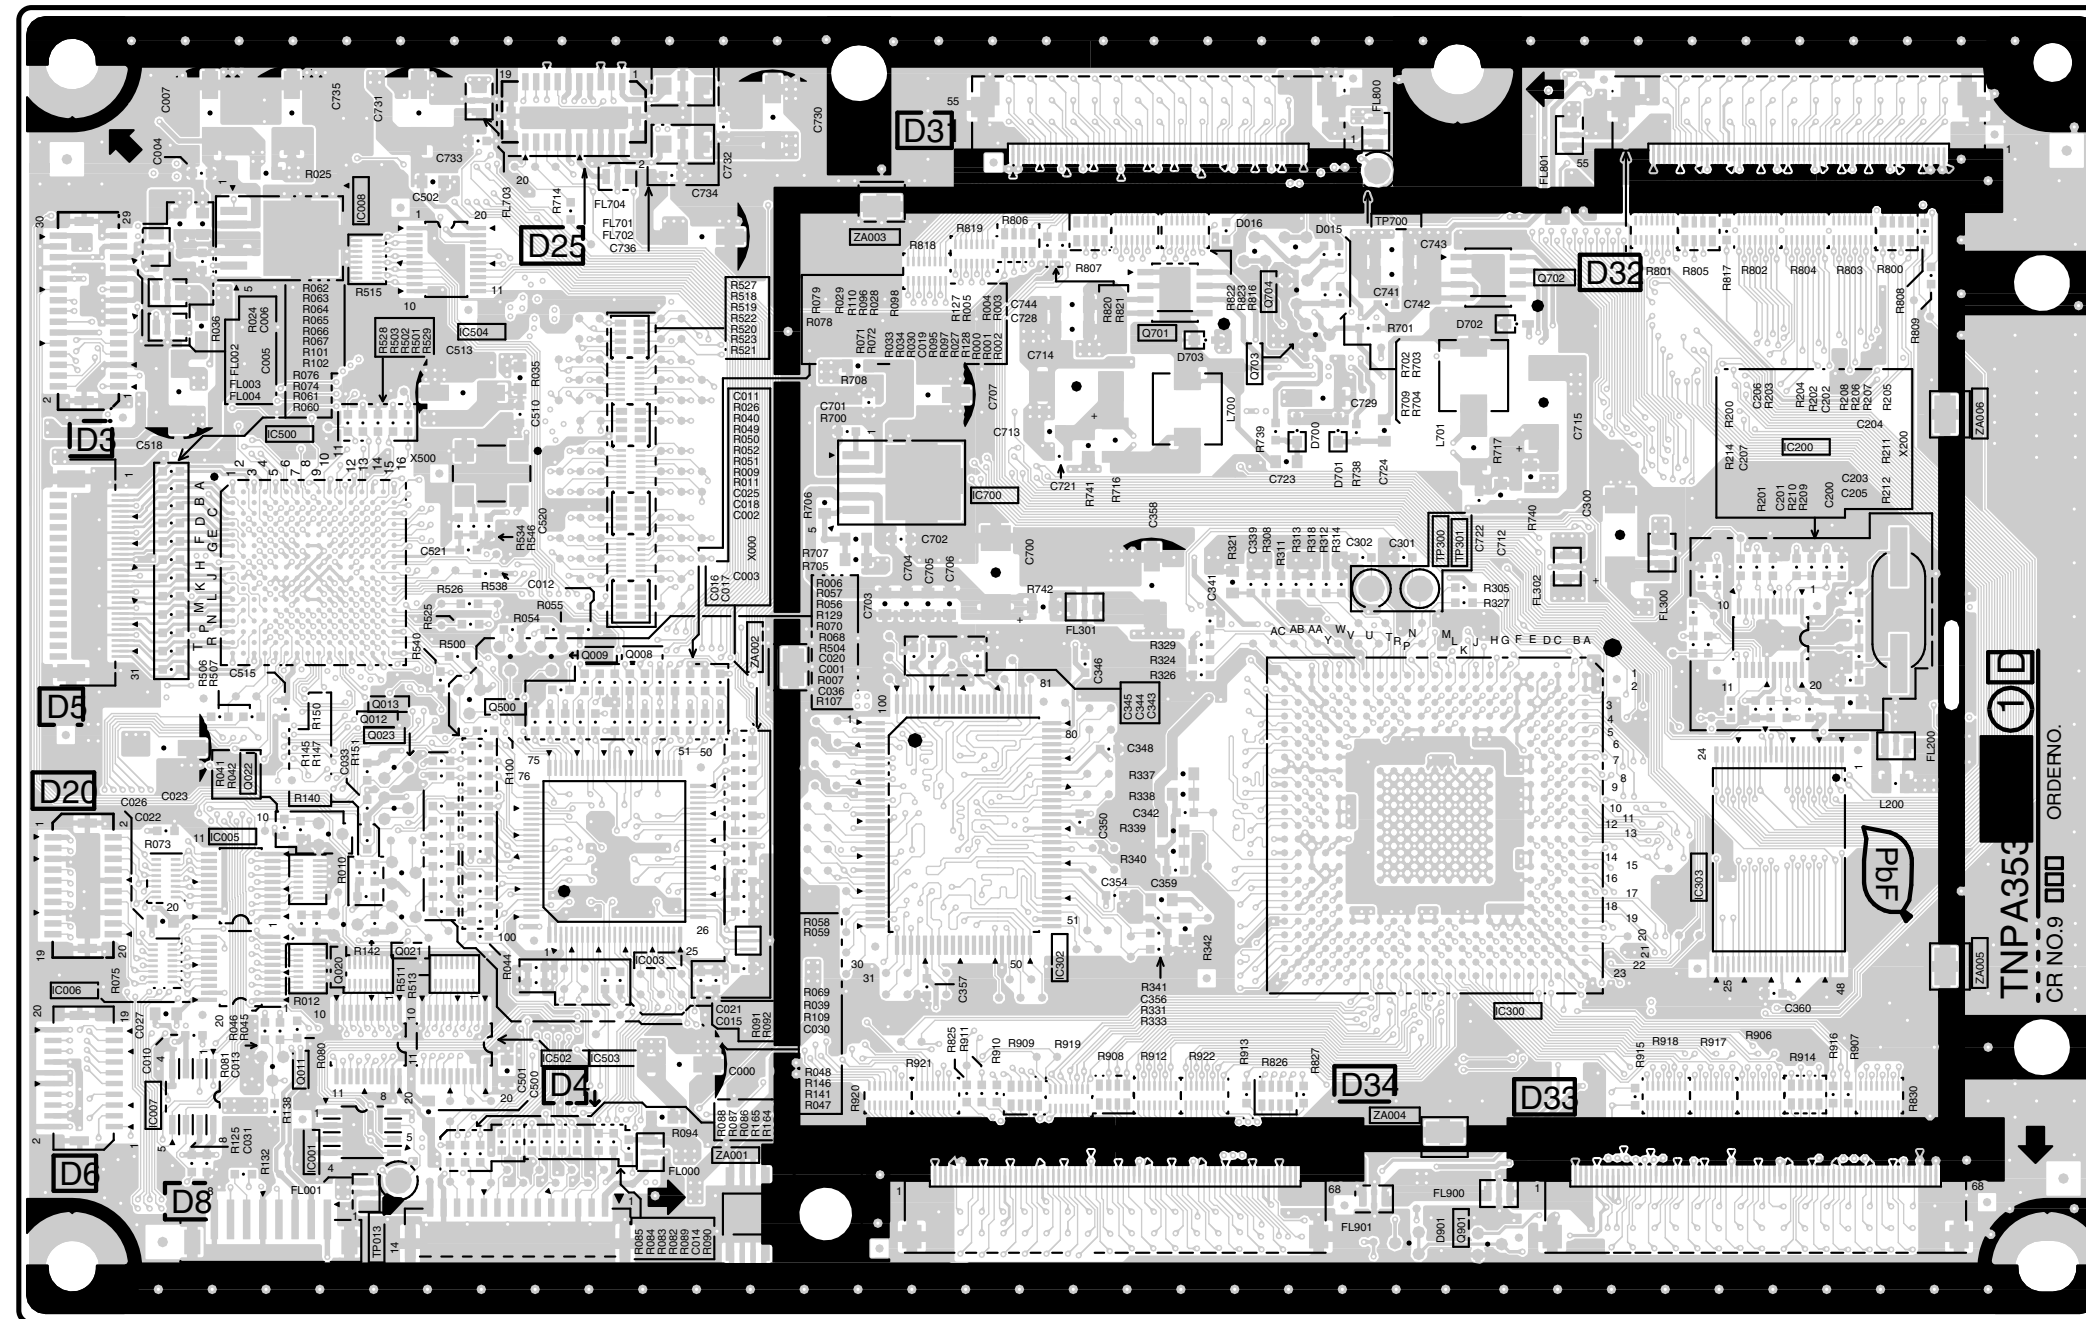


TH-50PX50U
D-BOARD TZTNP010YCS

TH-50PX50U
D-BOARD TZTNP010YCS


12.13. C1-Board (37inch)

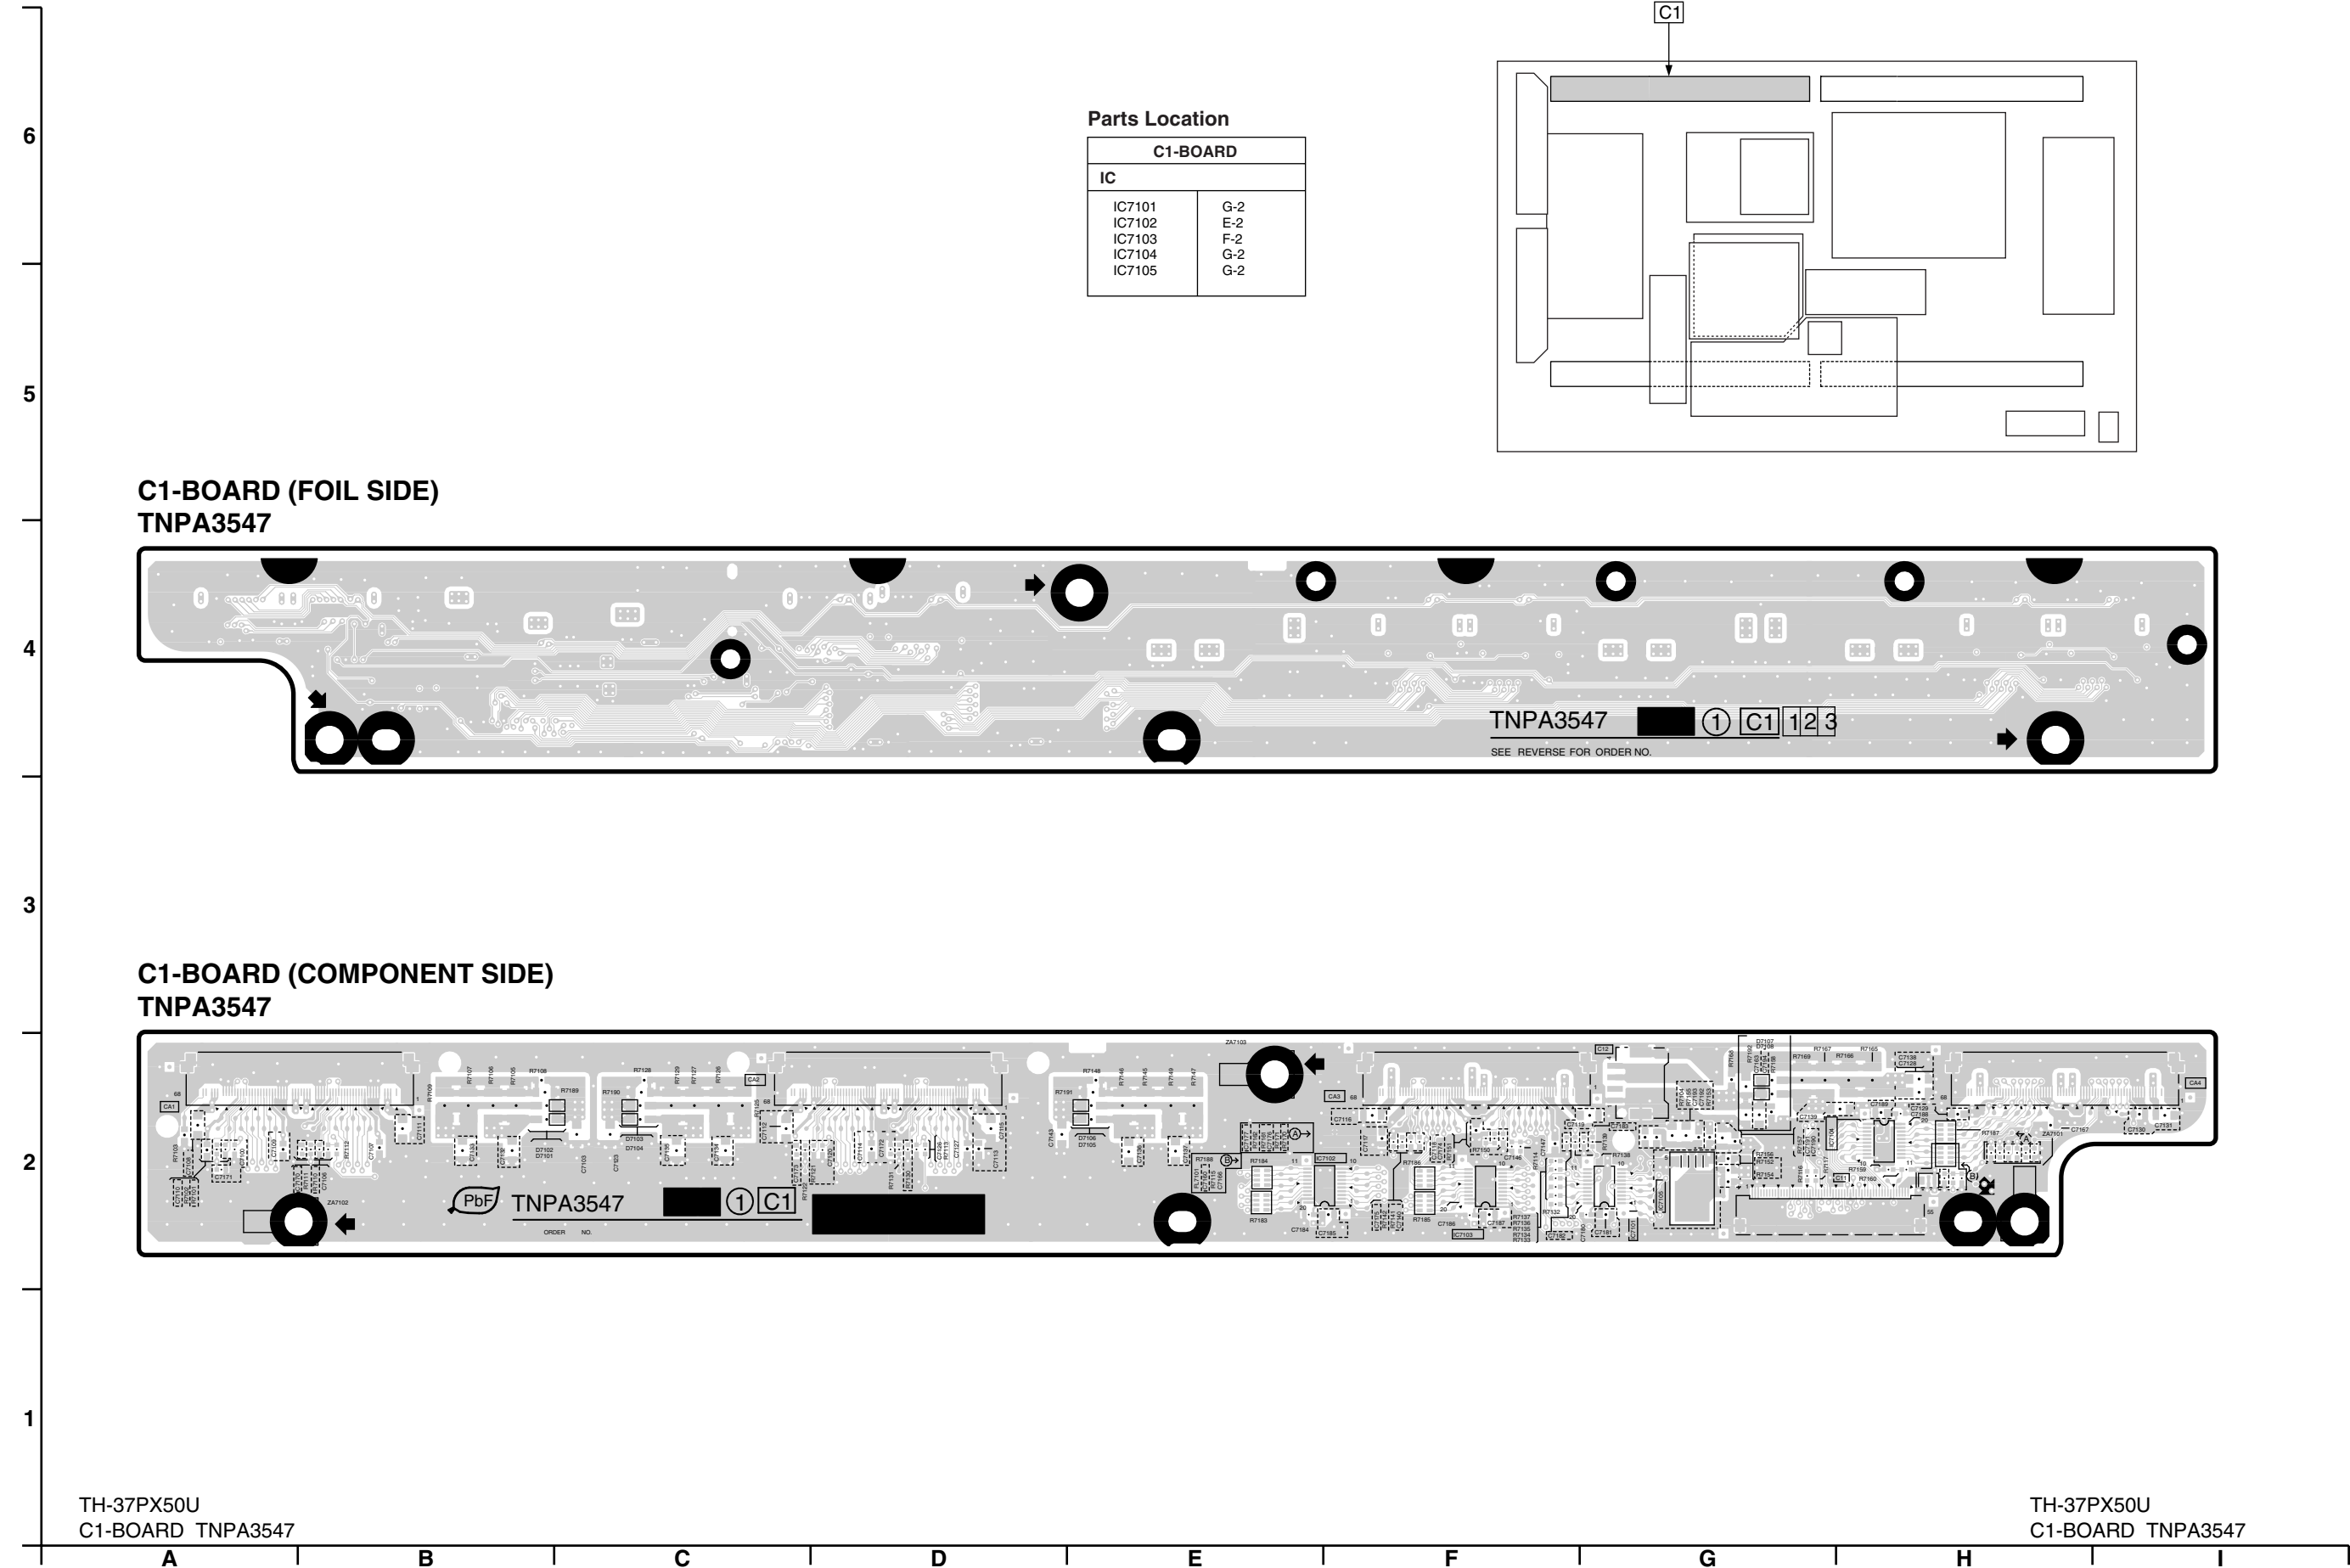


12.14. C2-Board (37inch)

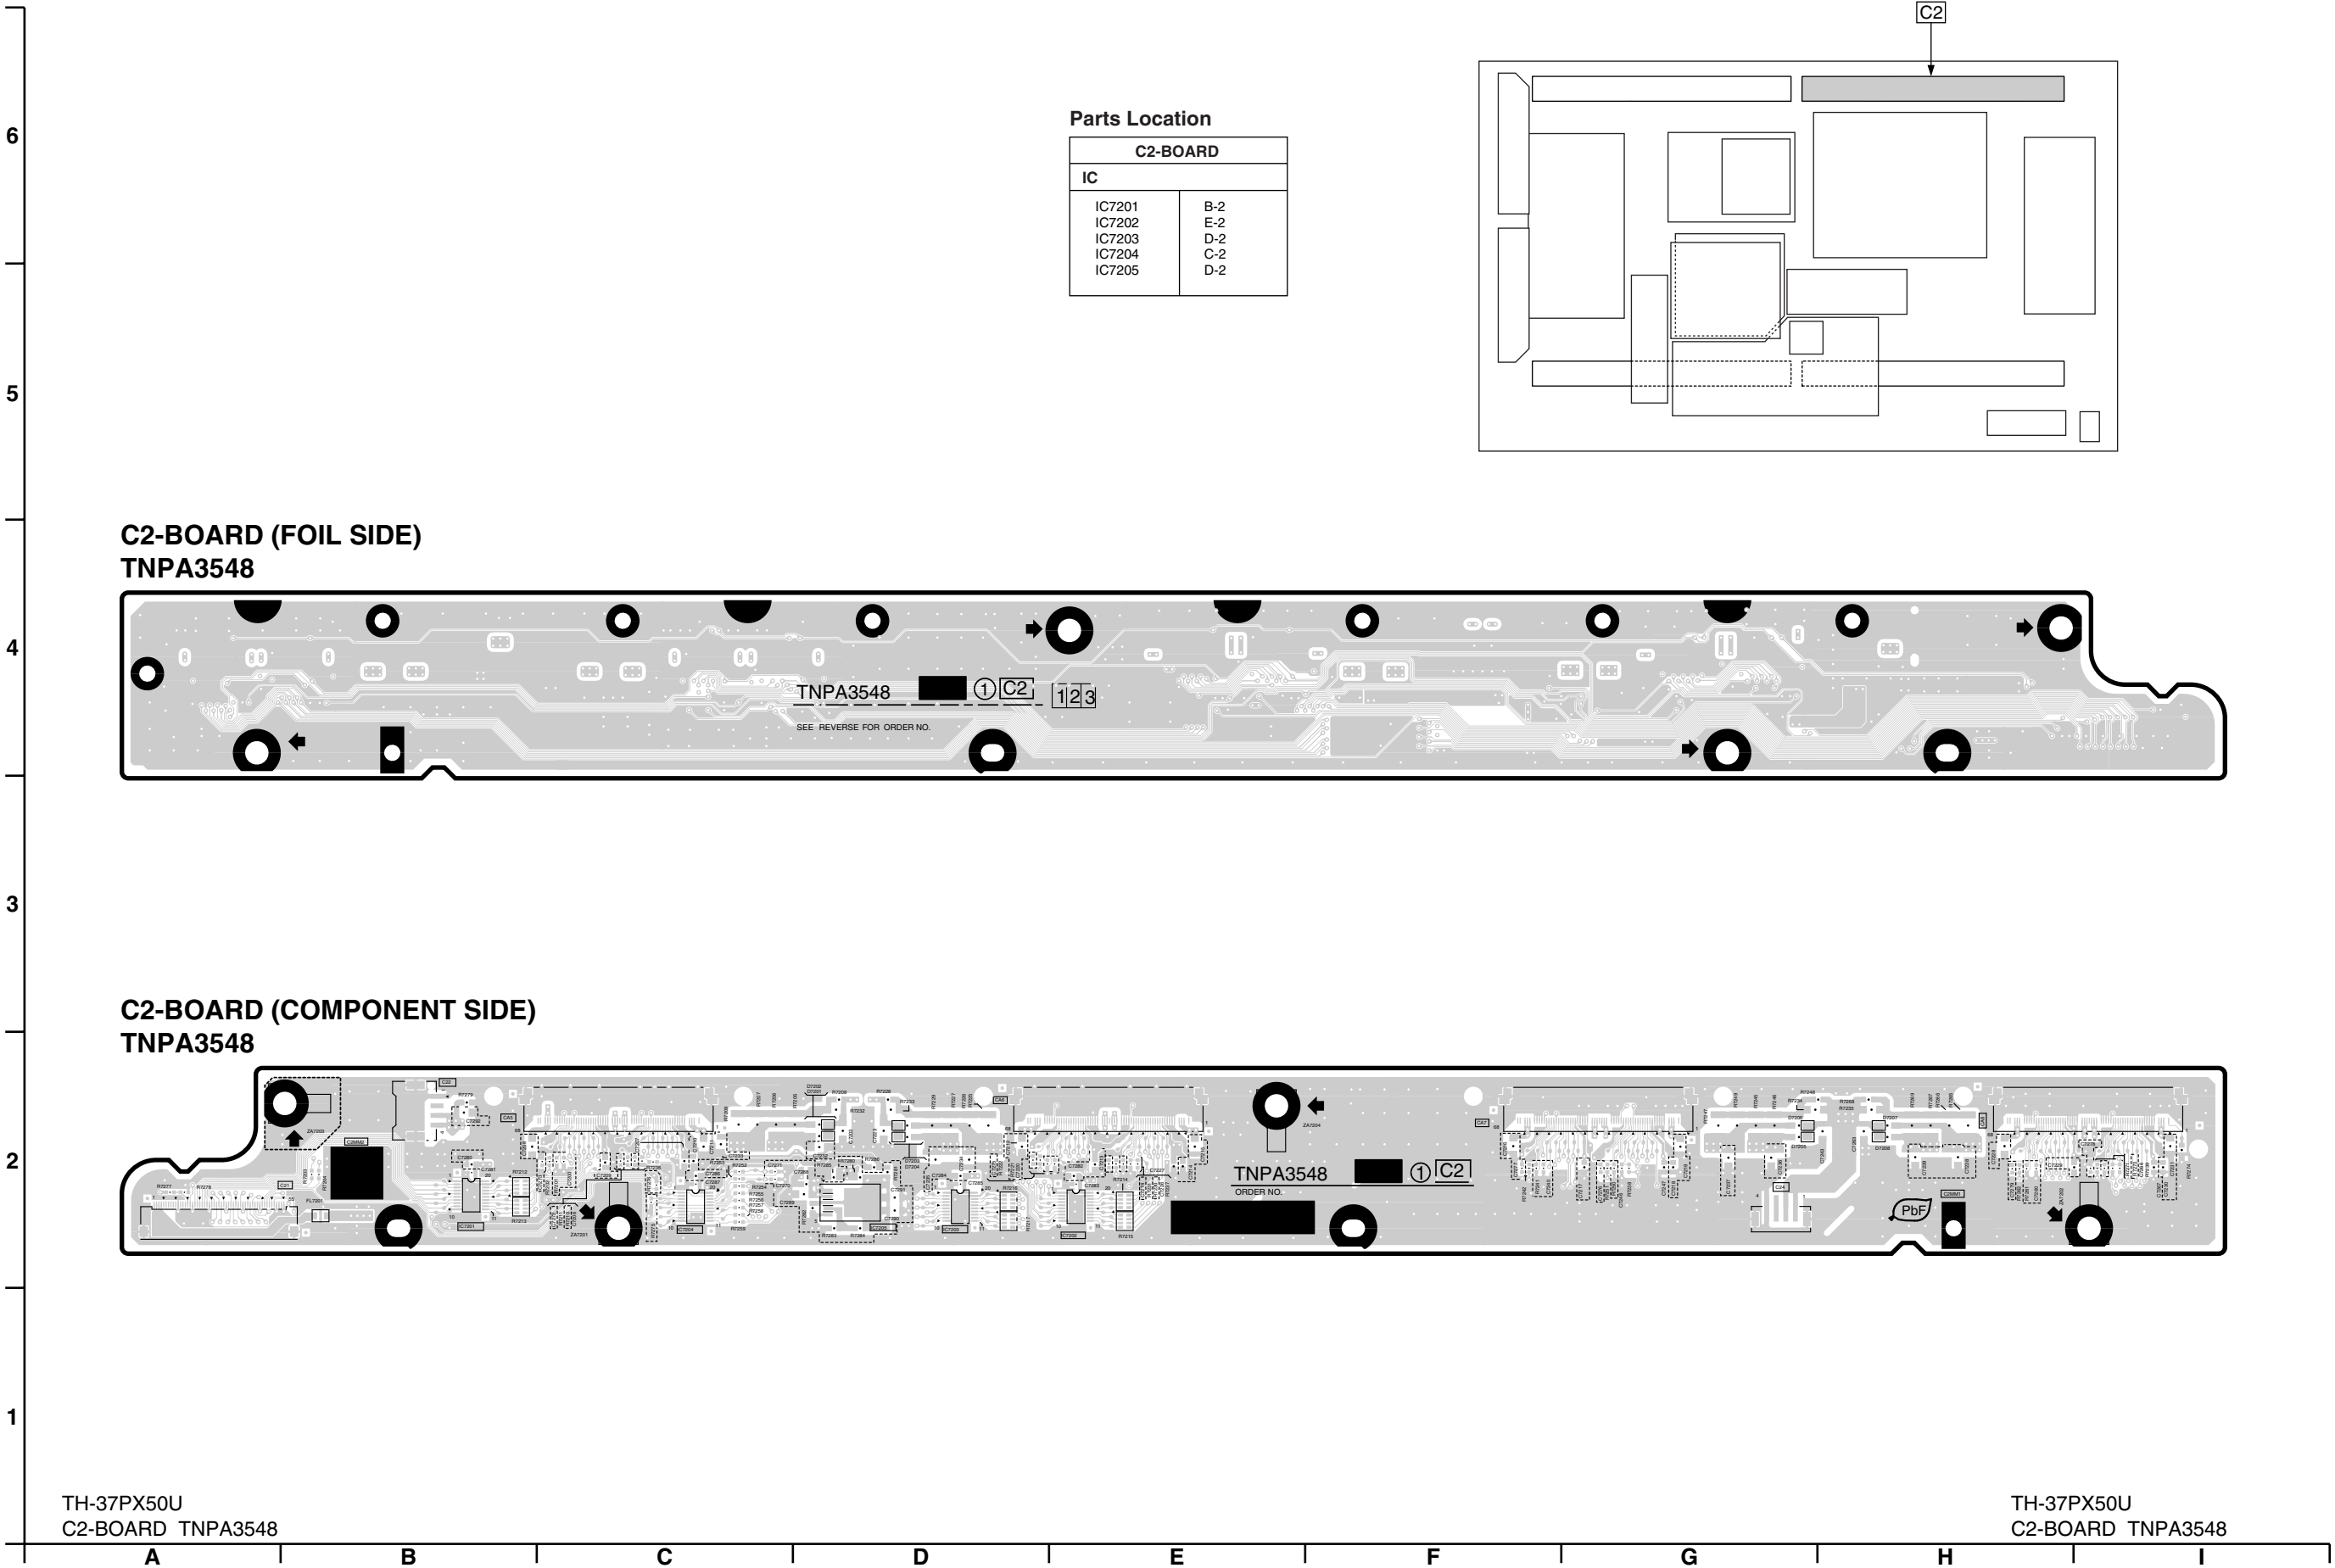


12.15. C3-Board (37inch)

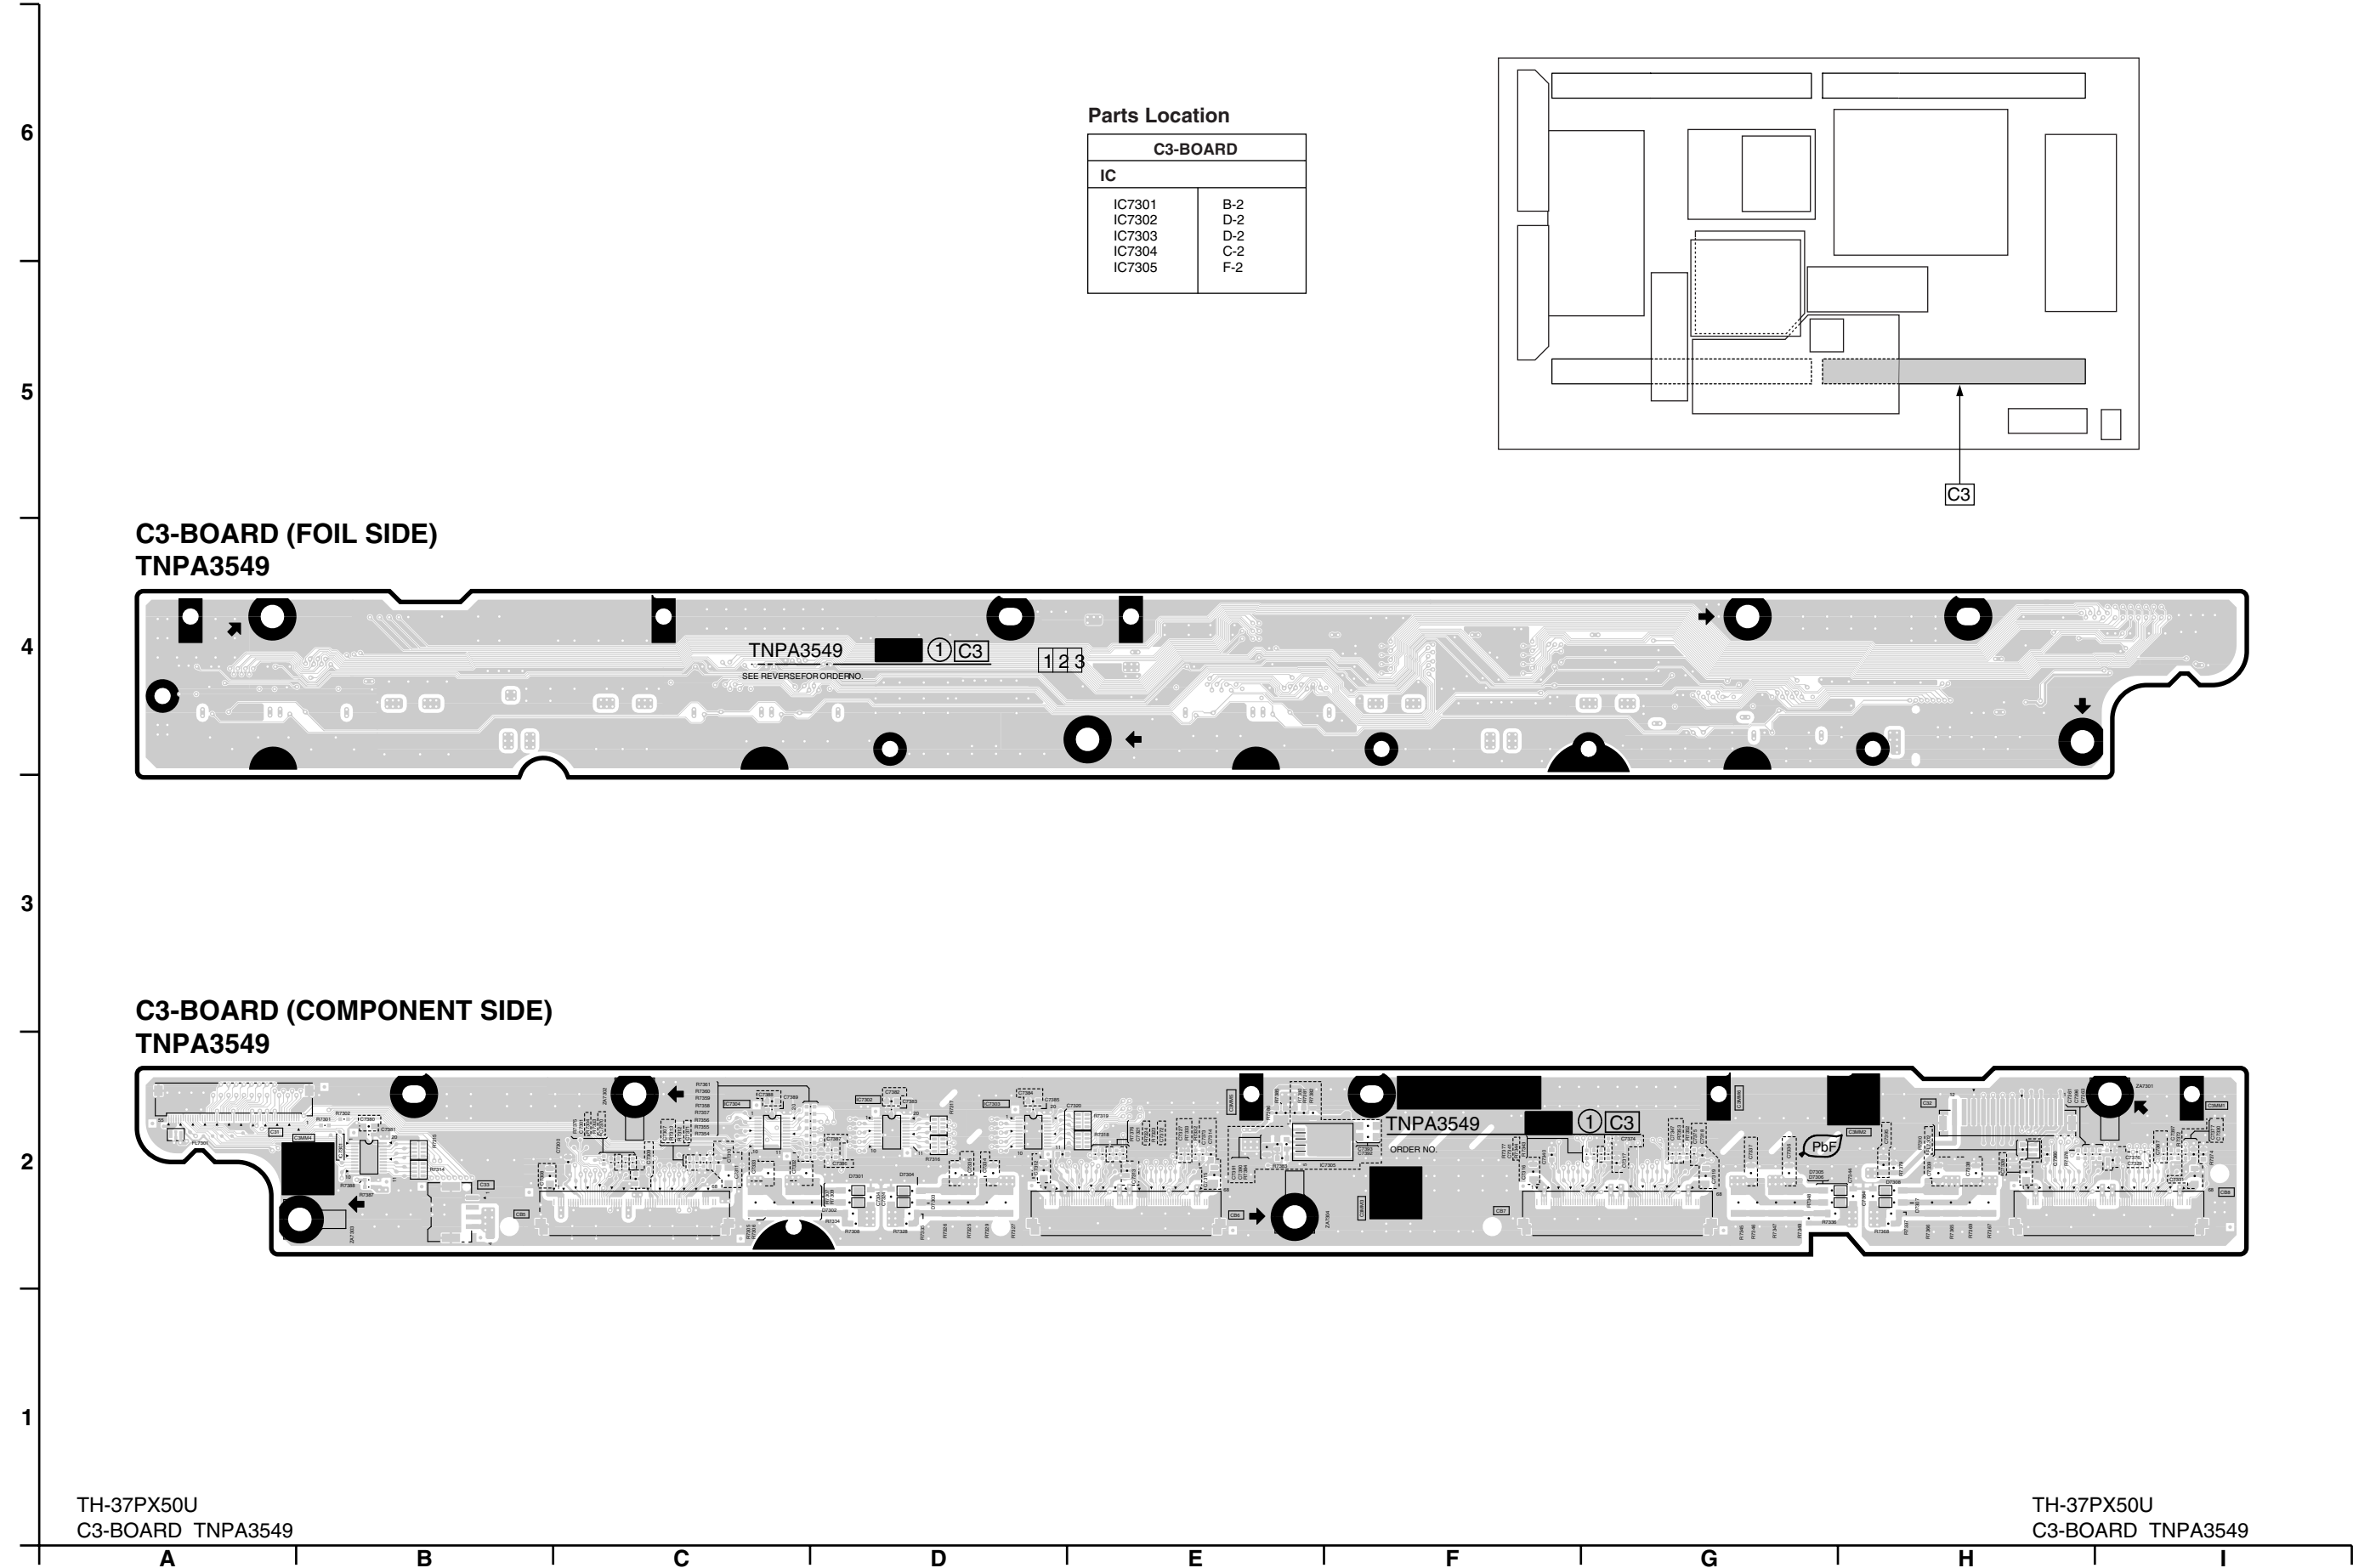


12.16. C4-Board (37inch)

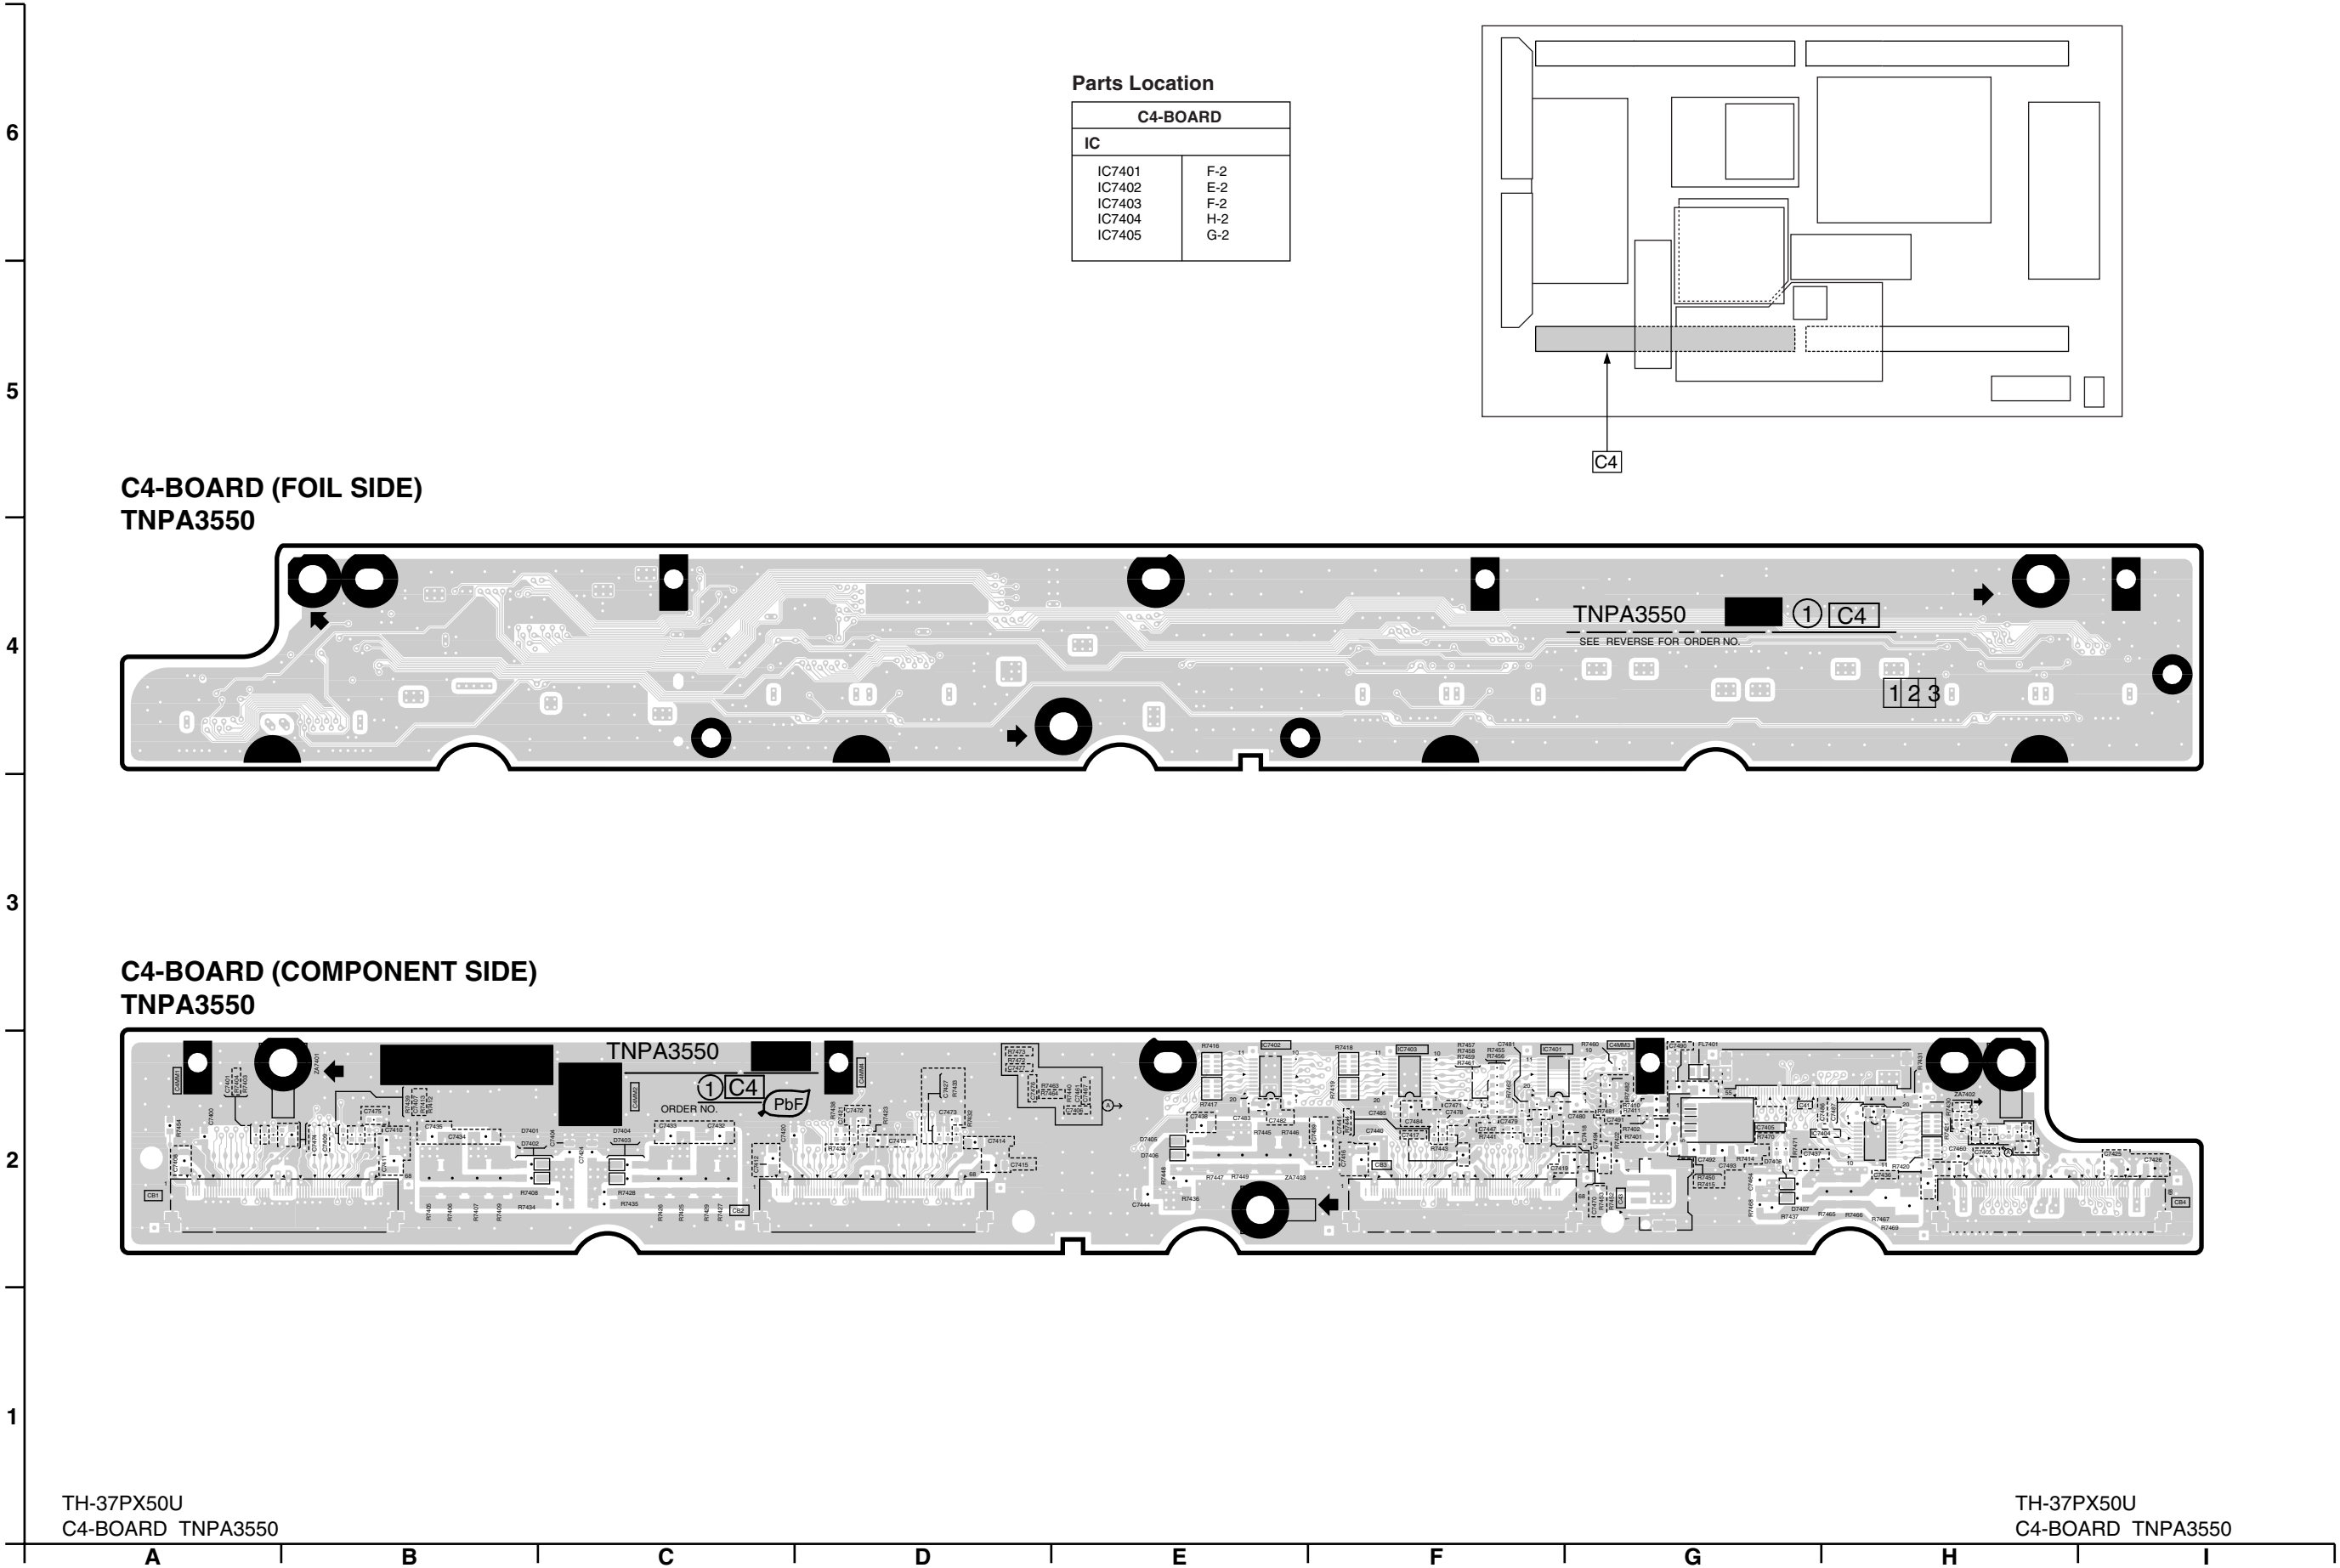


12.17. C1-Board (42inch)

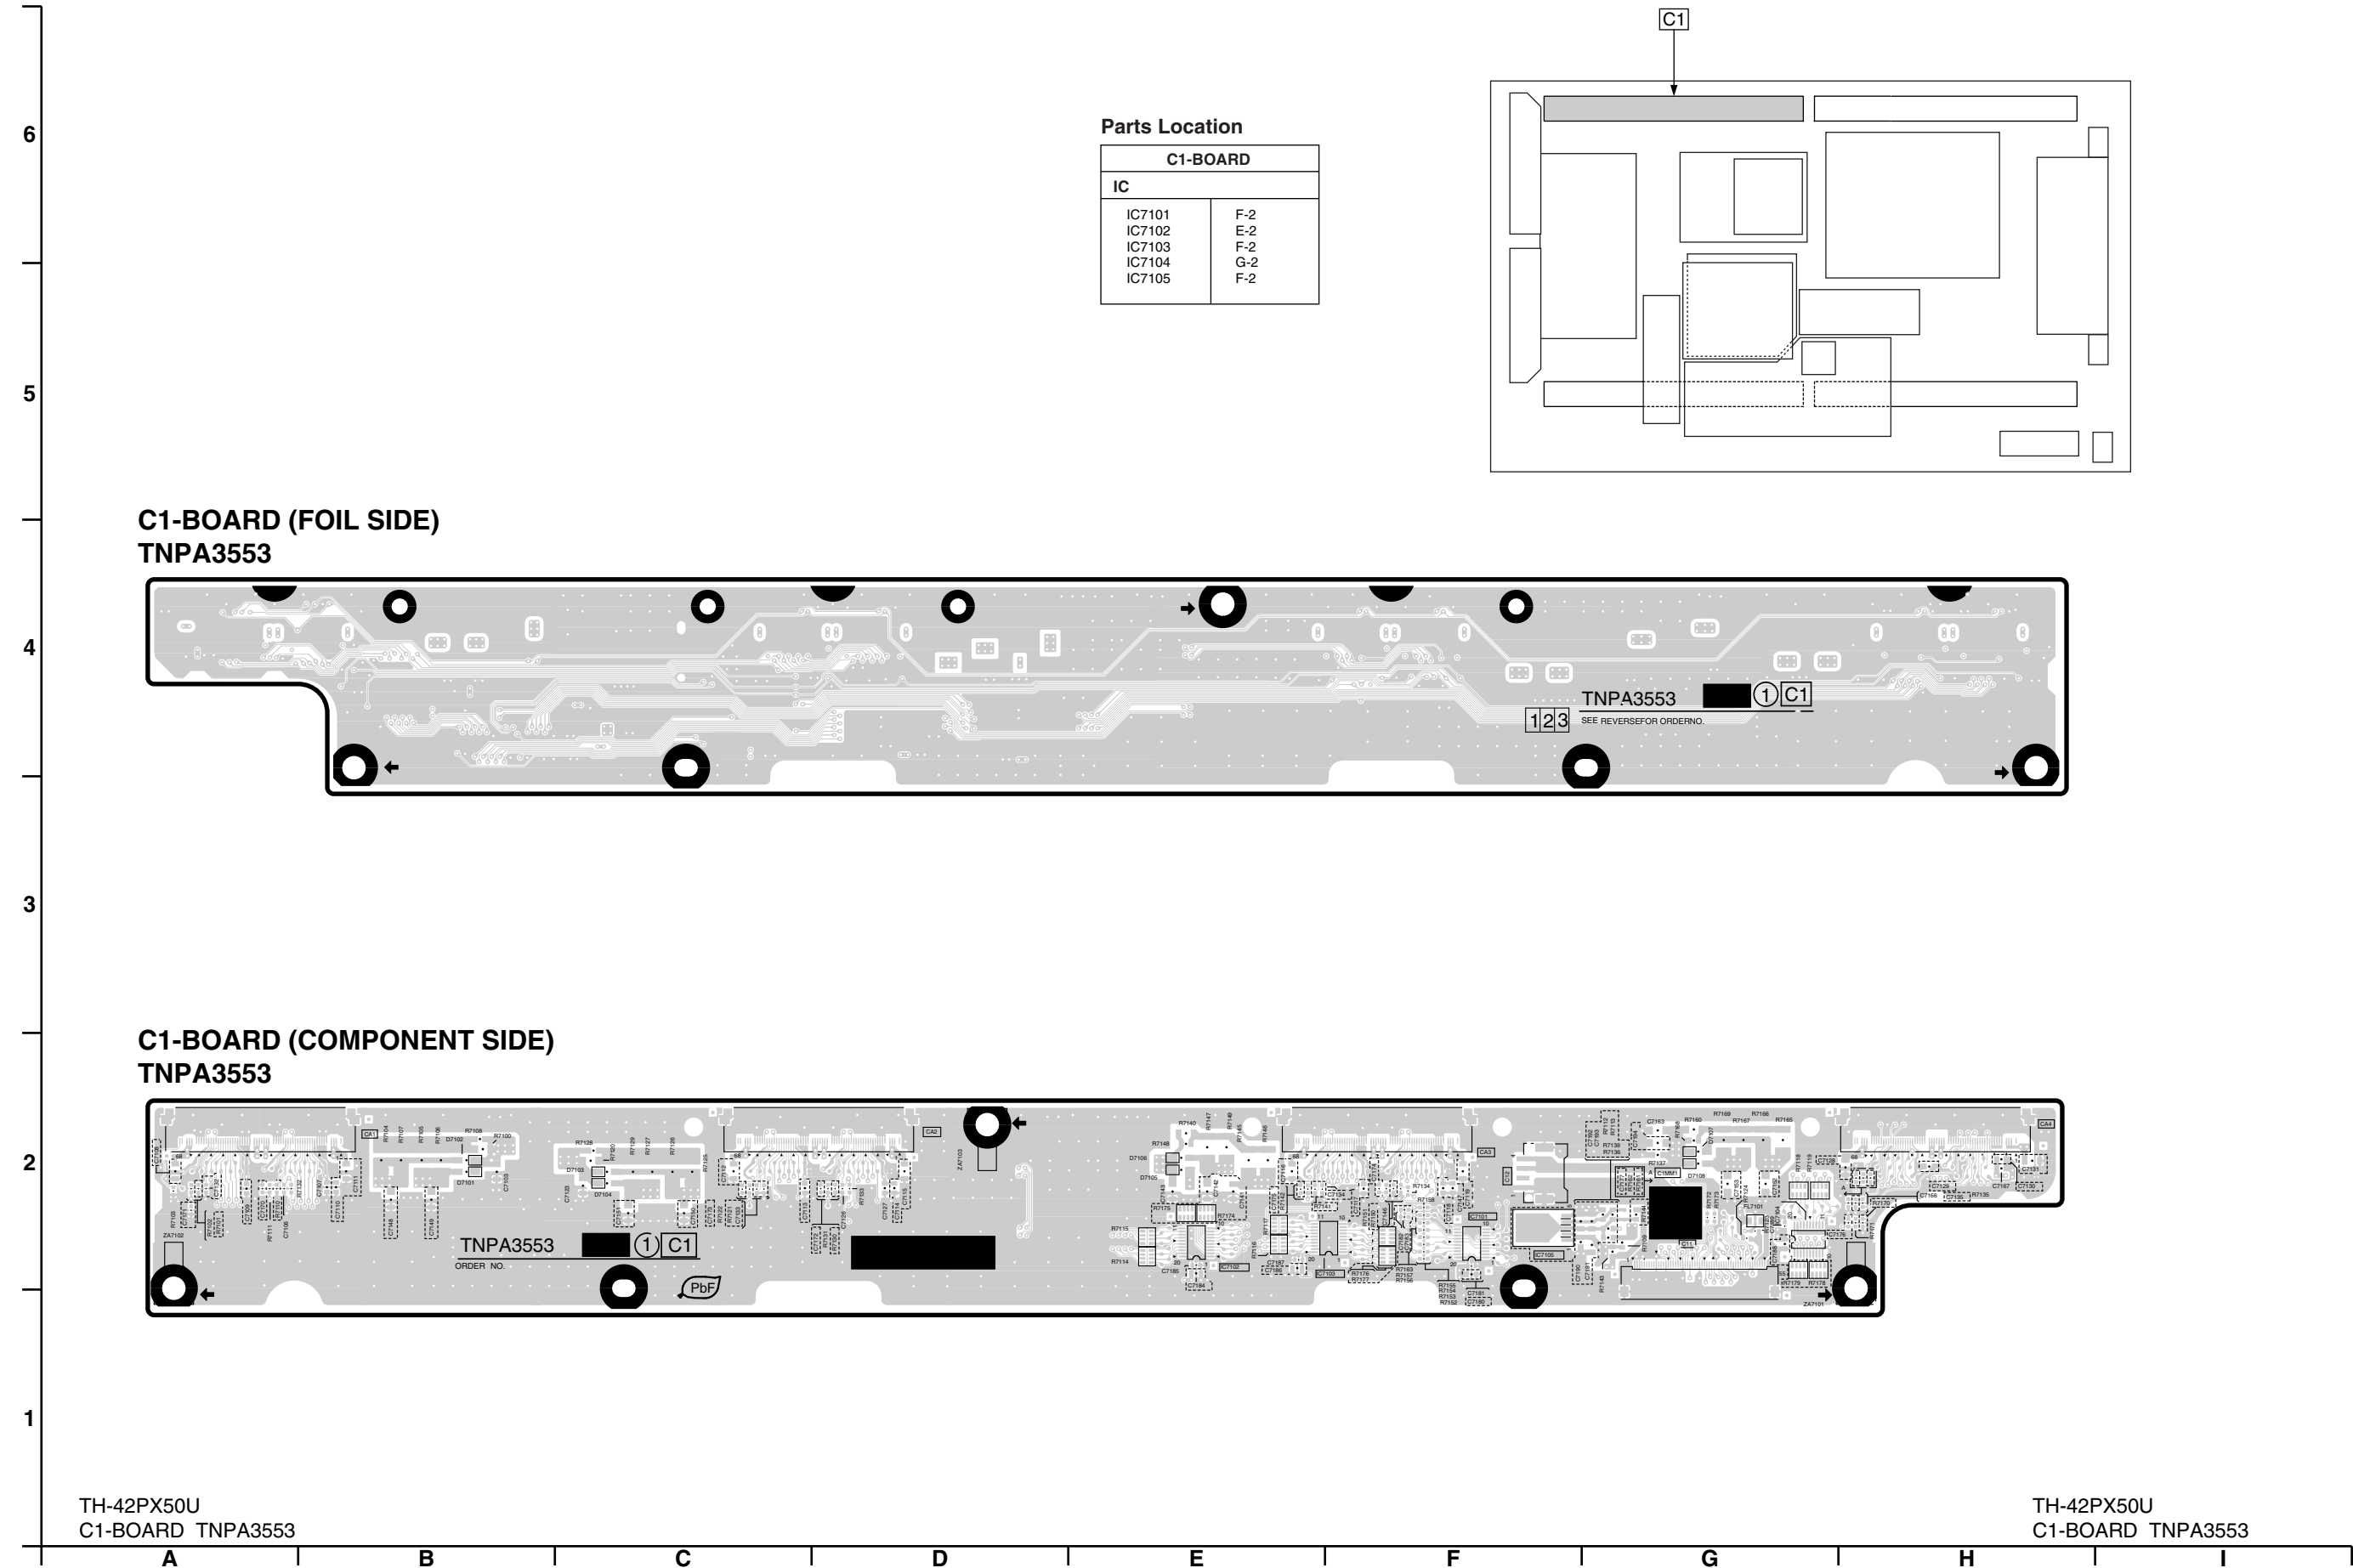


12.18. C2-Board (42inch)

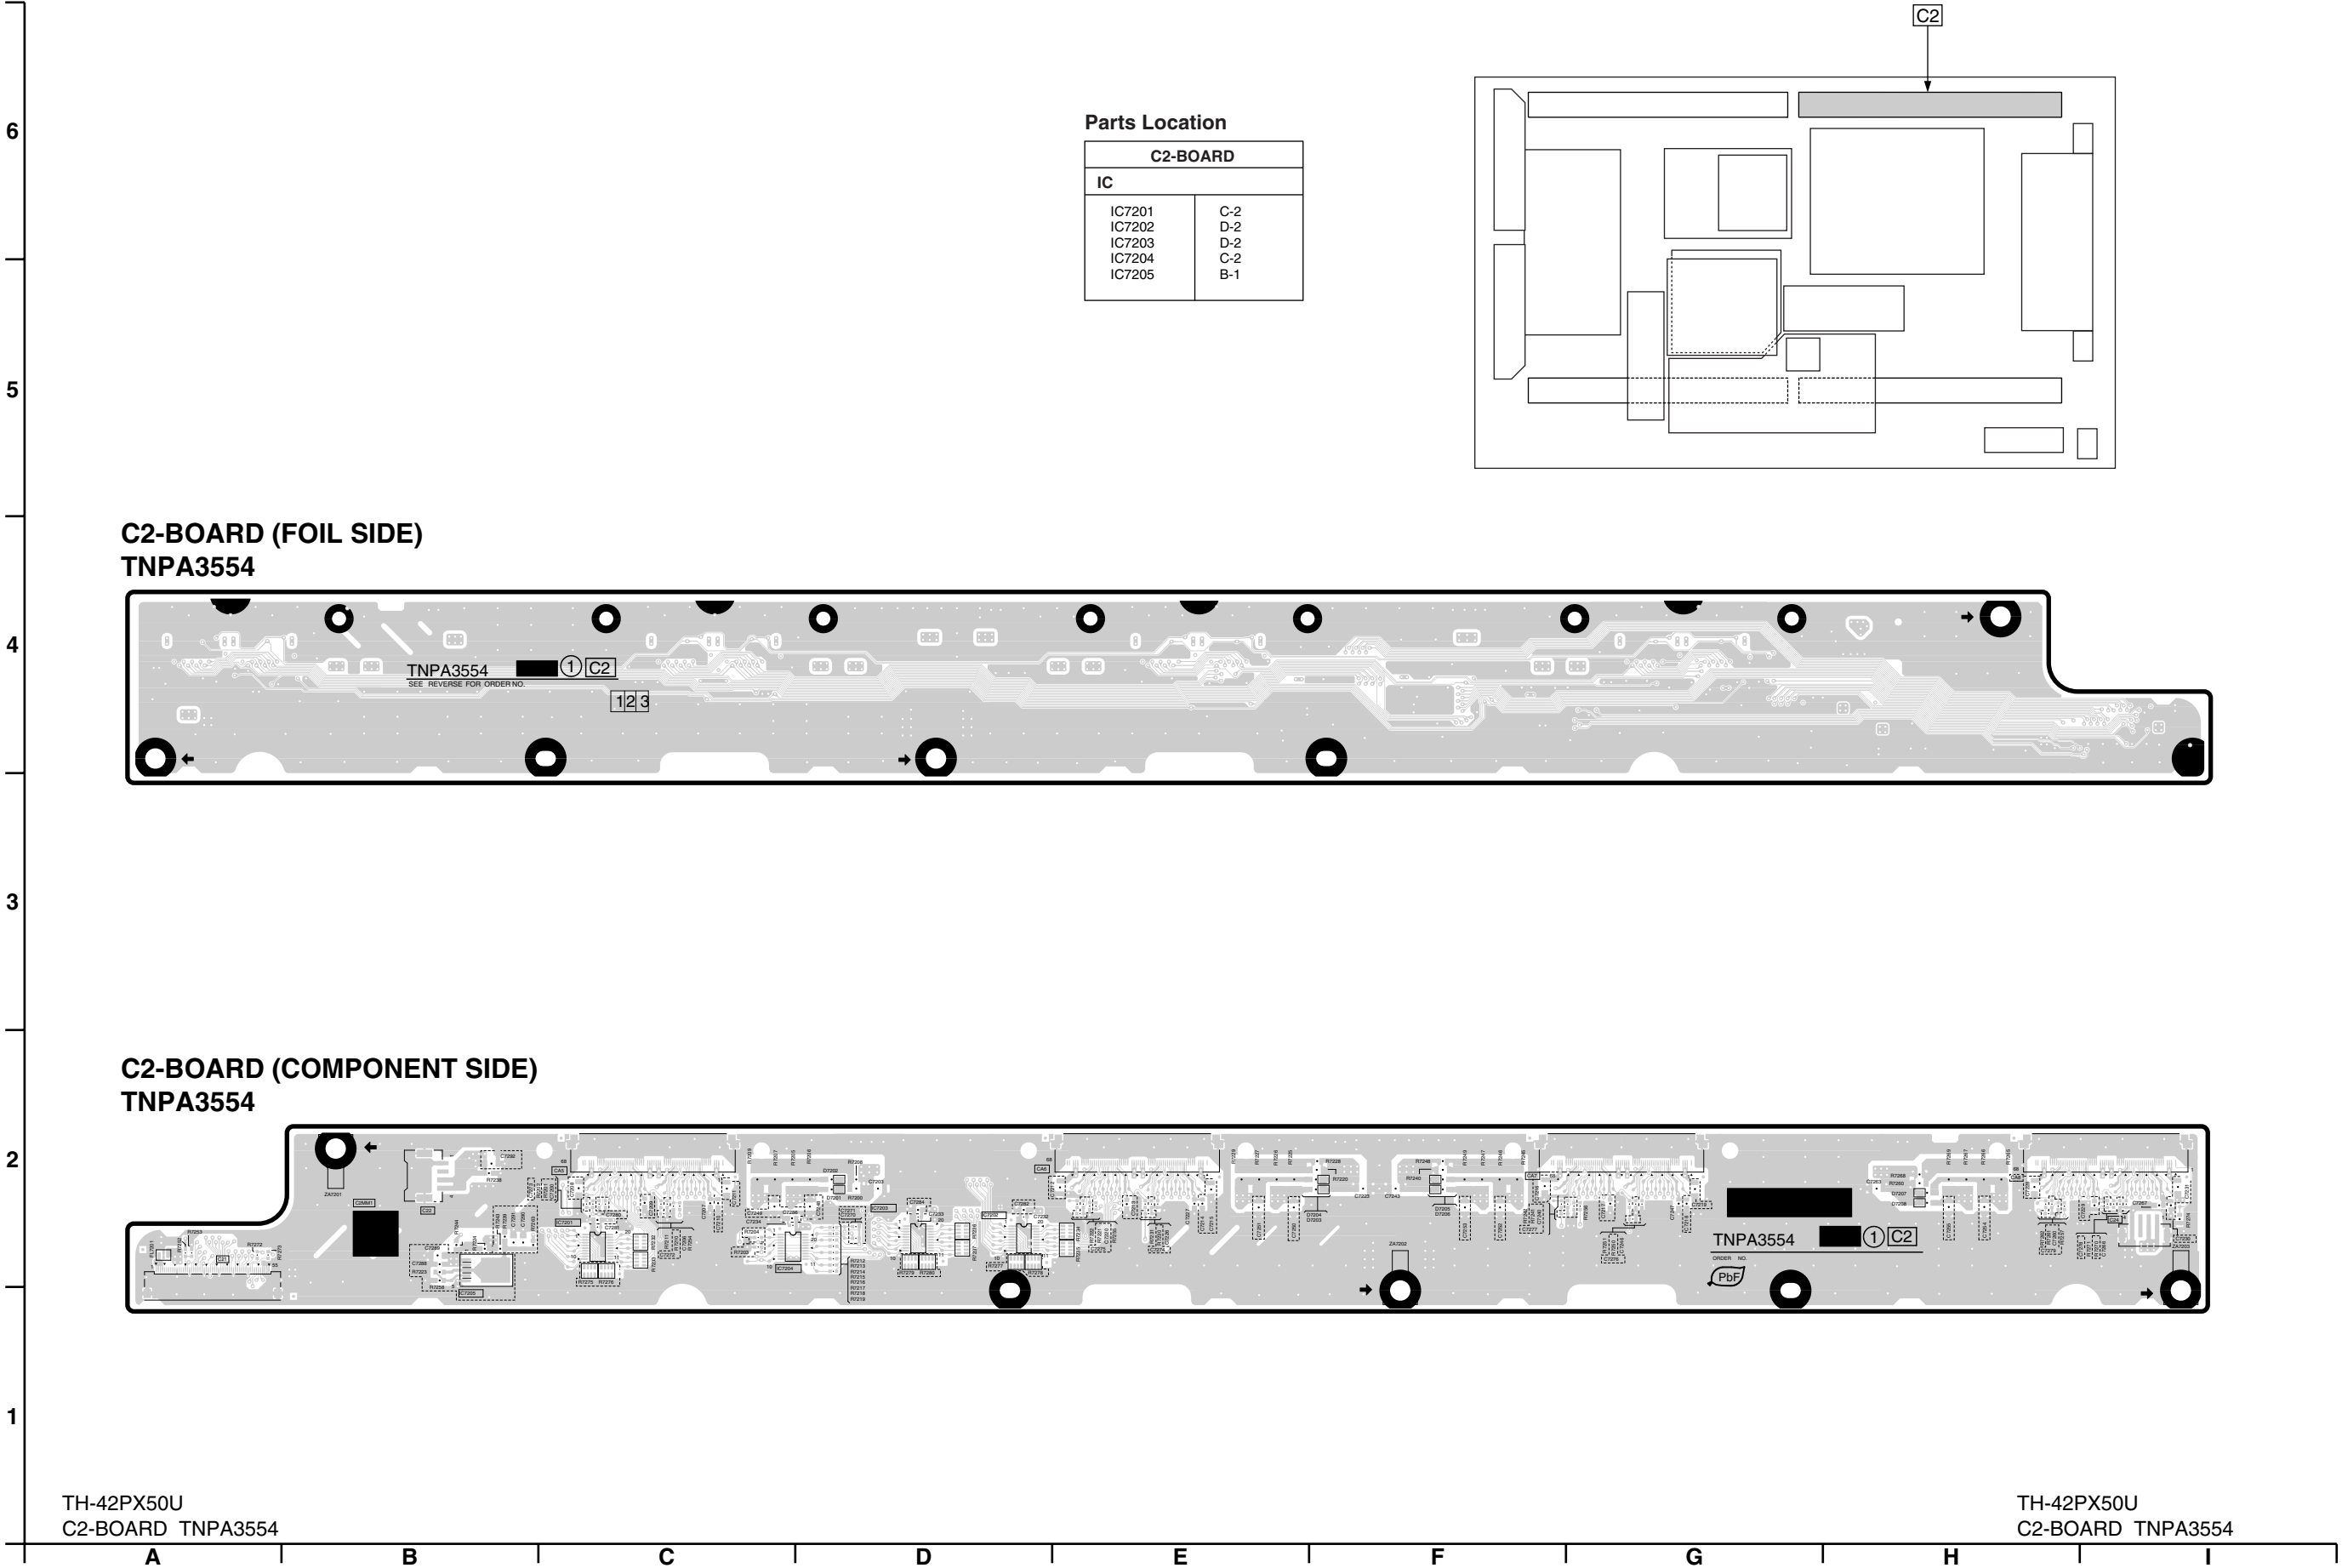

12.19. C3-Board (42inch)

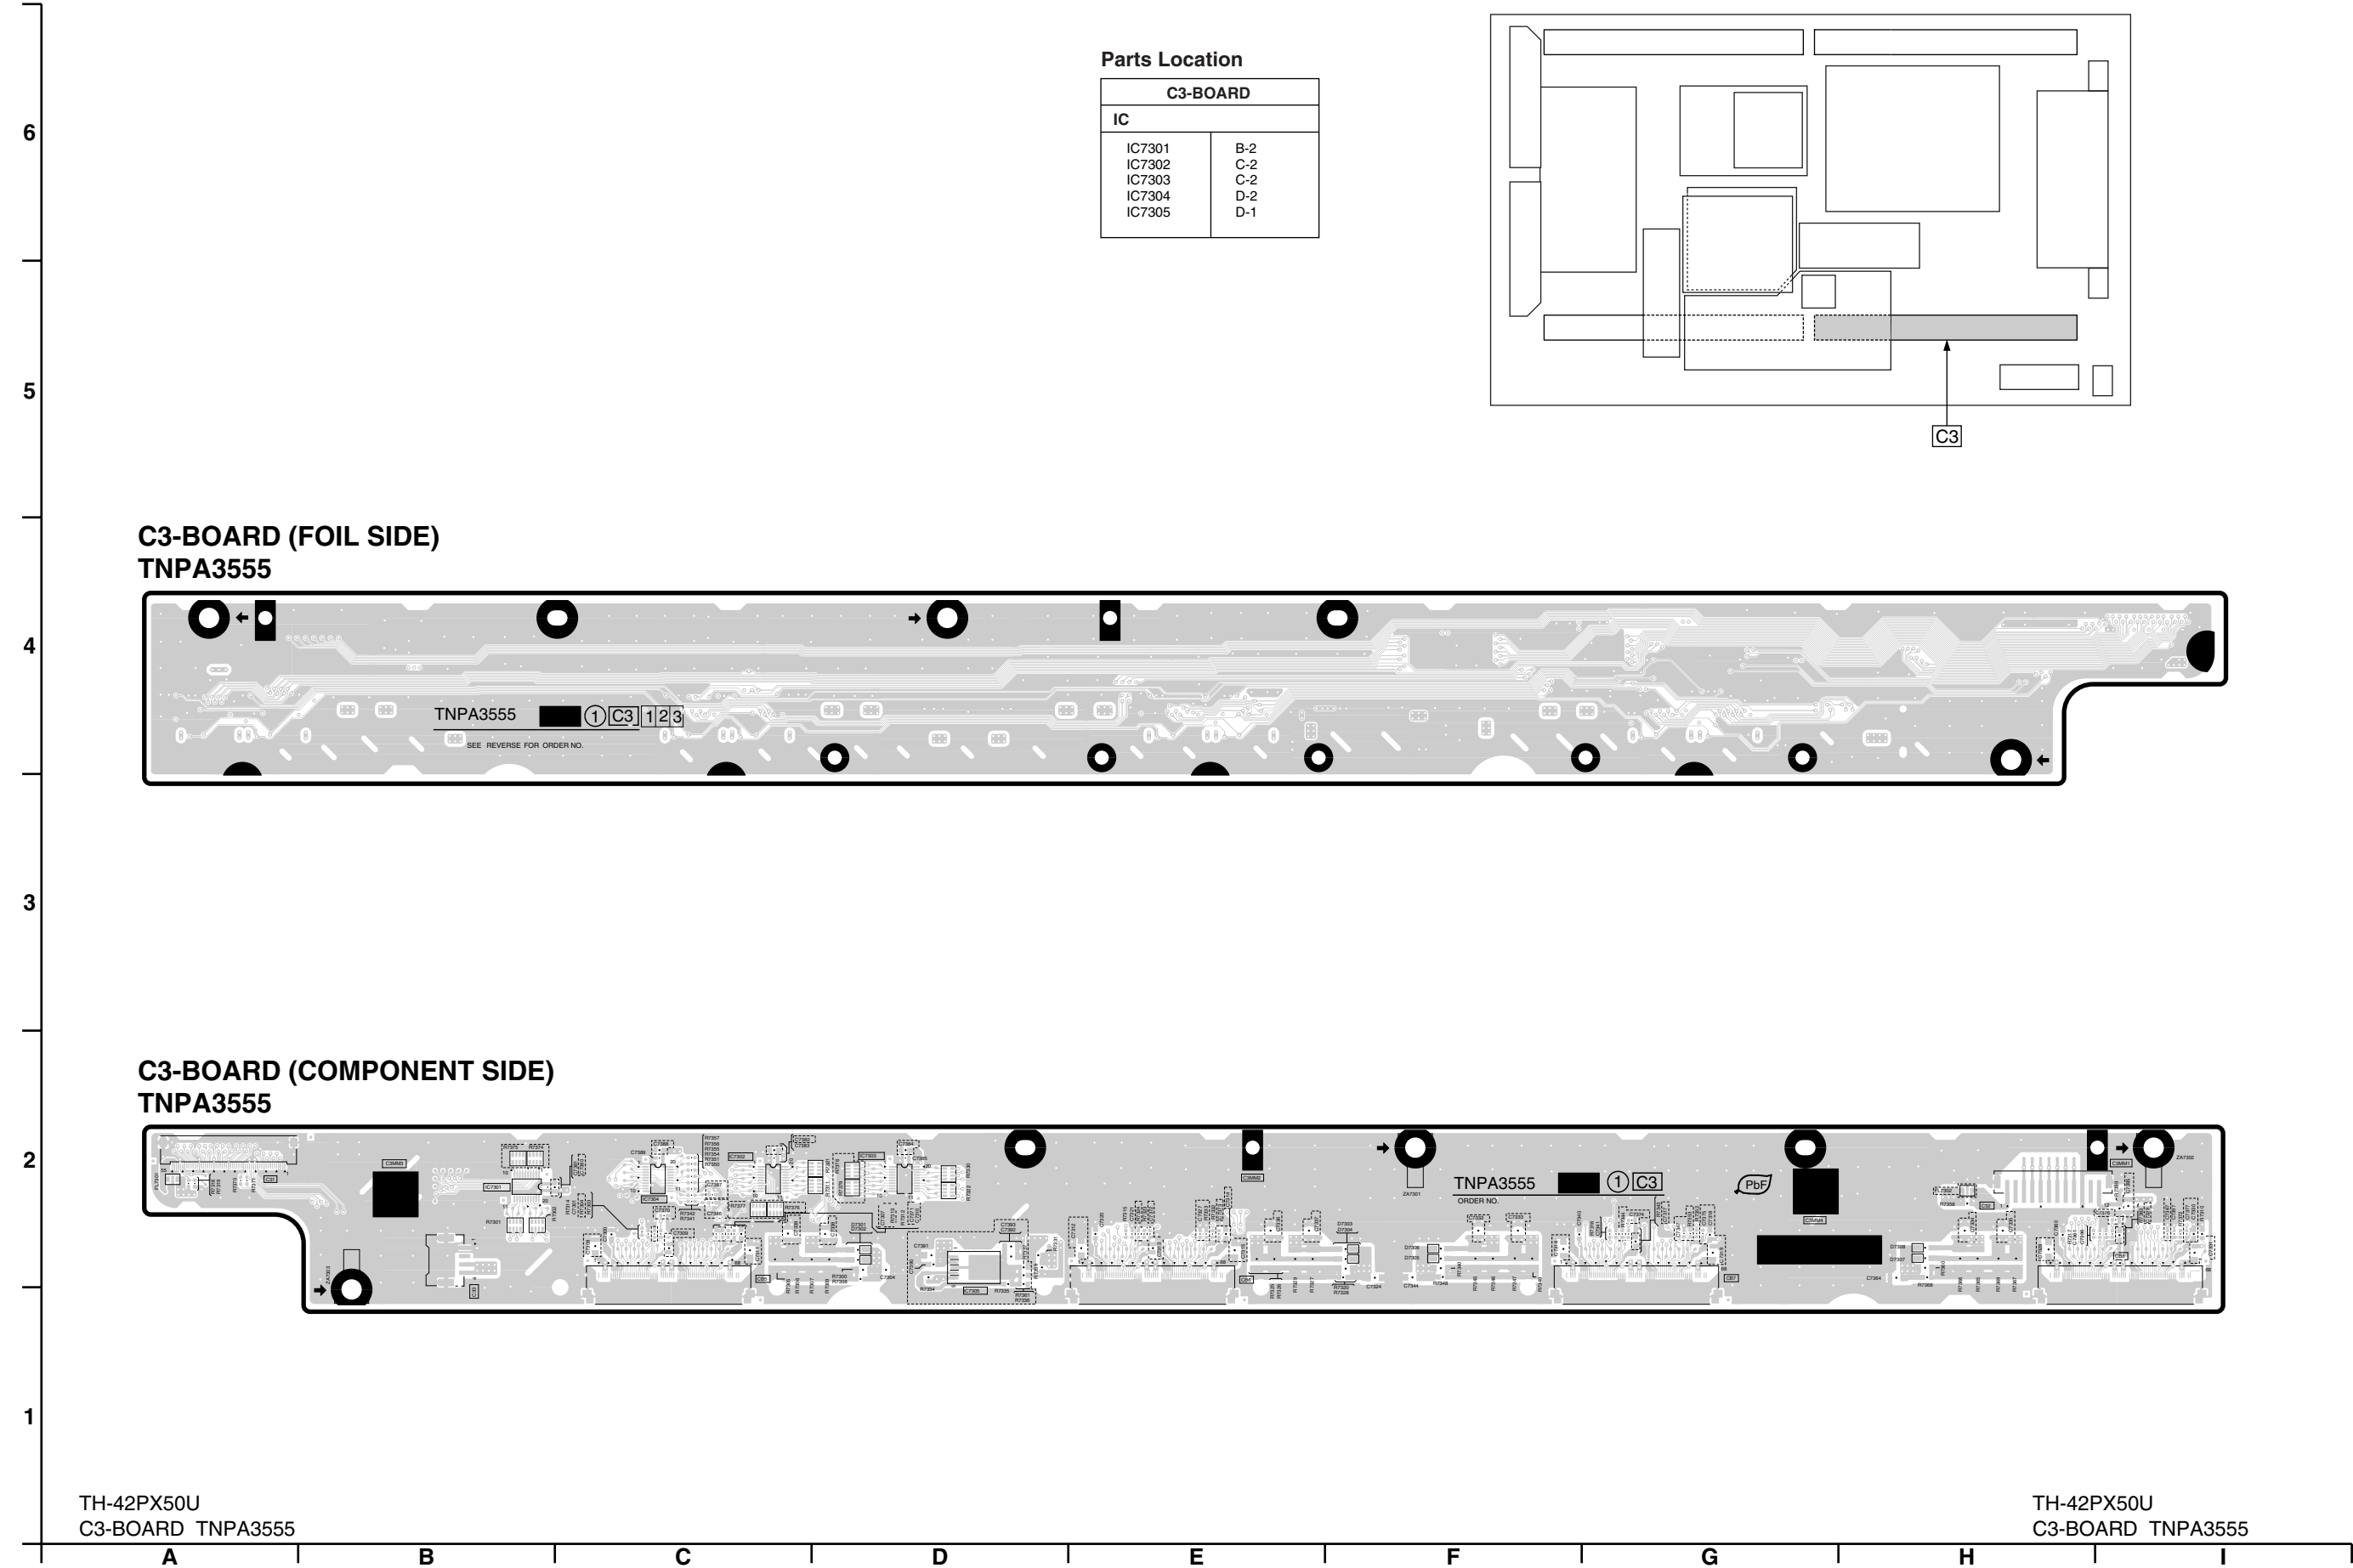


12.20. C4-Board (42inch)

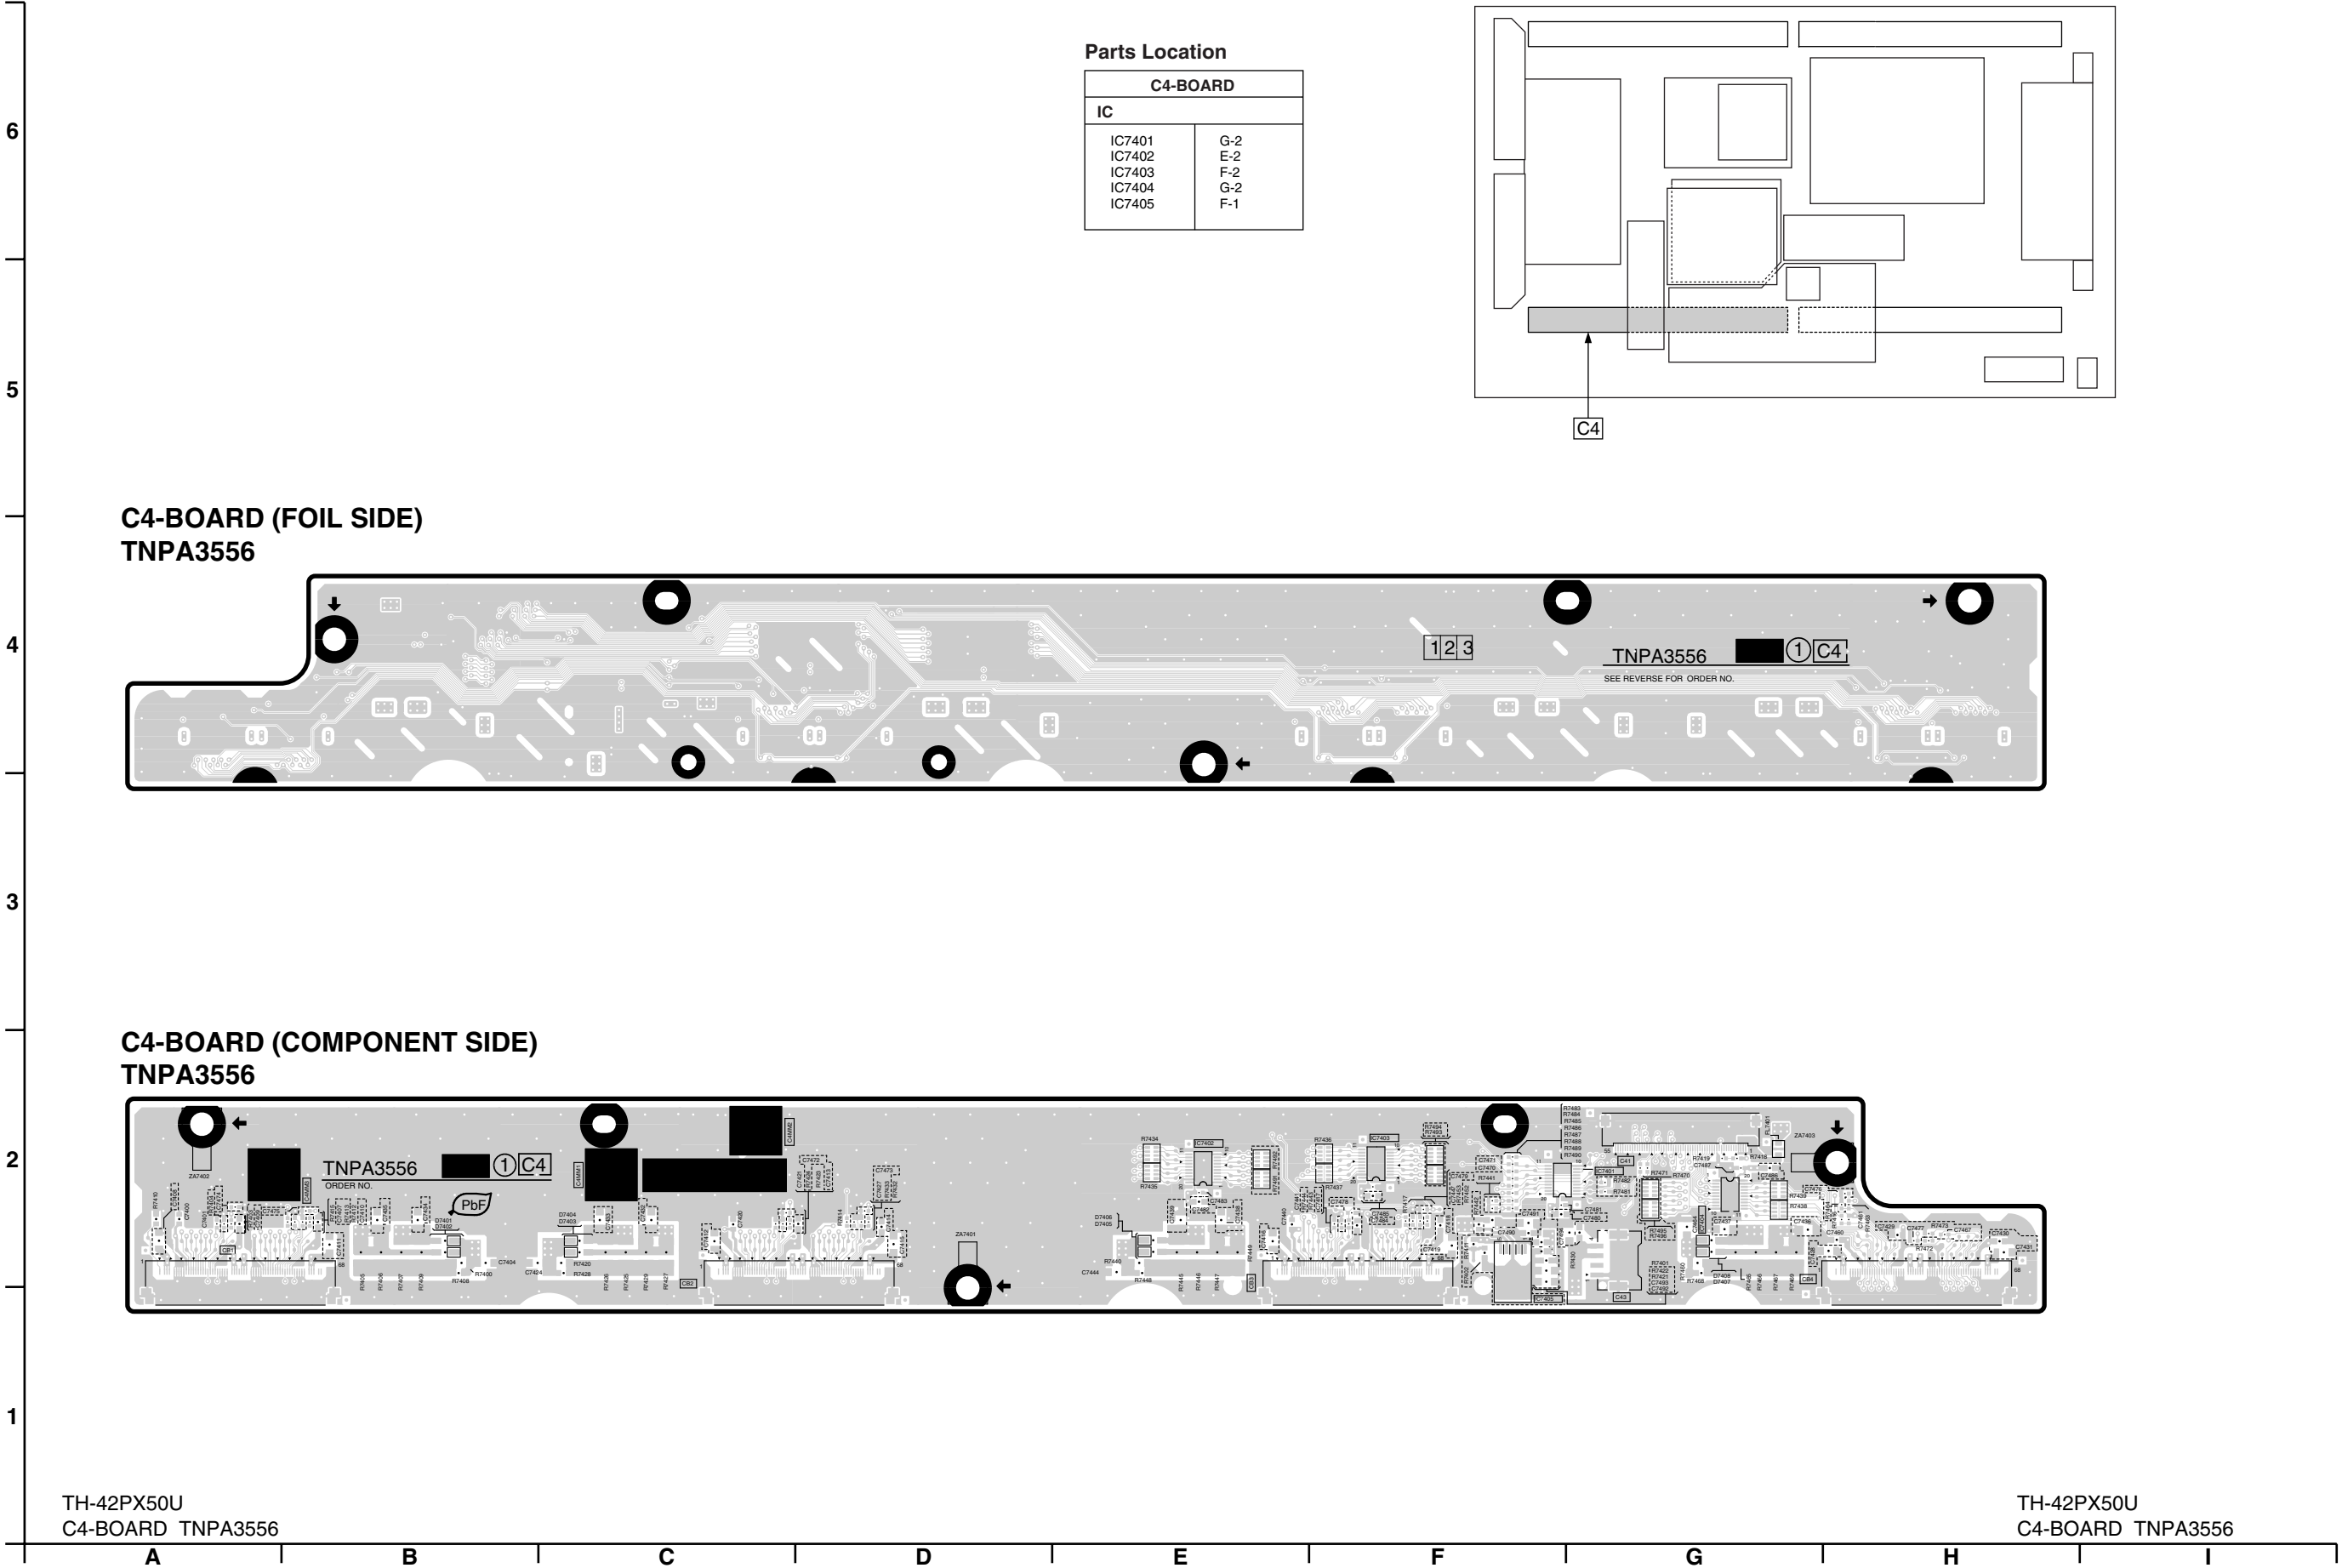


12.21. C1-Board (50inch)

C1-BOARD	
IC	
IC7102	F-2
IC7104	F-2
IC7105	E-2
IC7106	D-1

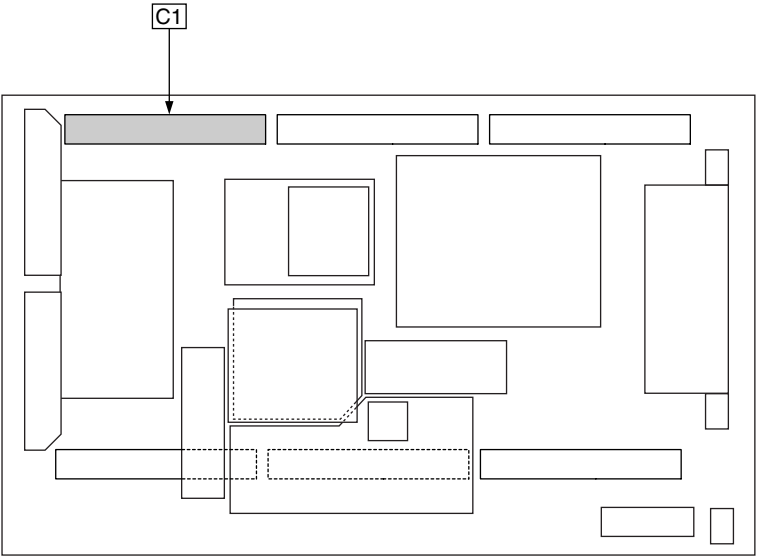


C1-BOARD (FOIL SIDE)
TNPA3561

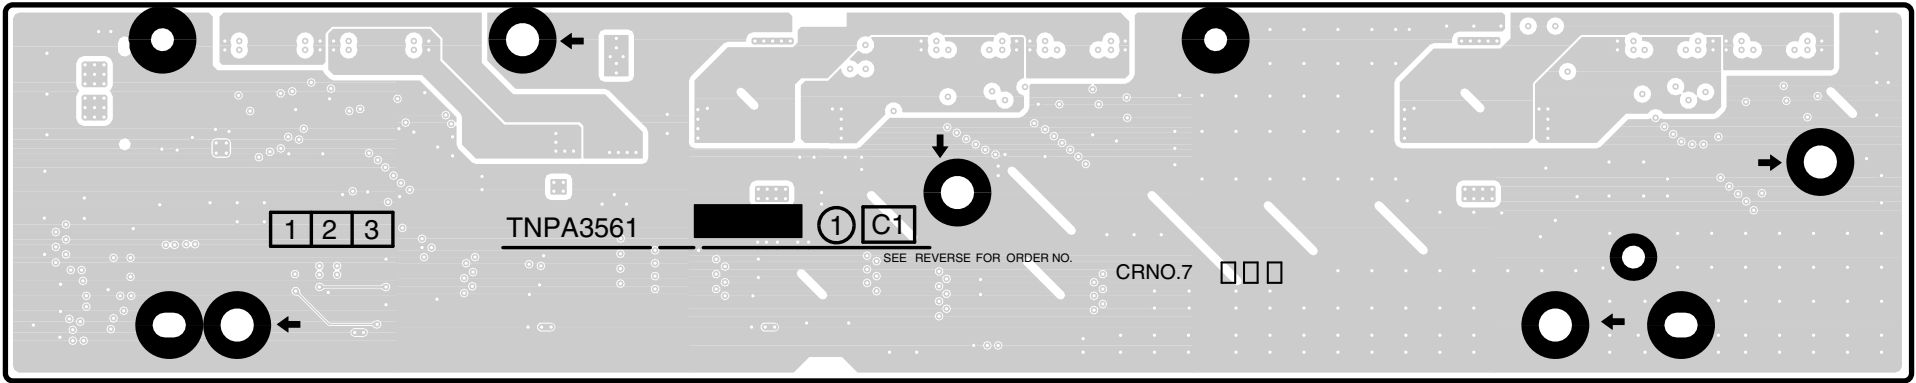

C1-BOARD (COMPONENT SIDE)


TNPA3561

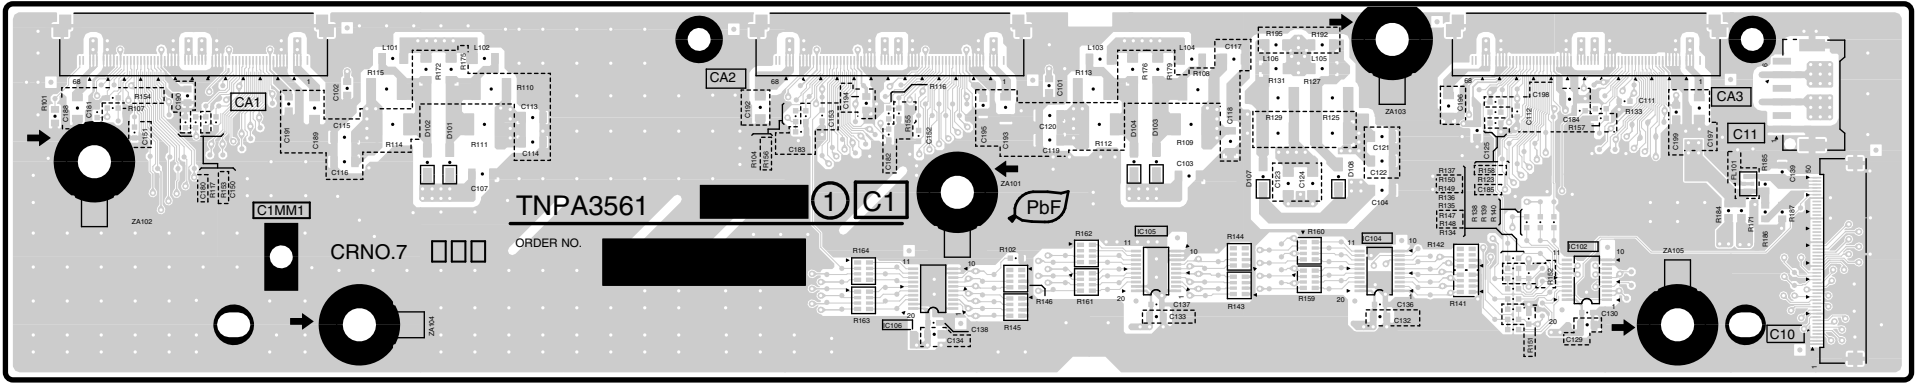

TH-50PX50U
C1-BOARD TNPA3561


TH-50PX50U
C1-BOARD TNPA3561

12.22. C2-Board (50inch)

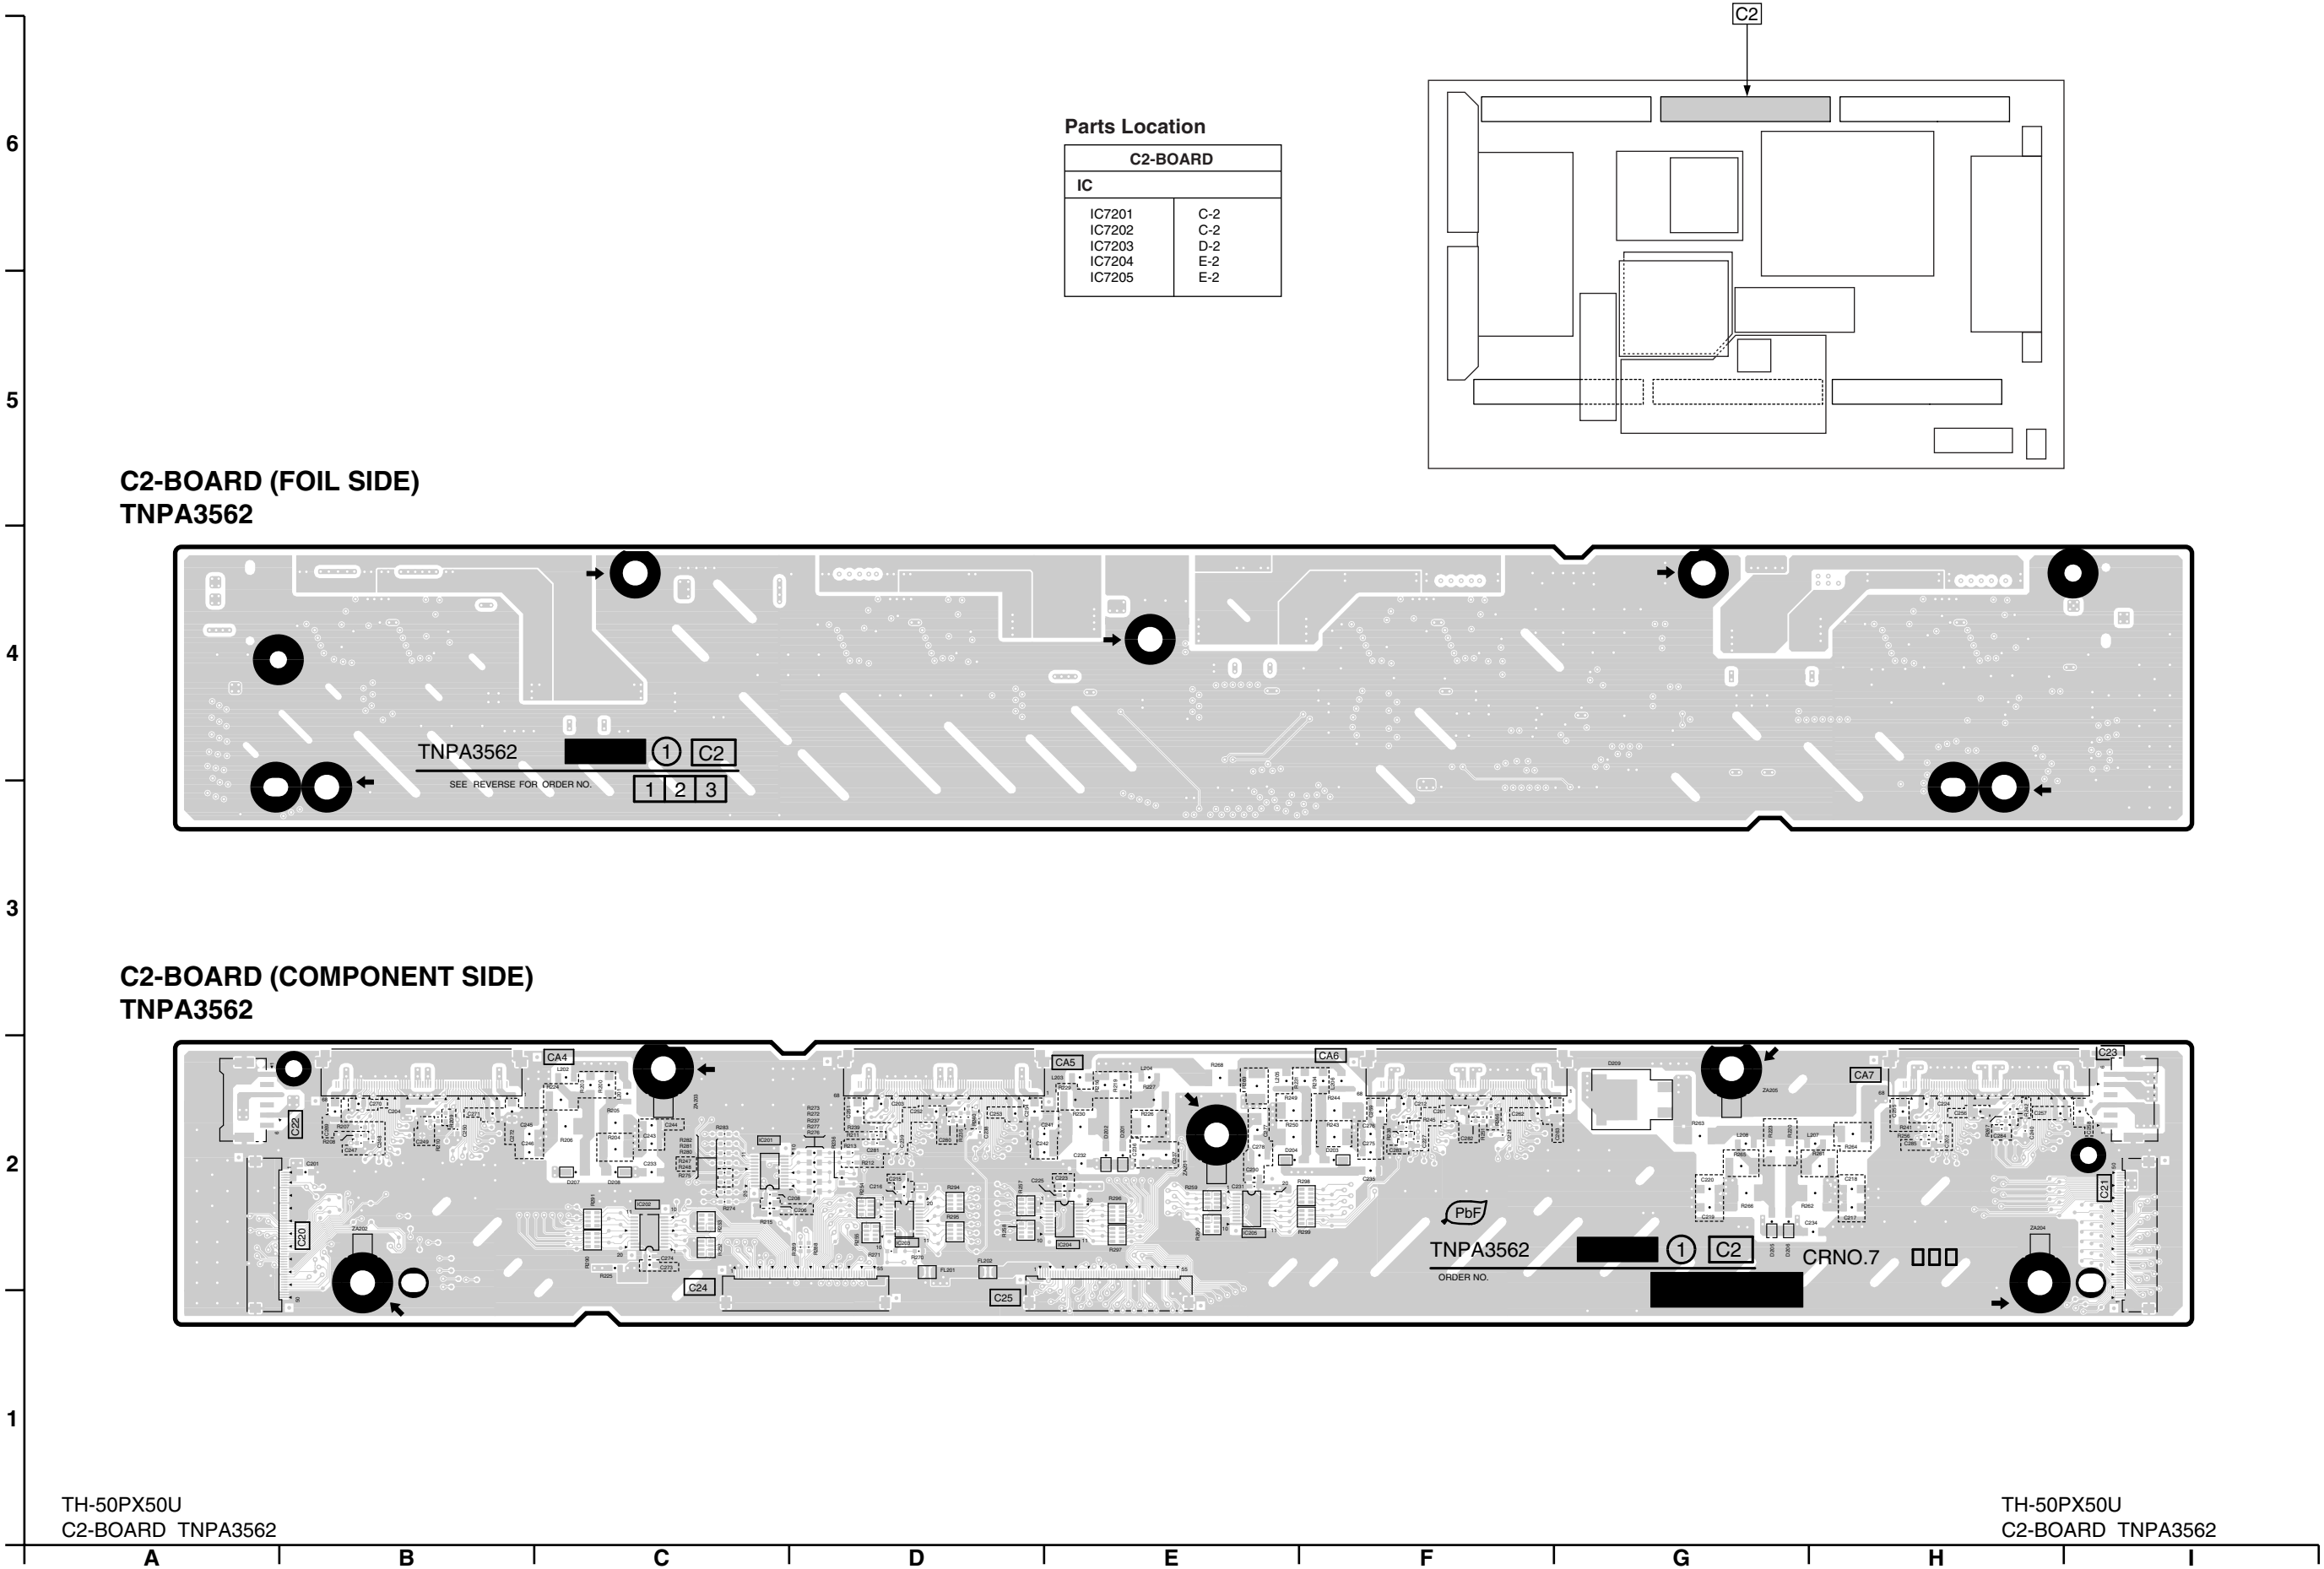


The floor plan shows a large rectangular building with a complex internal layout. The layout includes several large open spaces, corridors, and smaller rooms. A specific room in the top right corner is highlighted in grey and labeled 'C3' with an arrow pointing to it. This room is a long, narrow rectangle. Other rooms are represented by various sized rectangles and polygons. Some rooms have dashed outlines, indicating they might be under construction or planned. The overall shape of the building is irregular, with several protrusions and indentations.


12.24. C4-Board (50inch)

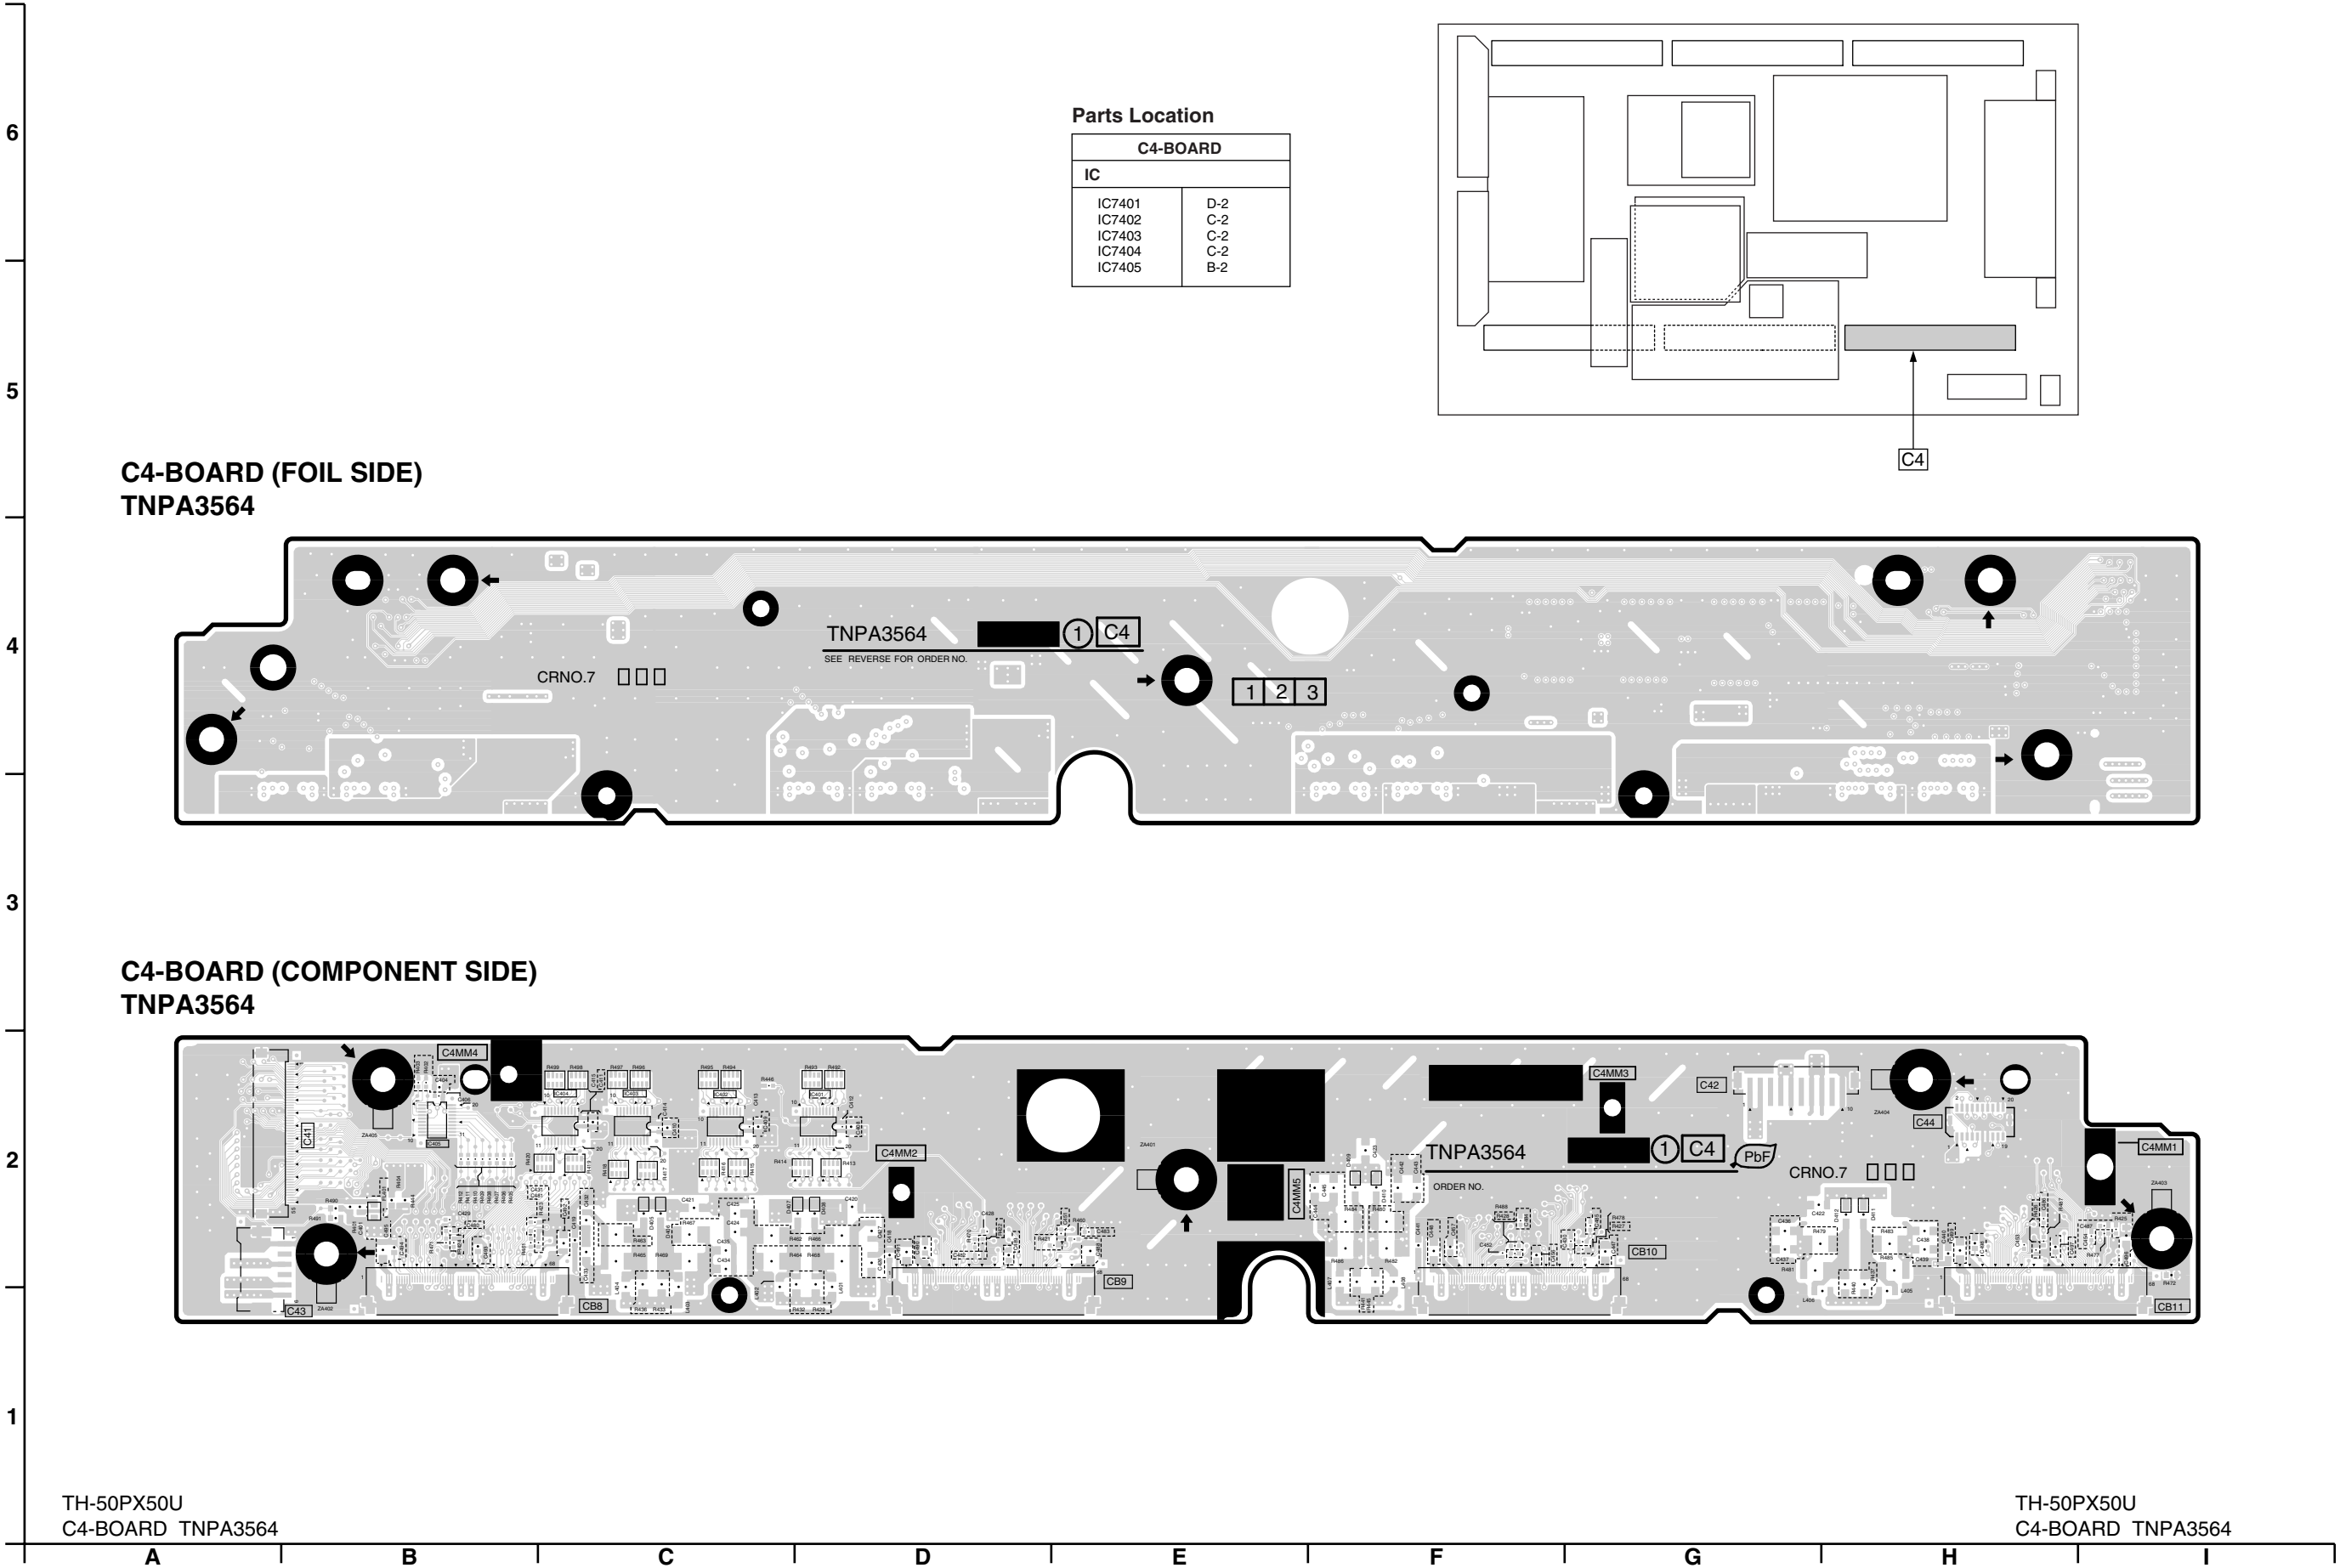

12.25. C5-Board (50inch)

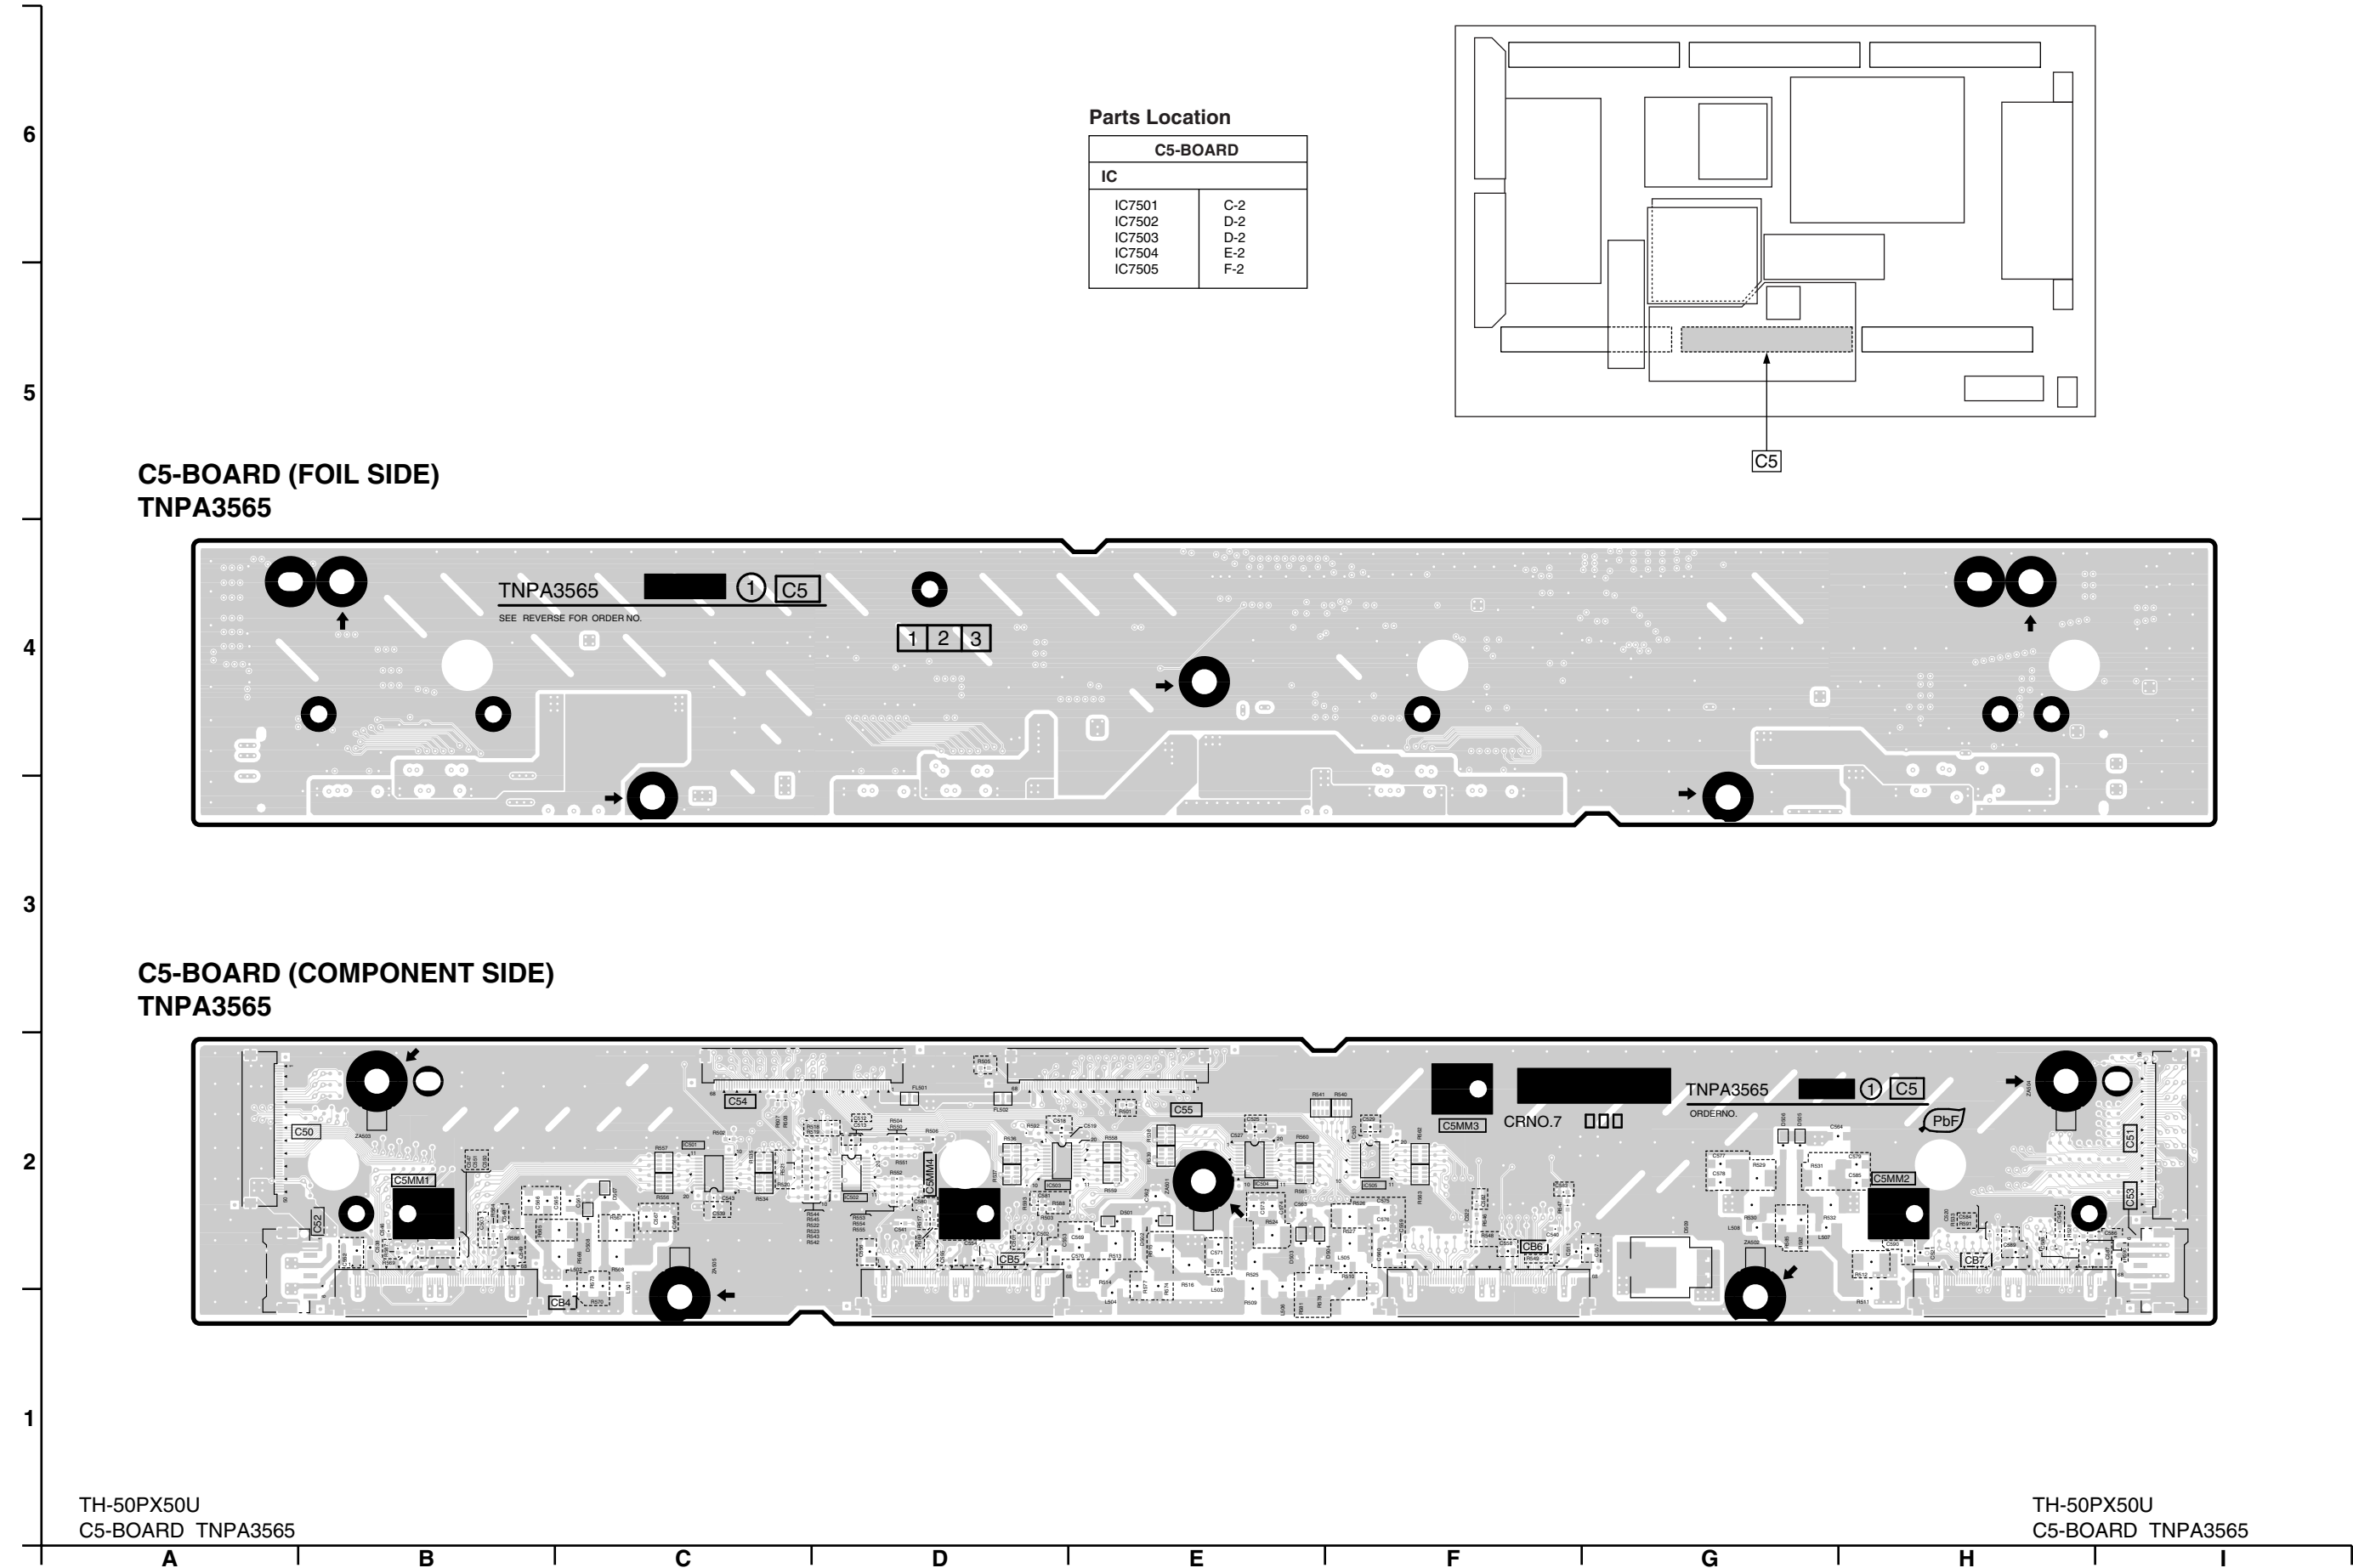


12.26. C6-Board (50inch)

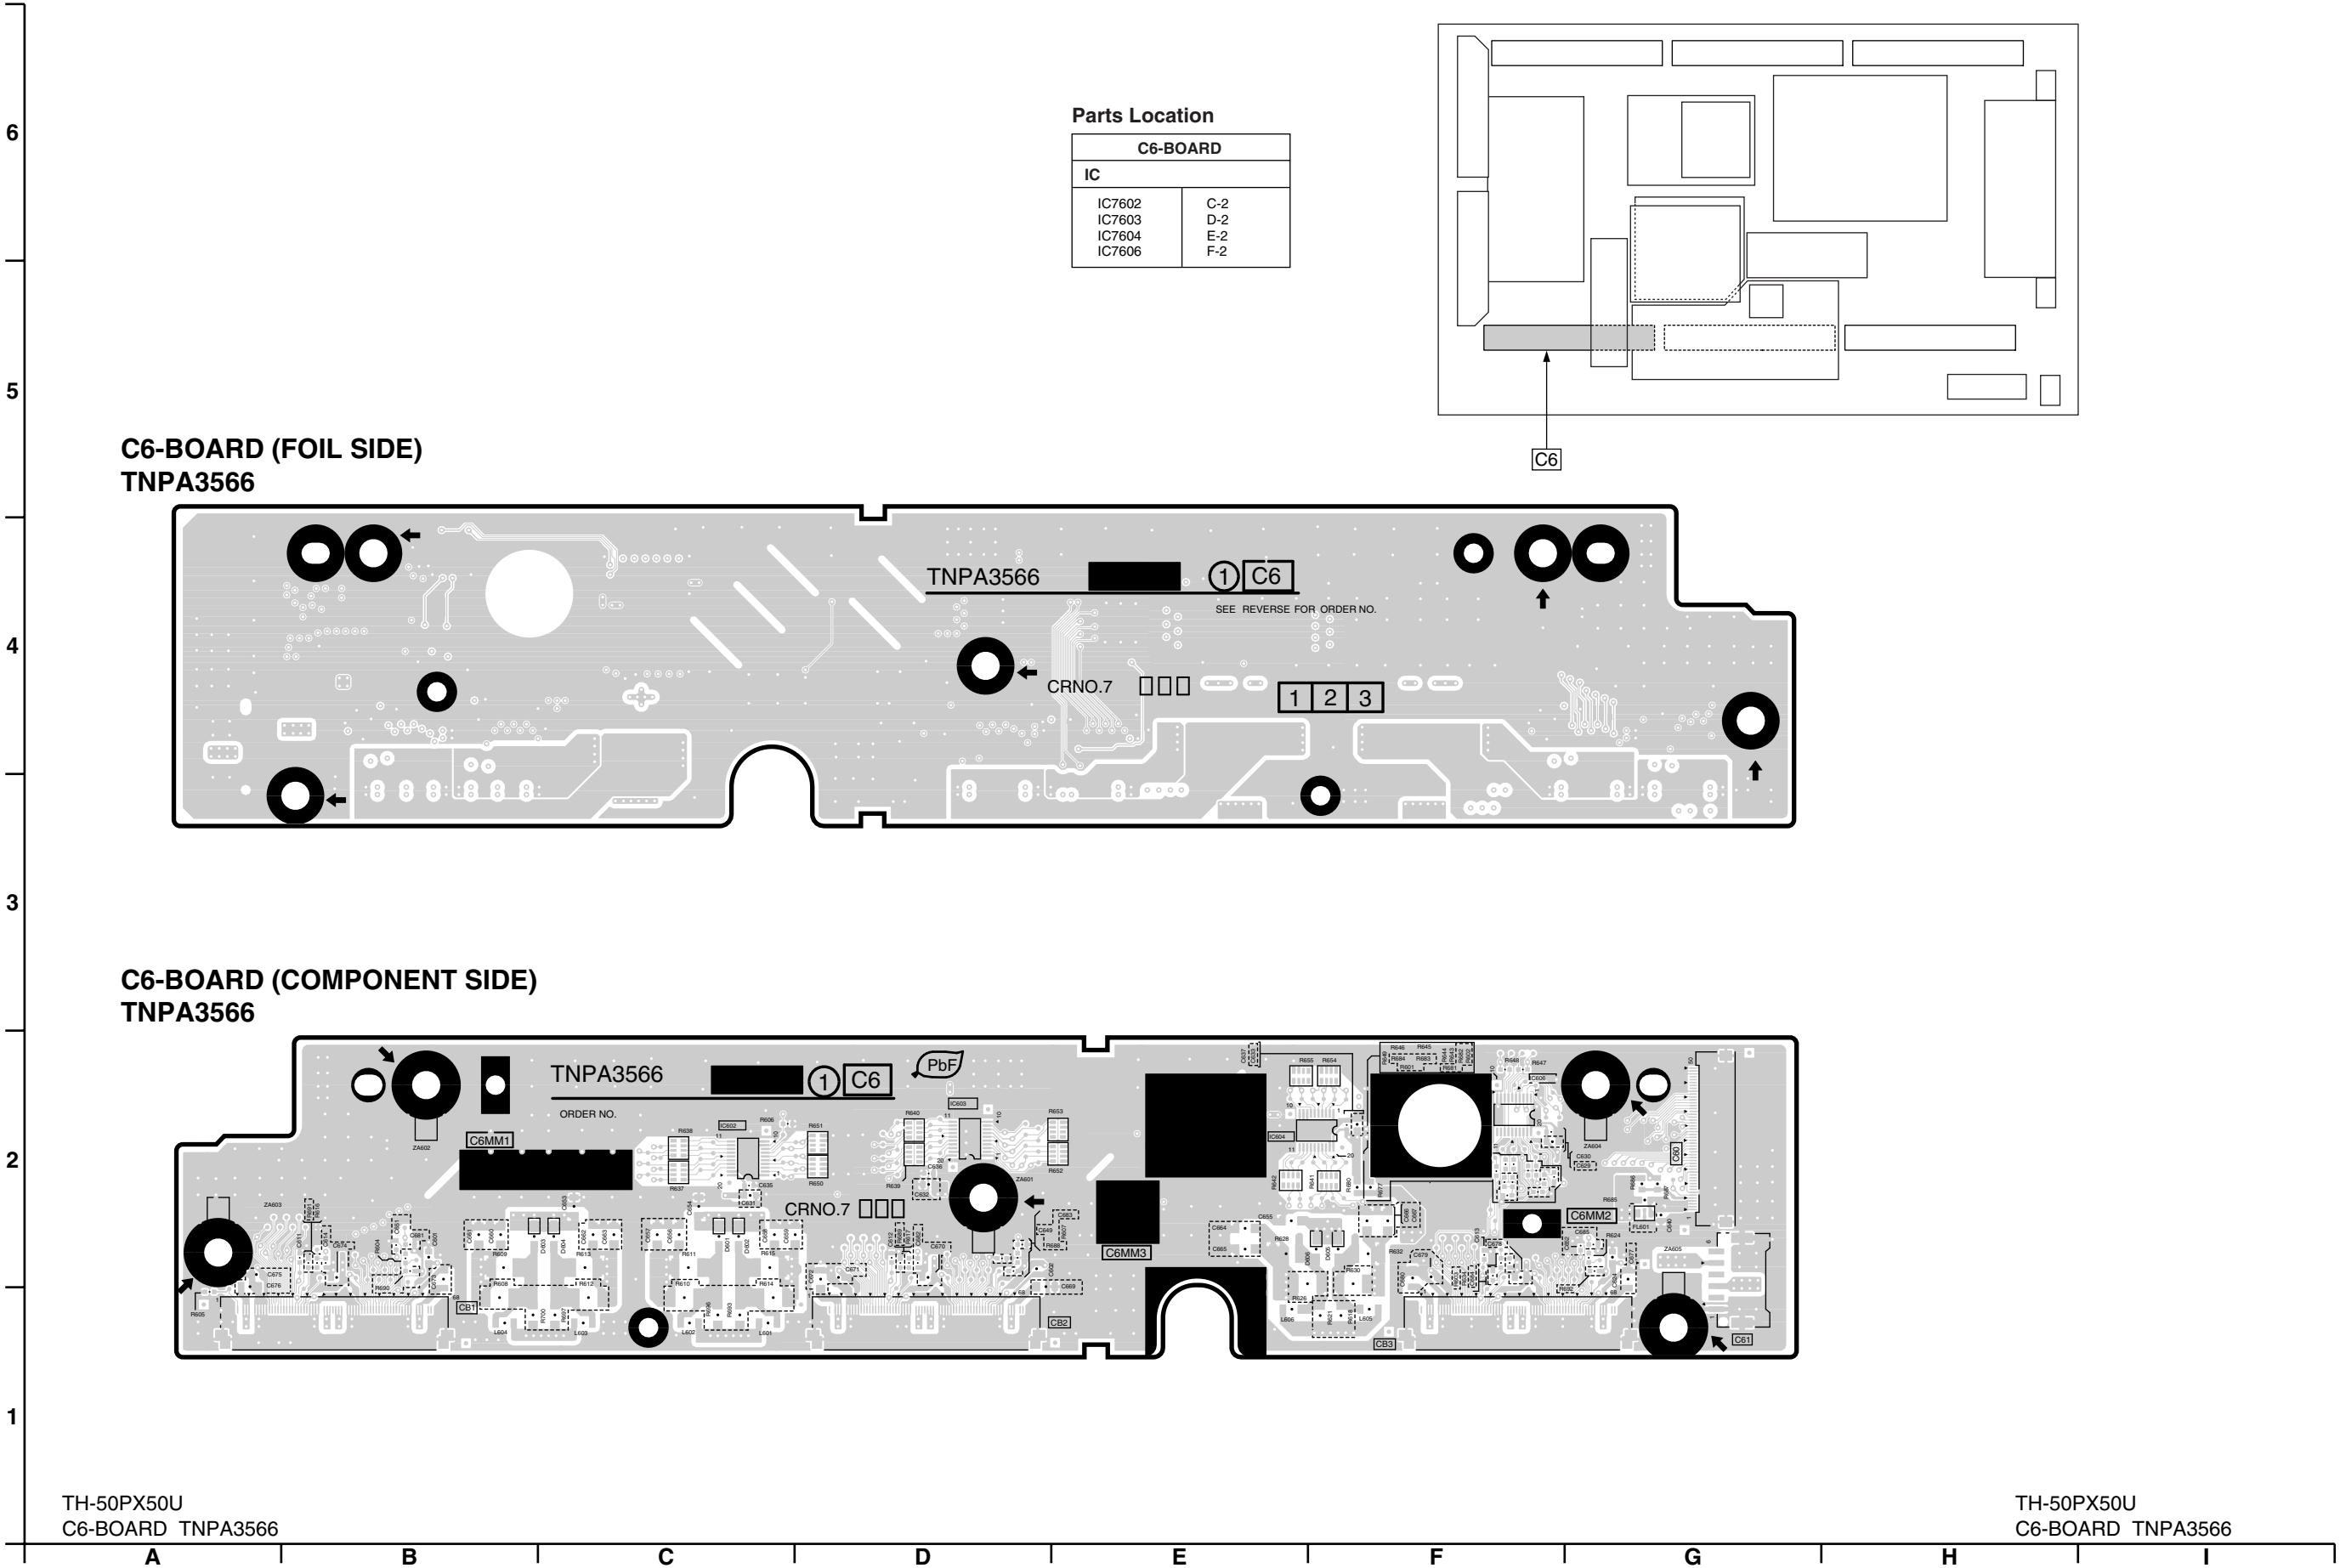

SC-BOARD (FOIL SIDE)
TNPA3573



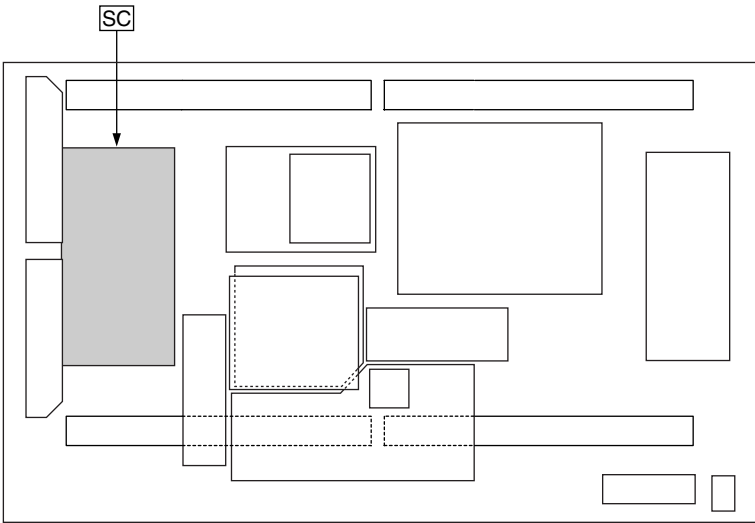

Parts Location

SC-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6552	E-4	TP1	B-1	TP43	C-5
Q6601	C-4	TP10	C-1	TP44	C-5
Q6602	B-4	TP11	C-1	TP45	B-5
Q6603	B-4	TP12	C-1	TP46	G-5
Q6611	D-4	TP13	C-1	TP47	G-5
Q6612	D-4	TP14	C-1	TP48	G-5
Q6613	D-4	TP15	C-1	TP49	G-5
Q6635	D-2	TP16	D-1	TP5	B-1
Q6649	D-2	TP17	D-1	TP50	G-5
Q6762	G-3	TP18	D-1	TP51	G-5
Q6771	H-3	TP19	D-1	TP54	C-5
Q6791	G-2	TP2	B-1	TP55	C-5
Q6792	G-2	TP20	D-1	TP56	C-5
		TP21	D-1	TP57	C-5
		TP22	D-1	TP58	C-5
		TP23	D-1	TP59	F-5
		TP24	D-1	TP6	B-1
		TP25	C-1	TP60	F-5
		TP26	C-1	TP61	G-5
		TP27	D-1	TP62	G-5
		TP3	A-1	TP63	F-5
		TP30	G-3	TP7	B-1
		TP31	F-2	TP8	C-1
		TP4	A-1	TP80	D-5
		TP40	C-5	TP81	D-5
		TP41	C-5	TP83	F-5
		TP42	C-5	TP84	F-5
				TP9	C-1

Parts Location

SC-BOARD (COMPONENT SIDE)							
IC		TRANSISTOR					
IC6500	B-2	Q6501	B-4	Q6562	F-5	Q6764	B-3
IC6502	B-3	Q6503	C-4	Q6563	G-5	Q6765	B-1
IC6503	B-3	Q6504	C-4	Q6564	G-5	Q6768	B-2
IC6504	A-4	Q6511	B-5	Q6565	G-5	Q6771	B-3
IC6505	A-4	Q6512	B-5	Q6566	H-5	Q6772	A-2
IC6506	B-5	Q6520	D-4	Q6581	F-1	Q6774	A-2
IC6510	A-3	Q6521	D-4	Q6582	E-5	Q6775	A-2
IC6511	B-3	Q6523	D-4	Q6583	E-5	Q6776	B-4
IC6514	C-2	Q6524	C-4	Q6586	C-5	Q6777	B-4
IC6515	A4	Q6525	D-5	Q6601	G-4	Q6791	C-2
IC6524	A-5	Q6526	D-5	Q6602	G-4	Q6792	C-2
IC6525	B-4	Q6527	B-4	Q6603	G-4	TP	
IC6526	C-4	Q6530	E-4	Q6608	G-4		
IC6527	D-4	Q6531	E-4	Q6609	G-4		
IC6528	C-5	Q6532	E-4	Q6611	E-4		
IC6529	C-5	Q6533	F-4	Q6612	E-4		
IC6530	B-4	Q6534	F-4	Q6613	F-4		
IC6531	D-5	Q6535	F-4	Q6619	F-4		
IC6532	F-1	Q6536	G-4	Q6620	F-4		
IC6533	F-4	Q6537	G-4	Q6627	F-2		
IC6534	F-3	Q6538	G-4	Q6628	F-2		
IC6535	E-3	Q6539	H-4	Q6629	F-2		
IC6536	E-1	Q6540	H-4	Q6630	F-2		
IC6537	E-2	Q6551	C-4	Q6635	F-2		
IC6538	E-2	Q6552	D-4	Q6639	E-1	TPSC1	B-5
		Q6560	F-5	Q6640	E-1	TPSOS1	F-1
		Q6561	F-5	Q6649	E-2	TPSOS2	F-2
				Q6761	C-2	TPV15V	G-1
				Q6762	B-3	TPVAD	B-3
						TPVSCN	B-3
						TPVSET	C-3
						TPVSET2	B-3
						TPVSUS	H-1

6

5


4

3

2


1


SC-BEARD (COMPONENT SIDE)
TNPA3573

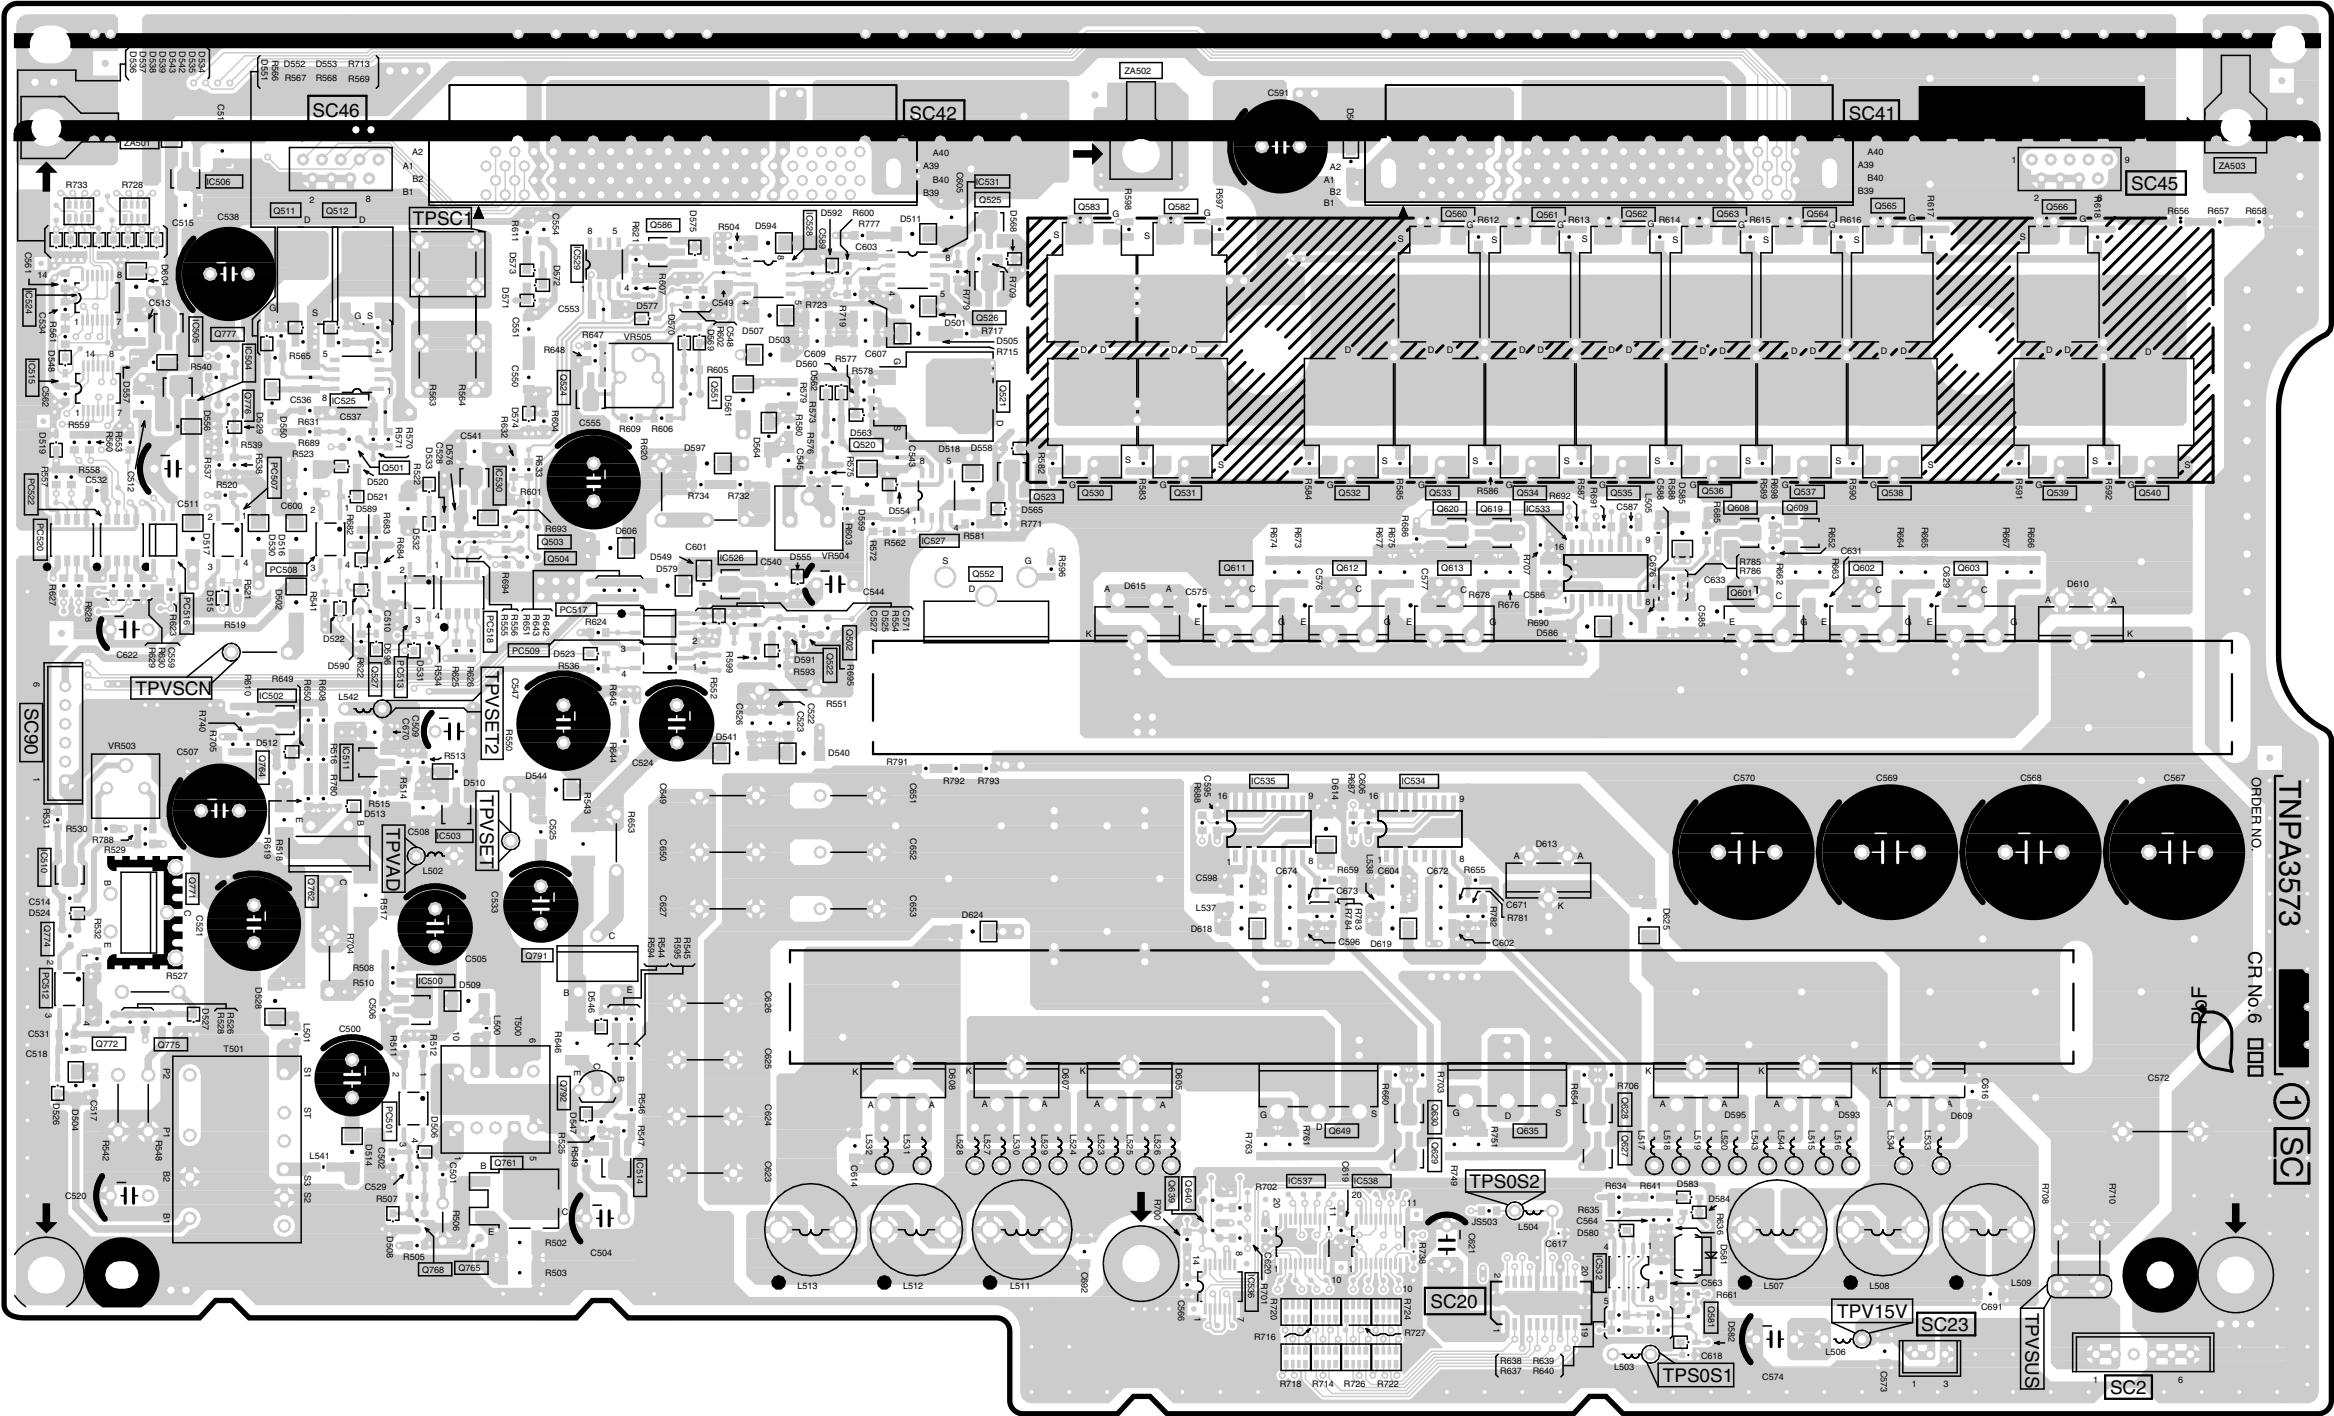

TNPA3573
ORDER NO. CR No.6 000 ① SC

12.28. SC-Board (42inch)

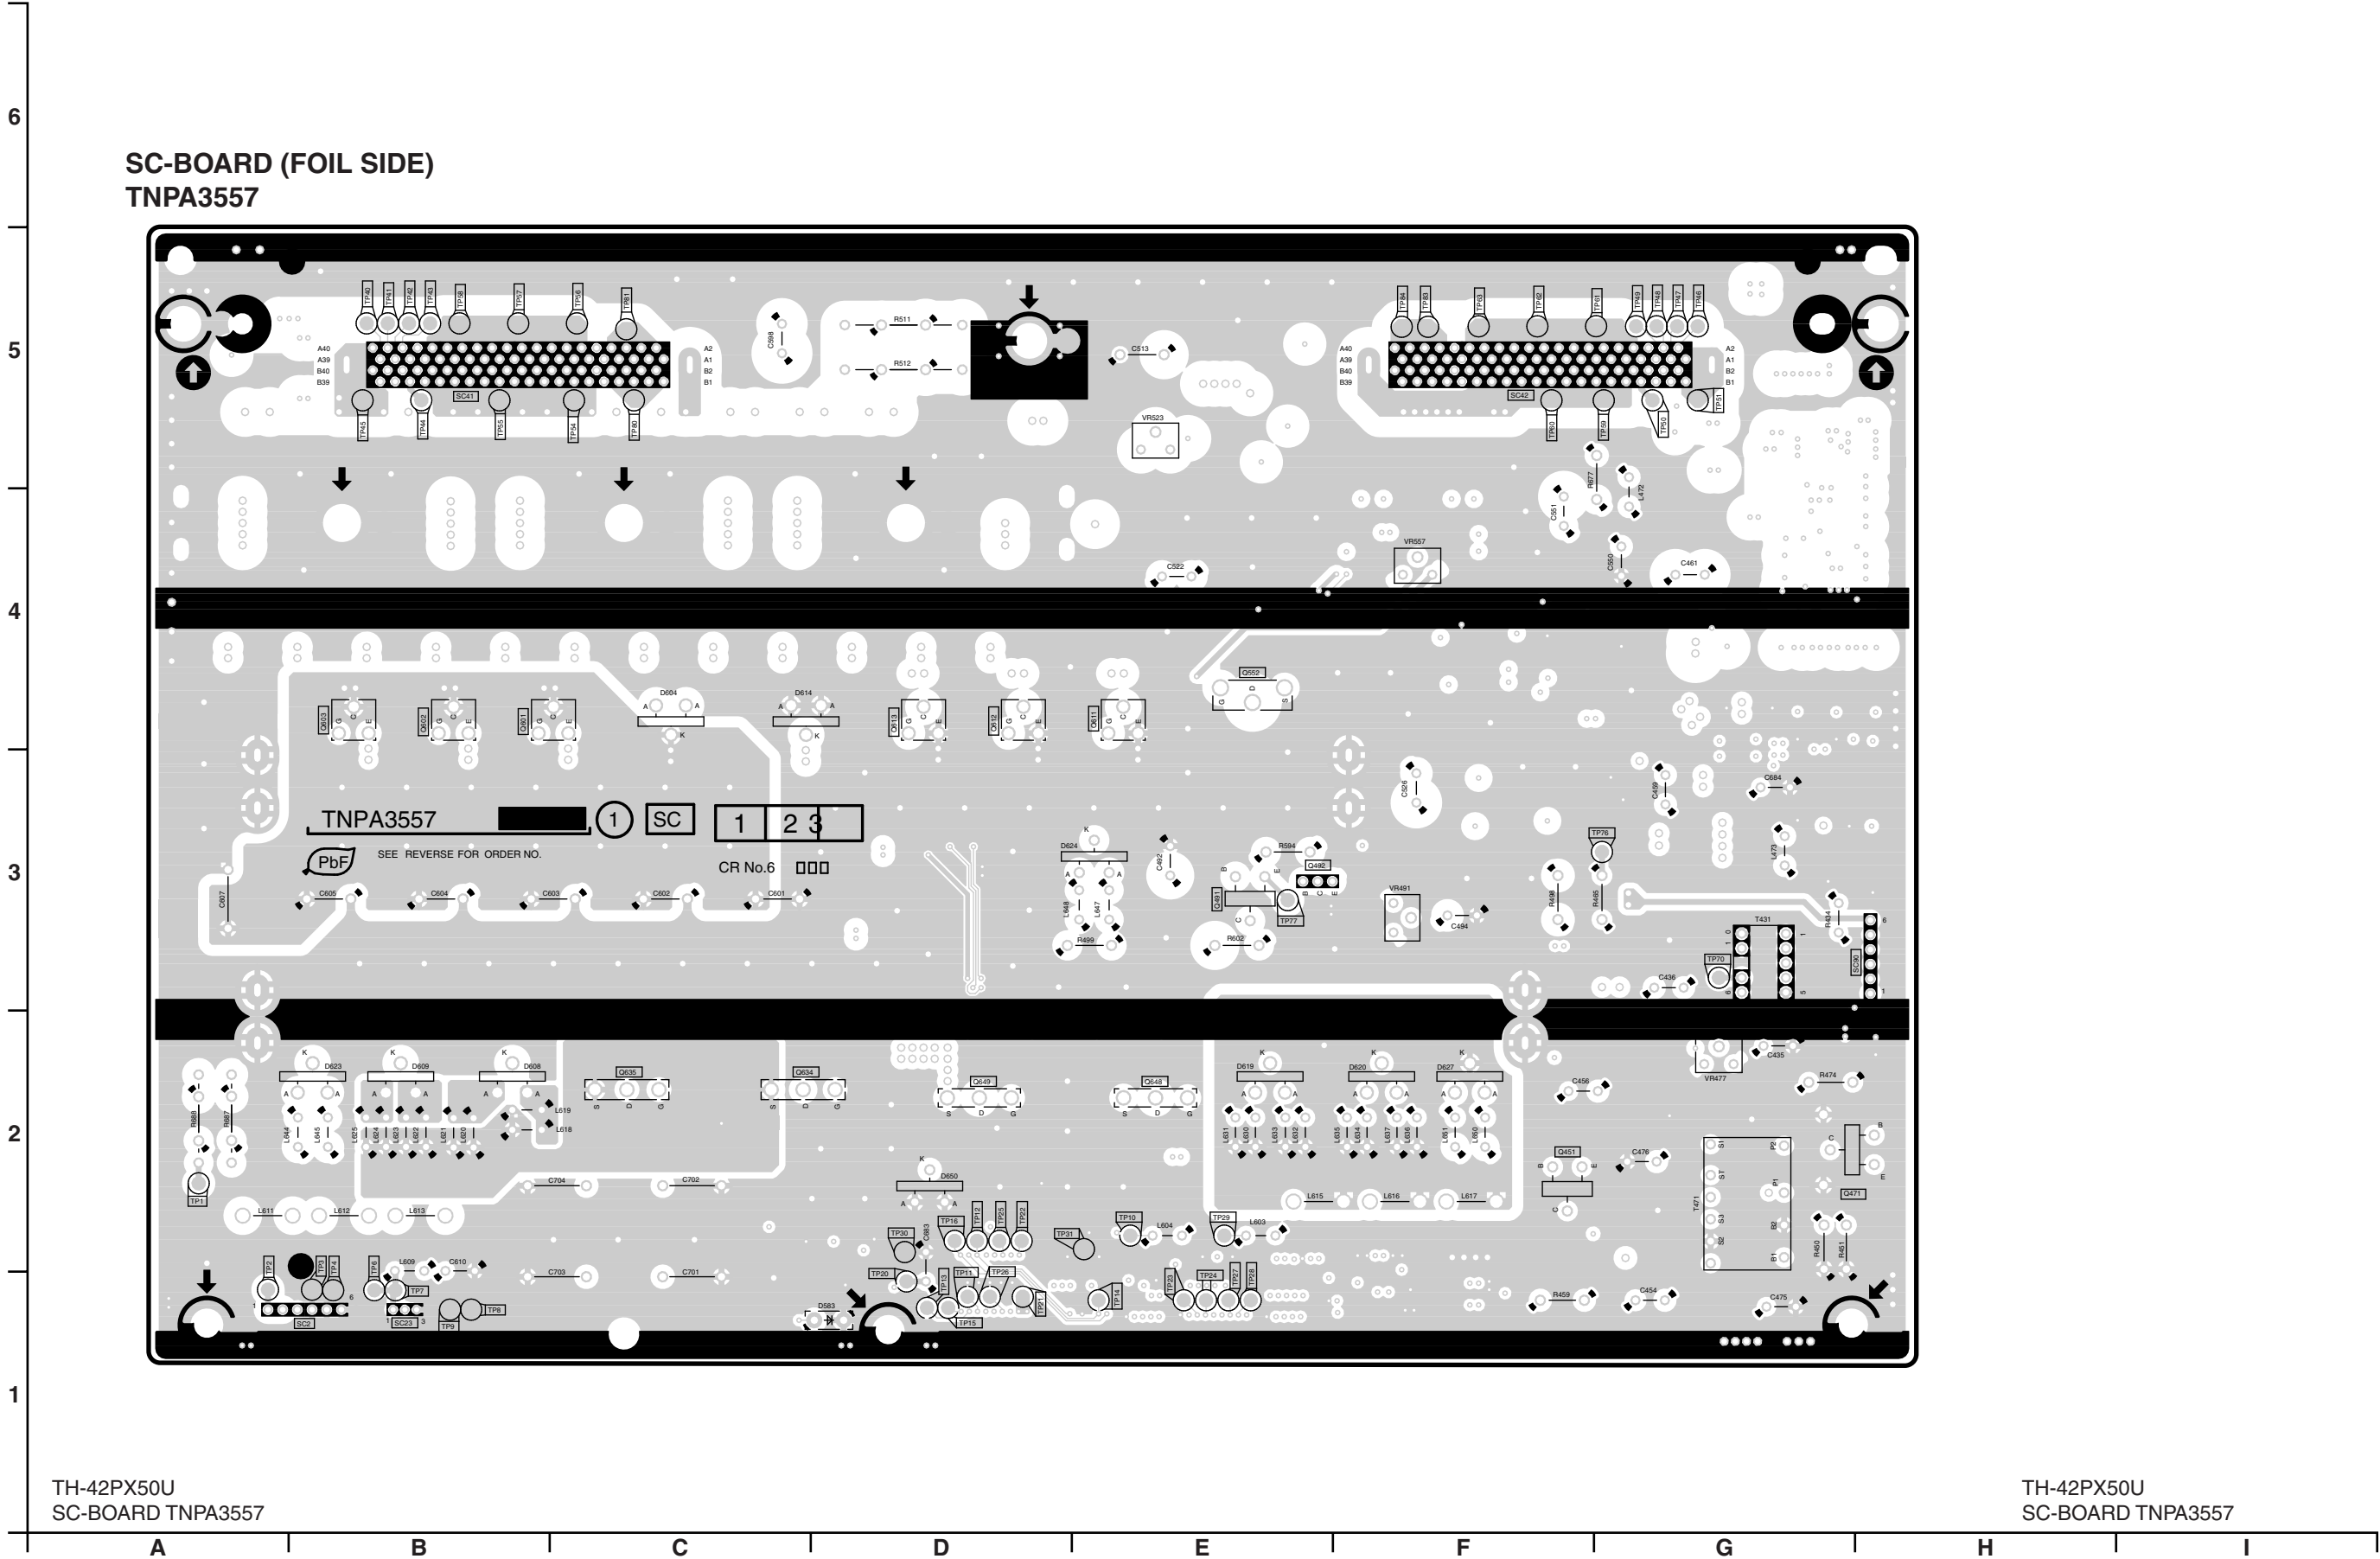

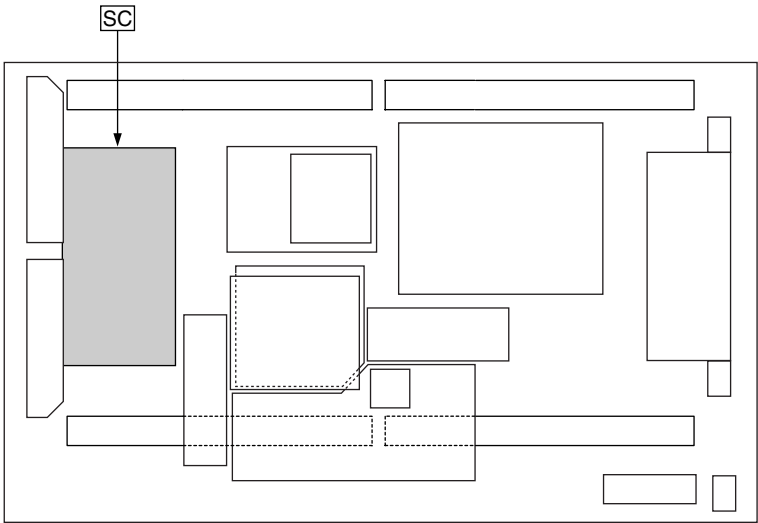

Parts Location

SC-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6451	F-2	TP1	A-2	TP41	B-5
Q6471	G-2	TP2	A-1	TP42	B-5
Q6491	E-3	TP3	B-1	TP43	B-5
Q6492	E-3	TP4	B-1	TP44	B-5
Q6552	E-4	TP6	B-1	TP45	B-5
Q6601	C-4	TP7	B-1	TP46	G-5
Q6602	B-4	TP8	B-1	TP47	G-5
Q6603	B-4	TP9	B-1	TP48	G-5
Q6611	E-4	TP10	E-2	TP49	G-5
Q6612	D-4	TP11	D-1	TP50	G-5
Q6613	D-4	TP12	D-2	TP51	G-5
Q6634	D-2	TP13	D-1	TP54	C-5
Q6635	C-2	TP14	E-1	TP55	B-5
Q6648	E-2	TP15	D-1	TP56	C-5
Q6649	D-2	TP16	D-2	TP57	B-5
		TP20	D-1	TP58	B-5
		TP21	D-1	TP59	G-5
		TP22	D-2	TP60	F-5
		TP23	E-1	TP61	G-5
		TP24	E-1	TP62	F-5
		TP25	D-2	TP63	F-5
		TP26	D-1	TP70	G-3
		TP27	E-1	TP76	G-3
		TP28	E-1	TP77	E-3
		TP29	E-2	TP80	C-5
		TP30	D-2	TP81	C-5
		TP31	E-2	TP83	F-5
				TP84	F-5


TH-42PX50U
SC-BOARD PARTS LOCATION

Parts Location

SC-BOARD (COMPONENT SIDE)							
IC		TRANSISTOR					
IC6431	B-3	Q6431	A-3	Q6533	E-4	Q6603	G-4
IC6451	B-3	Q6432	A-3	Q6534	F-4	Q6608	E-3
IC6453	B-4	Q6435	A-3	Q6535	F-4	Q6609	E-3
IC6454	B-4	Q6451	B-2	Q6536	F-4	Q6611	D-4
IC6455	B-5	Q6455	B-2	Q6537	F-4	Q6612	D-4
IC6462	B-2	Q6471	A-2	Q6538	G-4	Q6613	E-4
IC6471	B-2	Q6472	A-2	Q6539	G-4	Q6619	D-3
IC6472	B-3	Q6474	B-2	Q6540	G-4	Q6620	D-3
IC6491	C-3	Q6475	A-2	Q6541	G-4	Q6627	E-2
IC6500	A-5	Q6476	B-4	Q6551	C-4	Q6628	E-2
IC6509	A-4	Q6477	A-4	Q6552	C-4	Q6629	D-2
IC6511	C-5	Q6491	D-3	Q6554	A-3	Q6630	D-2
IC6512	B-3	Q6492	C-3	Q6560	E-5	Q6634	E-2
IC6521	D-4	Q6502	C-3	Q6561	E-5	Q6635	F-2
IC6541	C-4	Q6503	C-4	Q6562	F-5	Q6639	C-1
IC6542	C-4	Q6504	C-4	Q6563	F-5	Q6640	C-1
IC6543	B-4	Q6506	C-3	Q6564	F-5	Q6648	D-2
IC6544	C-5	Q6511	D-5	Q6565	F-5	Q6649	E-2
IC6581	E-1	Q6512	D-5	Q6566	G-5	TP	
IC6601	E-3	Q6520	D-4	Q6567	G-5	TP15V	G-1
IC6602	E-2	Q6521	D-5	Q6568	G-5	TPSC1	E-5
IC6603	D-2	Q6523	D-4	Q6569	G-5	TPSOS1	C-2
IC6604	C-1	Q6524	C-4	Q6581	E-2	TPSOS2	D-2
IC6605	D-1	Q6525	C-5	Q6582	C-5	TPVAD	B-4
IC6606	C-1	Q6526	D-5	Q6583	C-5	TPVSCN	B-3
		Q6530	D-4	Q6588	C-4	TPVSET	B-3
		Q6531	E-4	Q6601	C-5	TPVSET2	A-3
		Q6532	E-4	Q6602	F-4	TPVSUS	H-2
					G-4		

TH-42PX50U
SC-BOARD PARTS LOCATION

SC-BEARD (COMPONENT SIDE)
TNPA3557

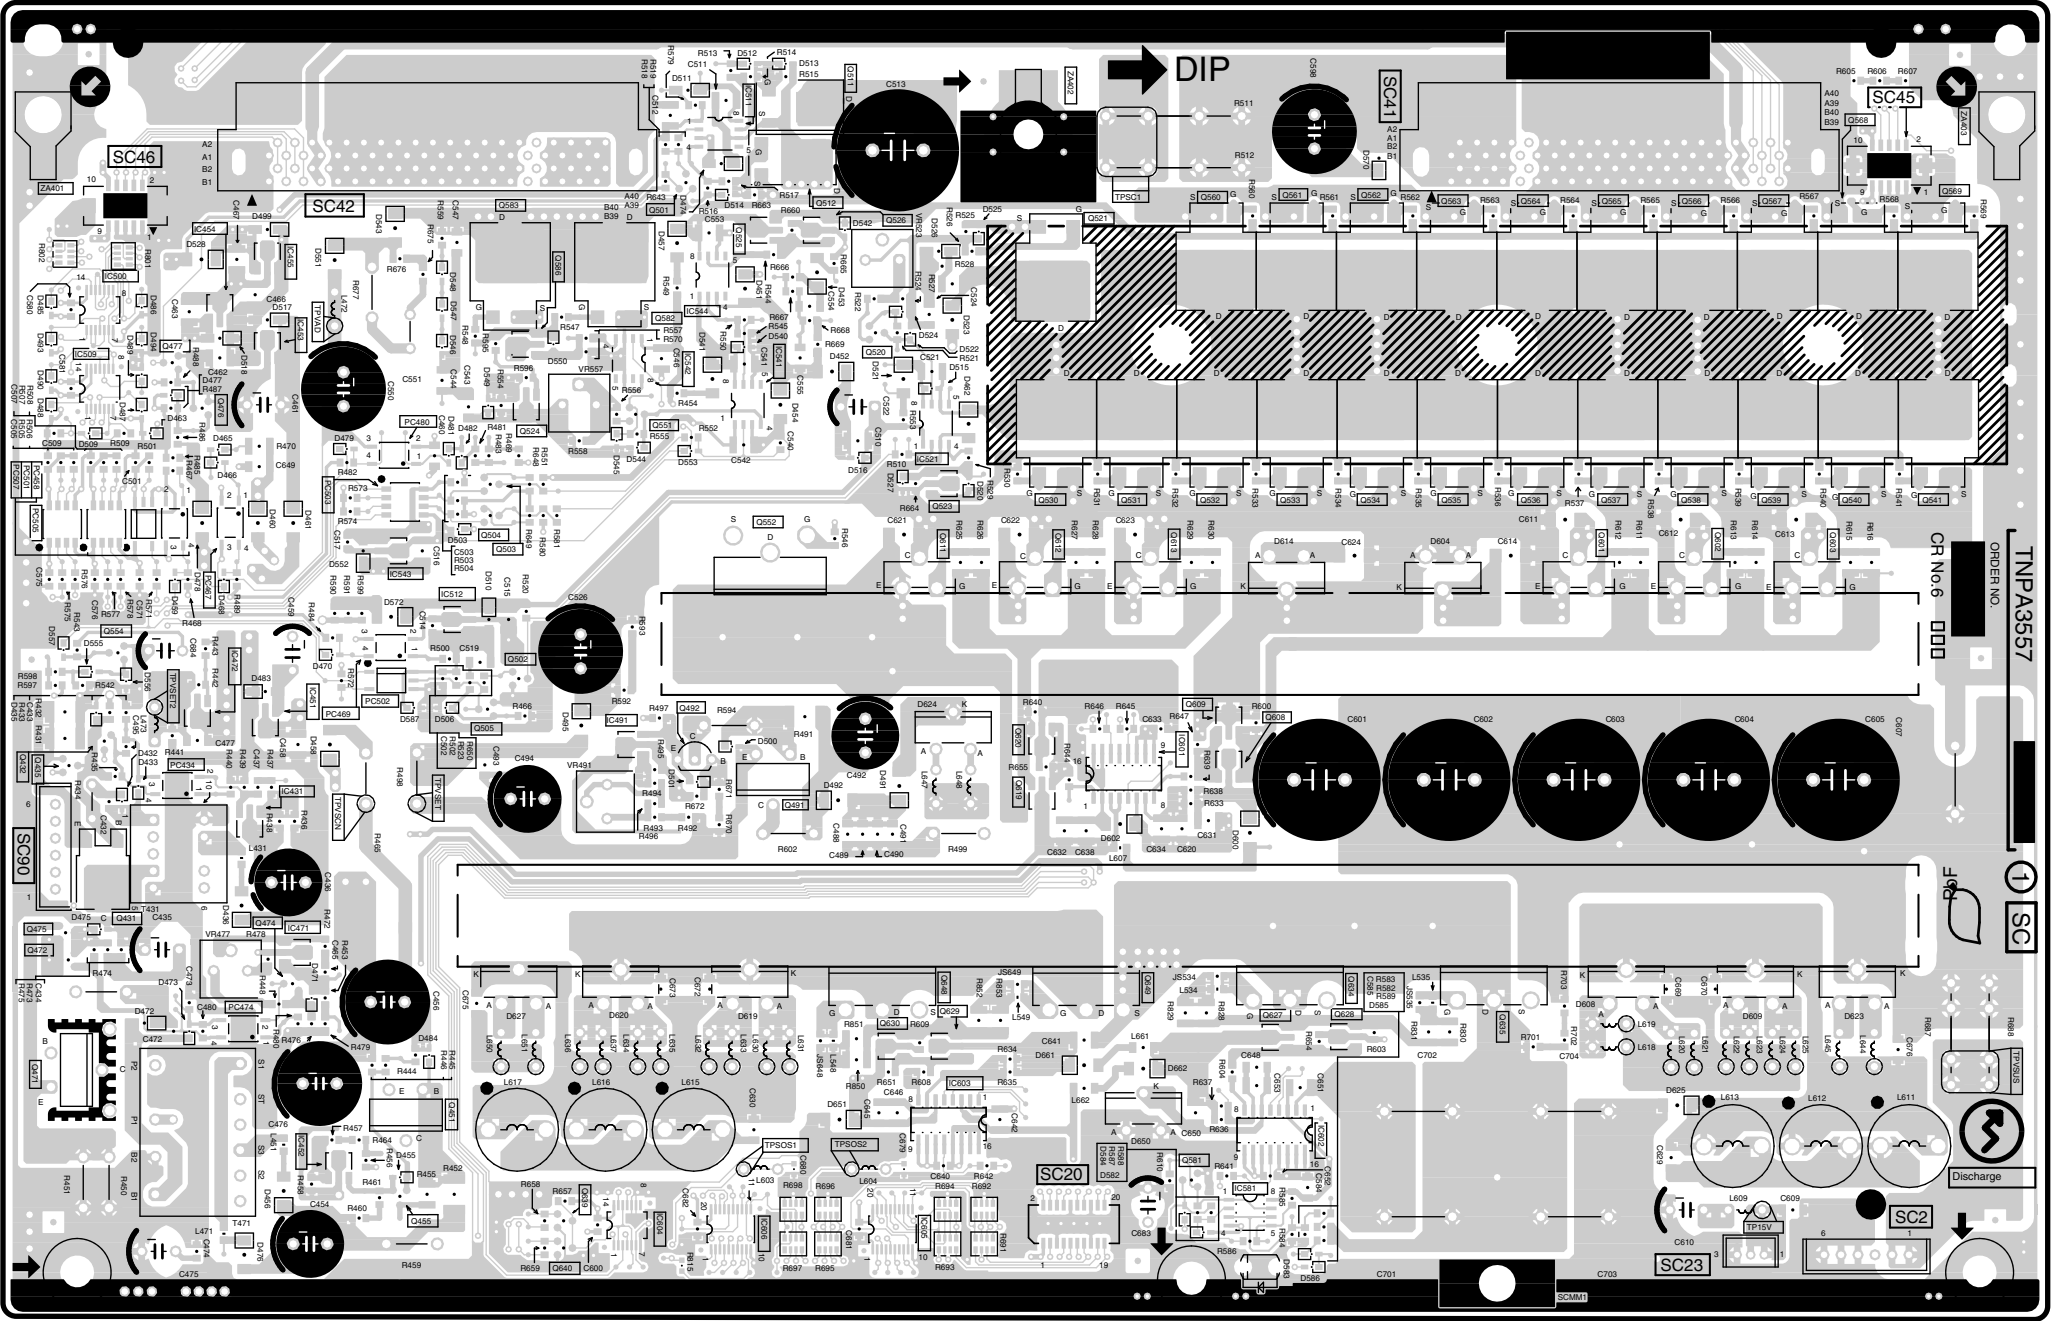


TH-42PX50U
SC-BEARD TNPA3557

TH-42PX50U
SC-BEARD TNPA3557

12.29. SC-Board (50inch)

6
5
4
3
2
1


SC-BOARD (FOIL SIDE)
TNPA3567

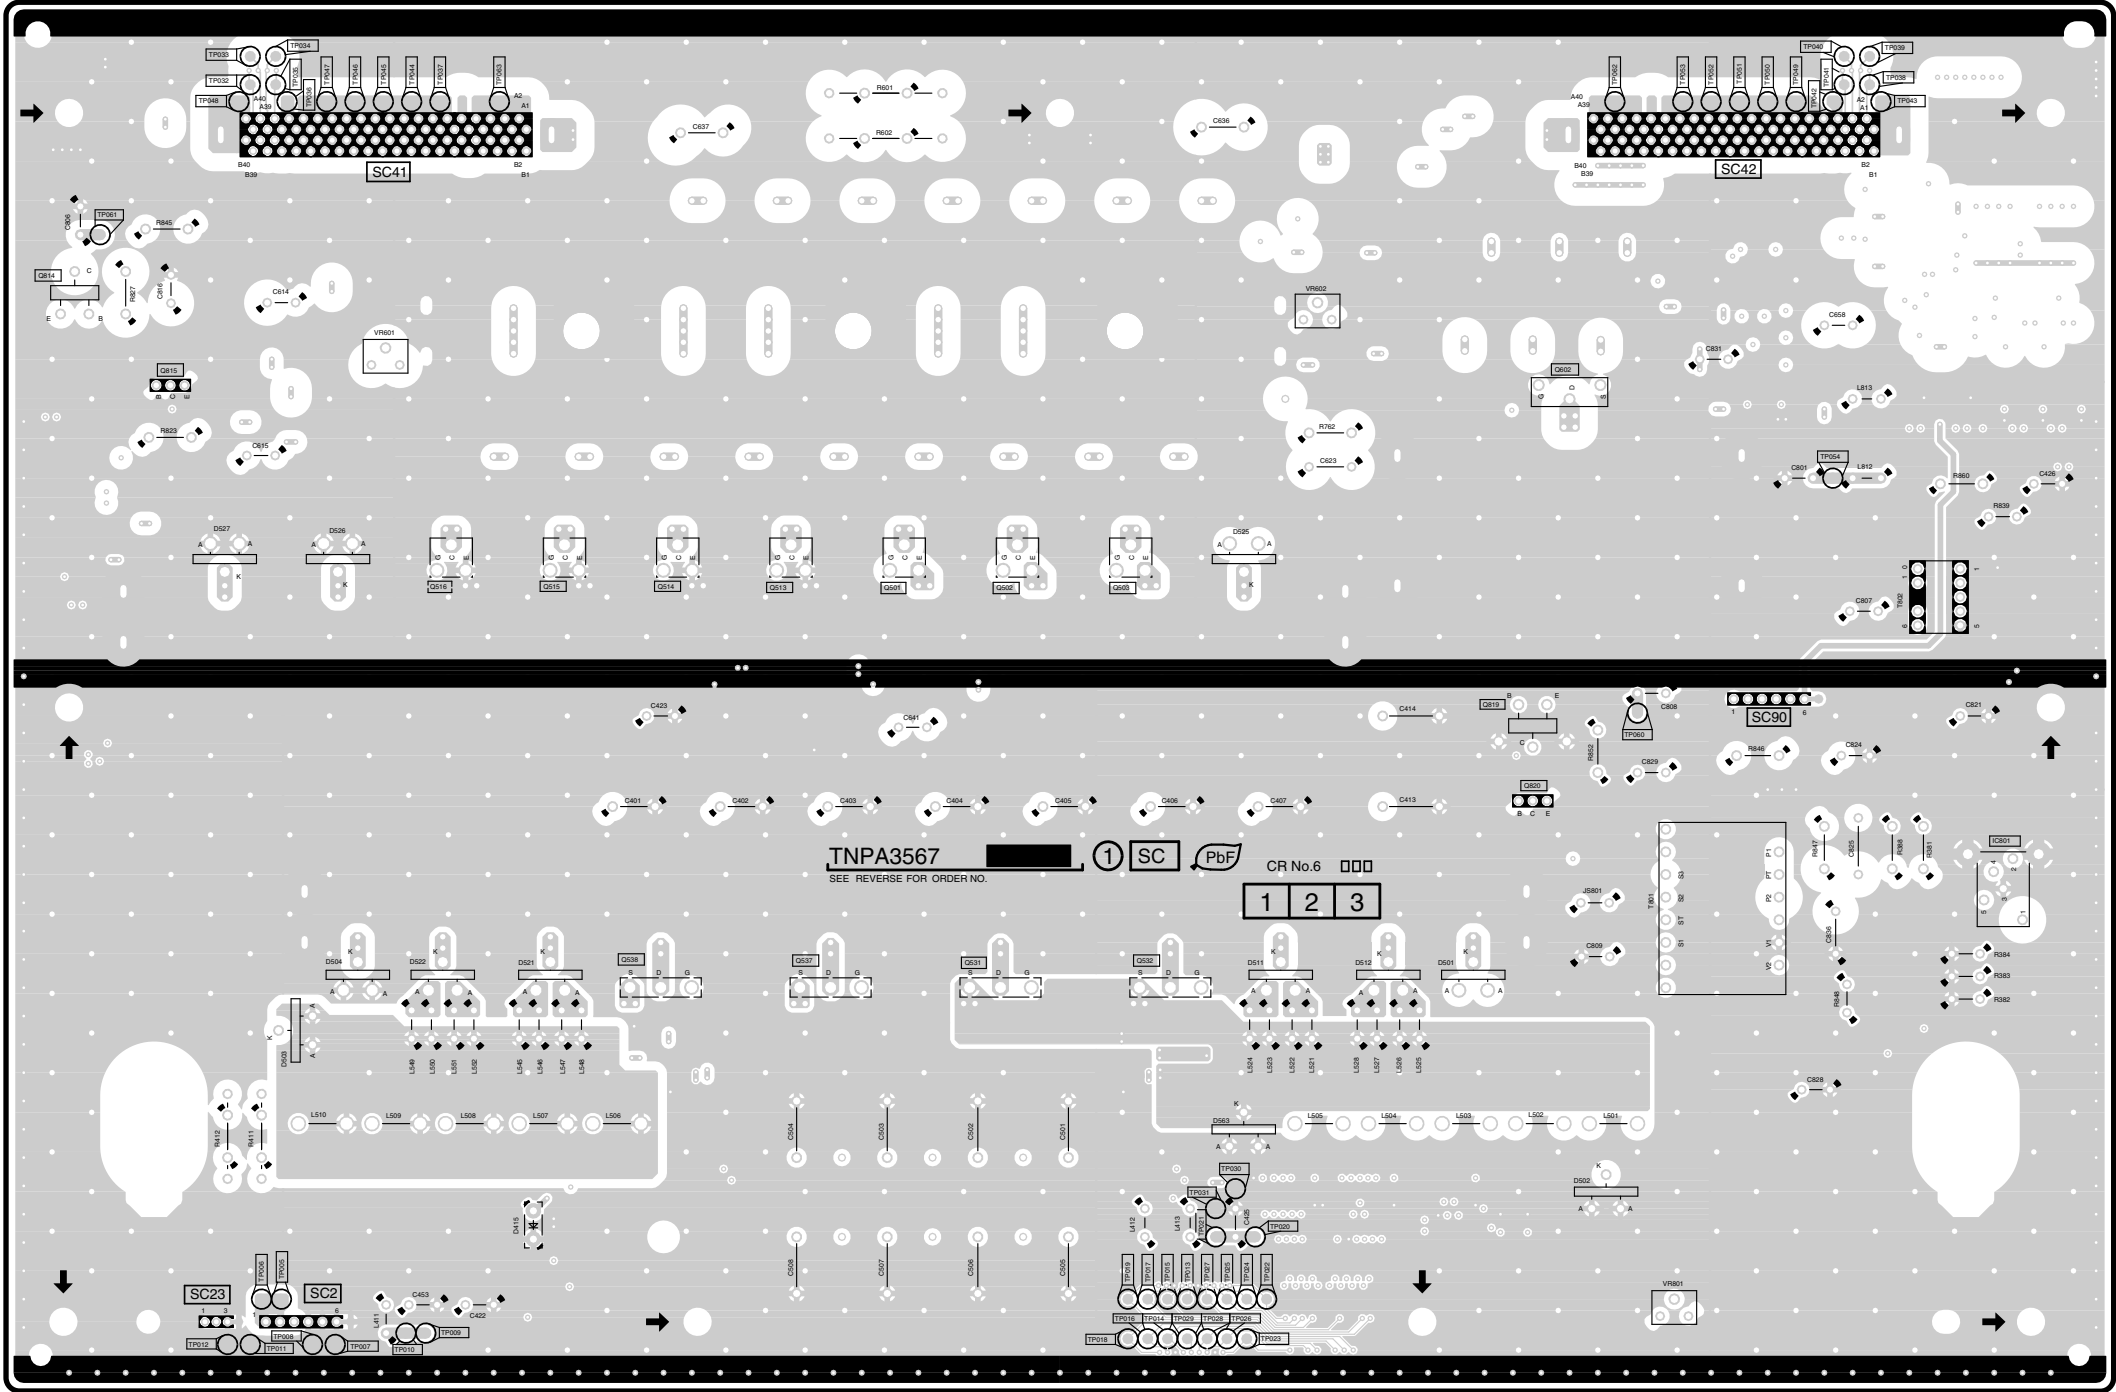

TH-50PX50U
SC-BOARD TNPA3567

TH-50PX50U
SC-BOARD TNPA3567

A B C D E F G H I

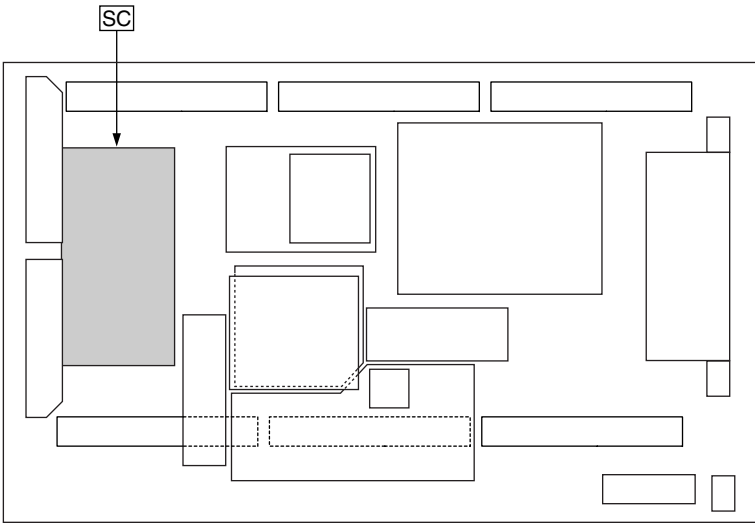

Parts Location

SC-BOARD (FOIL SIDE)					
IC		TP		TP6029	E-1
IC6801	H-3	TP4038	G-5	TP6030	E-2
TRANSISTOR		TP4039	G-5	TP6031	E-2
Q6501	D-4	TP4043	G-5	TP6032	B-5
Q6502	D-4	TP6005	B-1	TP6033	B-5
Q6503	E-4	TP6006	B-1	TP6034	B-5
Q6513	D-4	TP6007	B-1	TP6035	B-5
Q6514	C-4	TP6008	B-1	TP6036	B-5
Q6515	C-4	TP6009	B-1	TP6037	B-5
Q6516	B-4	TP6010	B-1	TP6040	G-5
Q6531	D-2	TP6011	B-1	TP6041	G-5
Q6532	E-2	TP6012	B-1	TP6042	G-5
Q6537	D-2	TP6013	E-1	TP6044	B-5
Q6538	C-2	TP6014	E-1	TP6045	B-5
Q6602	F-4	TP6015	E-1	TP6046	B-5
Q6814	A-5	TP6016	E-1	TP6047	B-5
Q6815	B-4	TP6017	E-1	TP6048	B-5
Q6819	F-3	TP6018	E-1	TP6049	G-5
Q6820	F-3	TP6019	E-1	TP6050	G-5
		TP6020	E-1	TP6051	G-5
		TP6021	E-1	TP6052	G-5
		TP6022	E-1	TP6053	G-5
		TP6023	E-1	TP6054	G-4
		TP6024	E-1	TP6060	F-3
		TP6025	E-1	TP6061	A-5
		TP6026	E-1	TP6062	F-5
		TP6027	E-1	TP6063	C-5
		TP6028	E-1		

TH-50PX50U
SC-BOARD PARTS LOCATION

Parts Location

SC-BOARD (COMPONENT SIDE)							
IC		TRANSISTOR		Q6614	E-4	Q6670	B-5
IC6411	D-2	Q6411	F-1	Q6615	E-4	Q6689	B-5
IC6412	C-2	Q6412	C-2	Q6616	E-4	Q6814	H-5
IC6413	C-2	Q6413	C-2	Q6617	F-4	Q6815	G-4
IC6421	F-1	Q6501	E-4	Q6618	F-4	Q6816	A-4
IC6501	E-3	Q6502	E-4	Q6619	F-4	Q6817	A-4
IC6502	D-2	Q6503	D-4	Q6630	D-5	Q6818	A-4
IC6603	F-2	Q6513	E-4	Q6631	D-5	Q6819	C-3
IC6610	G-4	Q6514	F-4	Q6632	E-5	Q6820	C-3
IC6611	G-4	Q6515	F-4	Q6633	E-5	Q6821	B-2
IC6620	D-5	Q6516	F-4	Q6634	E-5	Q6822	B-5
IC6640	C-5	Q6531	E-2	Q6635	E-5	Q6823	B-5
IC6650	A-5	Q6532	D-2	Q6636	F-5	Q6824	A-4
IC6651	A-5	Q6537	E-2	Q6650	C-5	TP	
IC6652	B-5	Q6538	F-2	Q6651	C-5	TP15V	G-1
IC6653	B-5	Q6551	E-3	Q6652	C-5	TPSC1	E-5
IC6654	B-5	Q6552	E-3	Q6654	C-5	TPSOS1	D-2
IC6801	A-3	Q6559	F-3	Q6655	G-4	TPVAD	B-4
IC6812	H-4	Q6567	D-2	Q6656	G-4	TPVSCN	A-4
IC6814	B-4	Q6568	D-2	Q6658	H-4	TPVSET	G-5
IC6815	C-3	Q6571	E-2	Q6659	H-4	TPVSET2	B-4
IC6817	B-2	Q6572	E-2	Q6660	D-5	TPVSUS	G-2
IC6818	B-4	Q6577	H-4	Q6660	F-3		
		Q6601	G-5	Q6661	D-5		
		Q6602	C-4	Q6664	C-5		
		Q6604	D-5	Q6665	D-4		
		Q6611	D-4	Q6666	B-5		
		Q6612	D-4	Q6667	B-5		
		Q6613	E-4	Q6668	B-5		

TH-50PX50U
SC-BOARD PARTS LOCATION

6

5


4

3

2

1

SC-BBOARD (COMPONENT SIDE)
TNPA3567

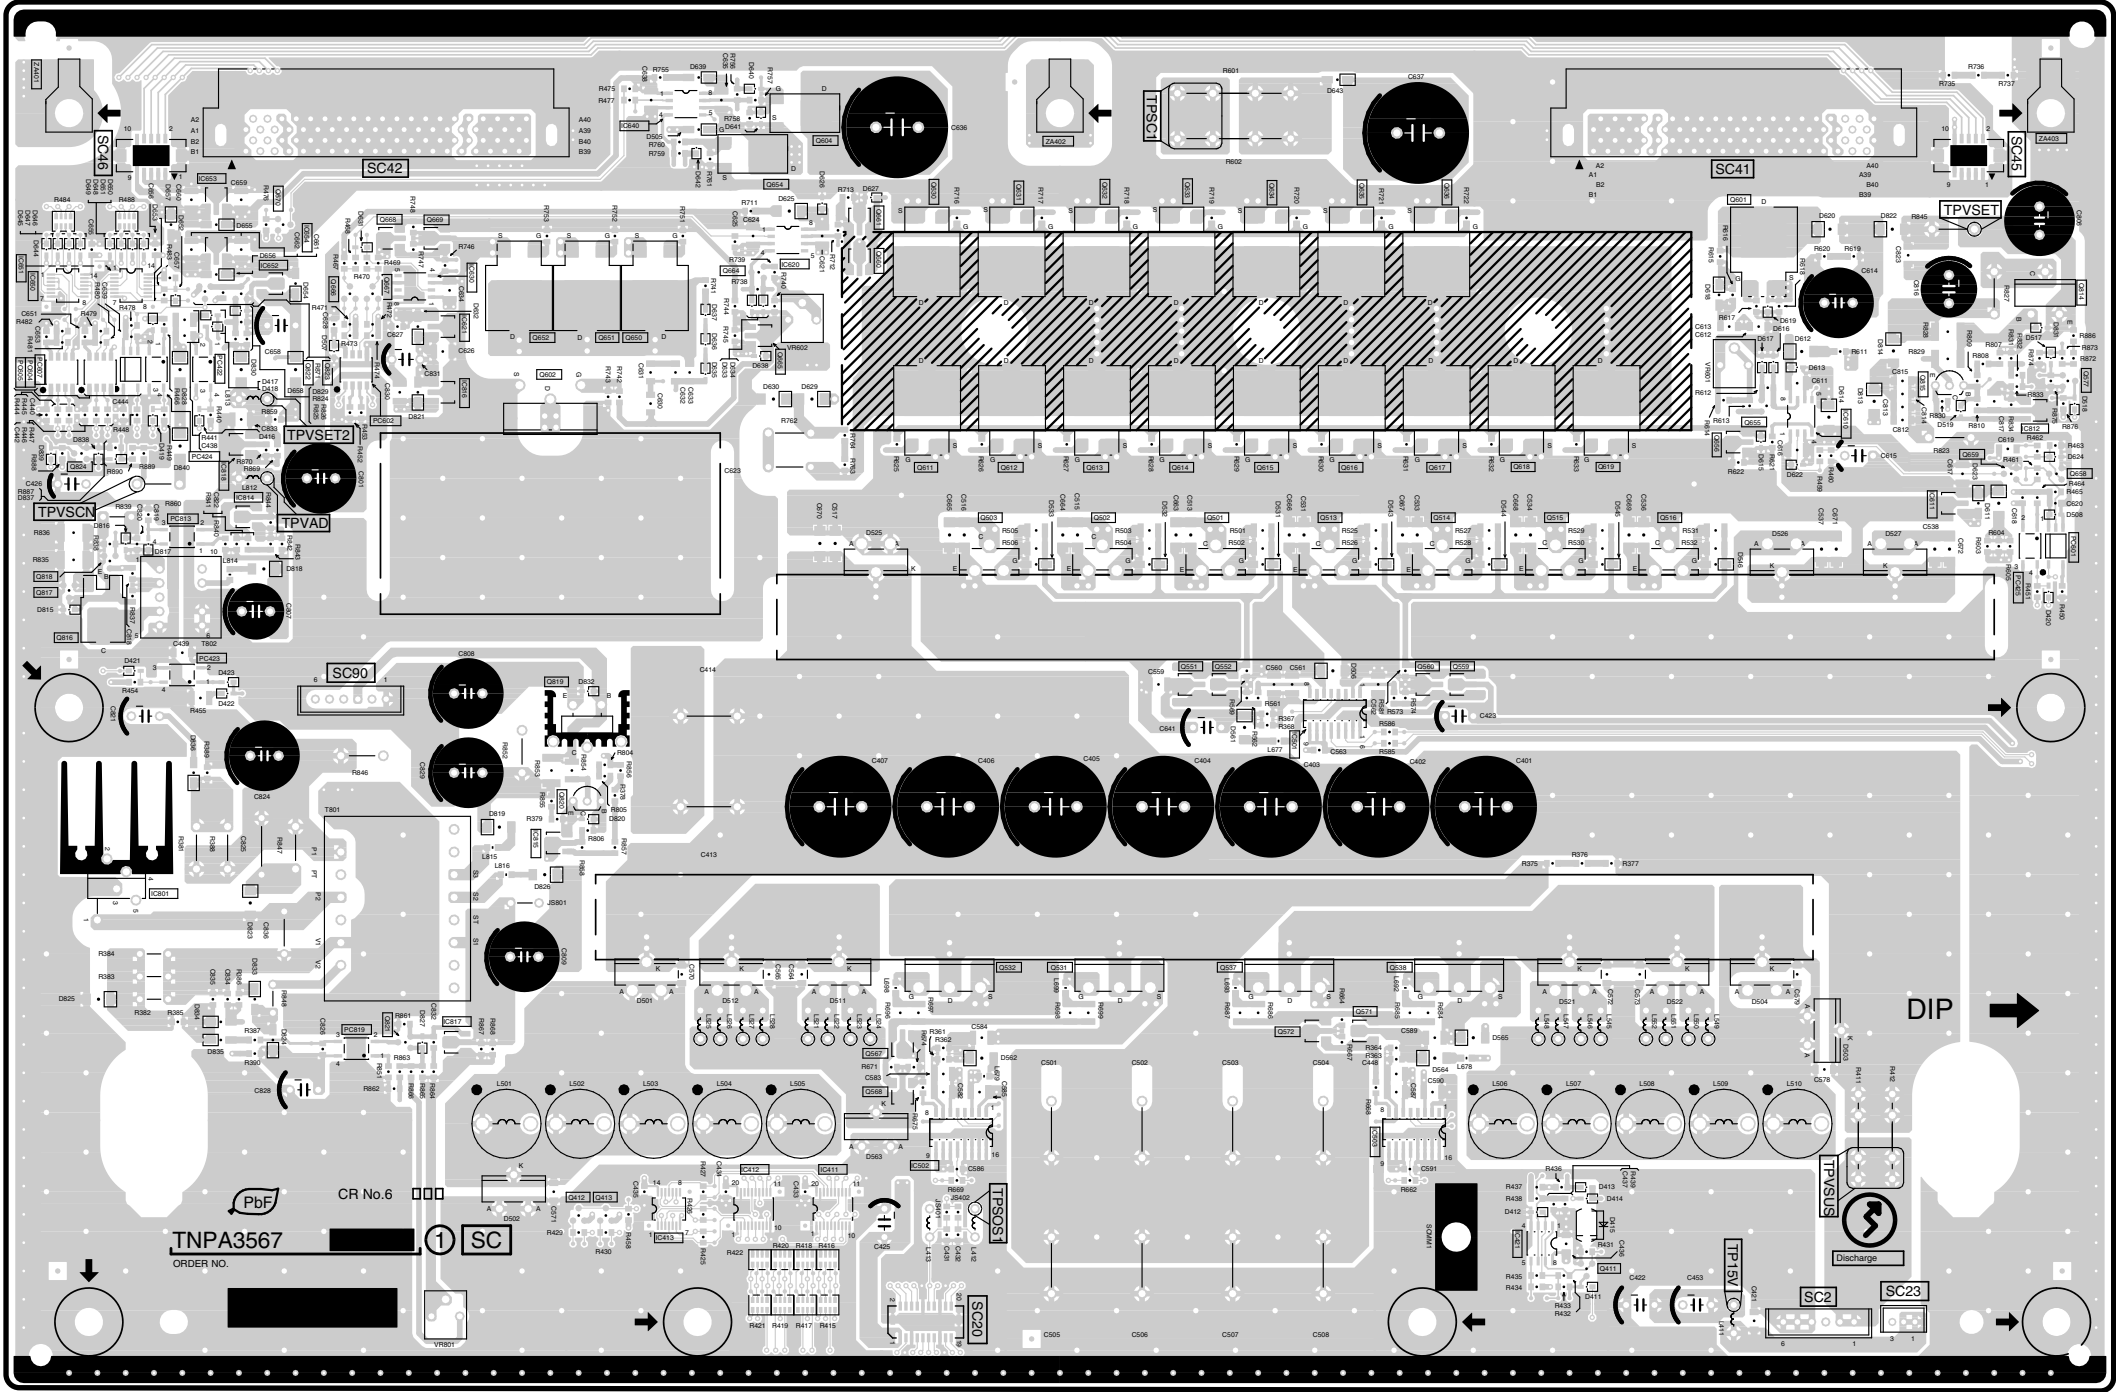


TH-50PX50U
SC-BBOARD TNPA3567

TH-50PX50U
SC-BBOARD TNPA3567

A B C D E F G H I


12.30. SU-Board (37inch)

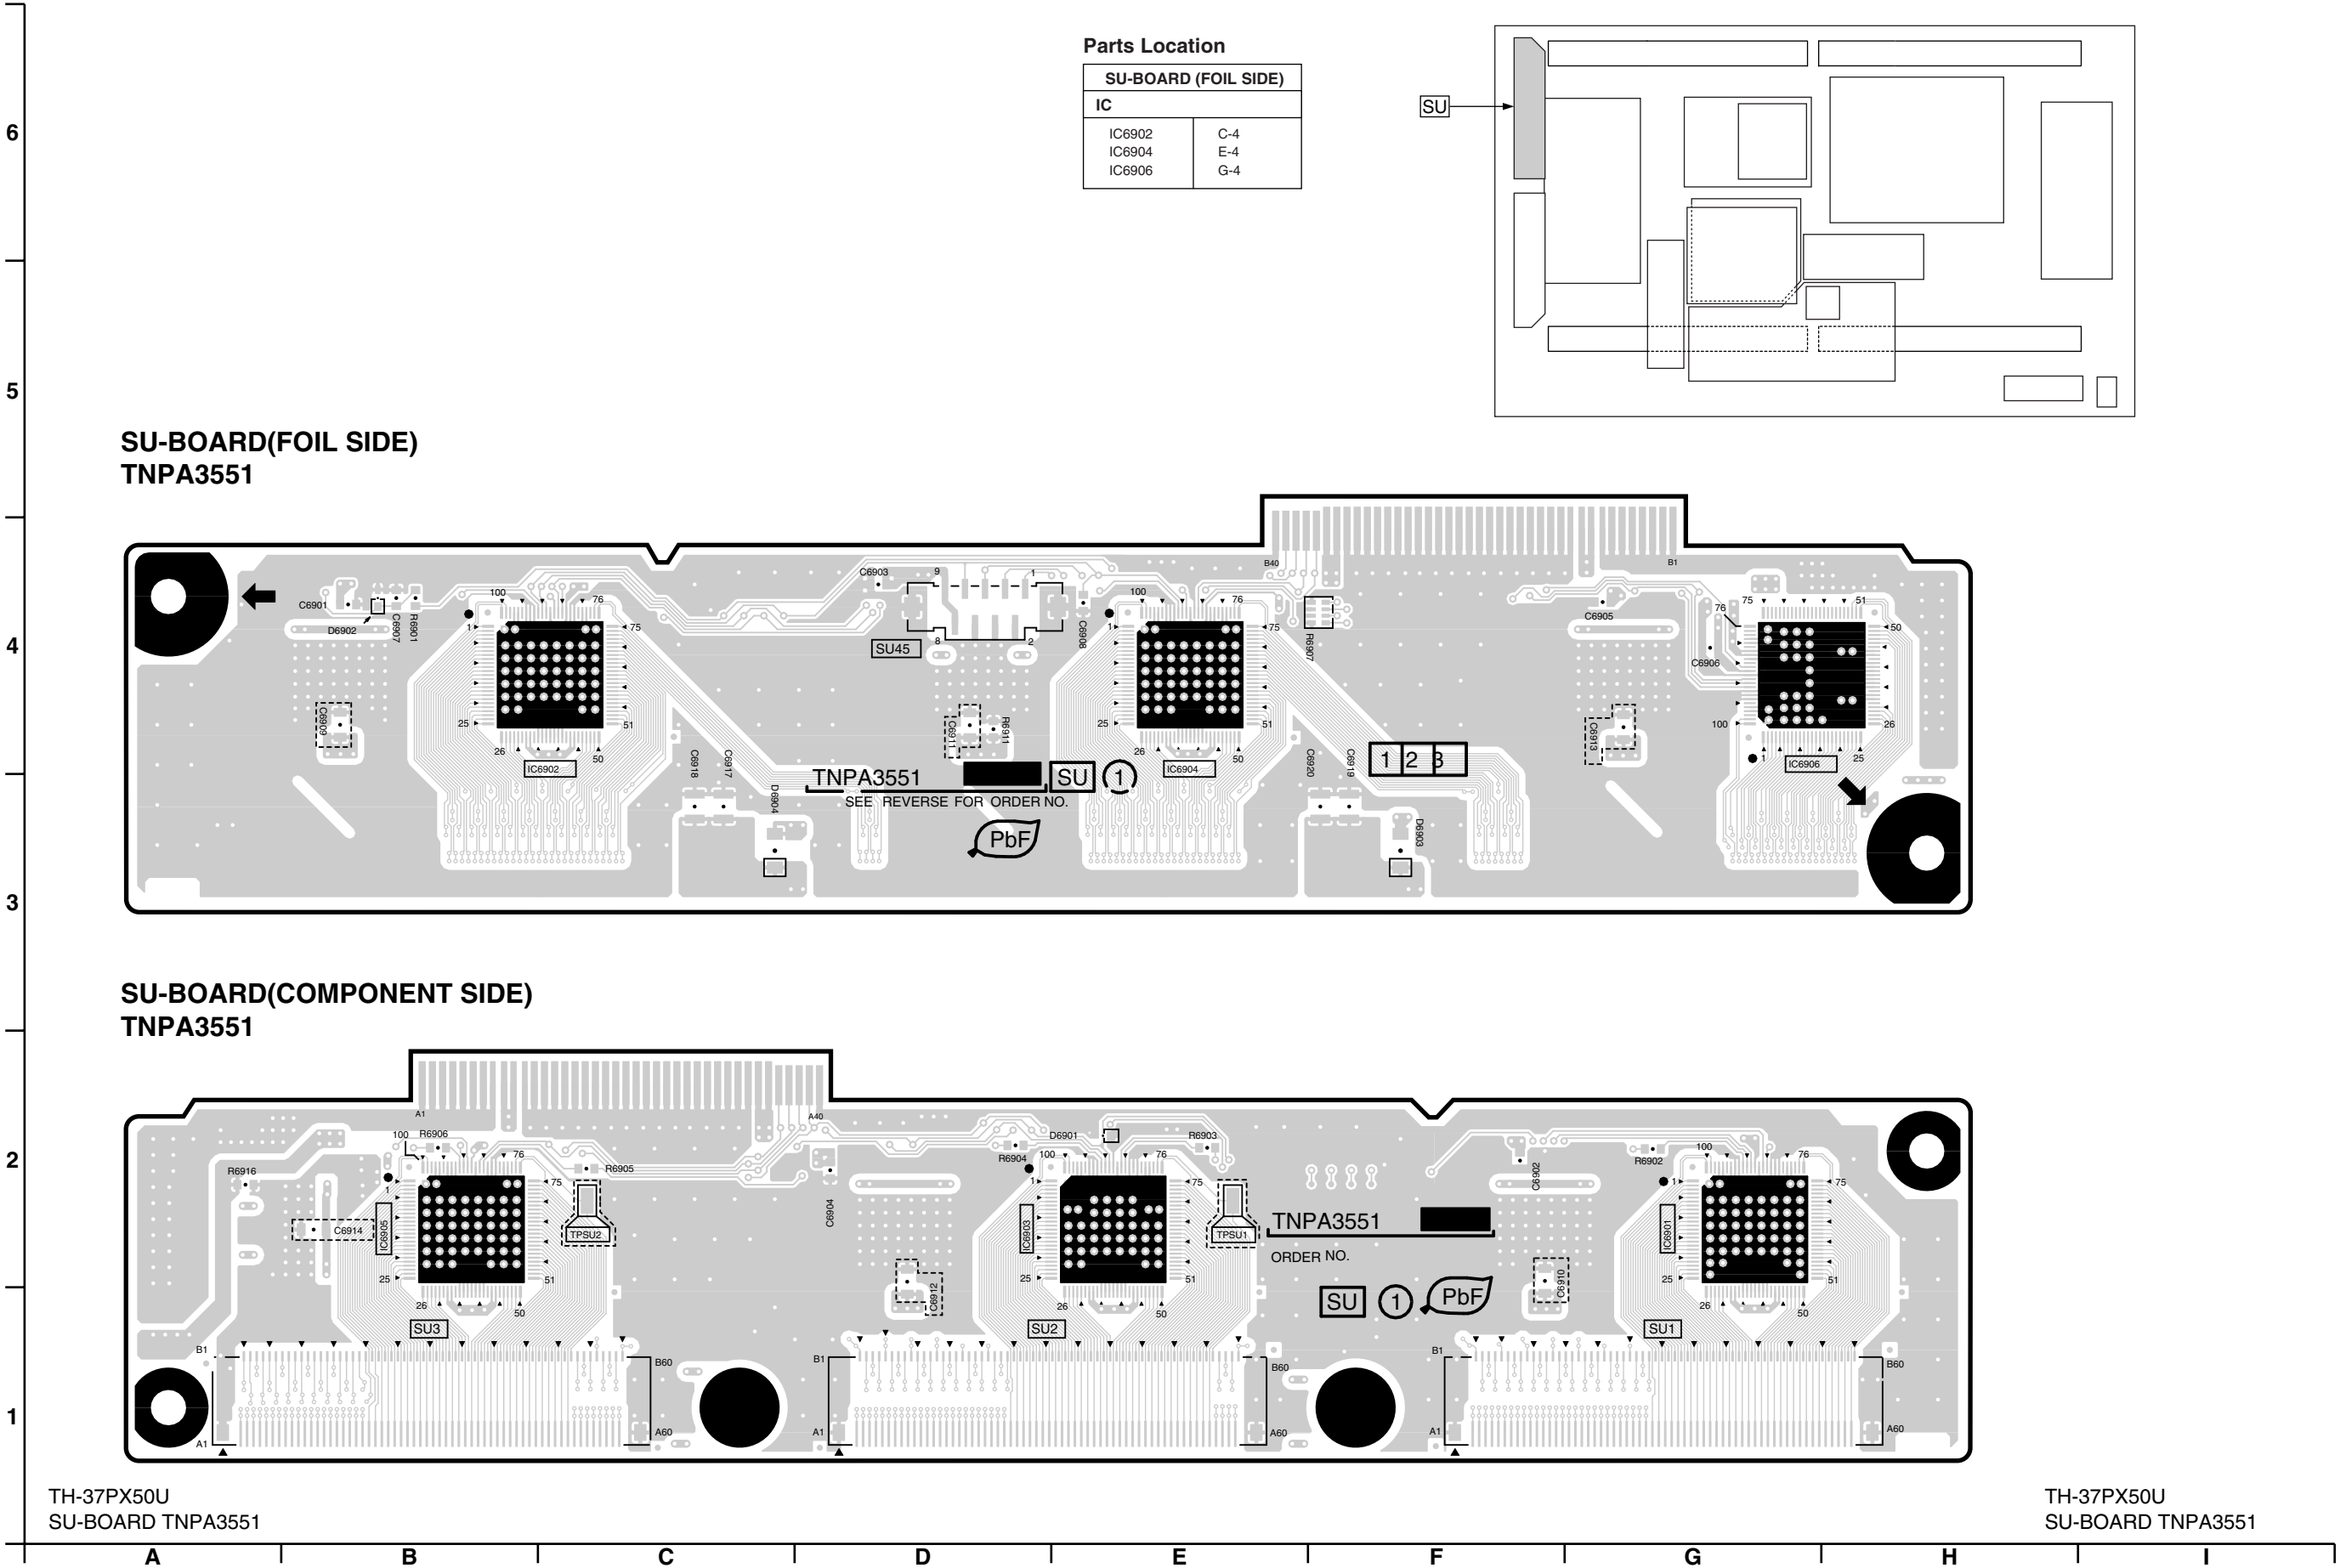


12.31. SU-Board (42inch)

Parts Location


SU-BOARD			
IC		TP	
IC6901	B-1	TPSU1	D-2
IC6902	C-2	TPSU2	F-2
IC6903	D-2		
IC6904	F-2		
IC6905	G-2		
IC6906	H-2		

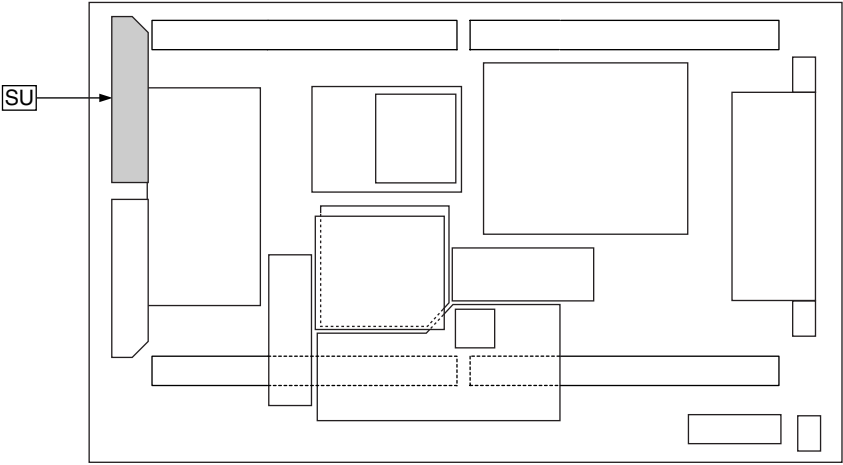

SU-BOARD(FOIL SIDE)
TNPA3189AB

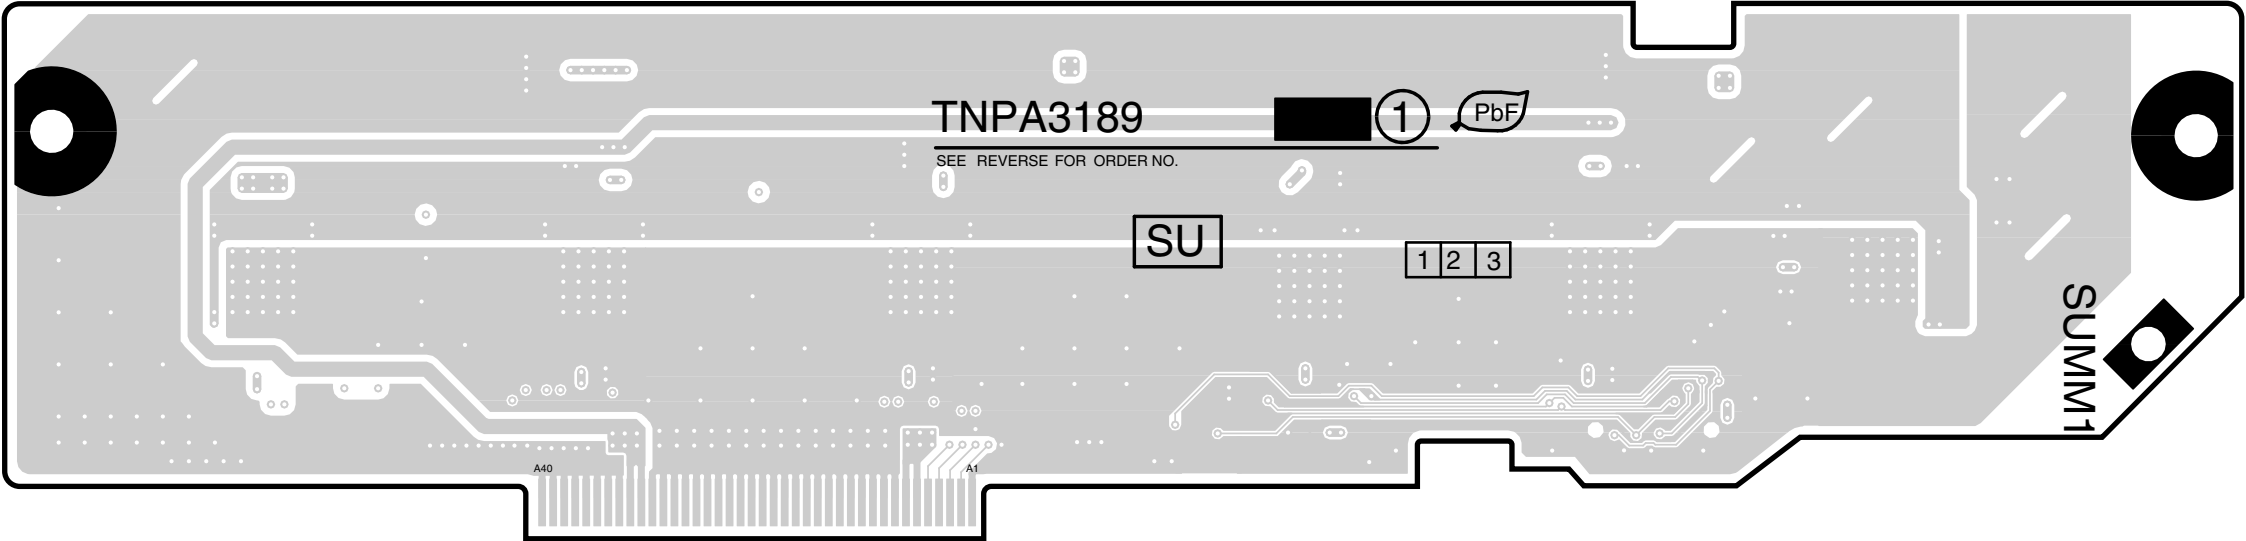


SU-BOARD(COMPONENT SIDE)
TNPA3189AB

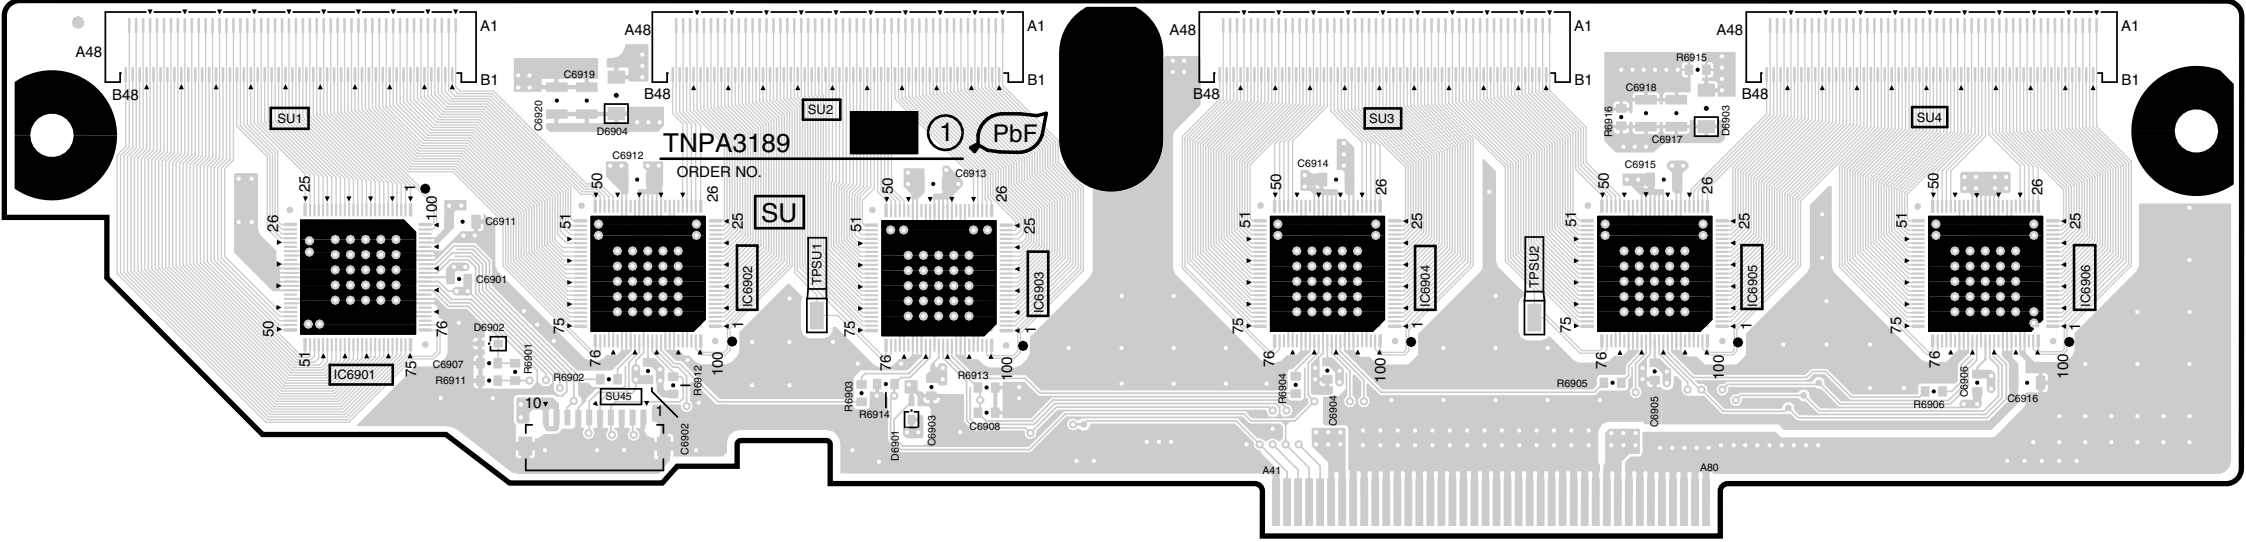

TH-42PX50U
SU-BOARD TNPA3189AB

TH-42PX50U
SU-BOARD TNPA3189AB


12.32. SU-Board (50inch)

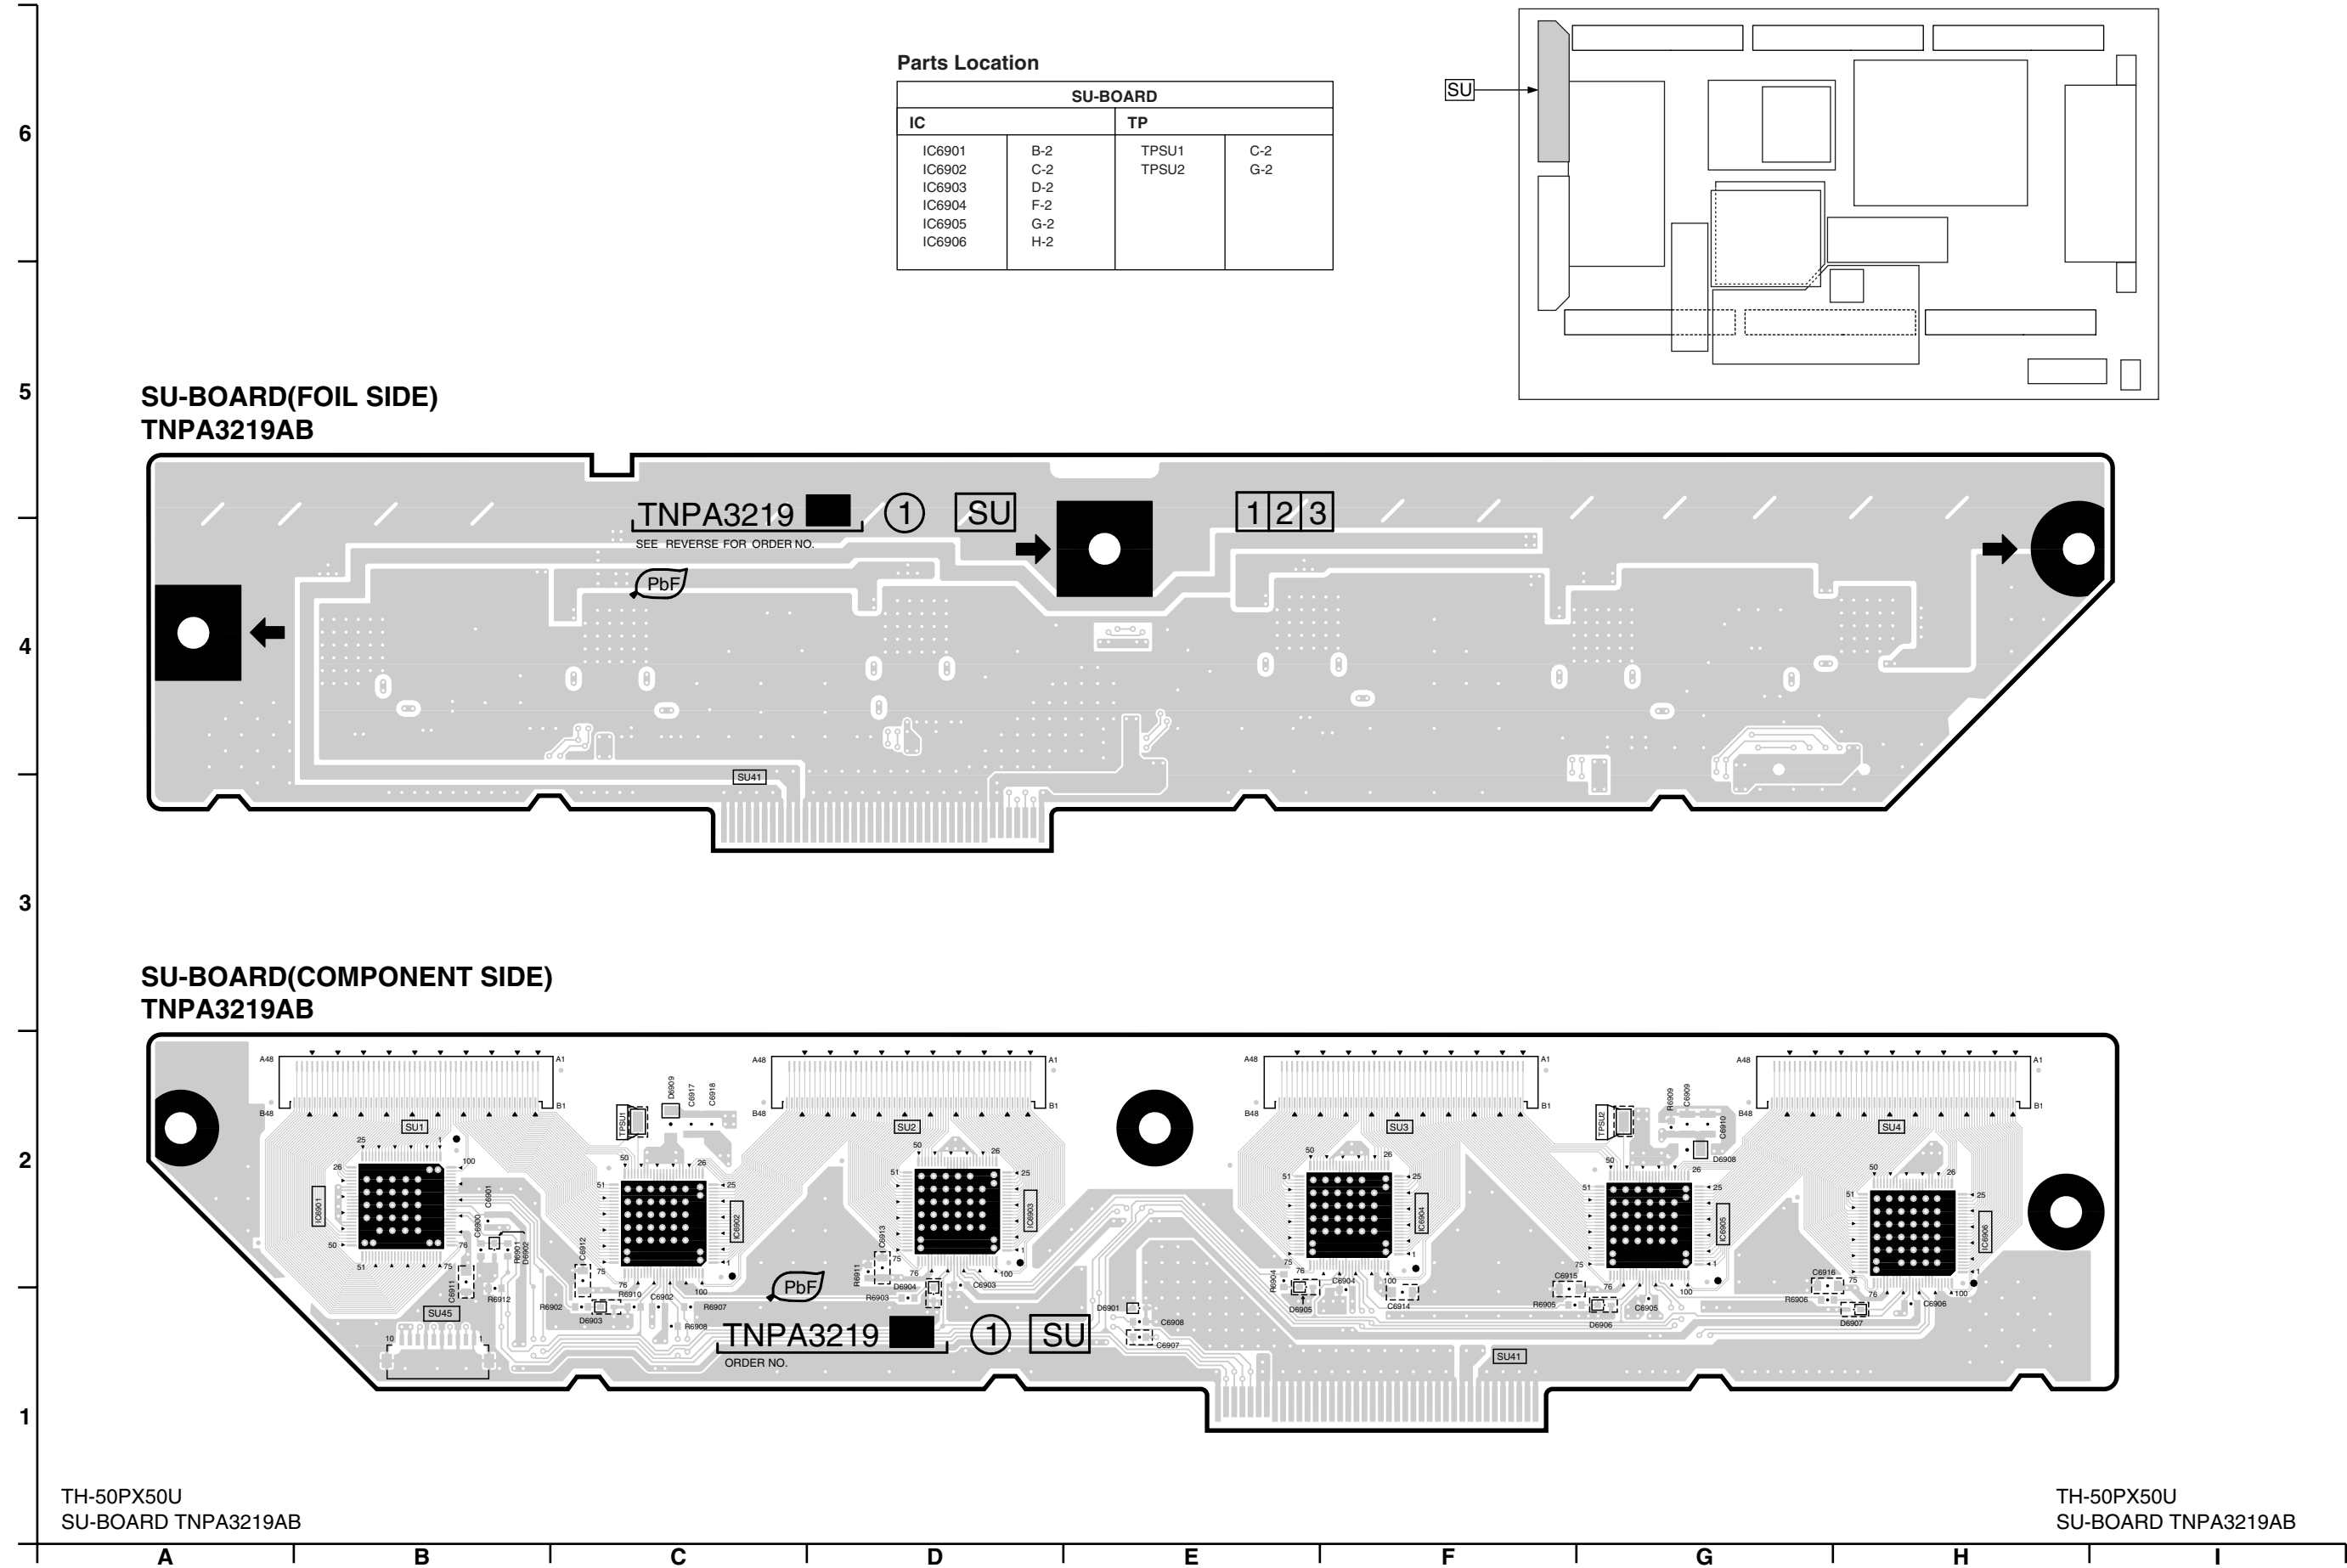


12.33. SD-Board (37inch)

Parts Location


SD-BOARD			
IC		TP	
IC6907	B-2	TPSD1	D-2
IC6908	F-4	TPSD2	F-2
IC6909	D-2		
IC6910	D-4		
IC6911	G-2		
IC6912	B-4		

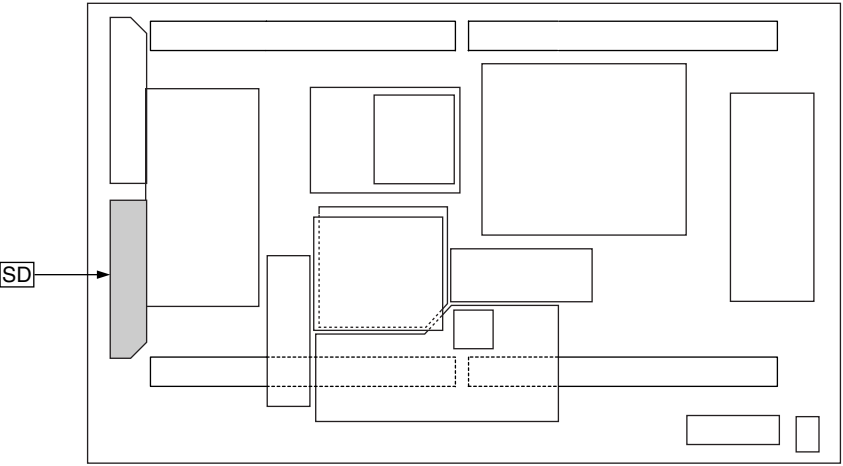


SD-BOARD(FOIL SIDE)
TNPA3552

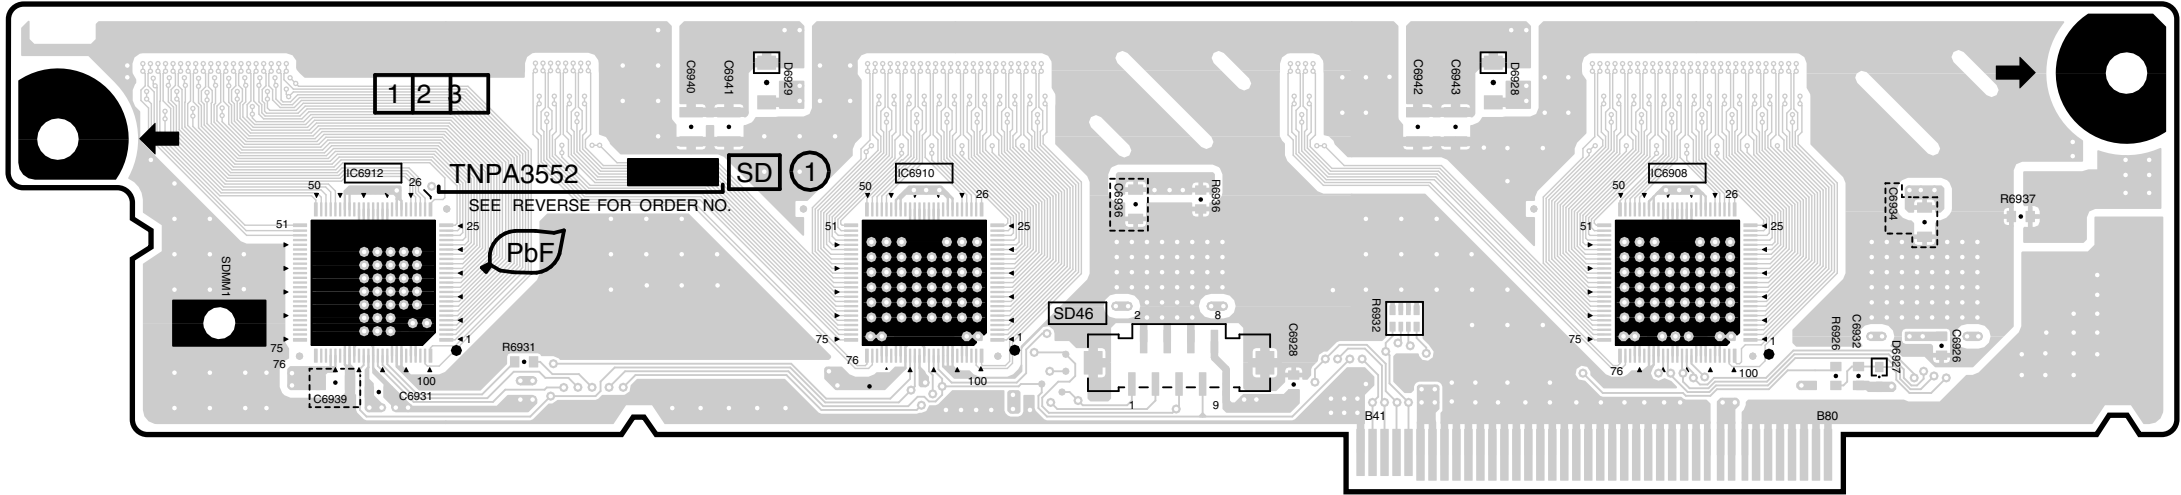

SD-BOARD(COMPONENT SIDE)
TNPA3552

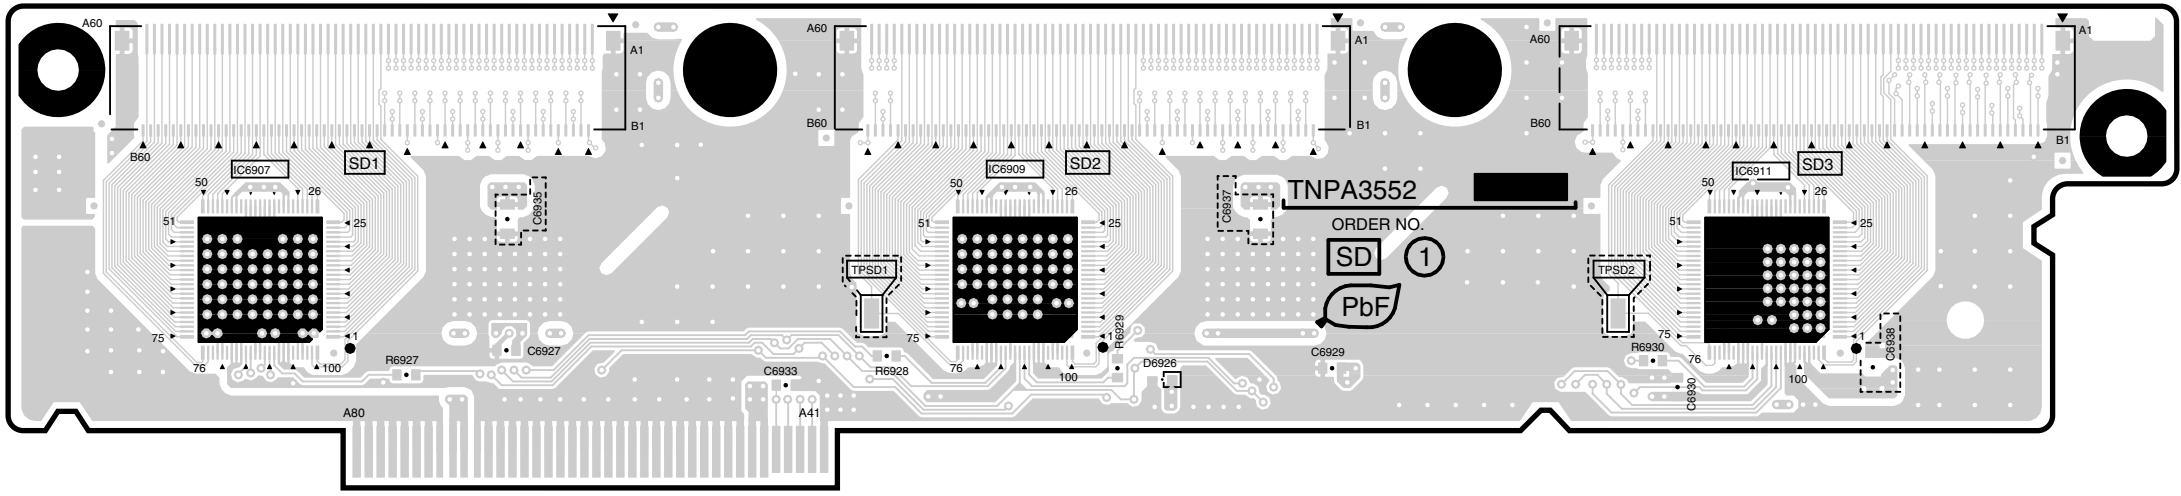


12.34. SD-Board (42inch)

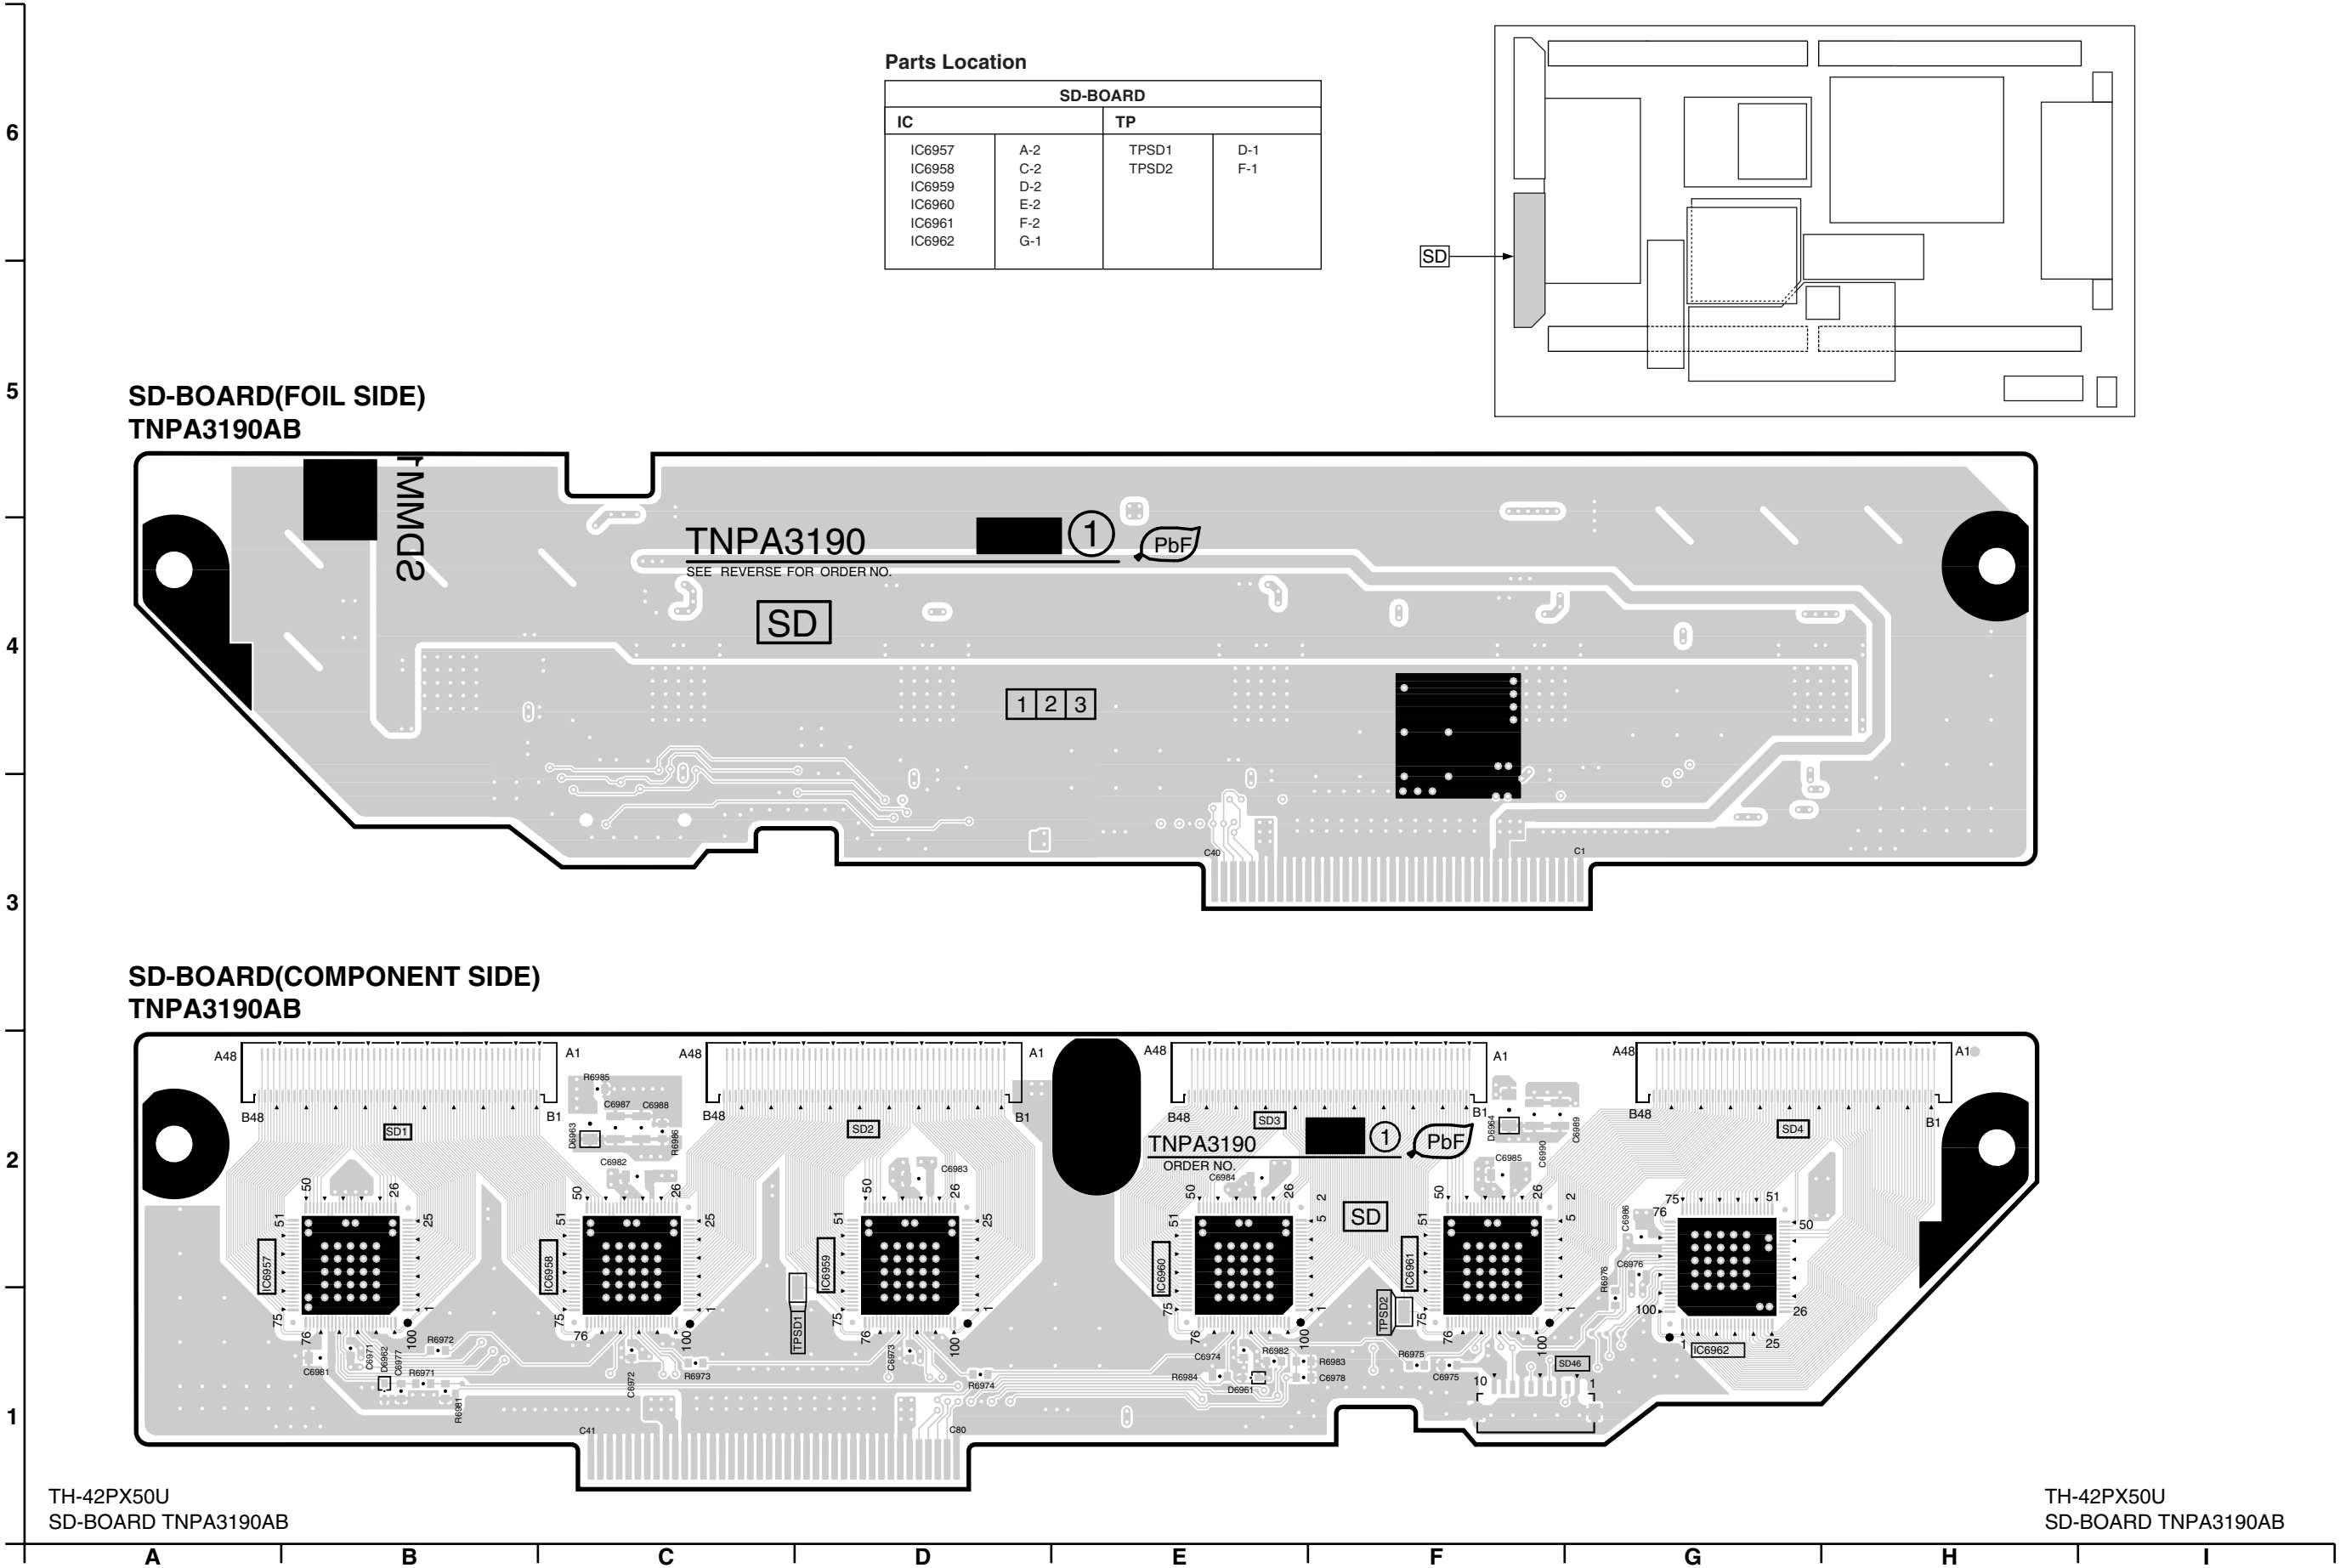


12.35. SD-Board (50inch)

Parts Location


SD-BOARD			
IC		TP	
IC6911	A-2	TPSD1	C-2
IC6912	C-2	TPSD2	F-2
IC6913	D-2		
IC6914	E-2		
IC6915	F-2		
IC6916	H-2		

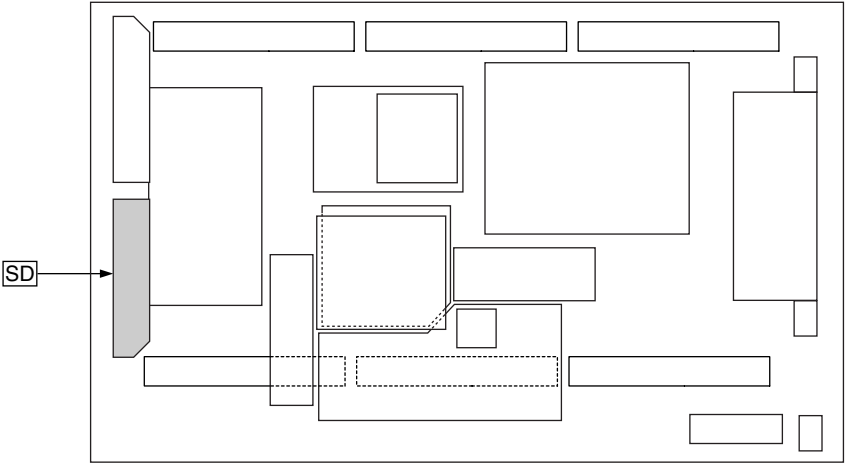


SD-BOARD(FOIL SIDE)
TNPA3220AB

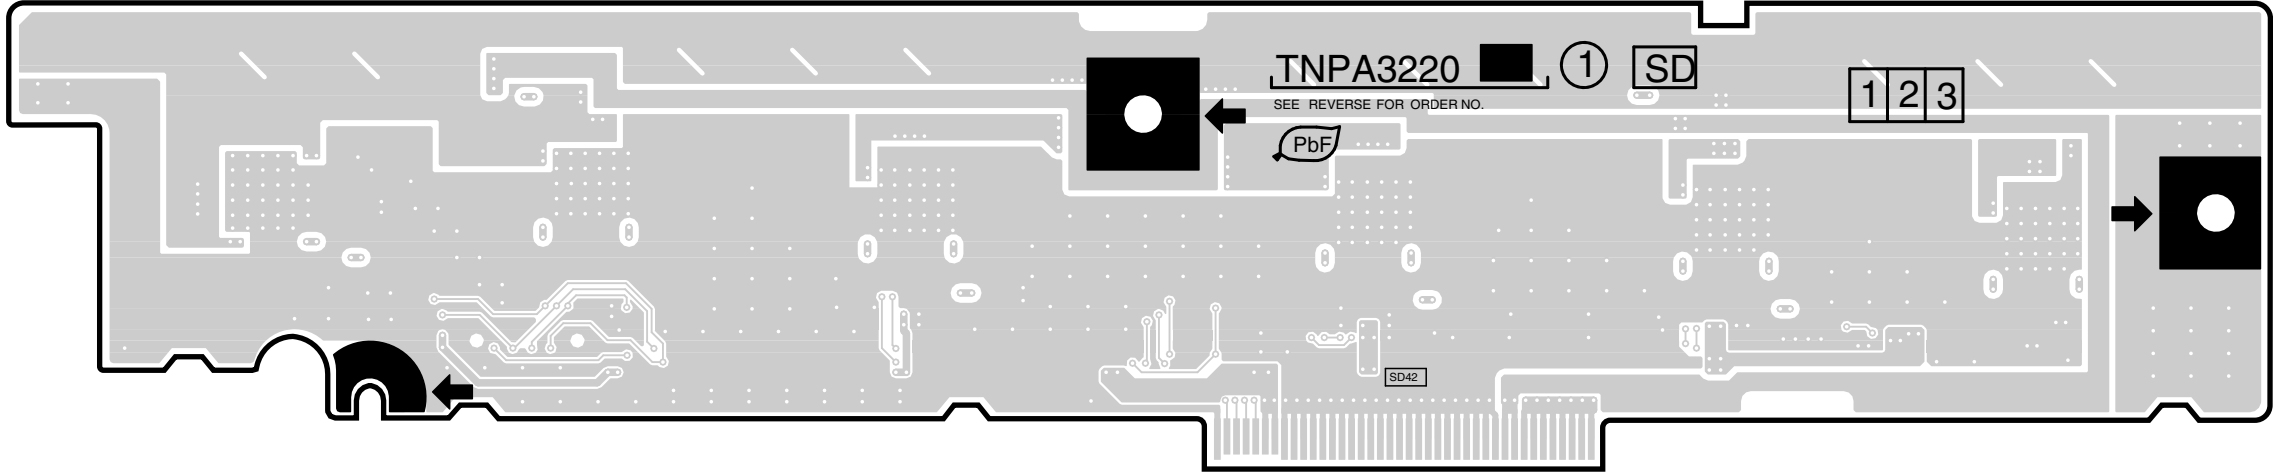

SD-BOARD(COMPONENT SIDE)
TNPA3220AB

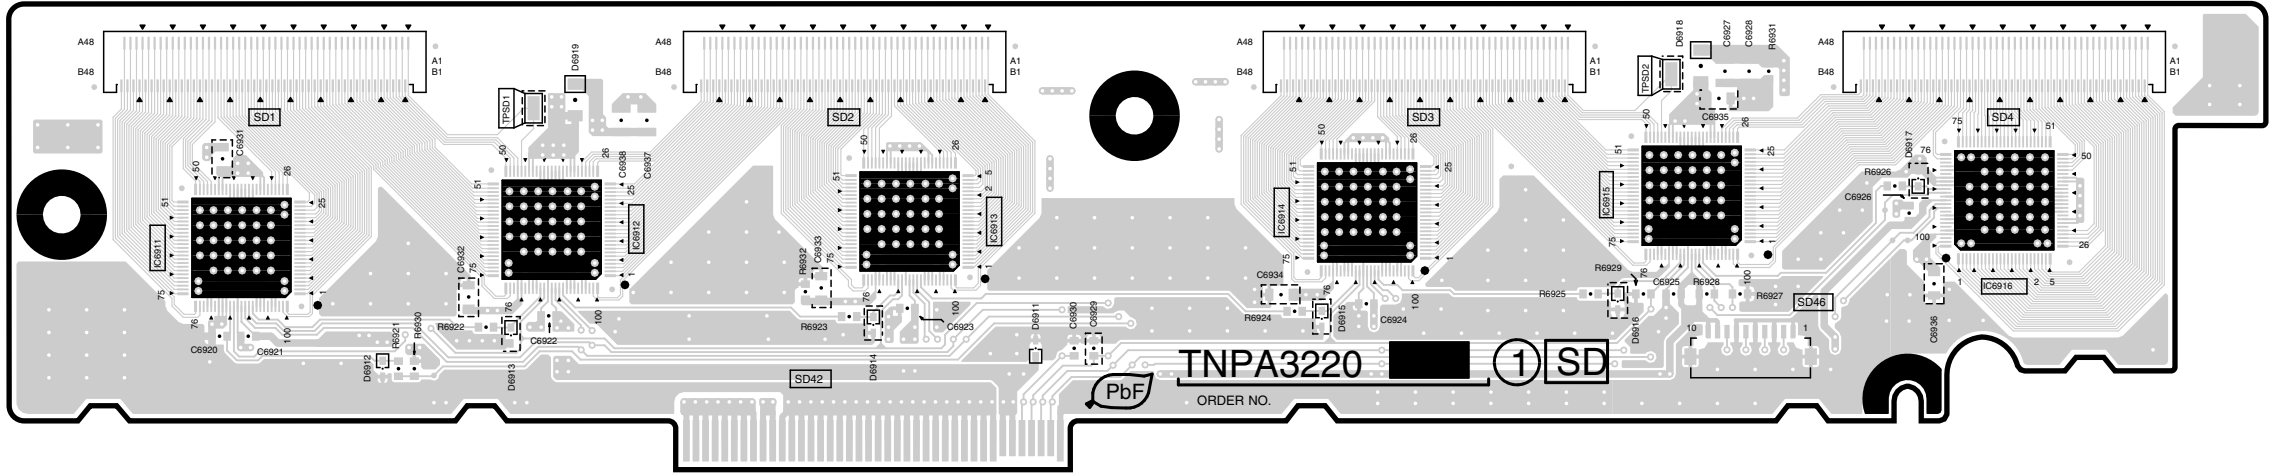


12.36. SS-Board (37inch)

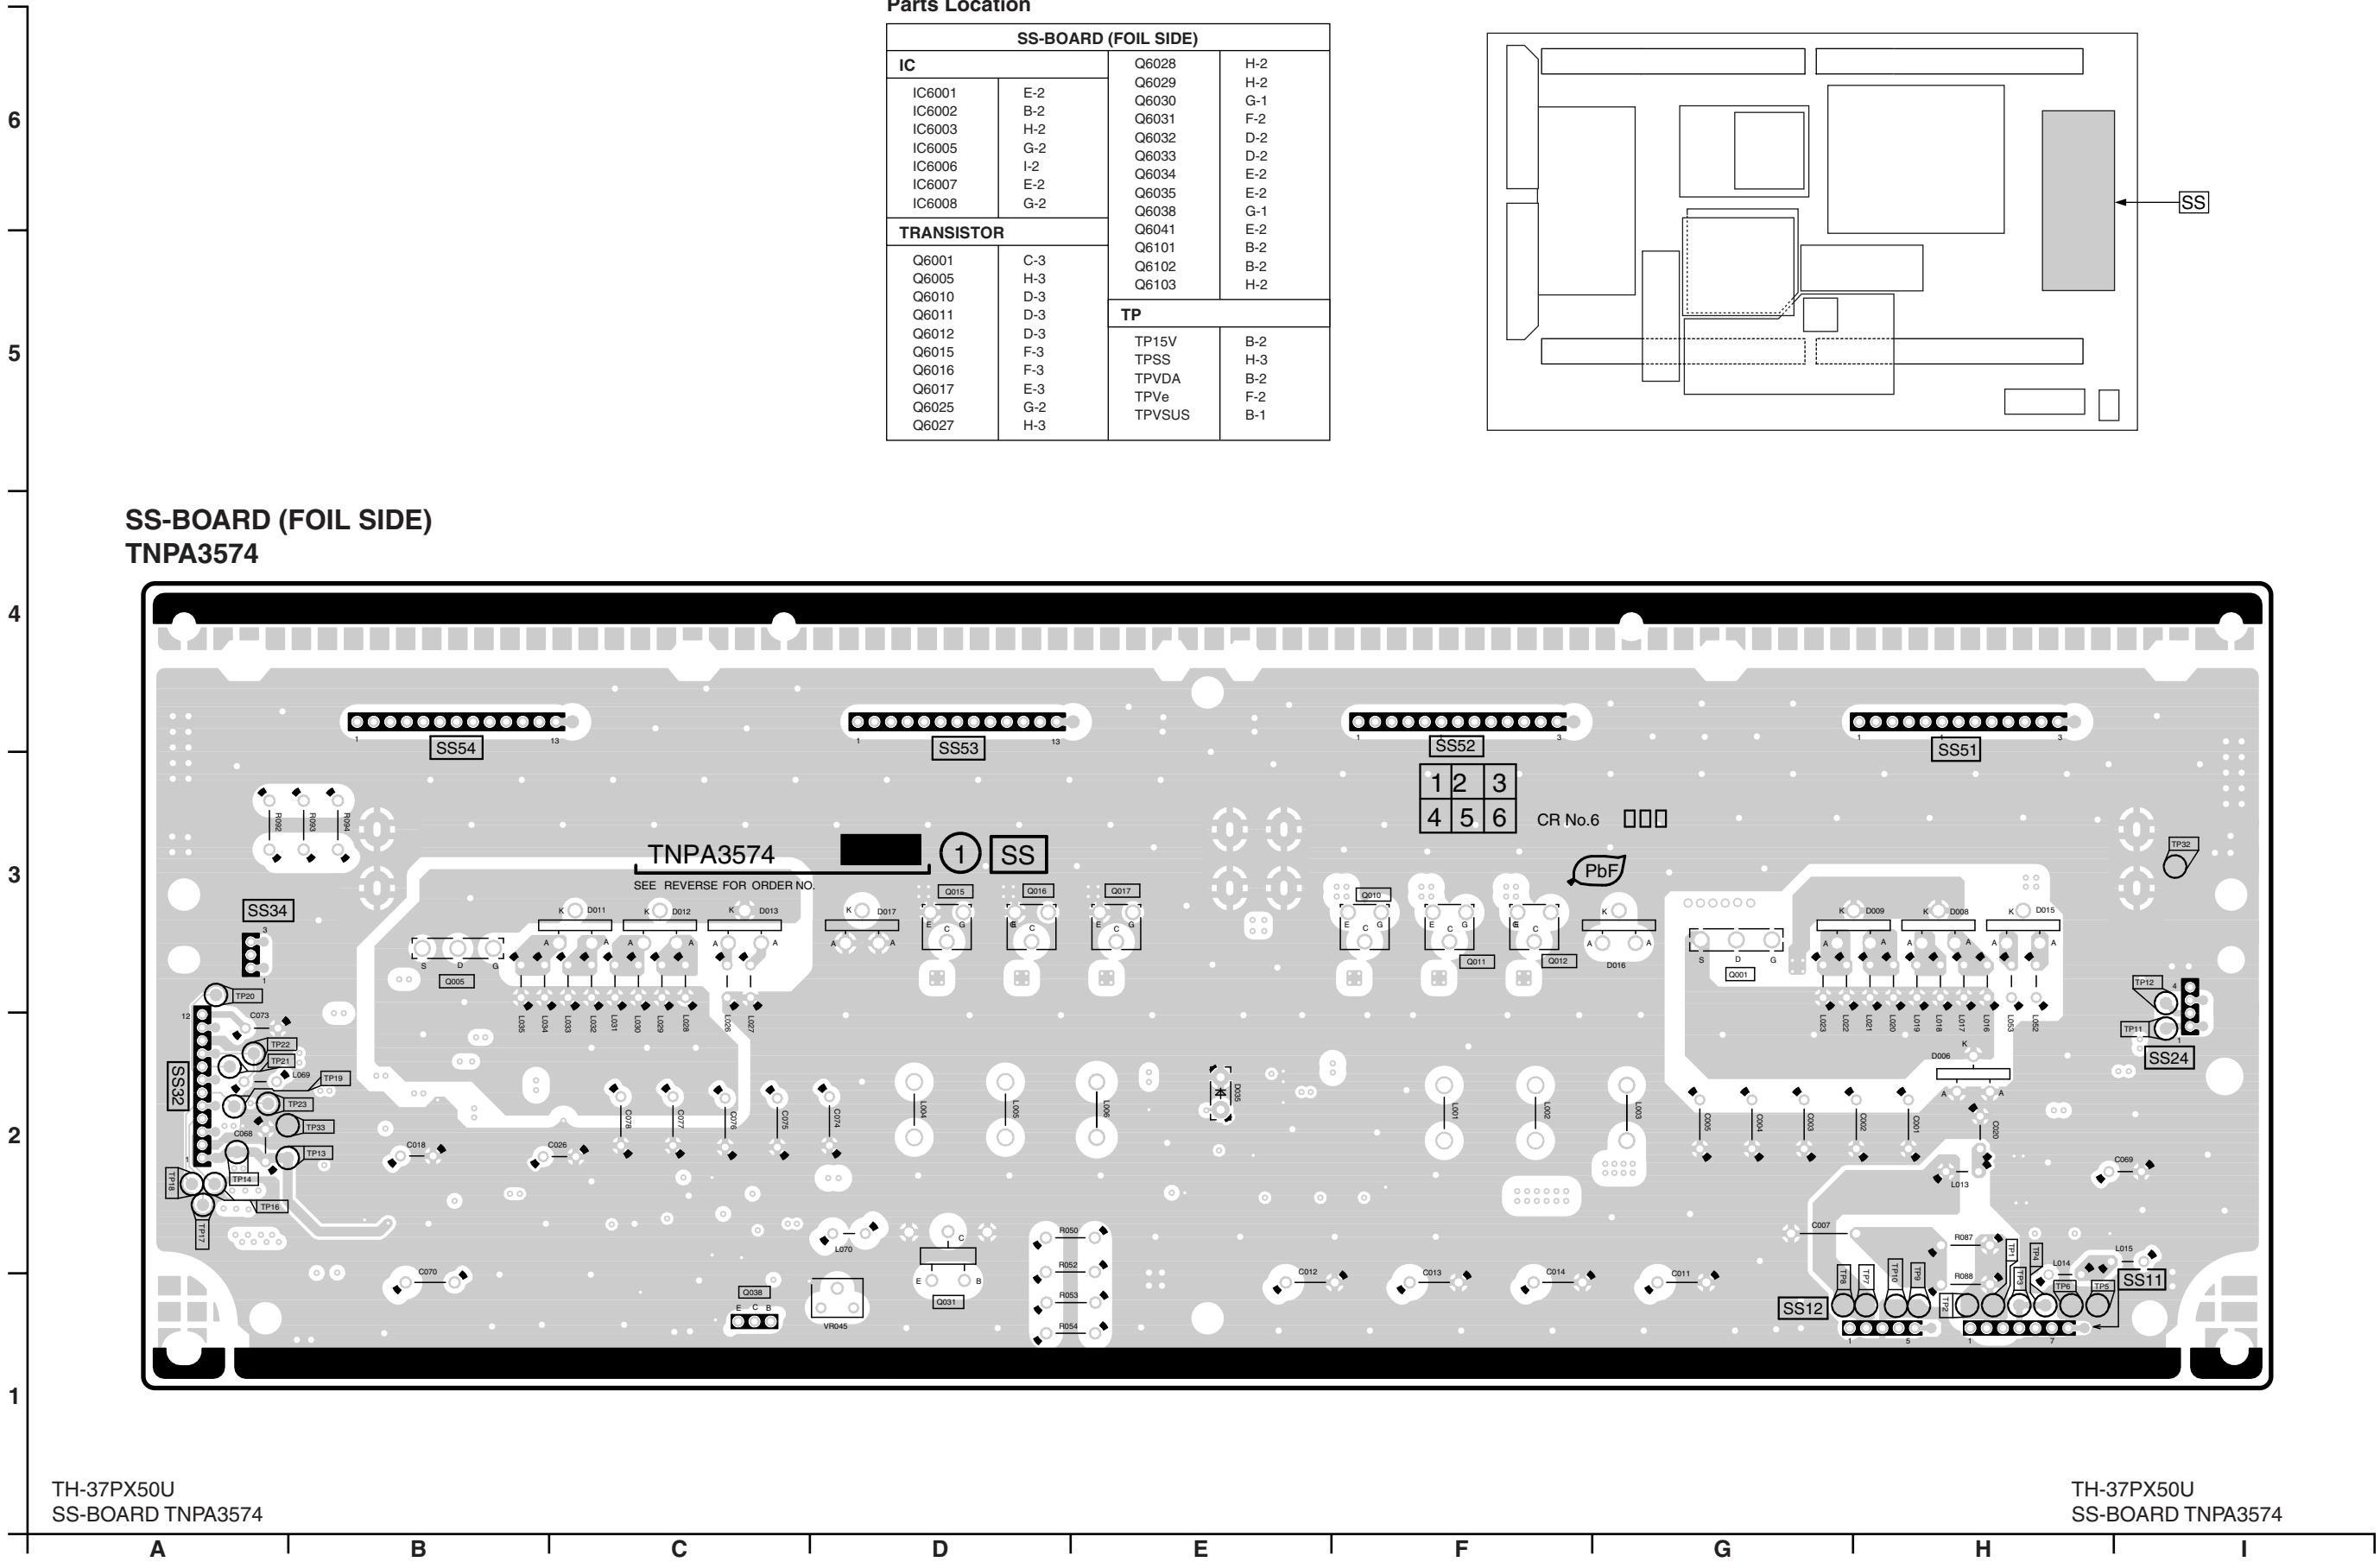


Parts Location


SS-BOARD (COMPONENT SIDE)			
TRANSISTOR		TP7	H-1
Q6001	G-3	TP8	G-1
Q6005	B-3	TP9	H-1
Q6010	F-3	TP10	H-1
Q6011	F-3	TP11	I-2
Q6012	F-3	TP12	I-3
Q6015	D-3	TP13	A-2
Q6016	D-3	TP14	A-2
Q6017	E-3	TP16	A-2
Q6031	D-2	TP17	A-2
Q6038	C-1	TP18	A-2
TP		TP19	A-2
TP1	H-1	TP20	A-3
TP2	H-1	TP21	A-2
TP3	H-1	TP22	A-2
TP4	H-1	TP23	A-2
TP5	H-1	TP32	I-3
TP6	H-1	TP33	A-2

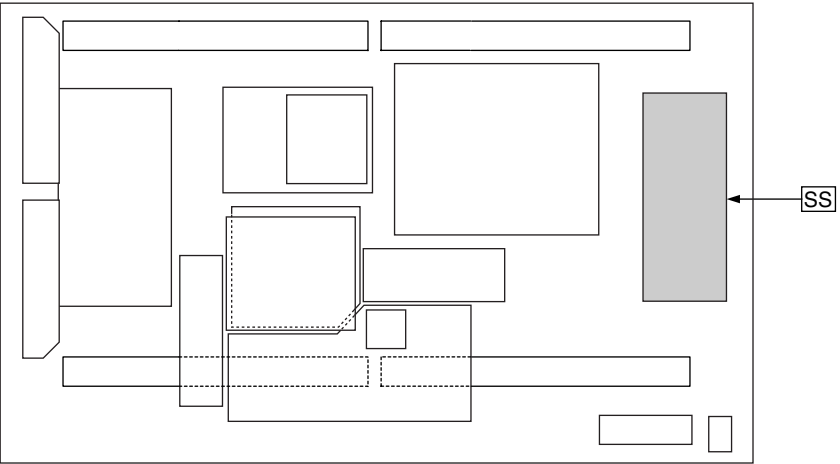


SS-BOARD (COMPONENT SIDE)
TNPA3574

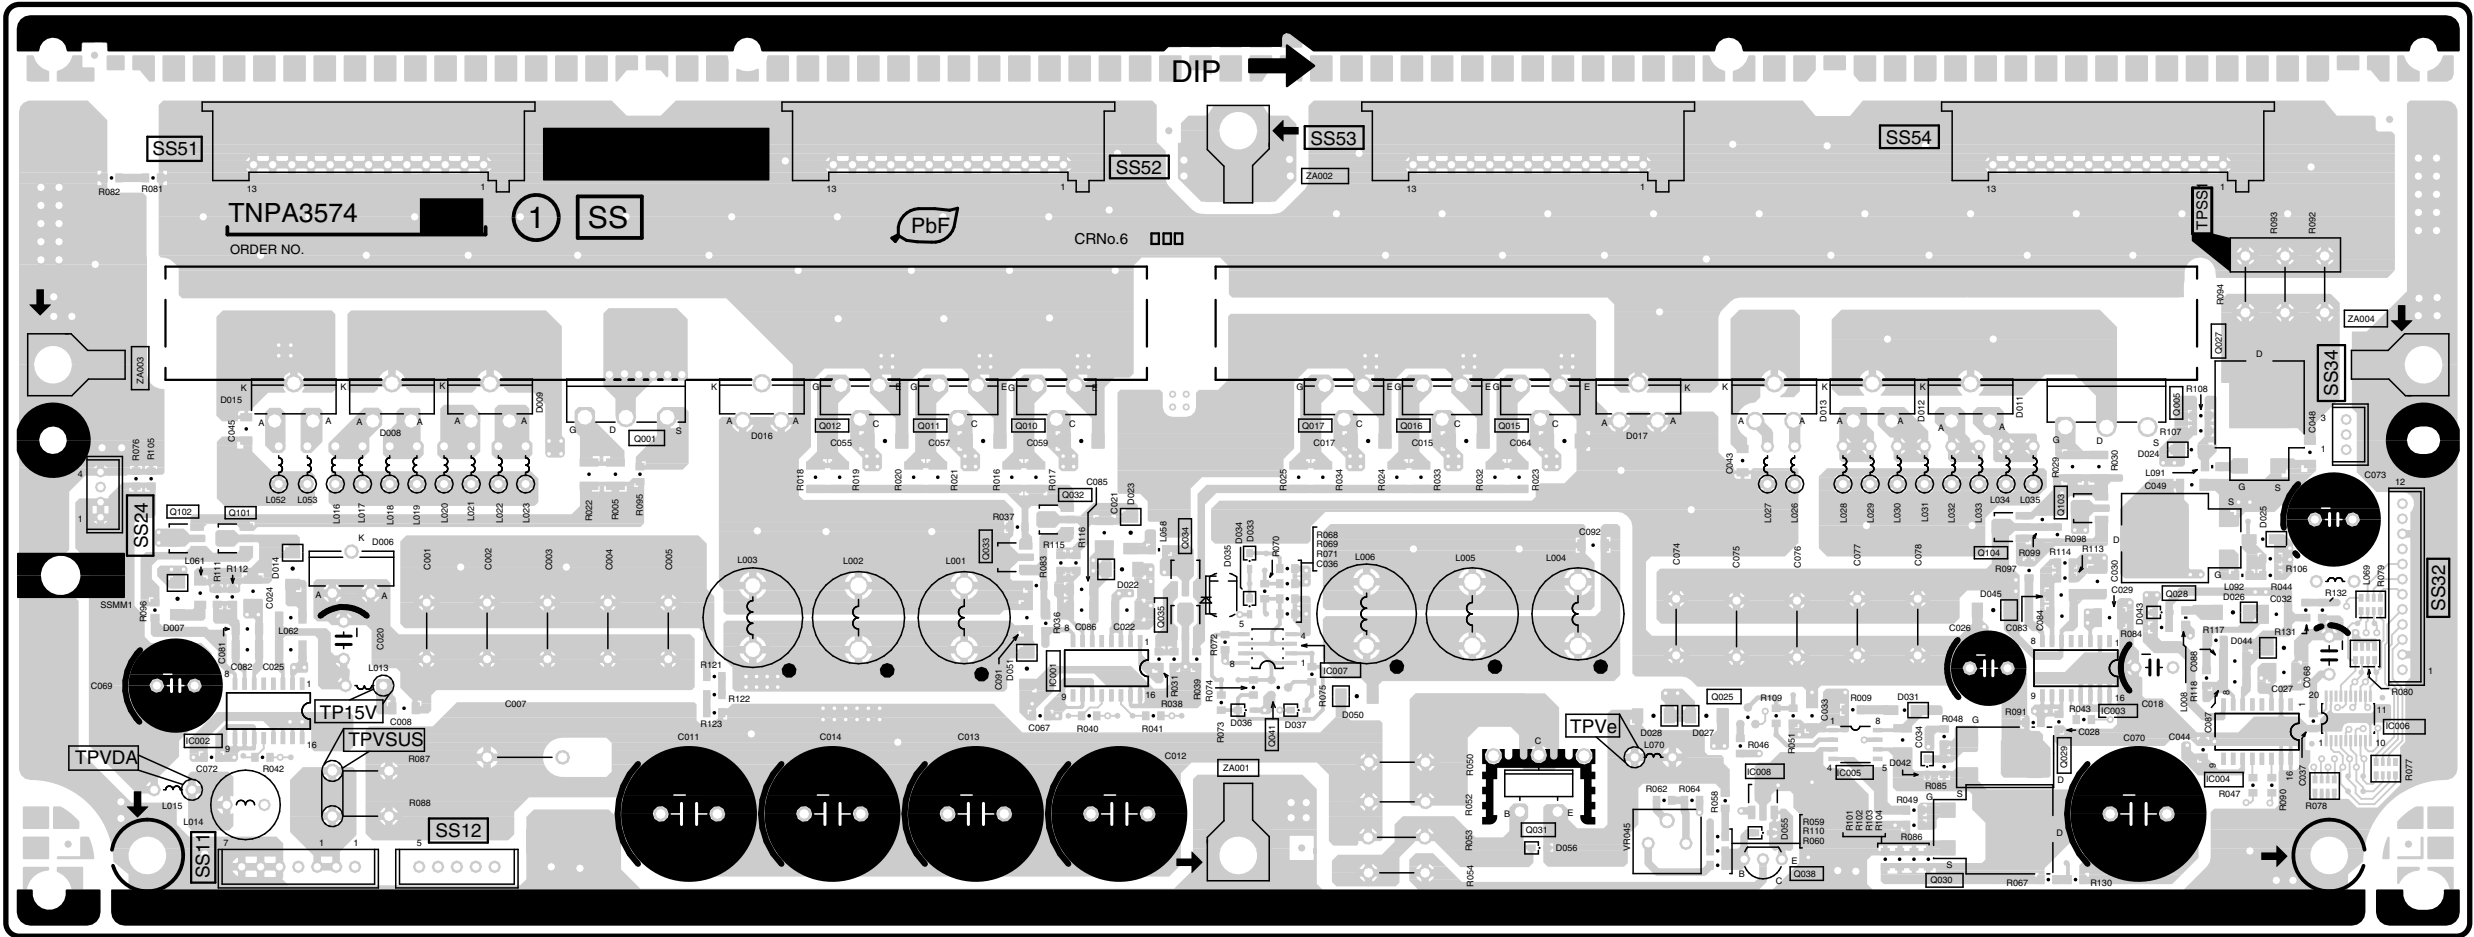

SS3-BOARD (COMPONENT SIDE)
TNPA3676

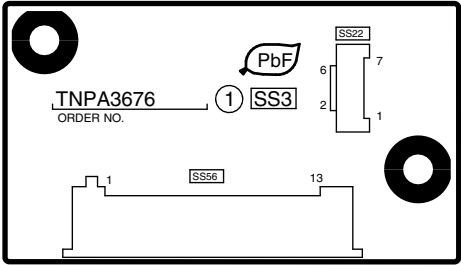


TNPA3558

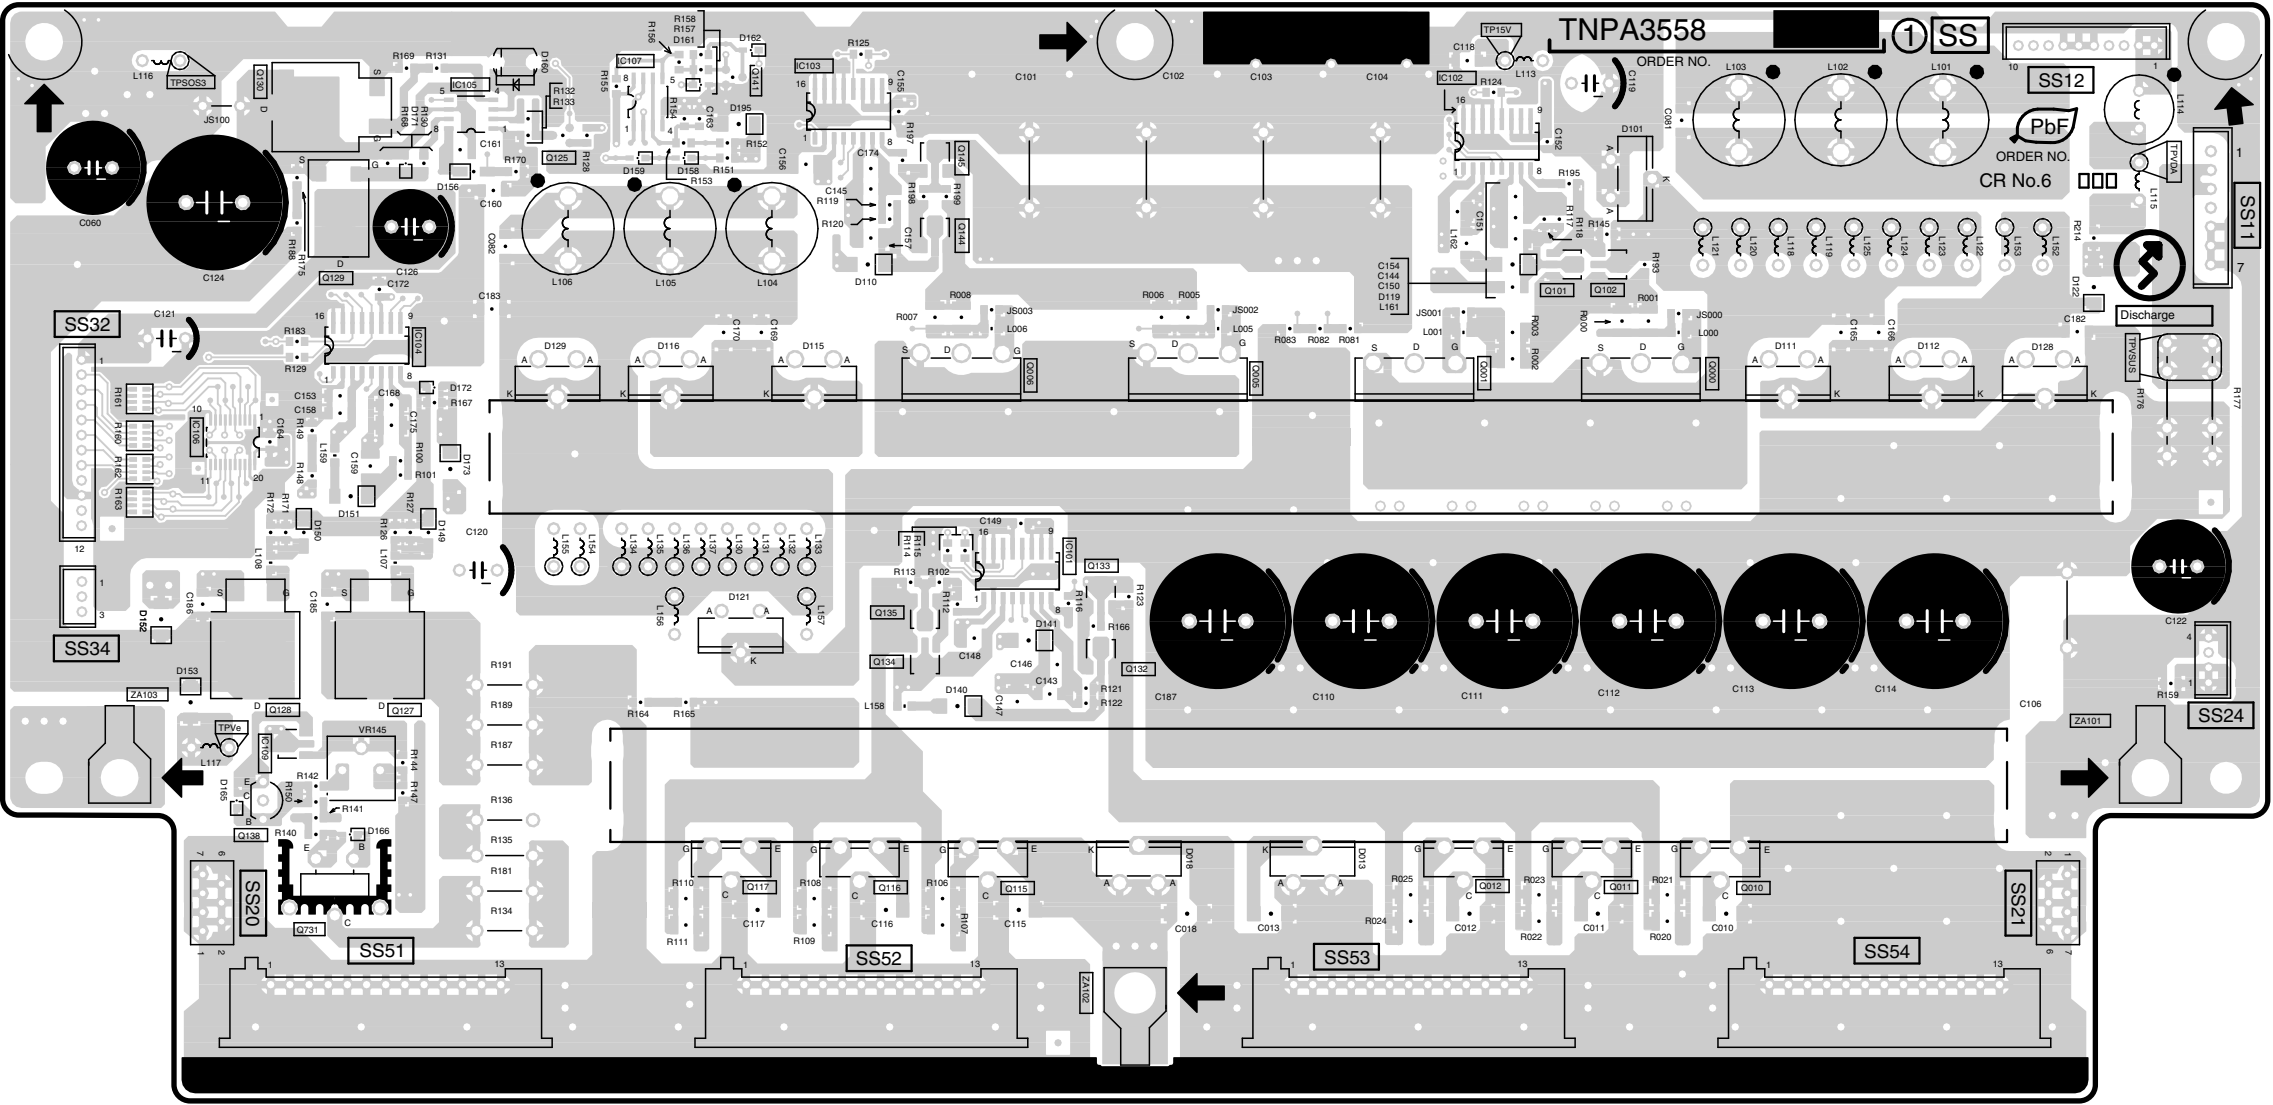

SS-BOARD (COMPONENT SIDE)


TRANSISTOR			
Q6000	C-4	TP6	A-4
Q6001	D-4	TP7	B-5
Q6005	E-4	TP8	D-5
Q6006	E-4	TP9	B-5
Q6010	C-2	TP10	C-4
Q6011	C-2	TP11	B-4
Q6012	D-2	TP12	A-2
Q6115	E-2	TP13	H-4
Q6116	F-2	TP14	H-4
Q6117	F-2	TP15	H-4
Q6138	H-2	TP16	H-4
Q6731	G-2	TP17	H-3
TP		TP18	H-3
TP1	A-4	TP19	H-3
TP2	A-4	TP20	H-3
TP3	A-4	TP21	H-3
TP4	H-3	TP22	H-3
TP5	A-4	TP23	H-3
		TP32	A-3
		TP33	H-3

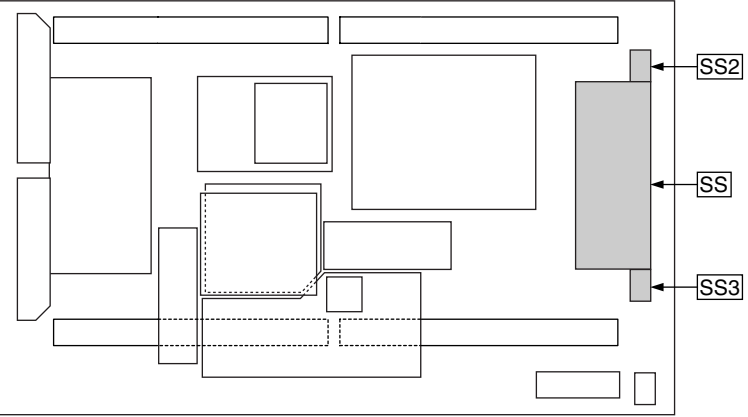


TH-42PX50U
SS-BOARD TNPA3558
SS2-BOARD TNPA3675
SS3-BOARD TNPA3676

12.38. SS, SS2 and SS3-Board (50inch)

SS2-BOARD (FOIL SIDE)
TNPA3559

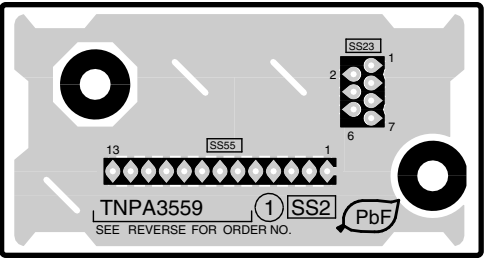


SS3-BOARD (FOIL SIDE)
TNPA3560

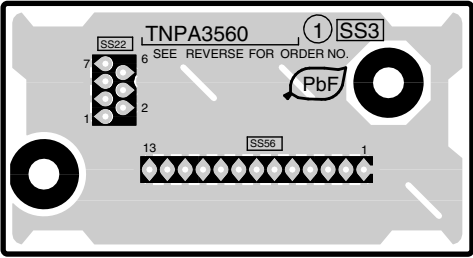


Parts Location

SS-BOARD (FOIL SIDE)					
TRANSISTOR		TP			
Q6001	C-3	TP1	B-4	TP17	H-3
Q6000	D-3	TP2	B-5	TP18	H-3
Q6020	E-3	TP3	B-5	TP19	H-3
Q6021	E-3	TP4	B-5	TP20	H-3
Q6102	C-2	TP5	B-5	TP21	H-3
Q6101	C-2	TP6	B-5	TP22	H-3
Q6100	D-2	TP7	B-5	TP23	H-3
Q6140	D-2	TP8	B-4	TP24	E-4
Q6141	E-2	TP9	A-4	TP25	A-2
Q6142	E-2	TP10	A-4	TP26	B-1
Q6143	E-2	TP11	A-3	TP27	F-1
Q6240	G-4	TP12	B-4	TP28	H-1
Q6256	G-2	TP13	H-3	TP29	E-1
Q6257	G-1	TP14	H-3	TP30	F-4
		TP15	H-3	TP31	H-2
		TP16	H-3	TP32	H-5
				TP33	B-4
				TP6904	A-3
				TP6905	A-3
				TP6910	H-4
				TP6911	H-4
				TP6913	H-3
				TP6914	H-3
				TP6915	H-3
				TP6916	A-3
				TP6917	A-3
				TP6918	H-3
				TP6919	H-3
				TP6920	H-3
				TP6921	H-3
				TP6922	H-3
				TP6923	H-3

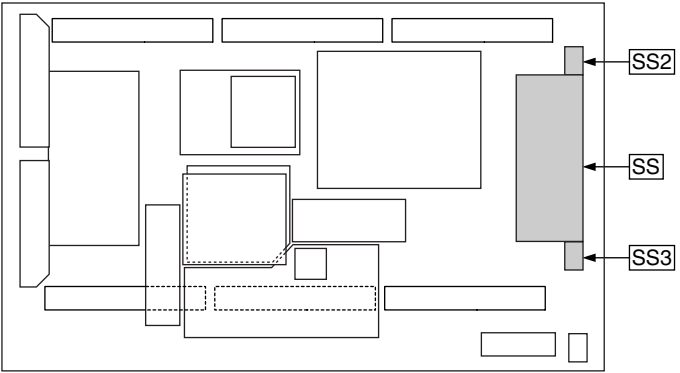

SS-BOARD (FOIL SIDE)
TNPA3568


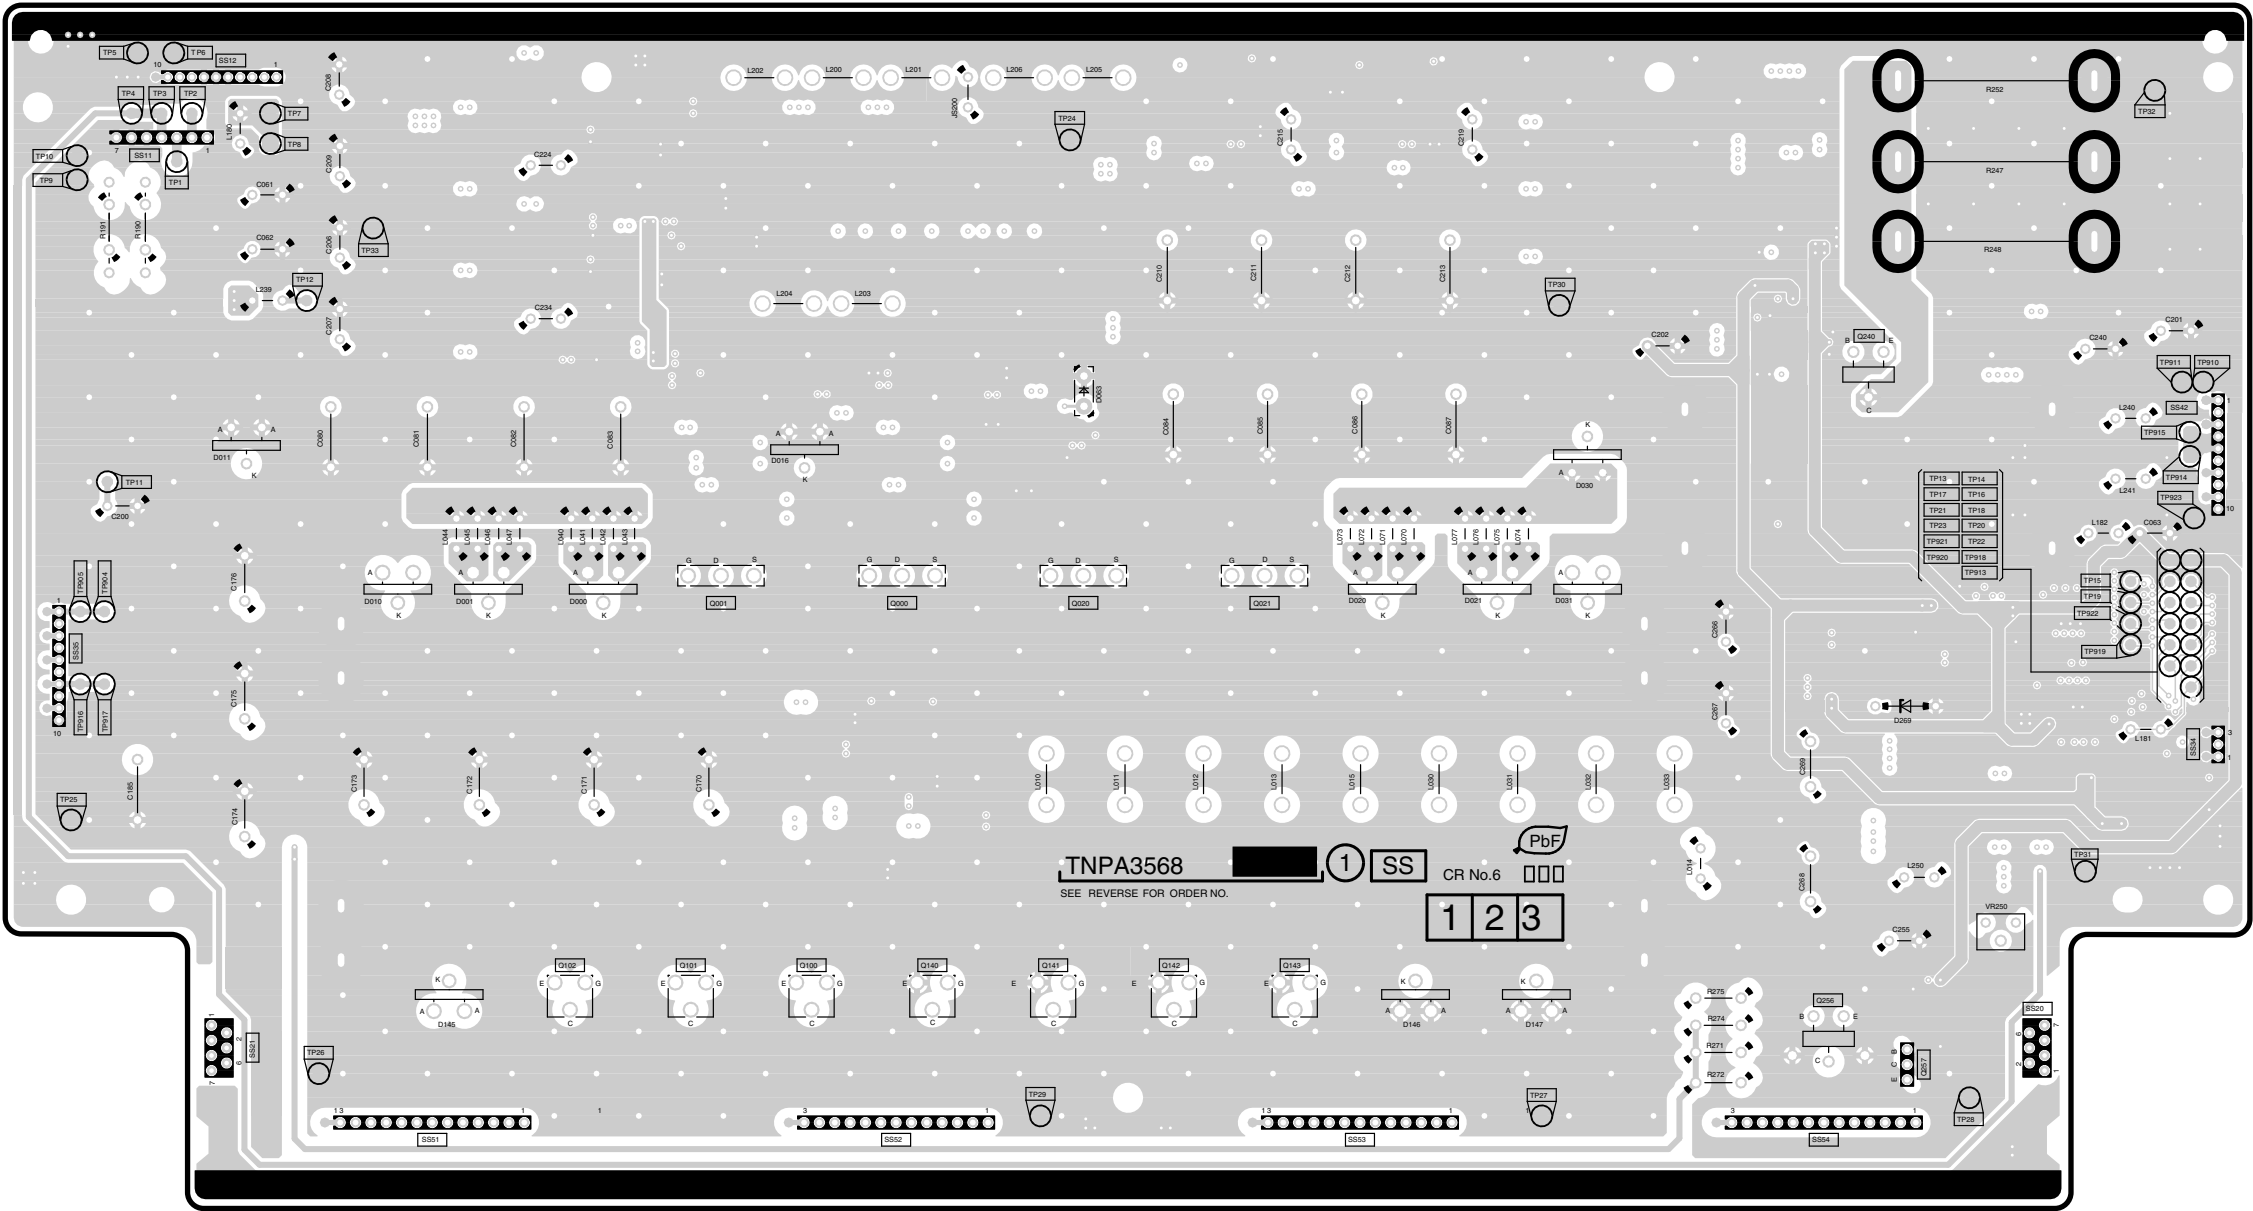


TH-50PX50U
SS-BOARD TNPA3568
SS2-BOARD TNPA3559
SS3-BOARD TNPA3560


TH-50PX50U
SS-BOARD TNPA3568
SS2-BOARD TNPA3559
SS3-BOARD TNPA3560

SS3-BOARD (COMPONENT SIDE)


TNPA3560

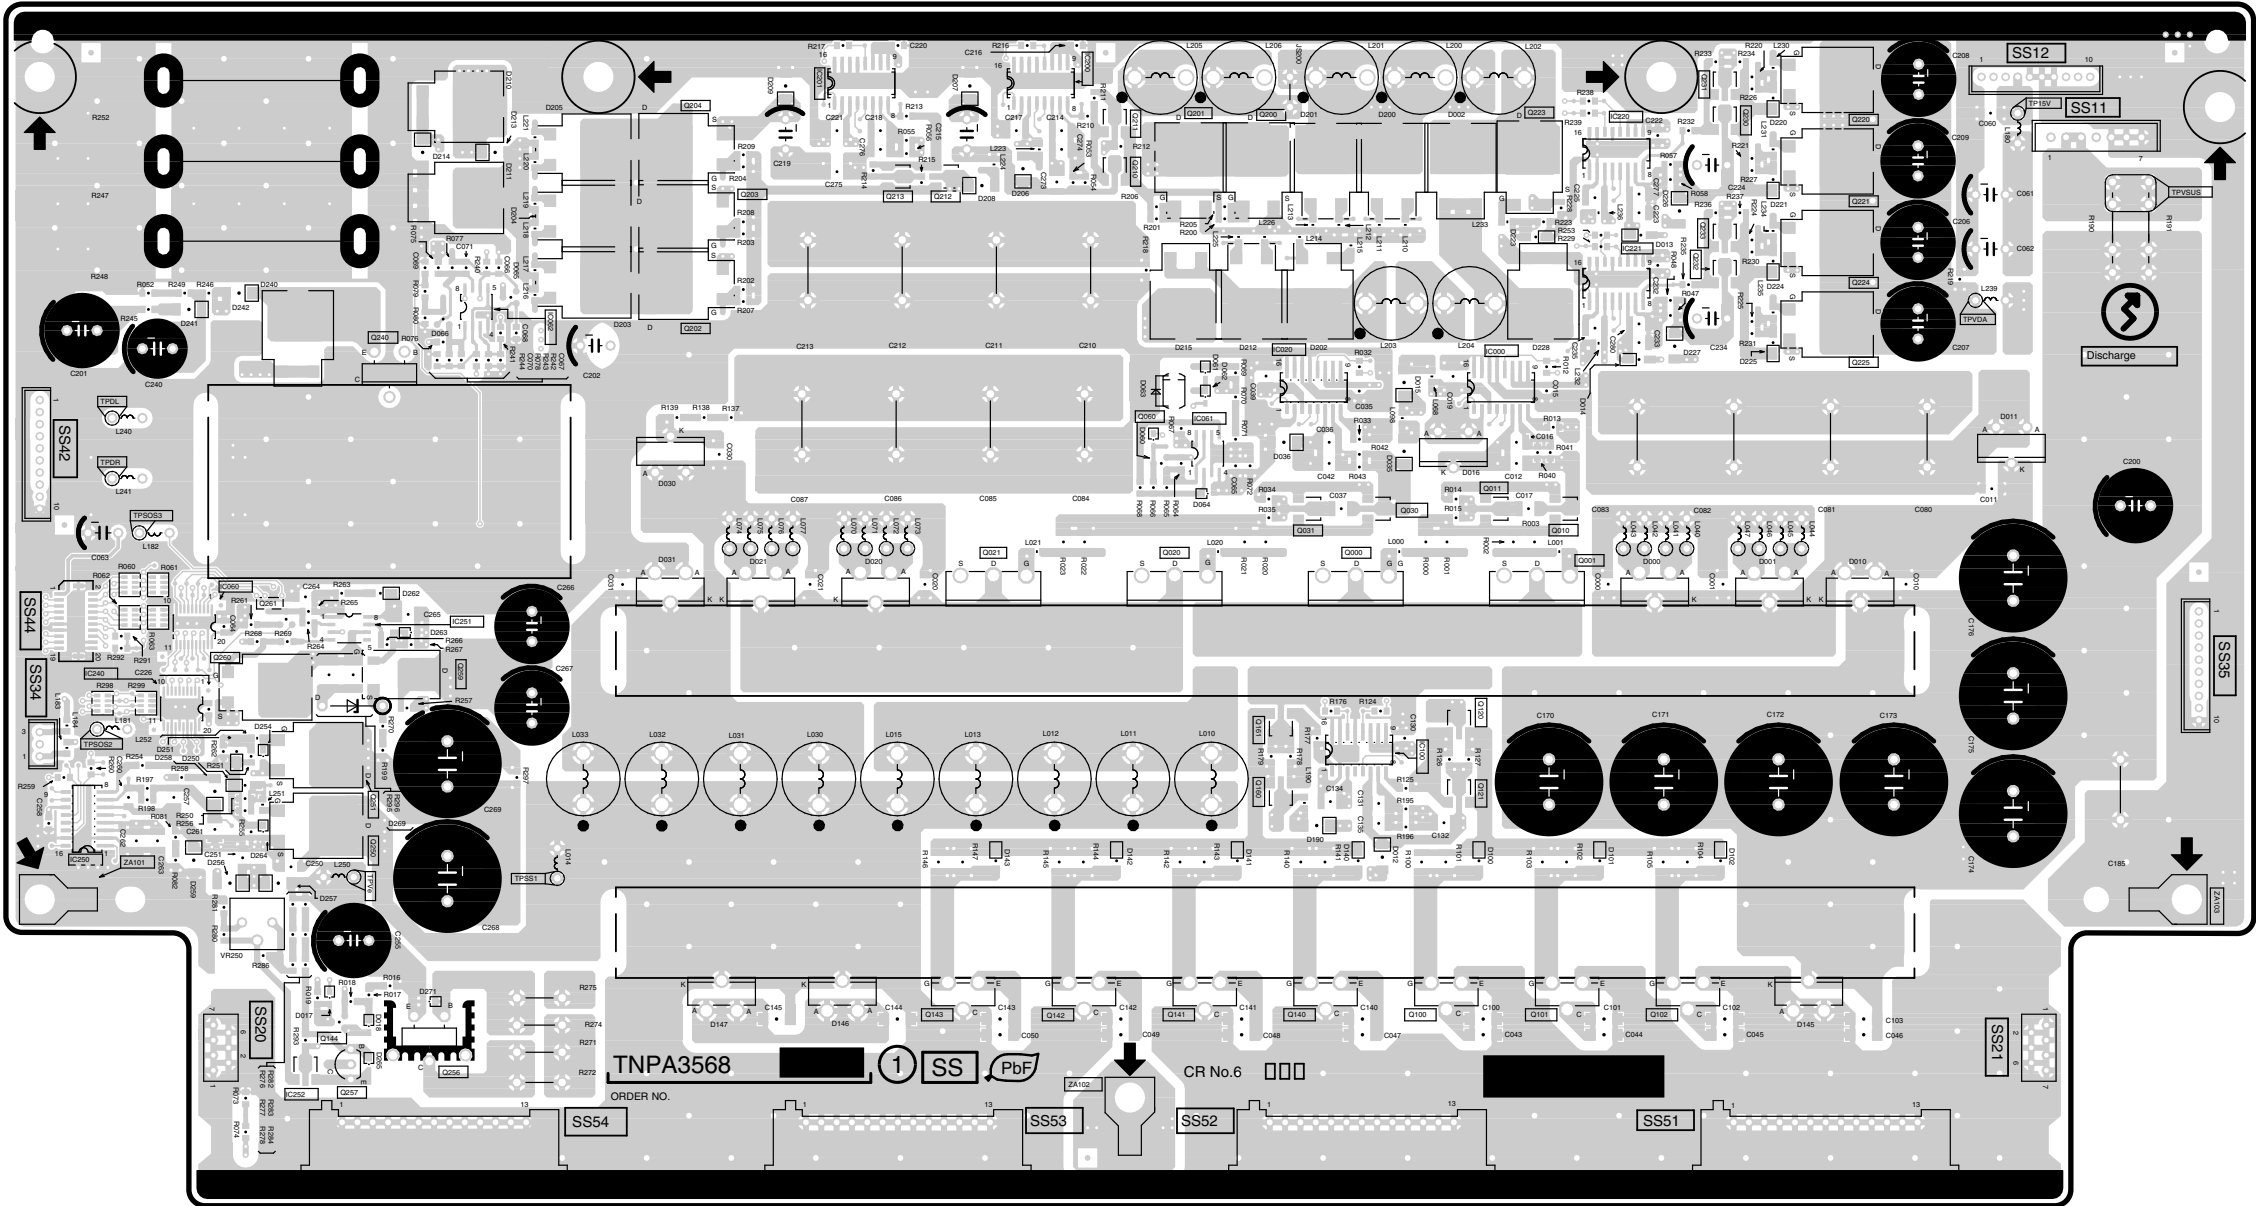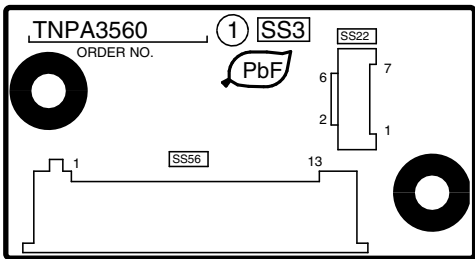

SS-BOARD (COMPONENT SIDE)							
IC		TRANSISTOR		Q6200 Q6201 Q6202 Q6203 Q6204 Q6210 Q6211 Q6212 Q6213 Q6220 Q6221 Q6223 Q6224 Q6225 Q6230 Q6231 Q6232 Q6233 Q6240 Q6250 Q6251 Q6256	E-4 E-4 C-4 C-4 C-5 E-4 E-5 D-4 D-4 G-5 G-4 F-4 G-4 G-4 G-5 G-5 G-4 B-4 B-2 B-2 B-1	Q6257 Q6259 Q6260 Q6261	B-1 B-3 B-3 B-3
						TP	
IC6000	F-4	Q6000	F-3				
IC6020	E-4	Q6001	F-3				
IC6060	B-3	Q6010	F-3				
IC6061	E-3	Q6011	F-3				
IC6062	C-4	Q6020	E-3				
IC6100	F-2	Q6021	D-3			TP15V	H-5
IC6200	E-5	Q6030	F-3			TPDL	A-4
IC6201	D-5	Q6031	E-3			TPDR	A-3
IC6220	F-4	Q6050	E-3			TPSOS2	A-3
IC6221	F-4	Q6100	F-2			TPSOS3	B-3
IC6240	B-3	Q6101	F-2			TPSS1	C-2
IC6250	A-2	Q6102	G-2			TPVDA	H-4
IC6251	B-3	Q6120	F-3			TPVe	B-2
IC6252	B-1	Q6121	F-2			TPVSUS	H-4
		Q6140	E-2				
		Q6141	E-2				
		Q6142	E-2				
		Q6143	D-2				
		Q6144	B-2				
		Q6160	E-2				
		Q6161	E-2				

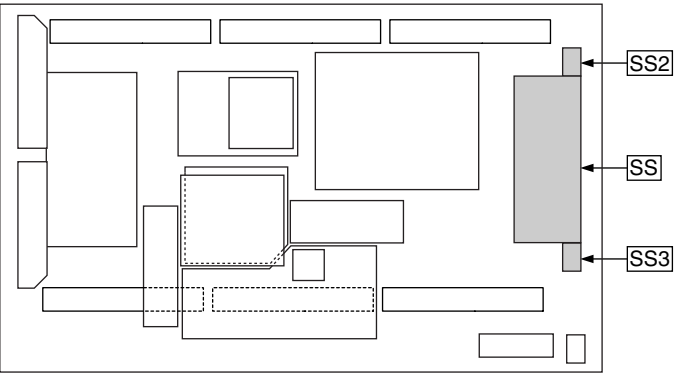

12.39. K and S-Board

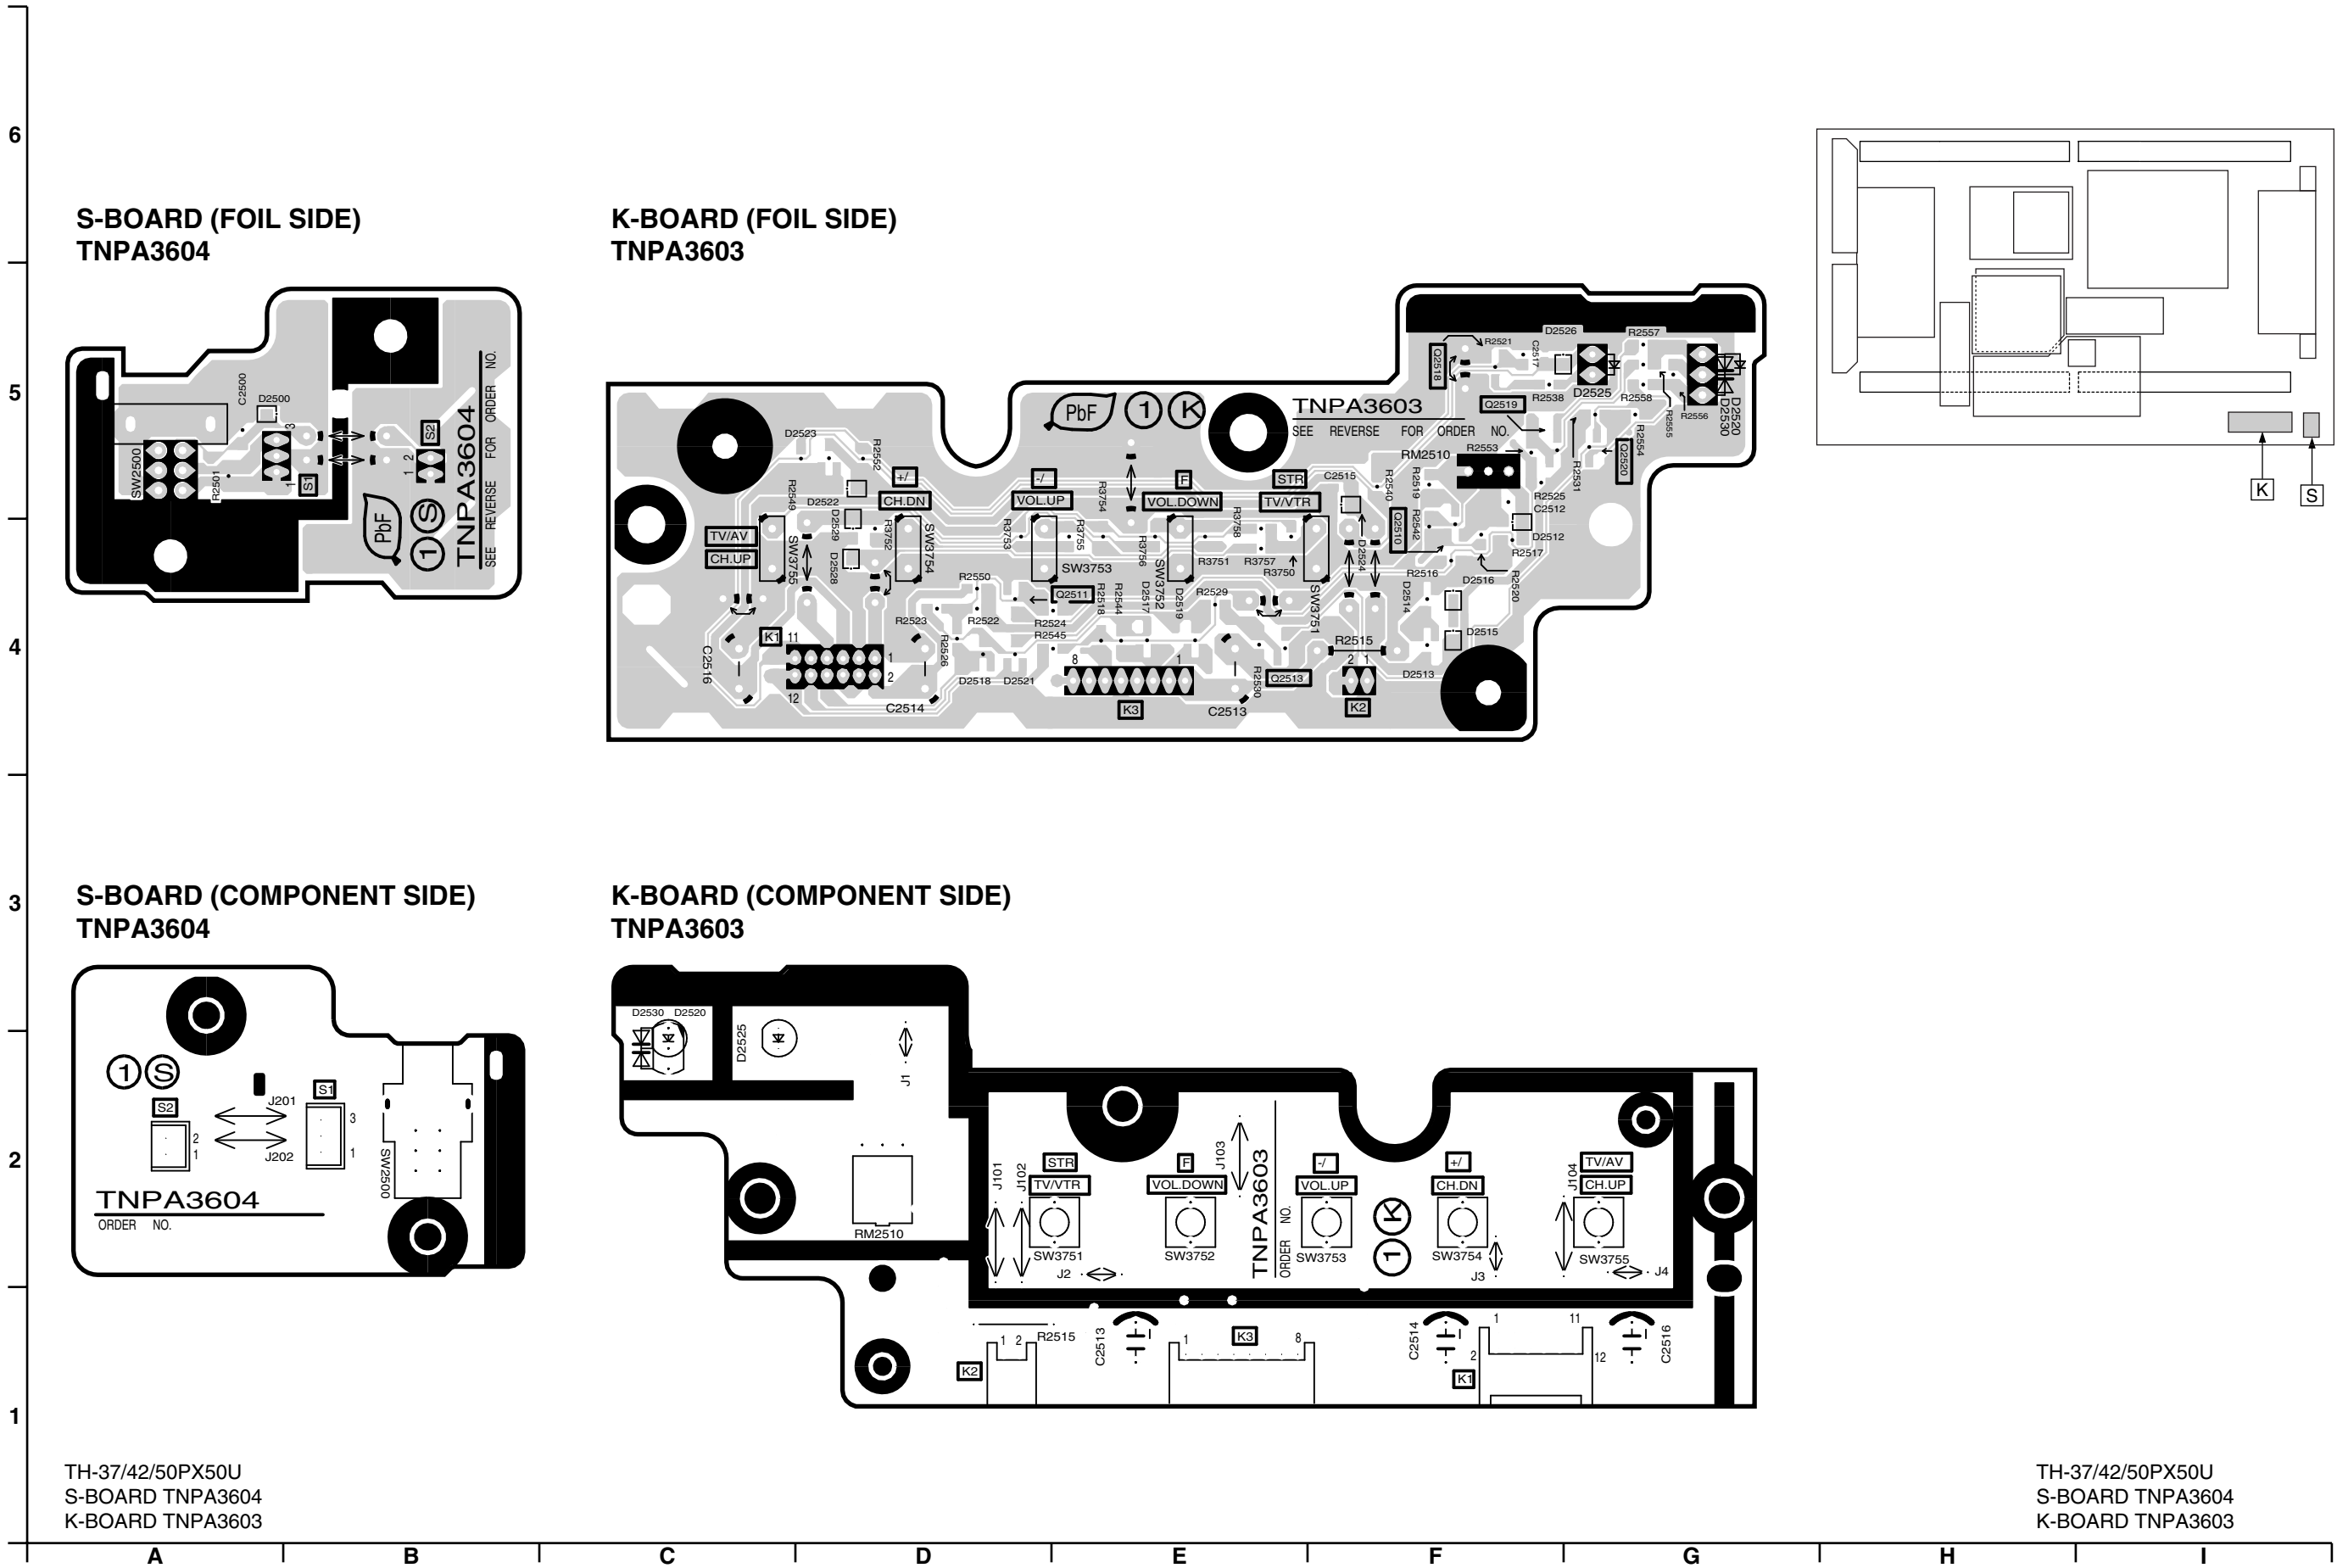

13 Block and Schematic Diagram

13.1. Schematic Diagram Notes

Important Safety Notice

Components identified by $\triangle$ mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.


Notes:

- 1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
- 2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
- 3. Coil
Unit of inductance is H, unless otherwise noted.
- 4. Test Point
 : Test Point position
- 5. Earth Symbol
 : Chassis Earth (Cold)  : Line Earth (Hot)
- 6. Voltage Measurement
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC120V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
- 7. When arrow mark () is found, connection is easily found from the direction of arrow.
- 8. Indicates the major signal flow. : Video  Audio 
- 9. This schematic diagram is the latest at the time of printing and subject to change without notice.

Remarks:

- 1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.
All circuits, except the Power Circuit, are cold.
Precautions
 - a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.


13.2. Main Block Diagram (37inch)

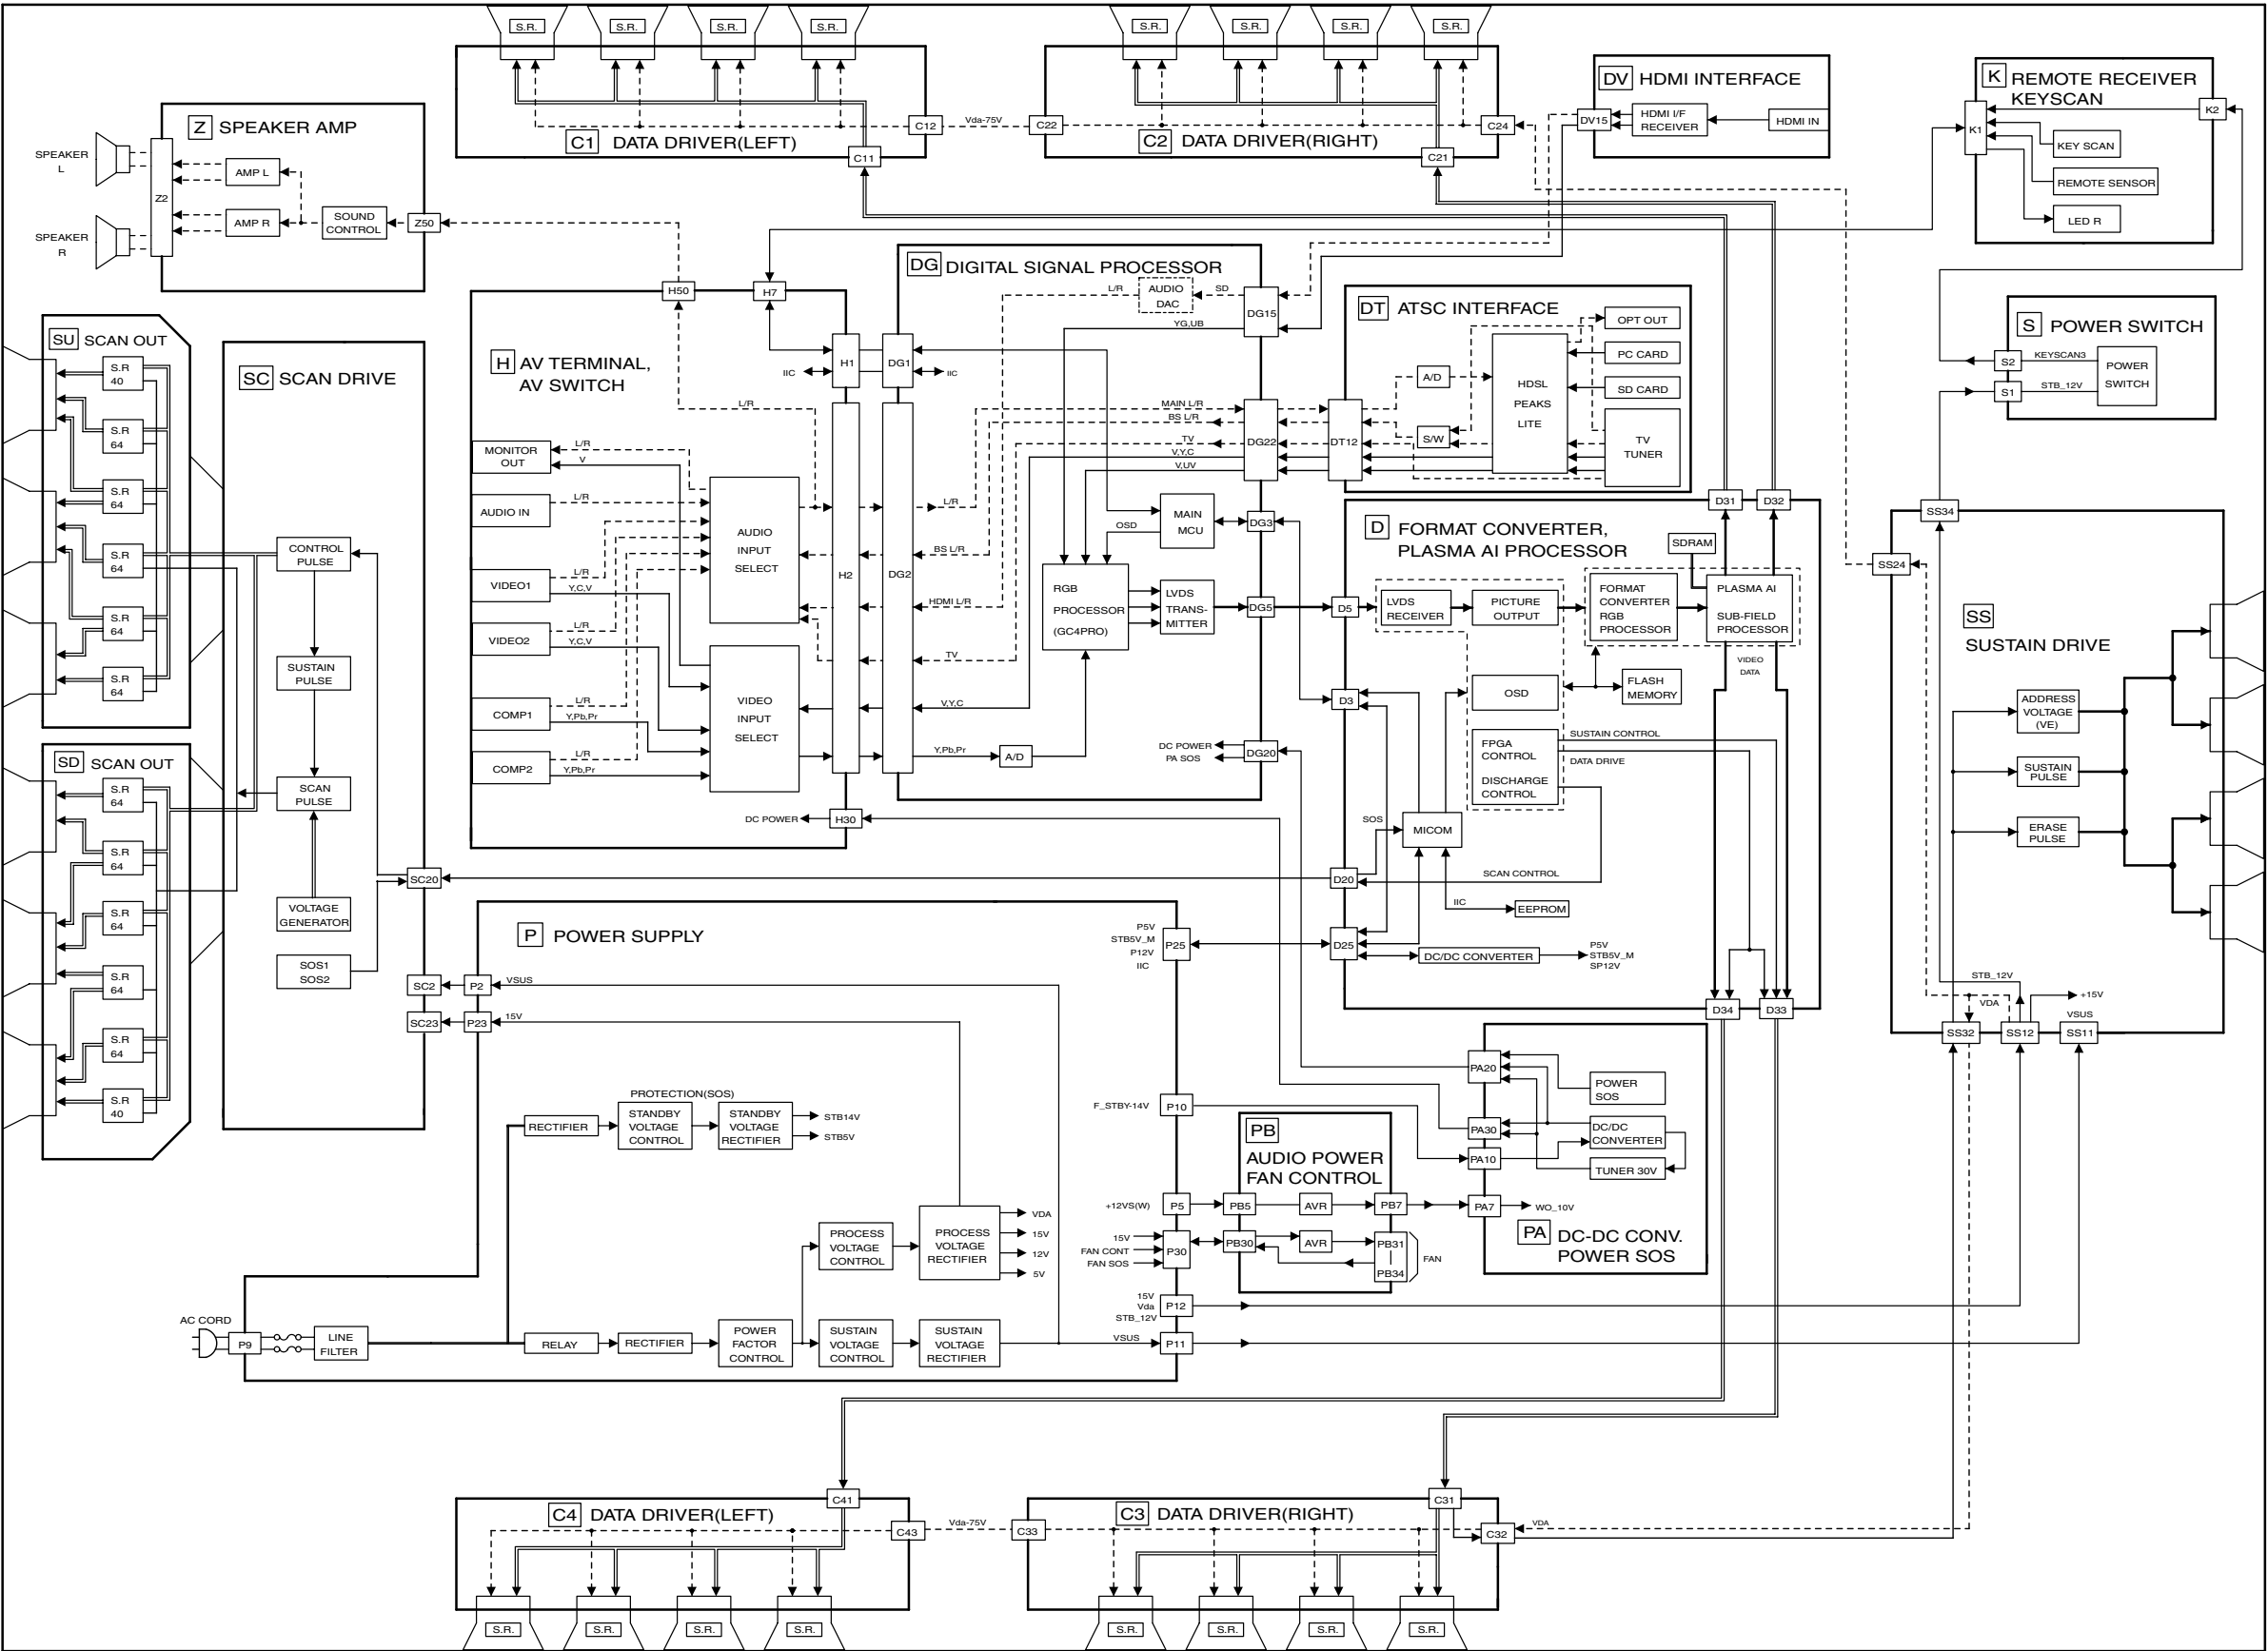

TH-37PX50U Main Block Diagram

TH-37PX50U Main Block Diagram


13.3. Main Block Diagram (42inch)

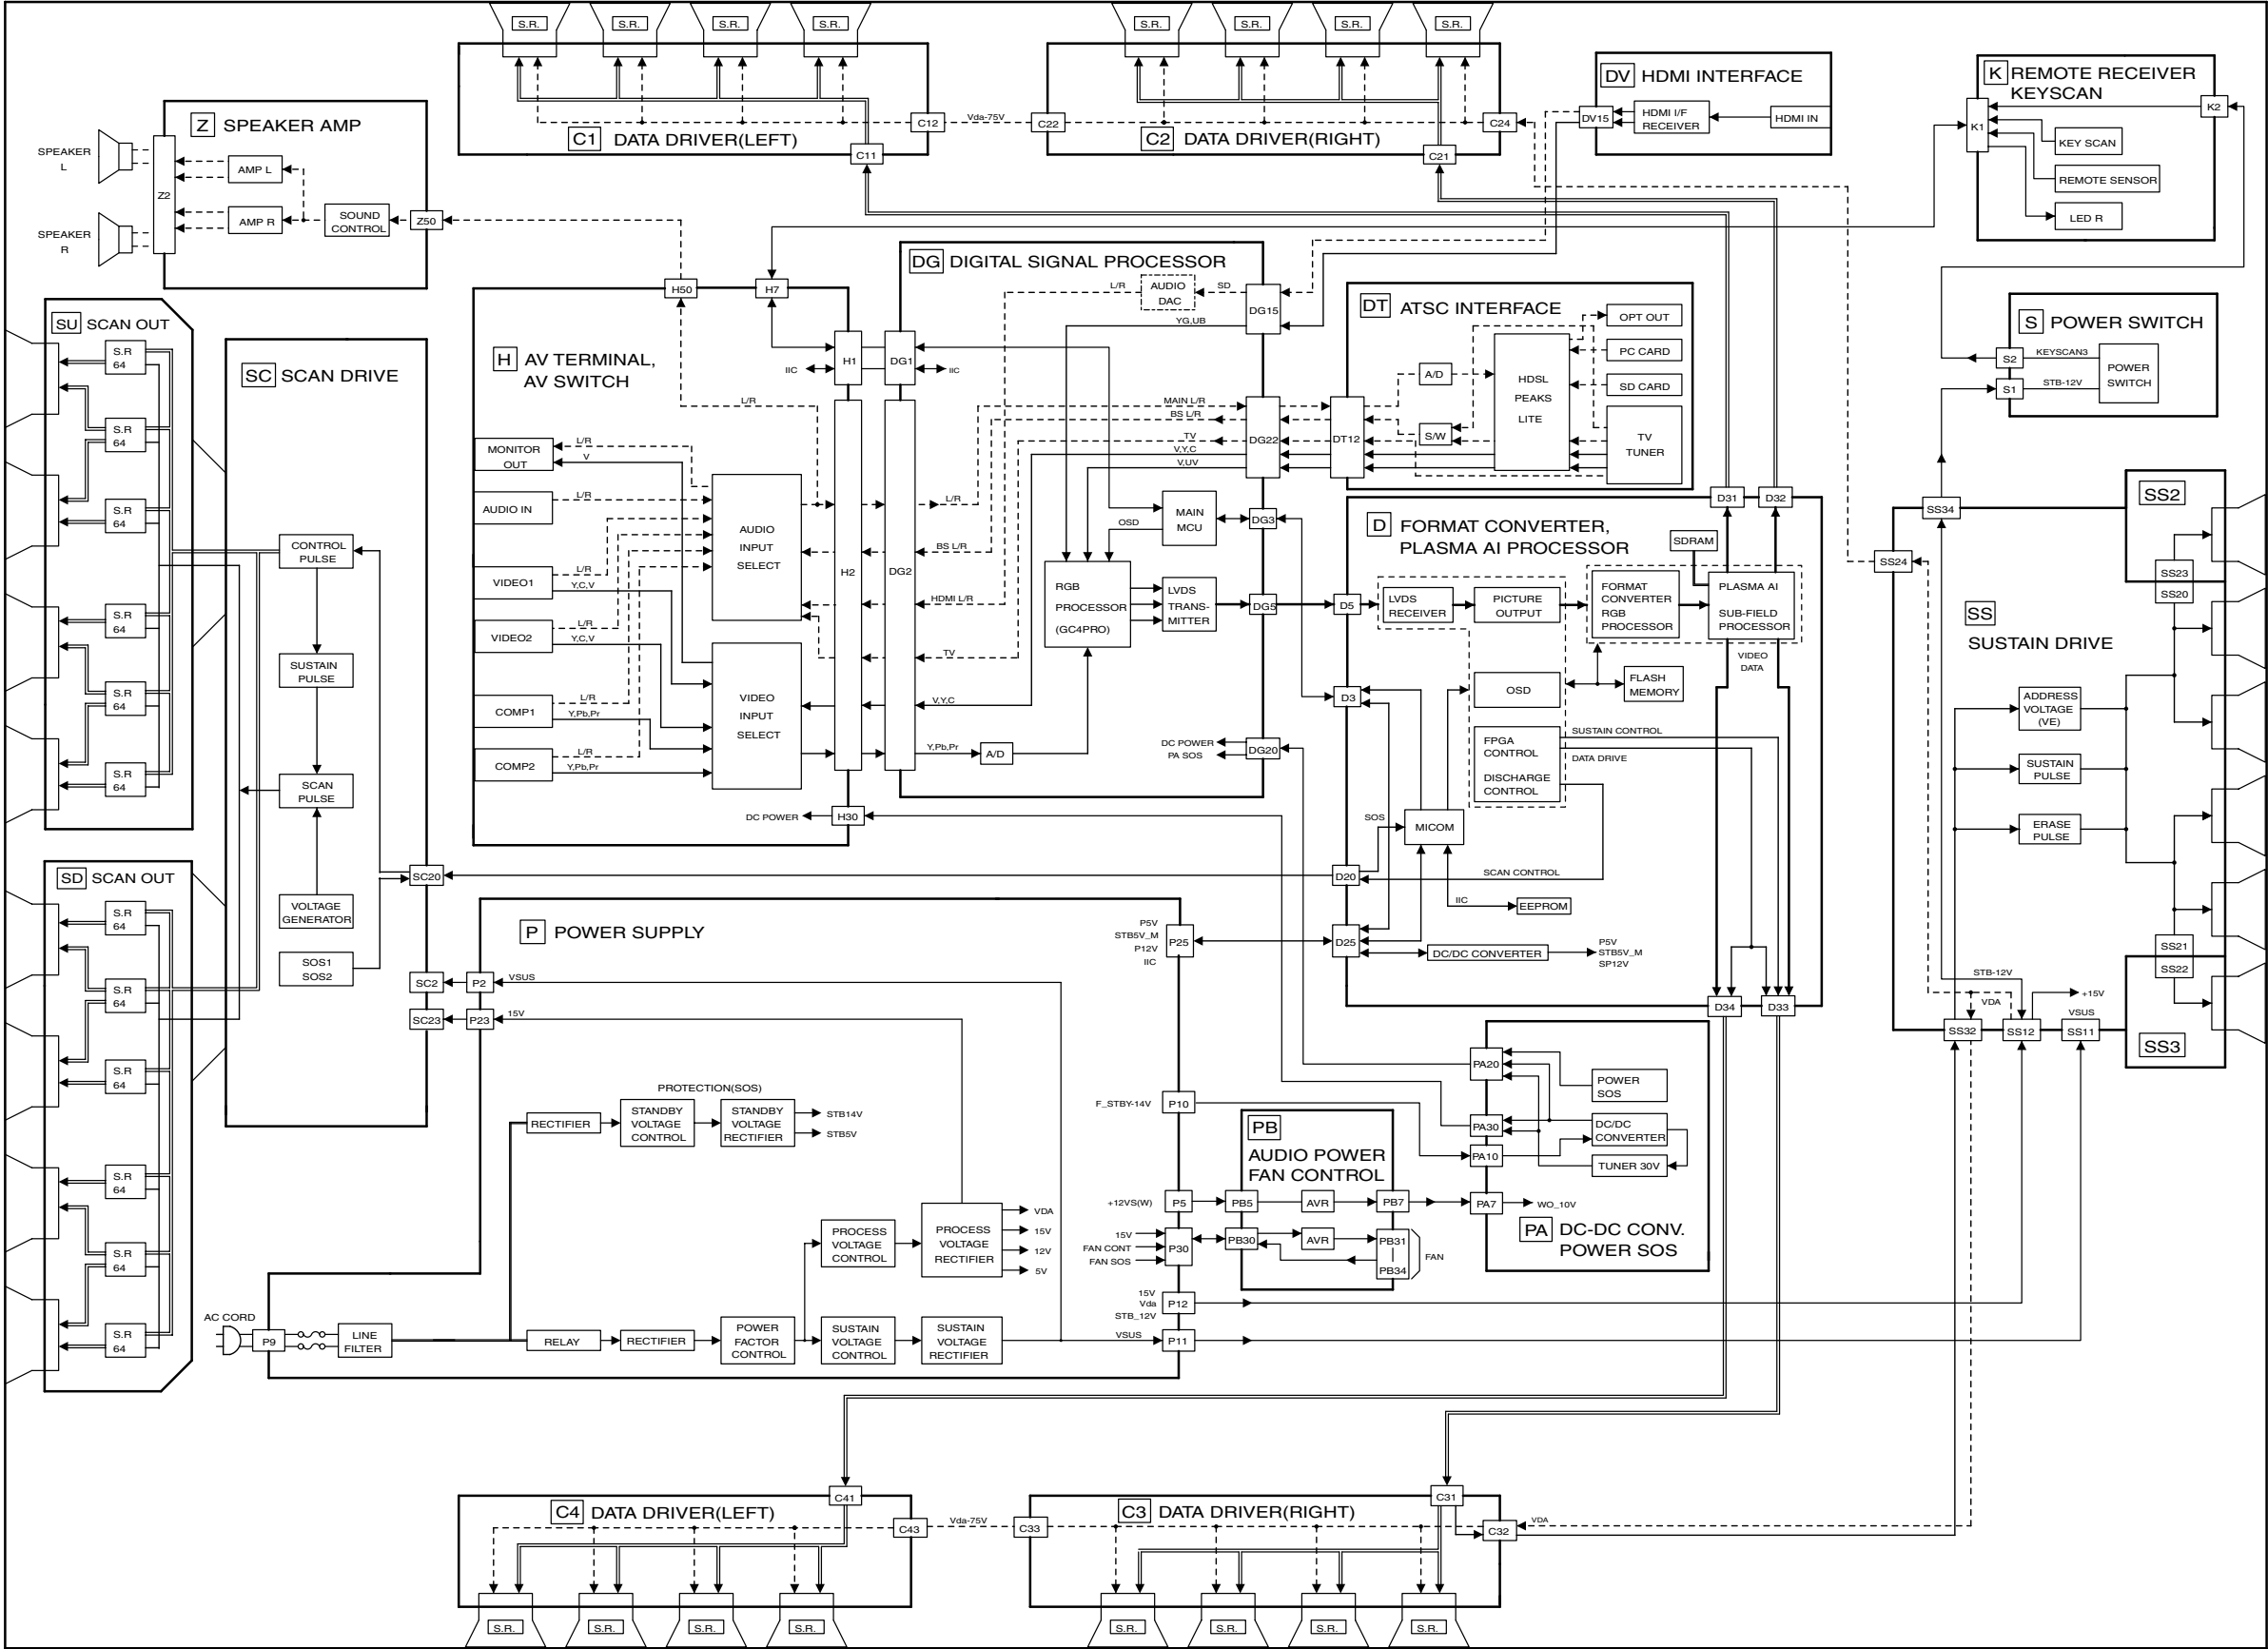

TH-42PX50U Main Block Diagram

TH-42PX50U Main Block Diagram


13.4. Main Block Diagram (50inch)

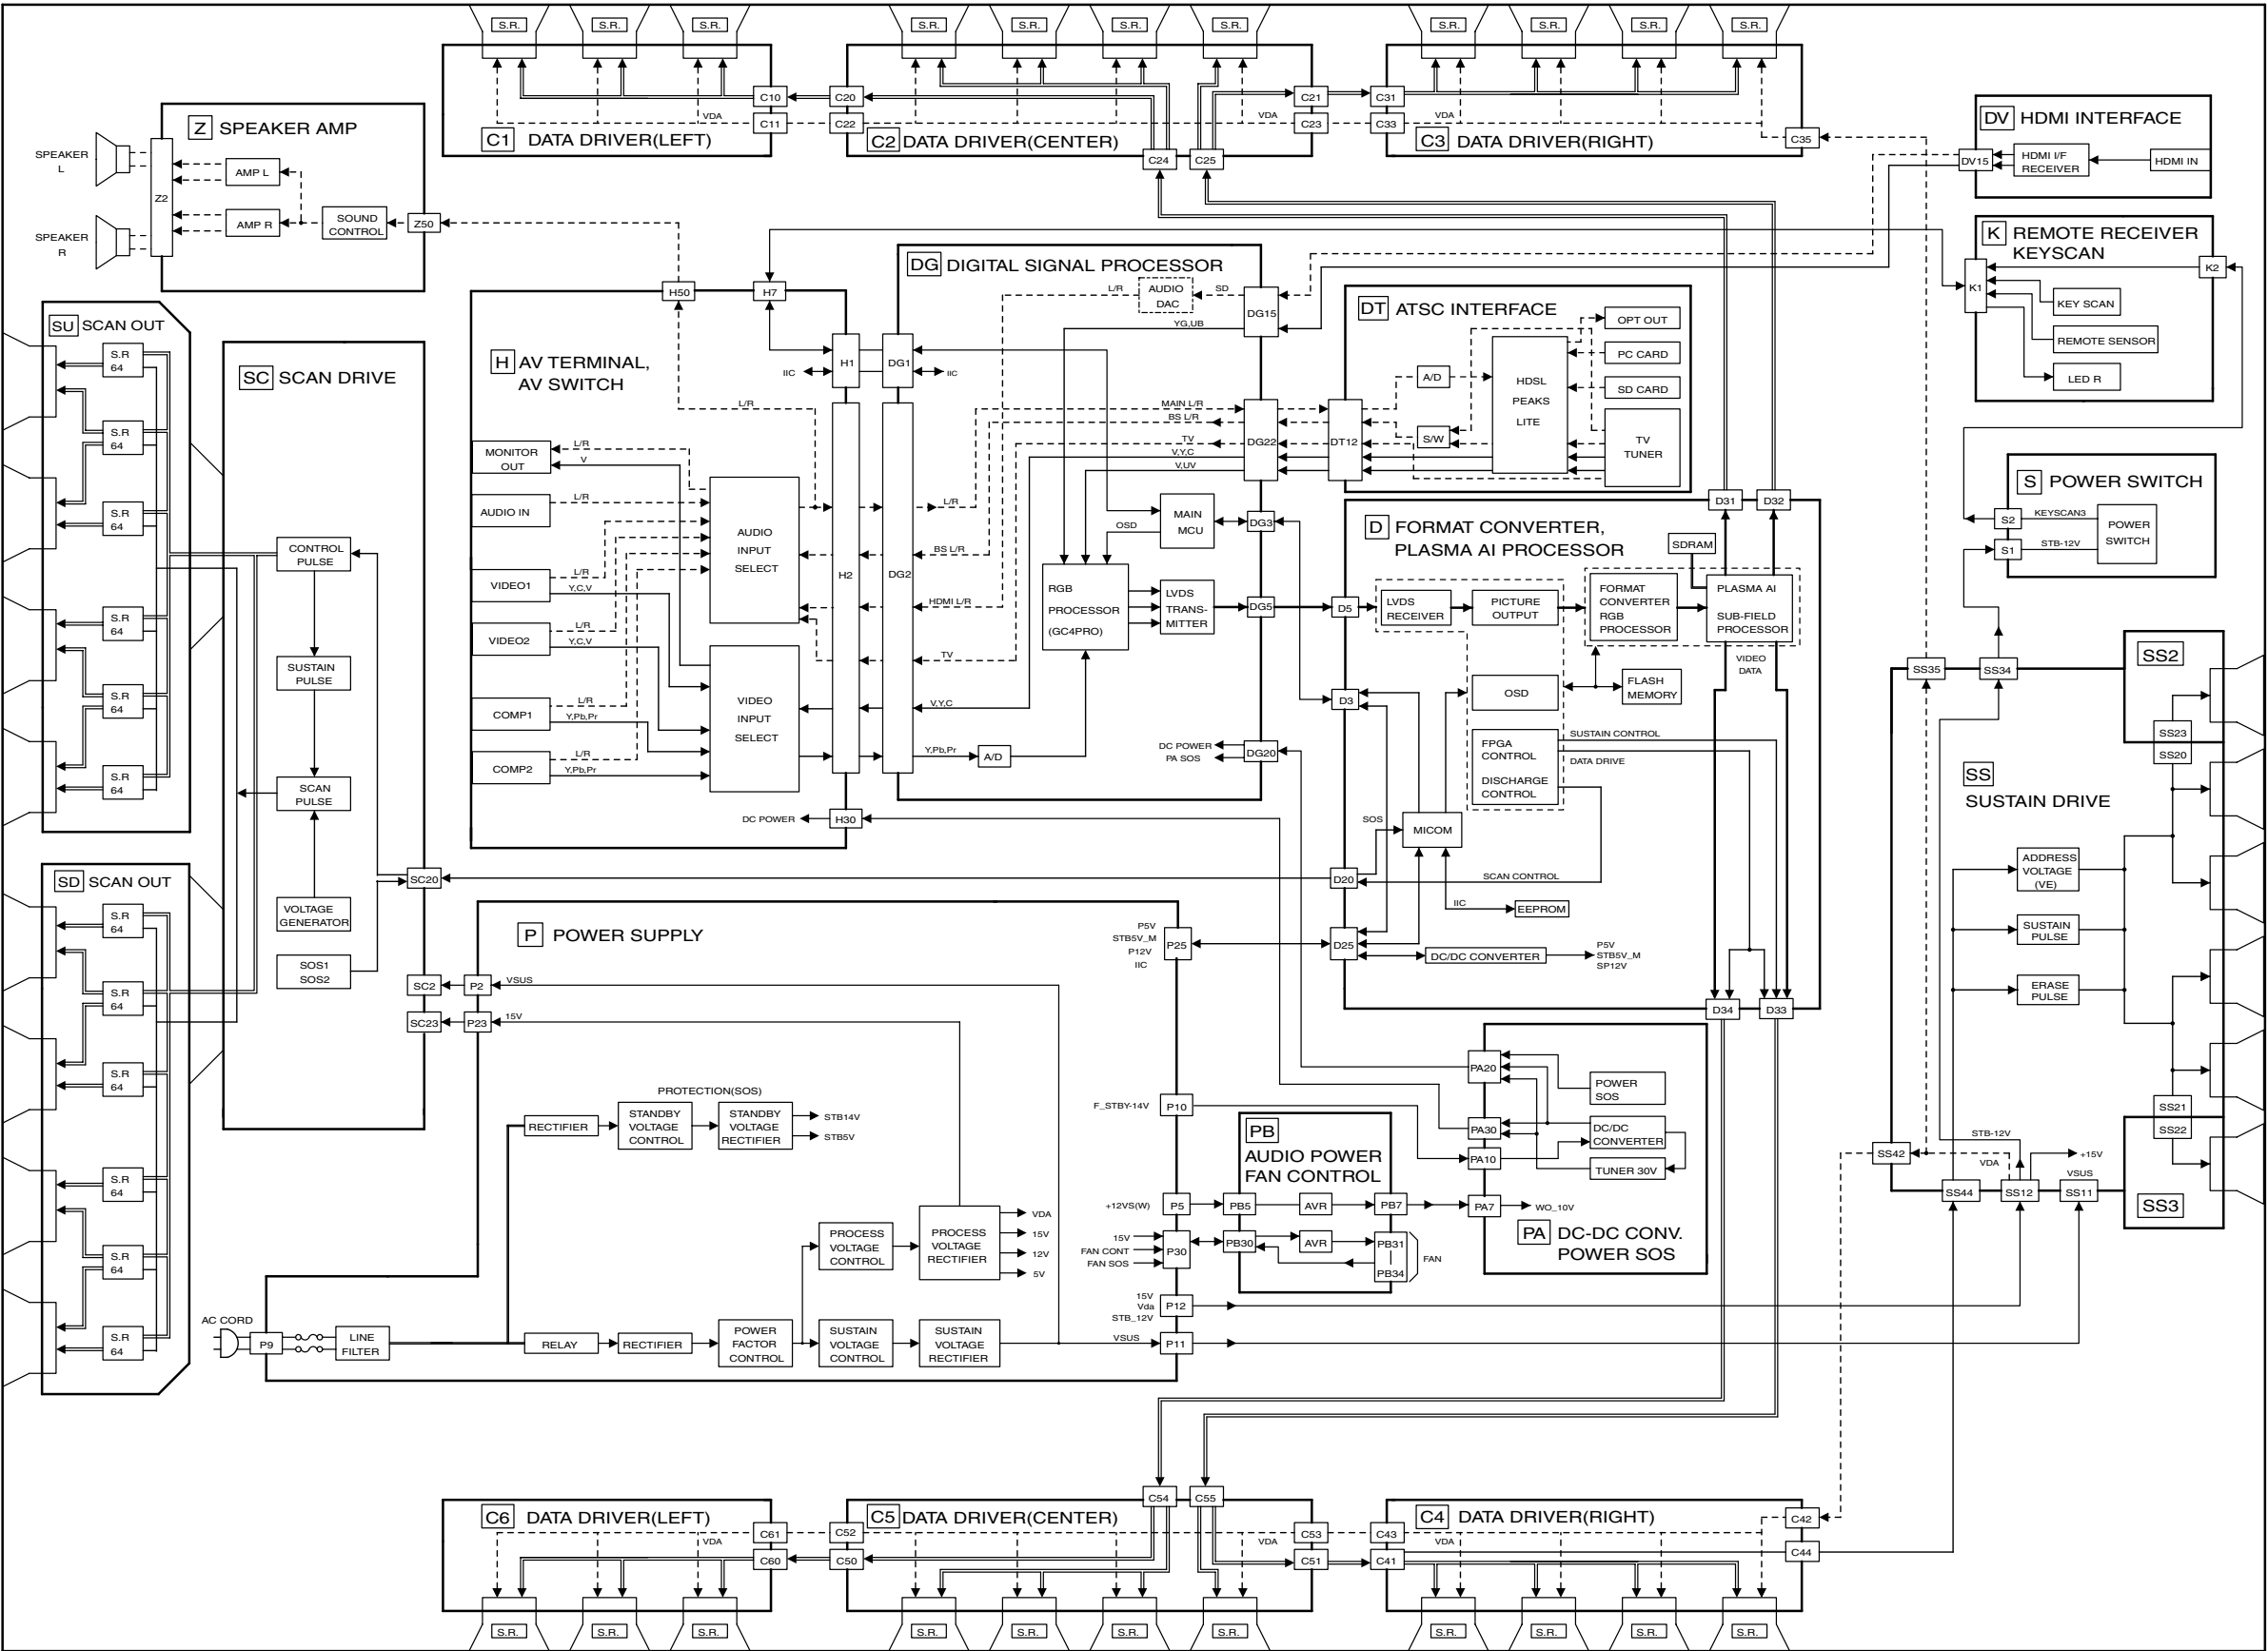

TH-50PX50U Main Block Diagram

TH-50PX50U Main Block Diagram


13.5. P-Board Block Diagram (37inch)

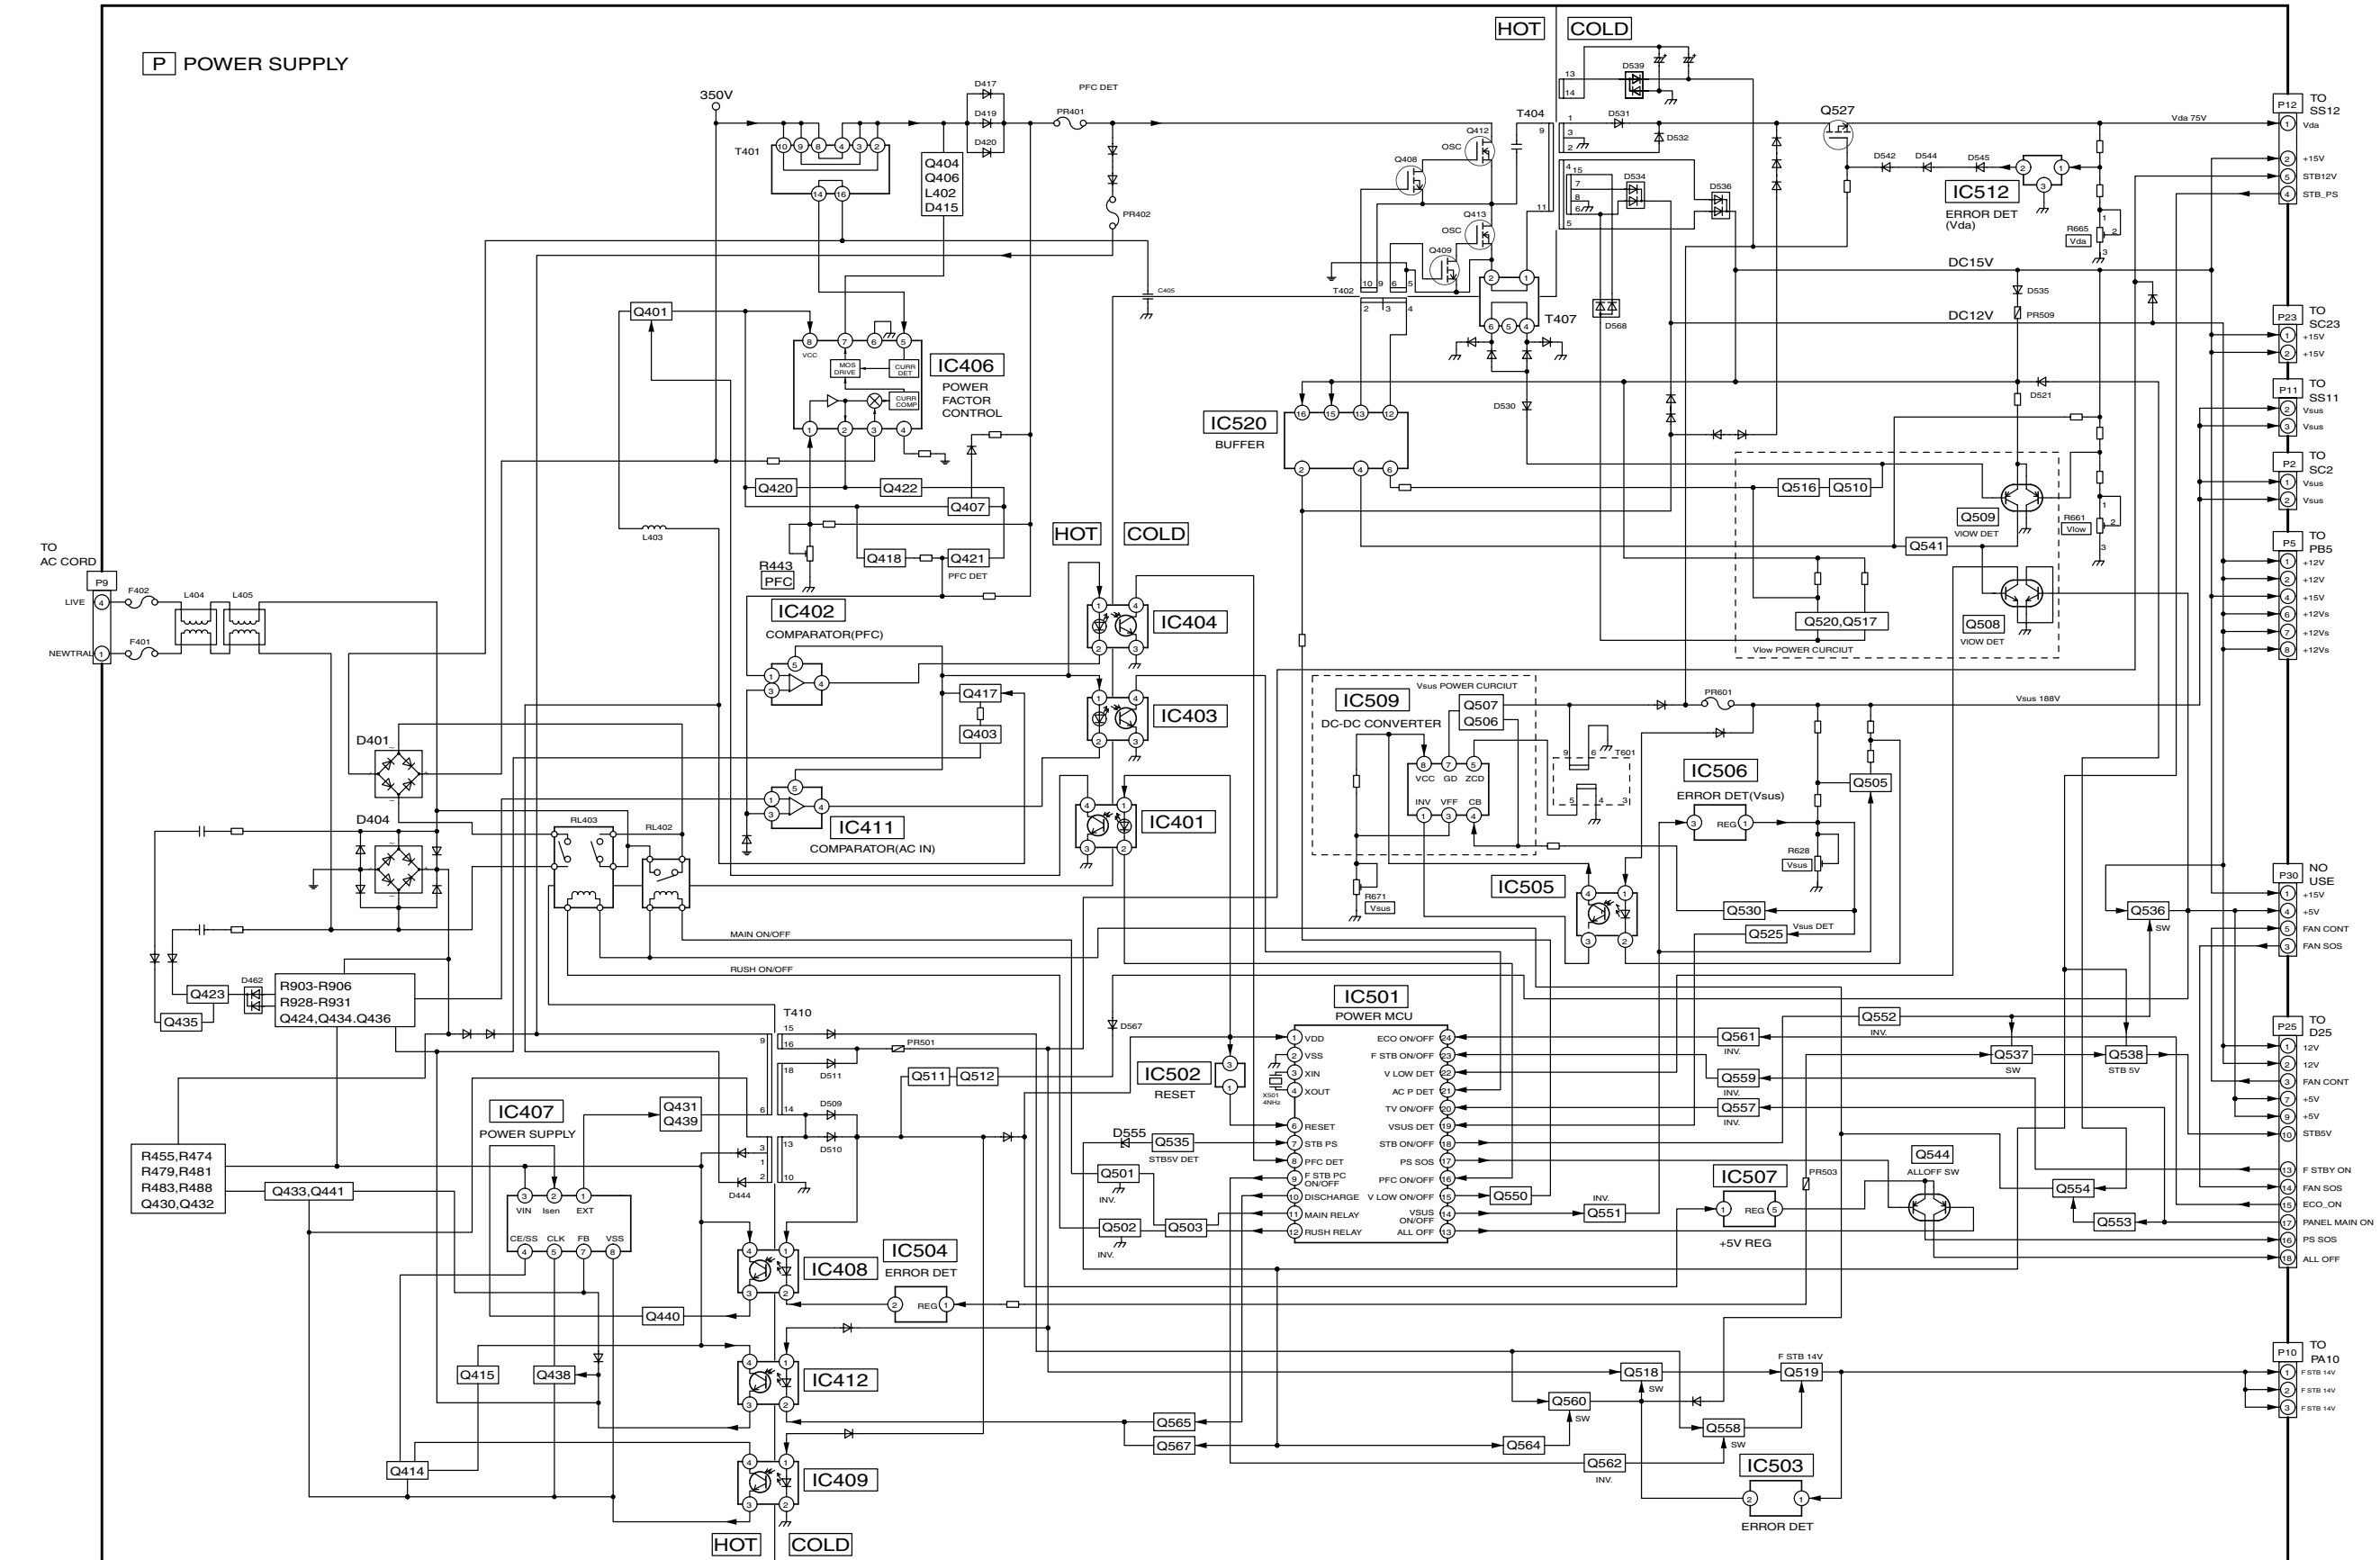


TH-37PX50U
P-Board Block Diagram

TH-37PX50U
P-Board Block Diagram


13.6. P-Board (1 of 6) Schematic Diagram (37inch)

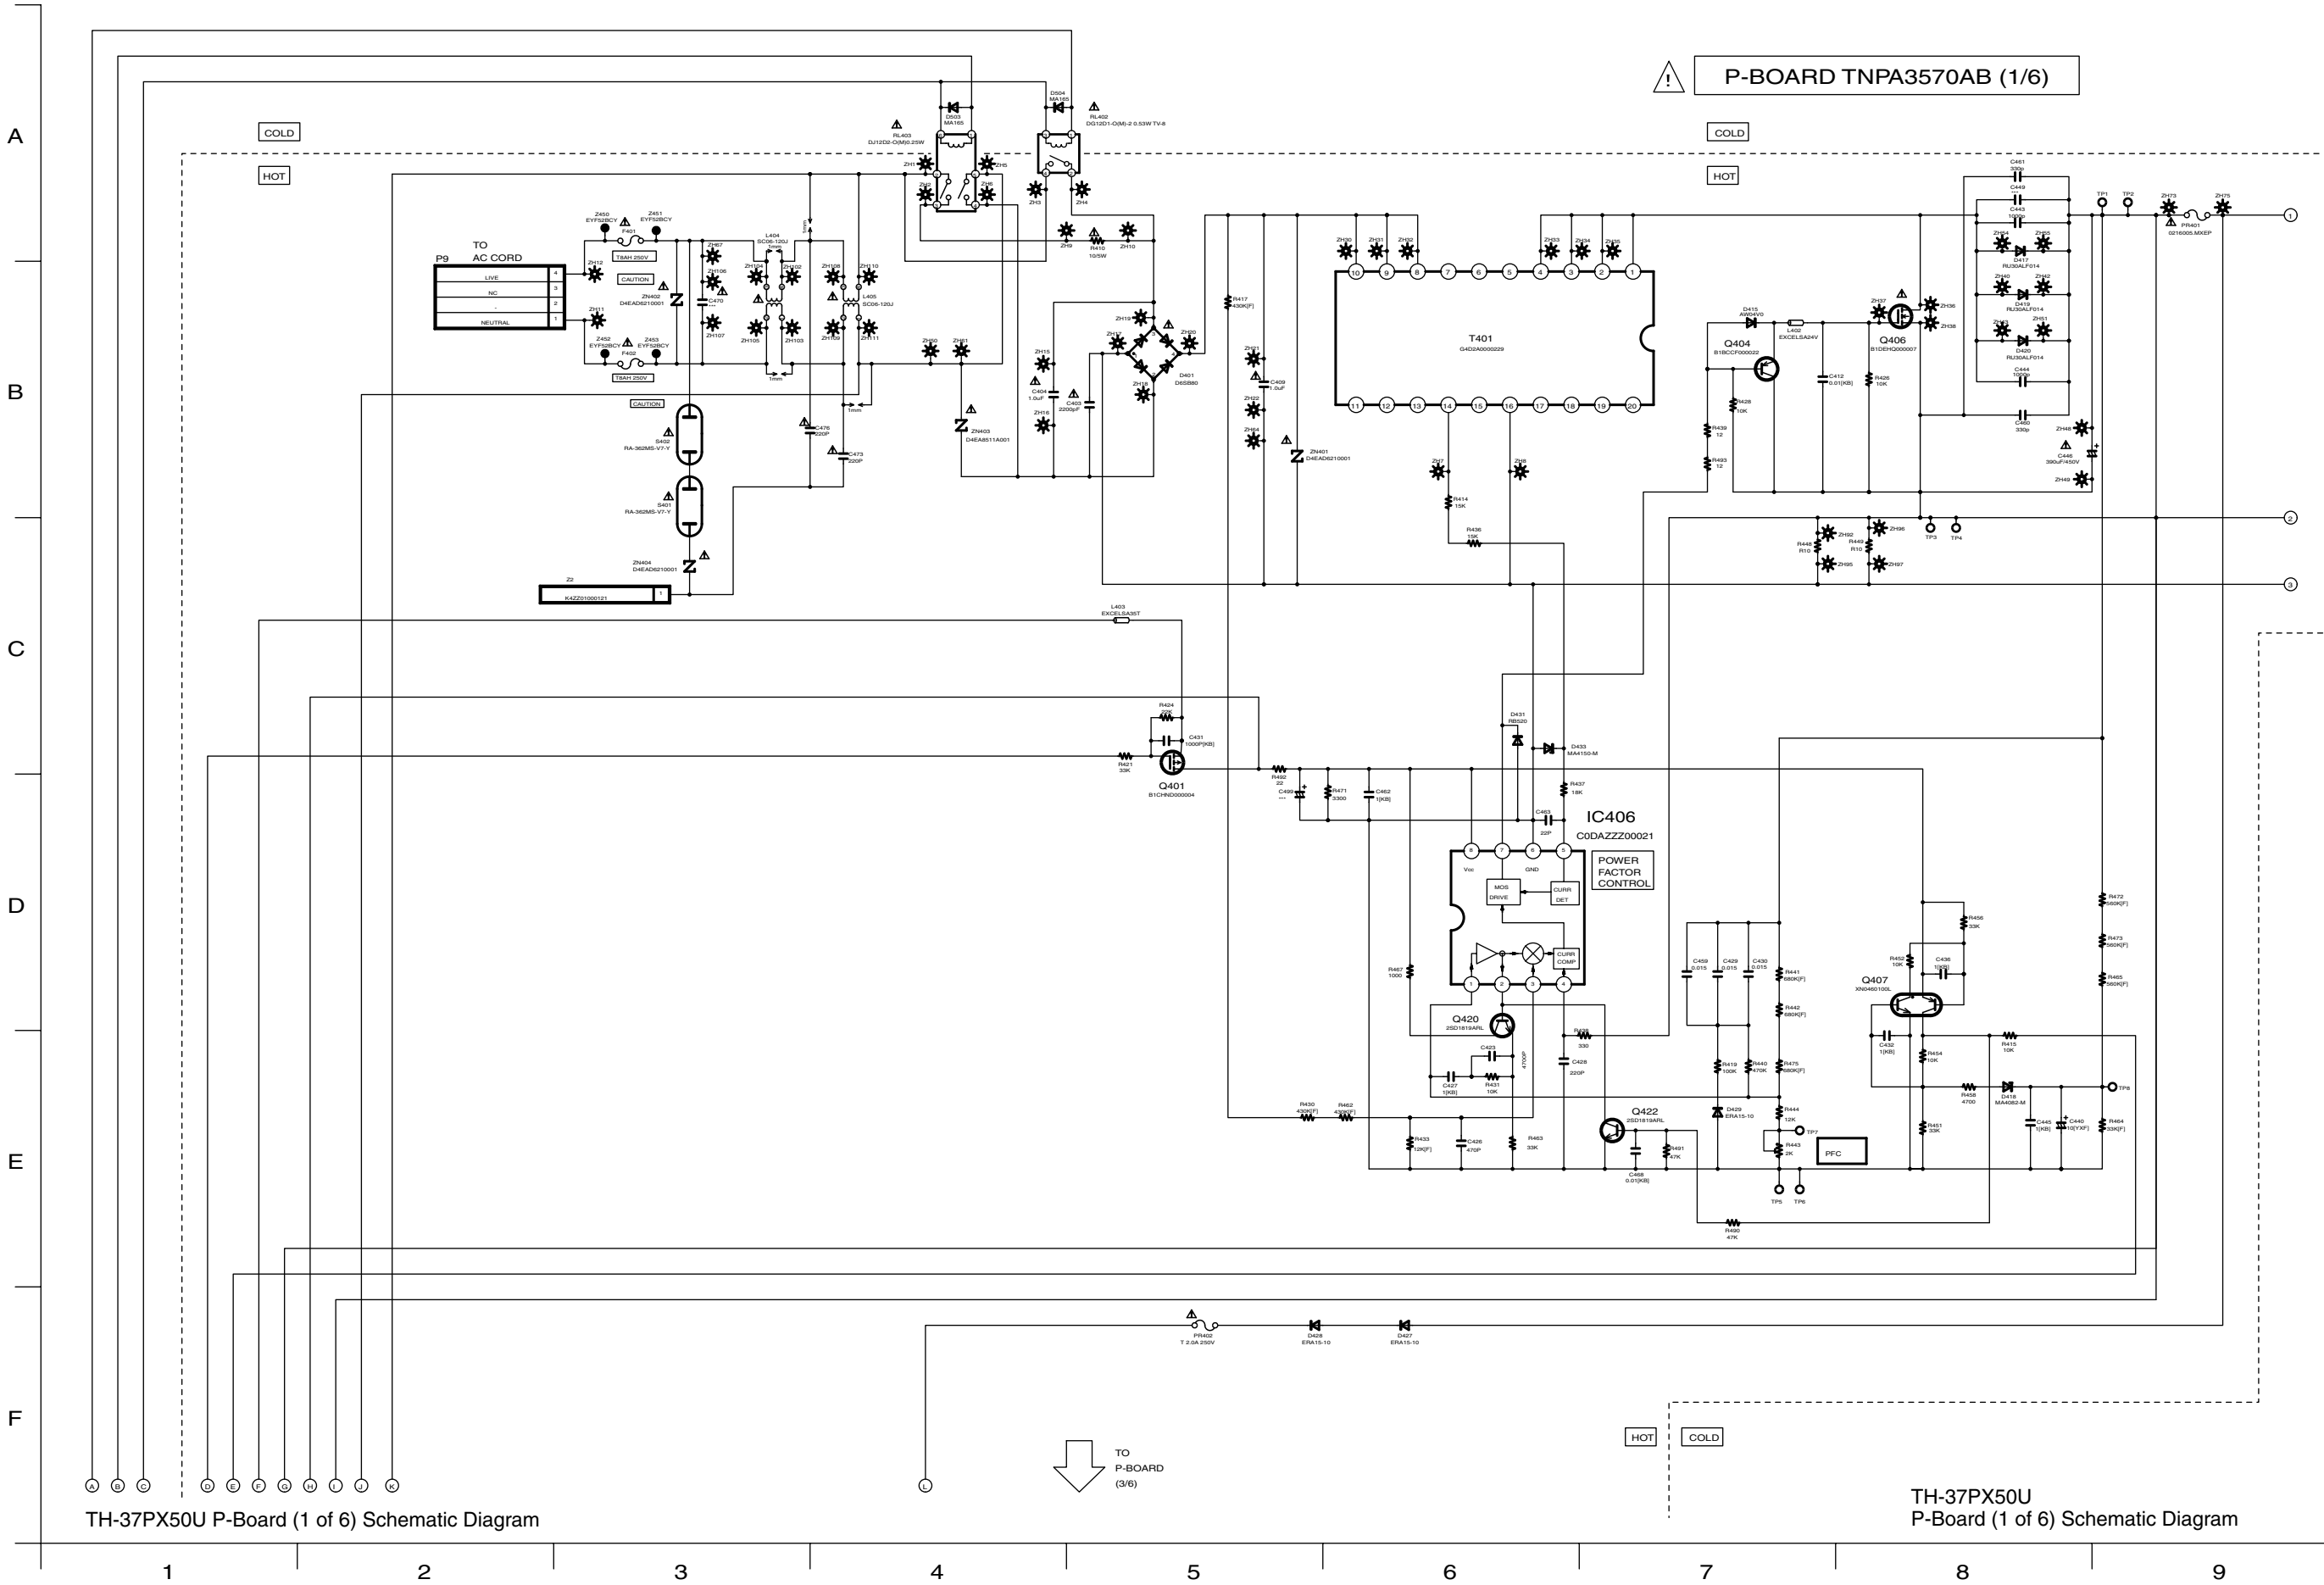


13.7. P-Board (2 of 6) Schematic Diagram (37inch)

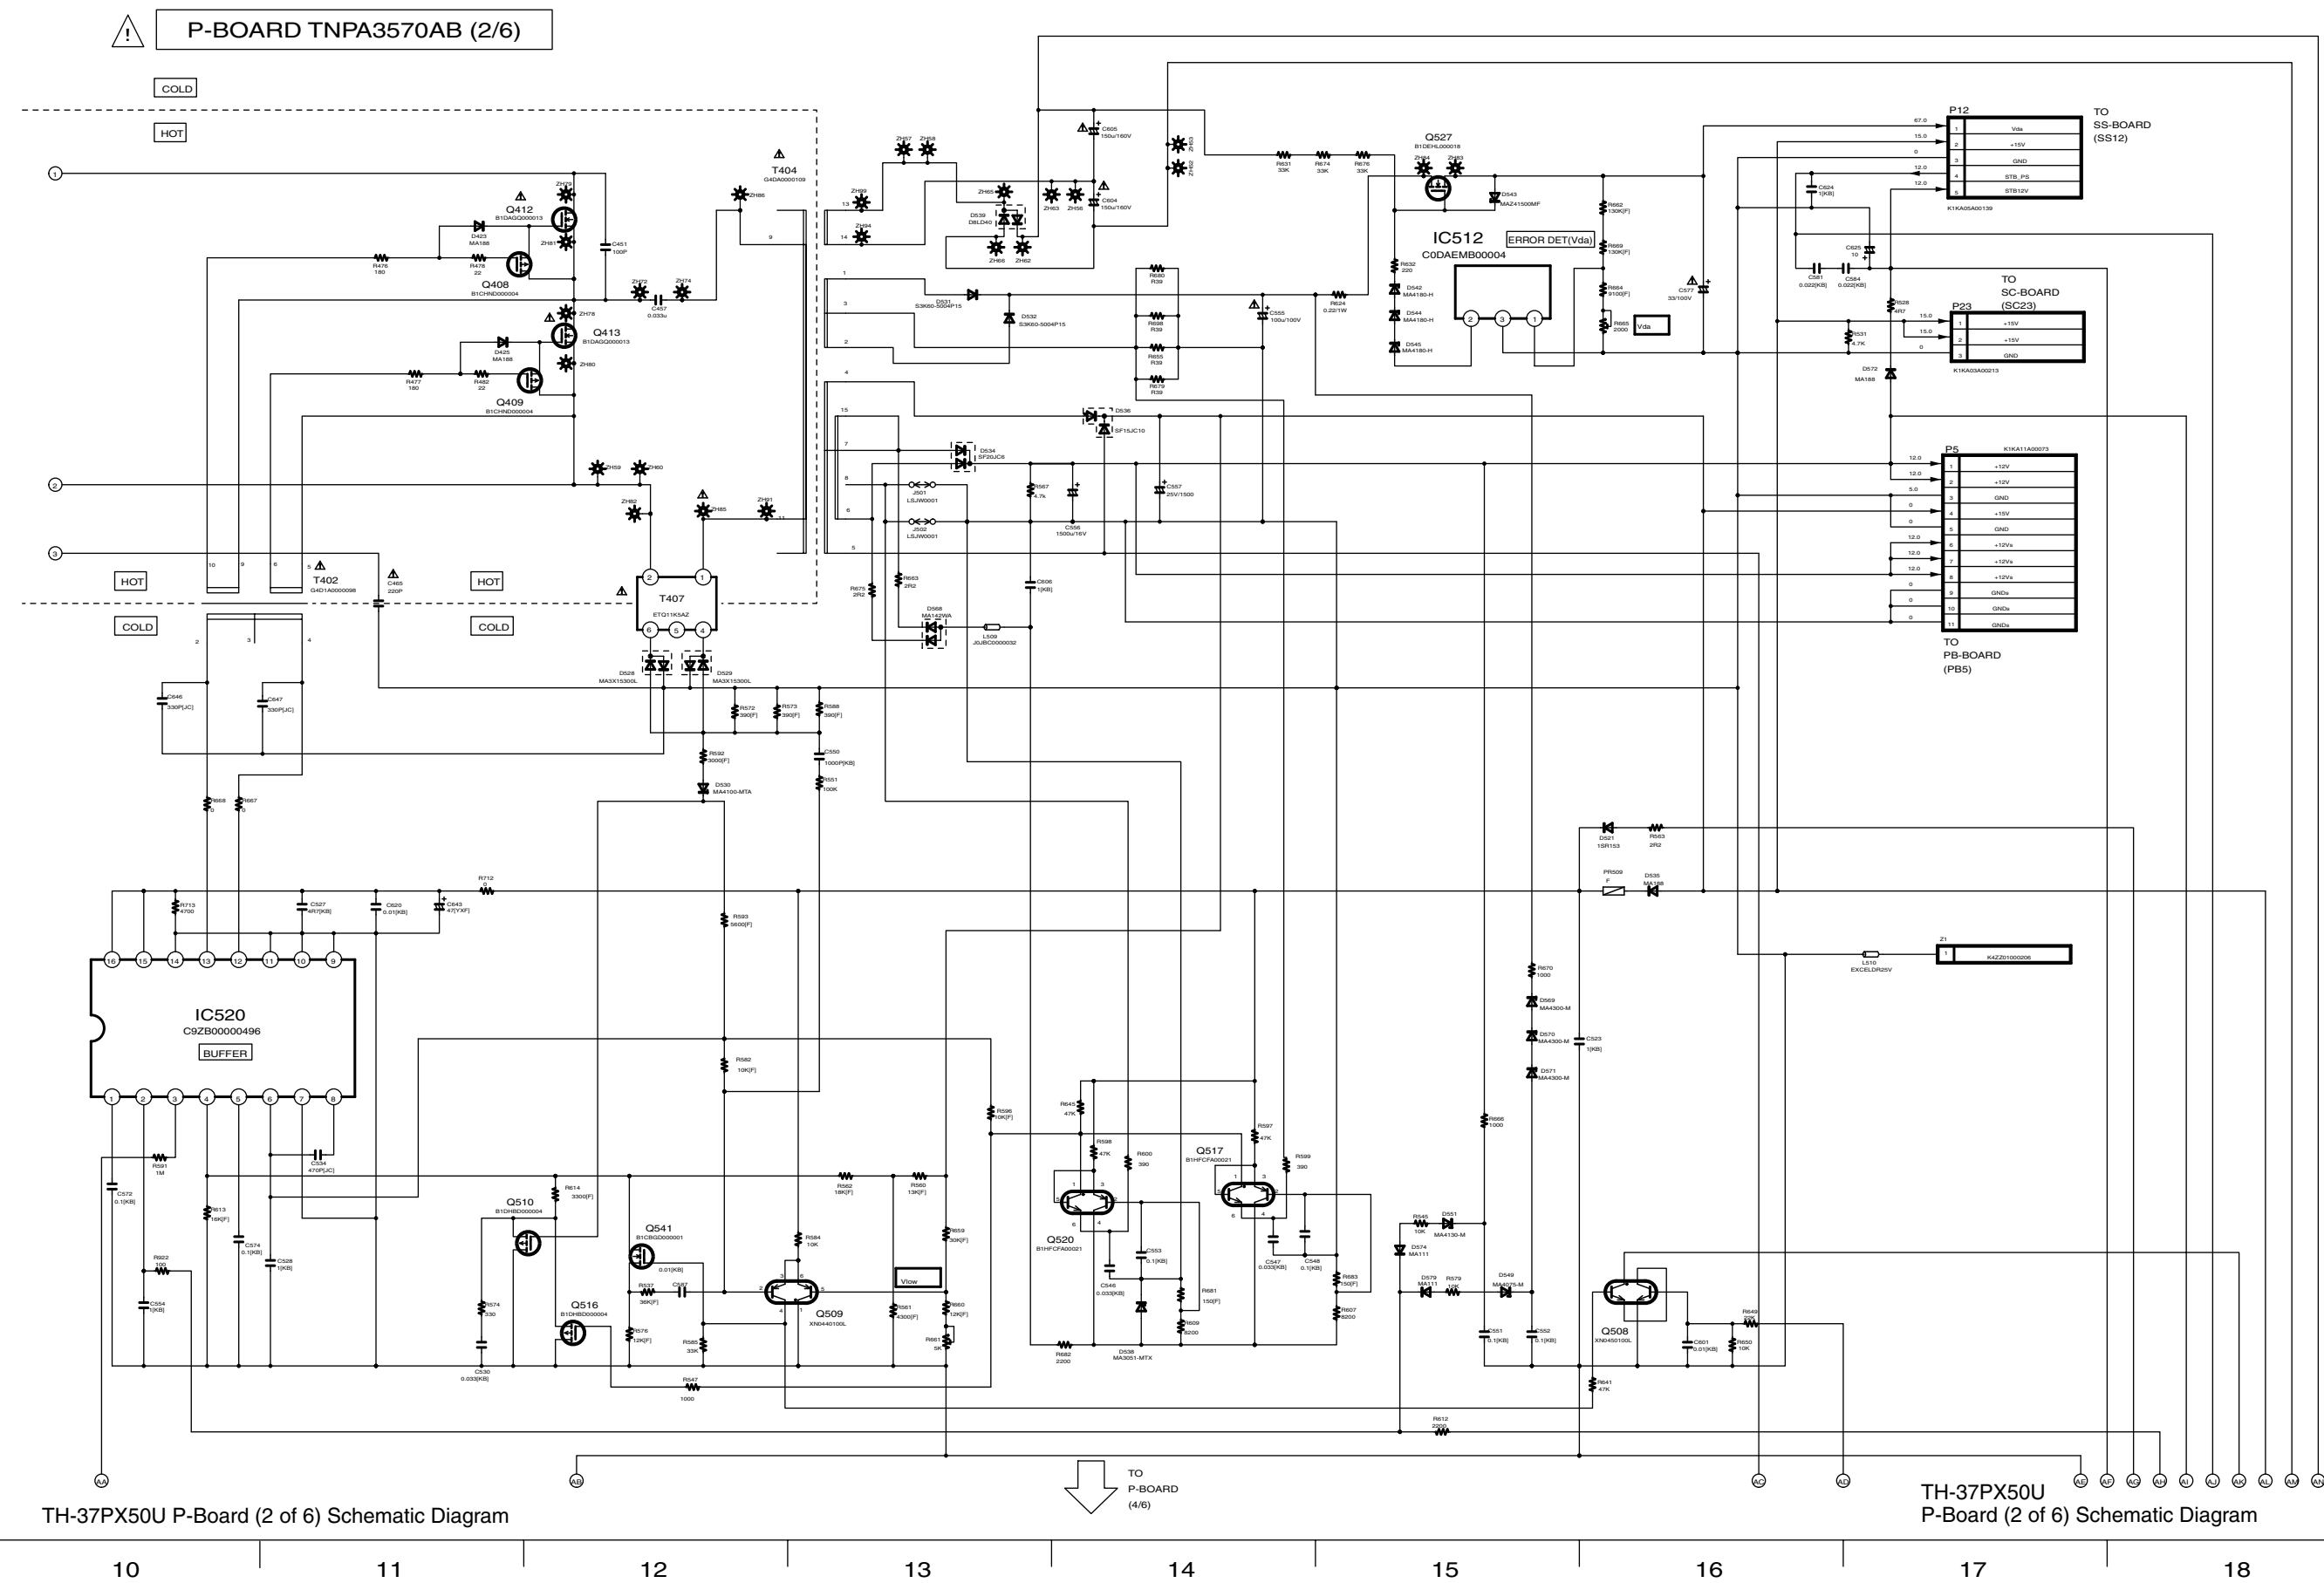


13.8. P-Board (3 of 6) Schematic Diagram (37inch)

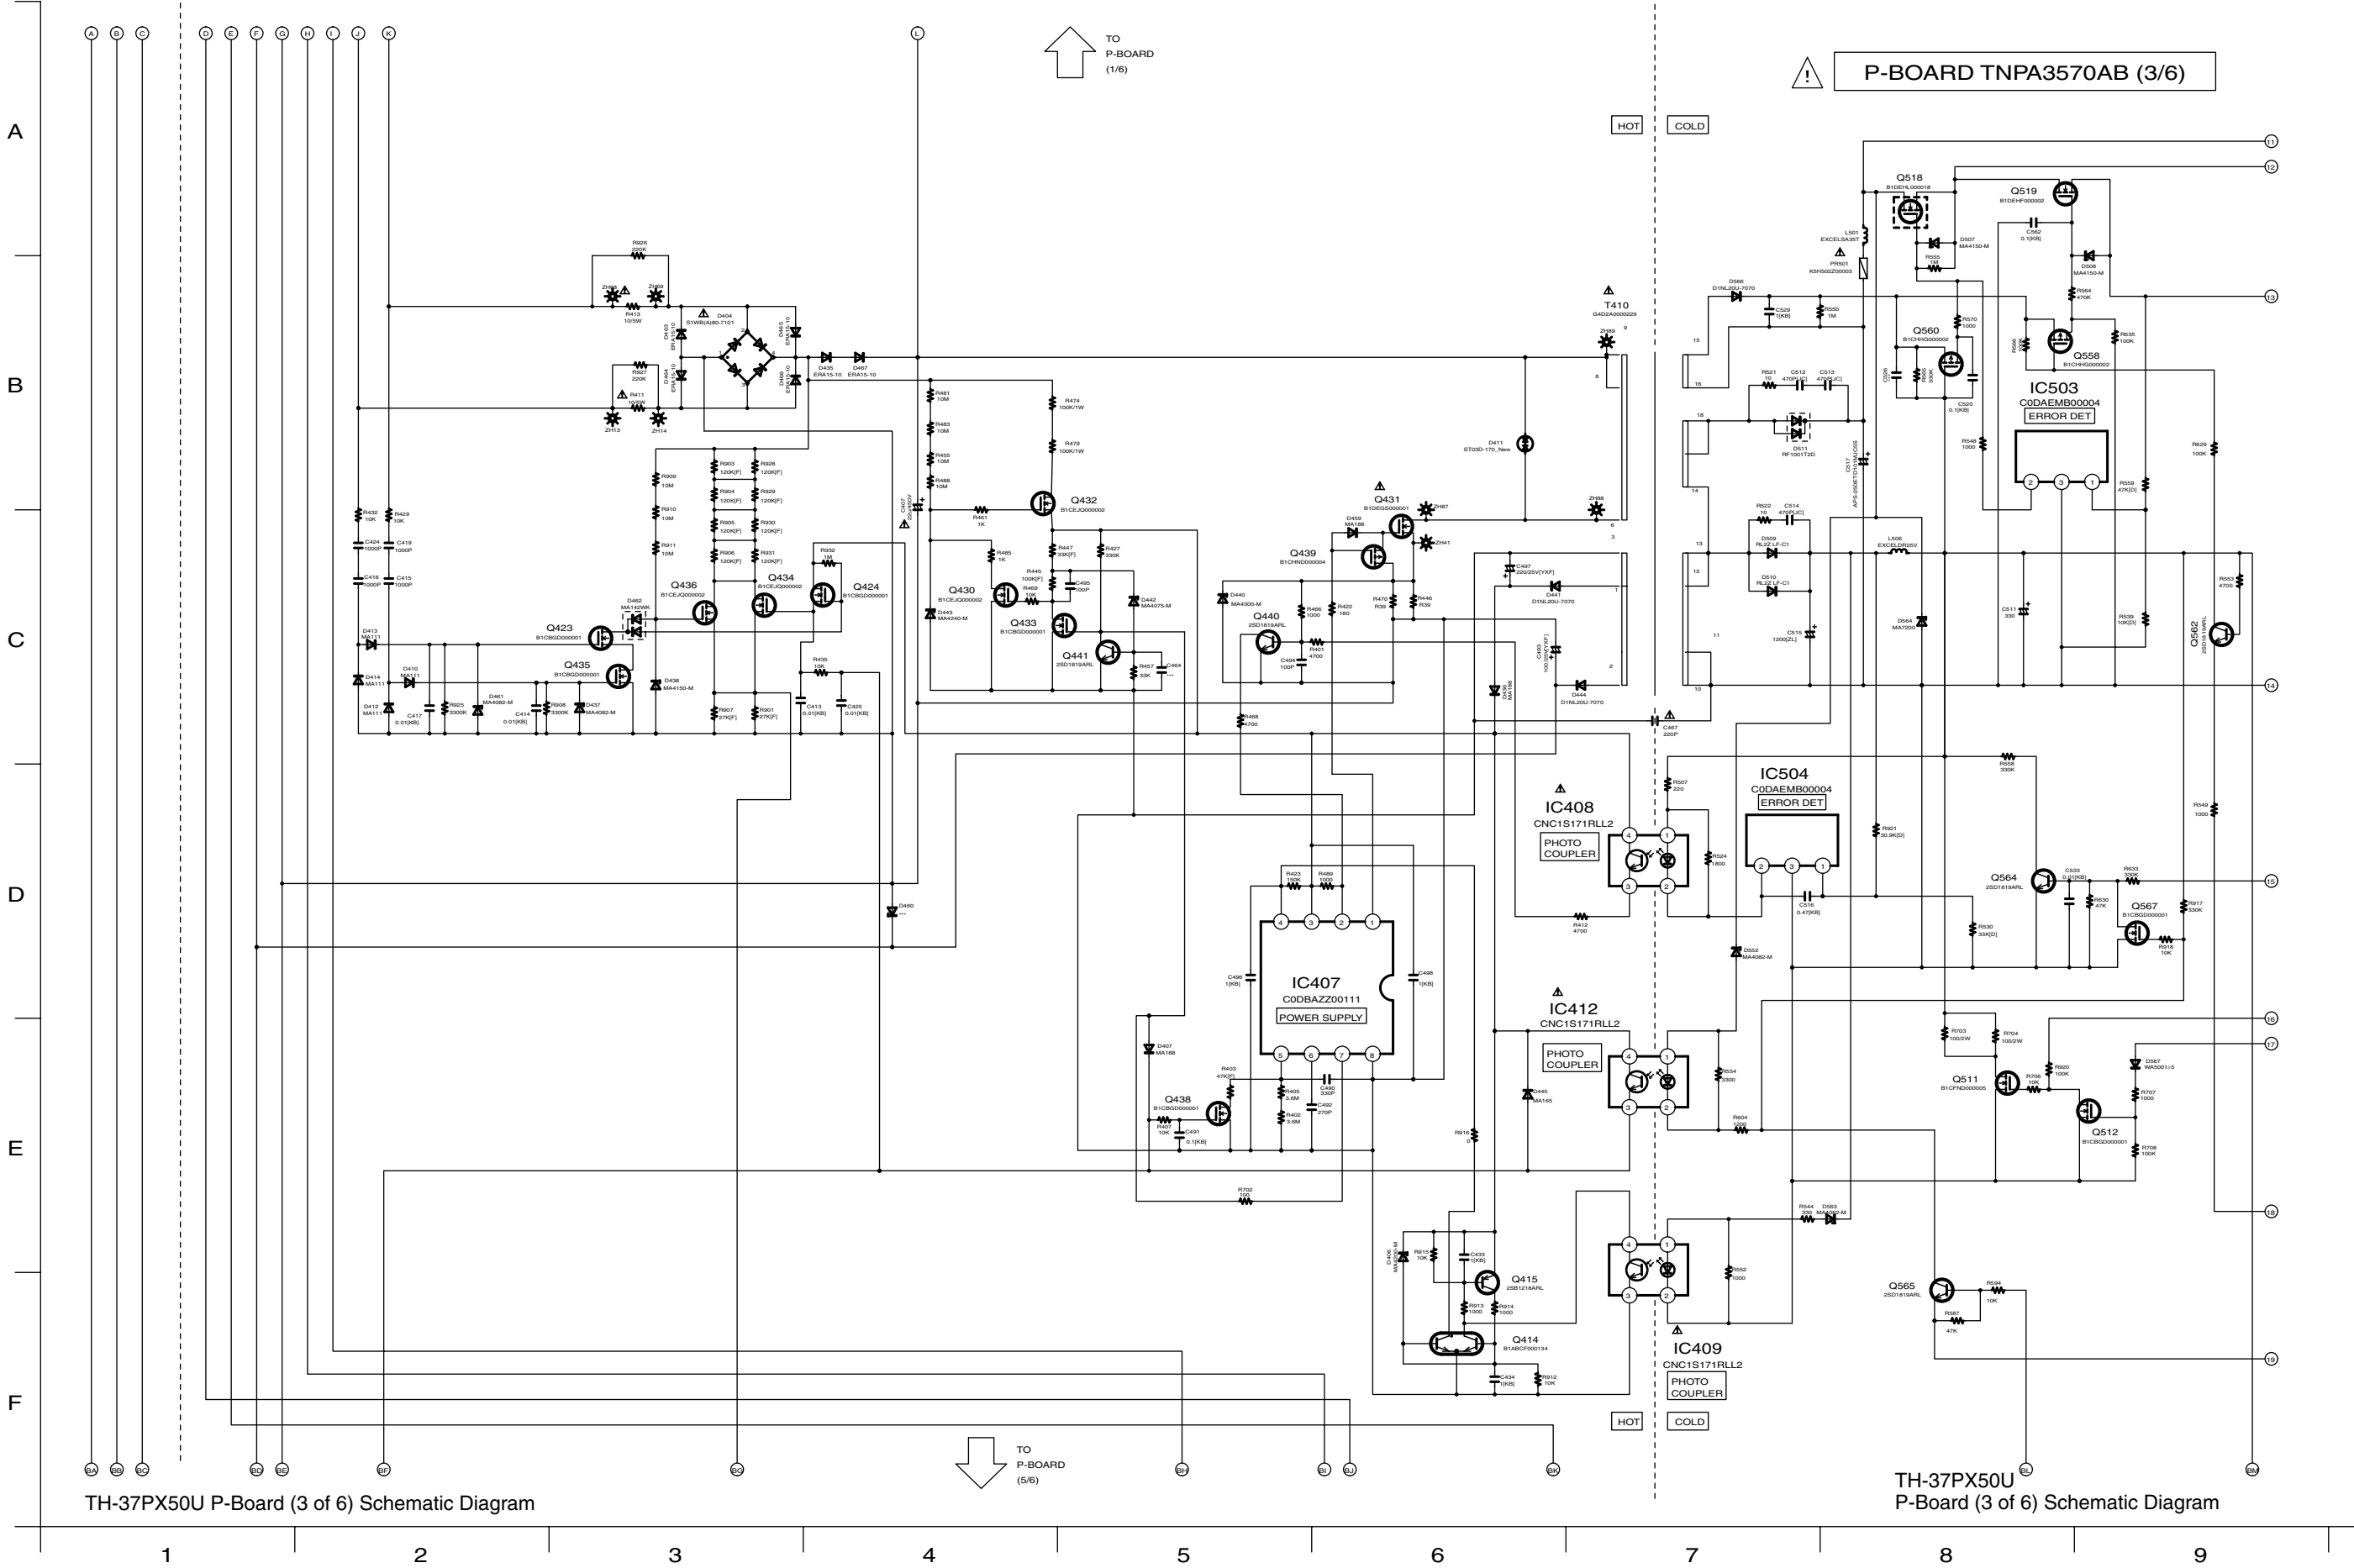


13.9. P-Board (4 of 6) Schematic Diagram (37inch)

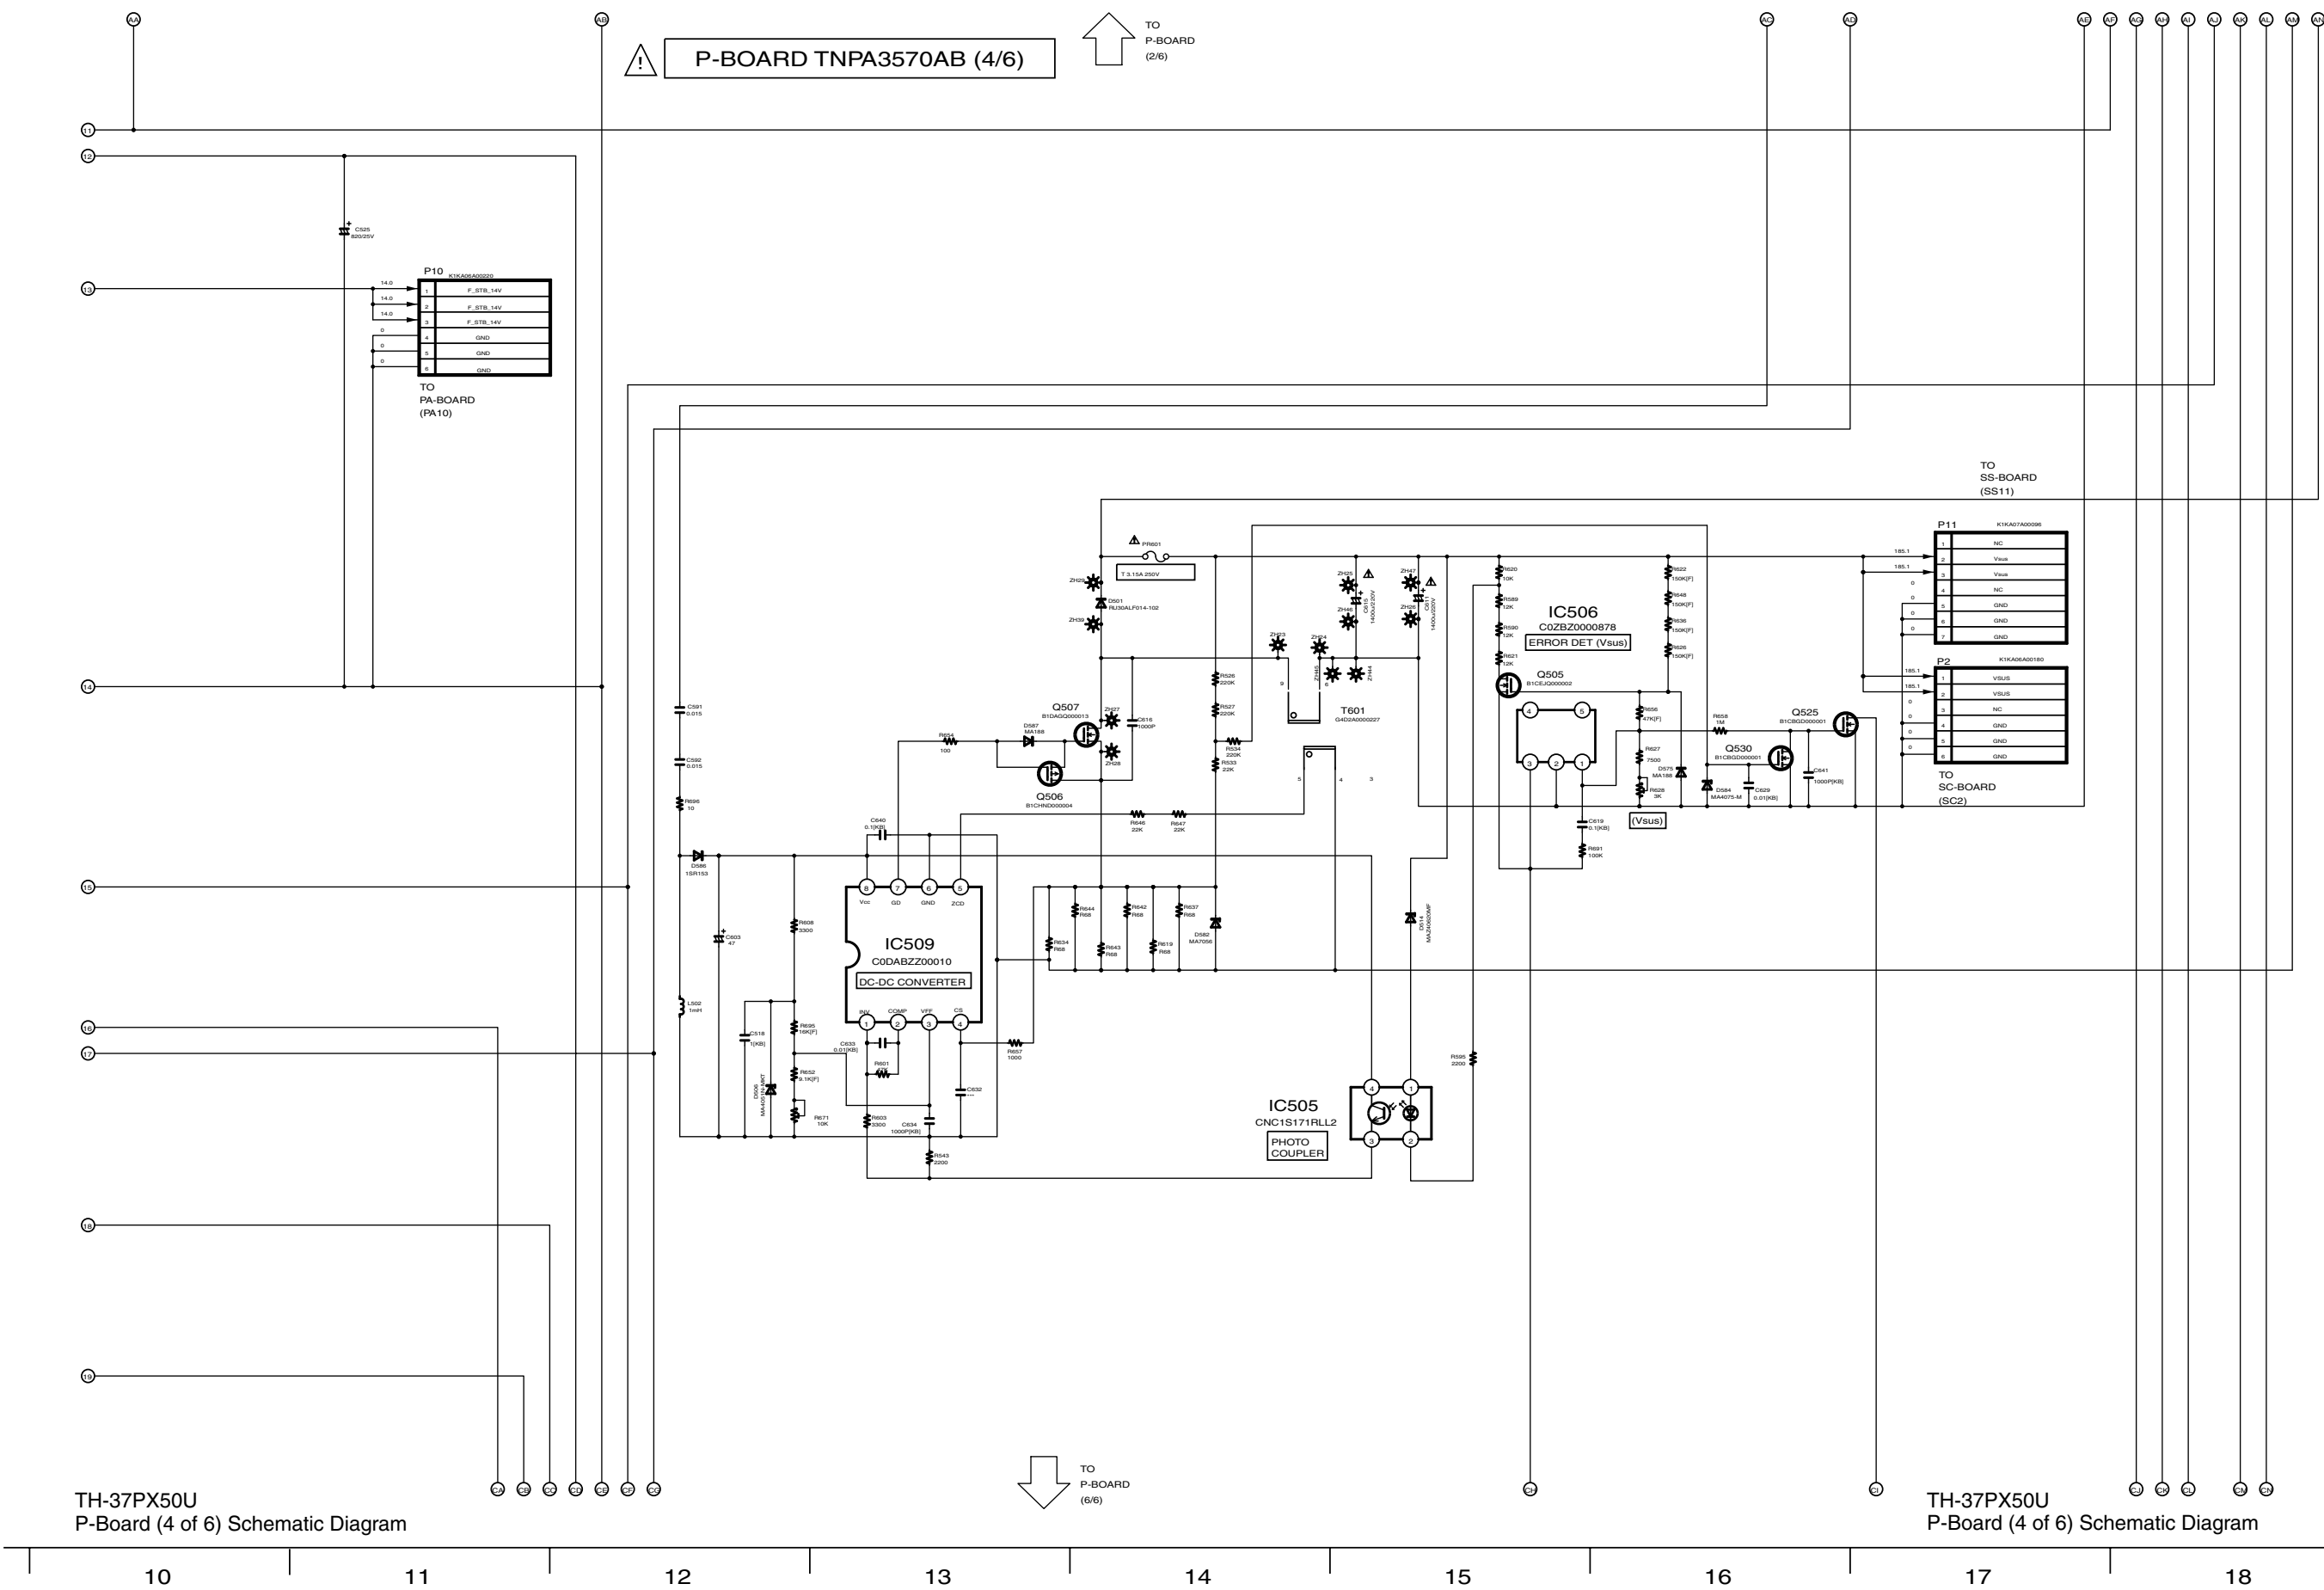




13.11. P-Board (6 of 6) Schematic Diagram (37inch)

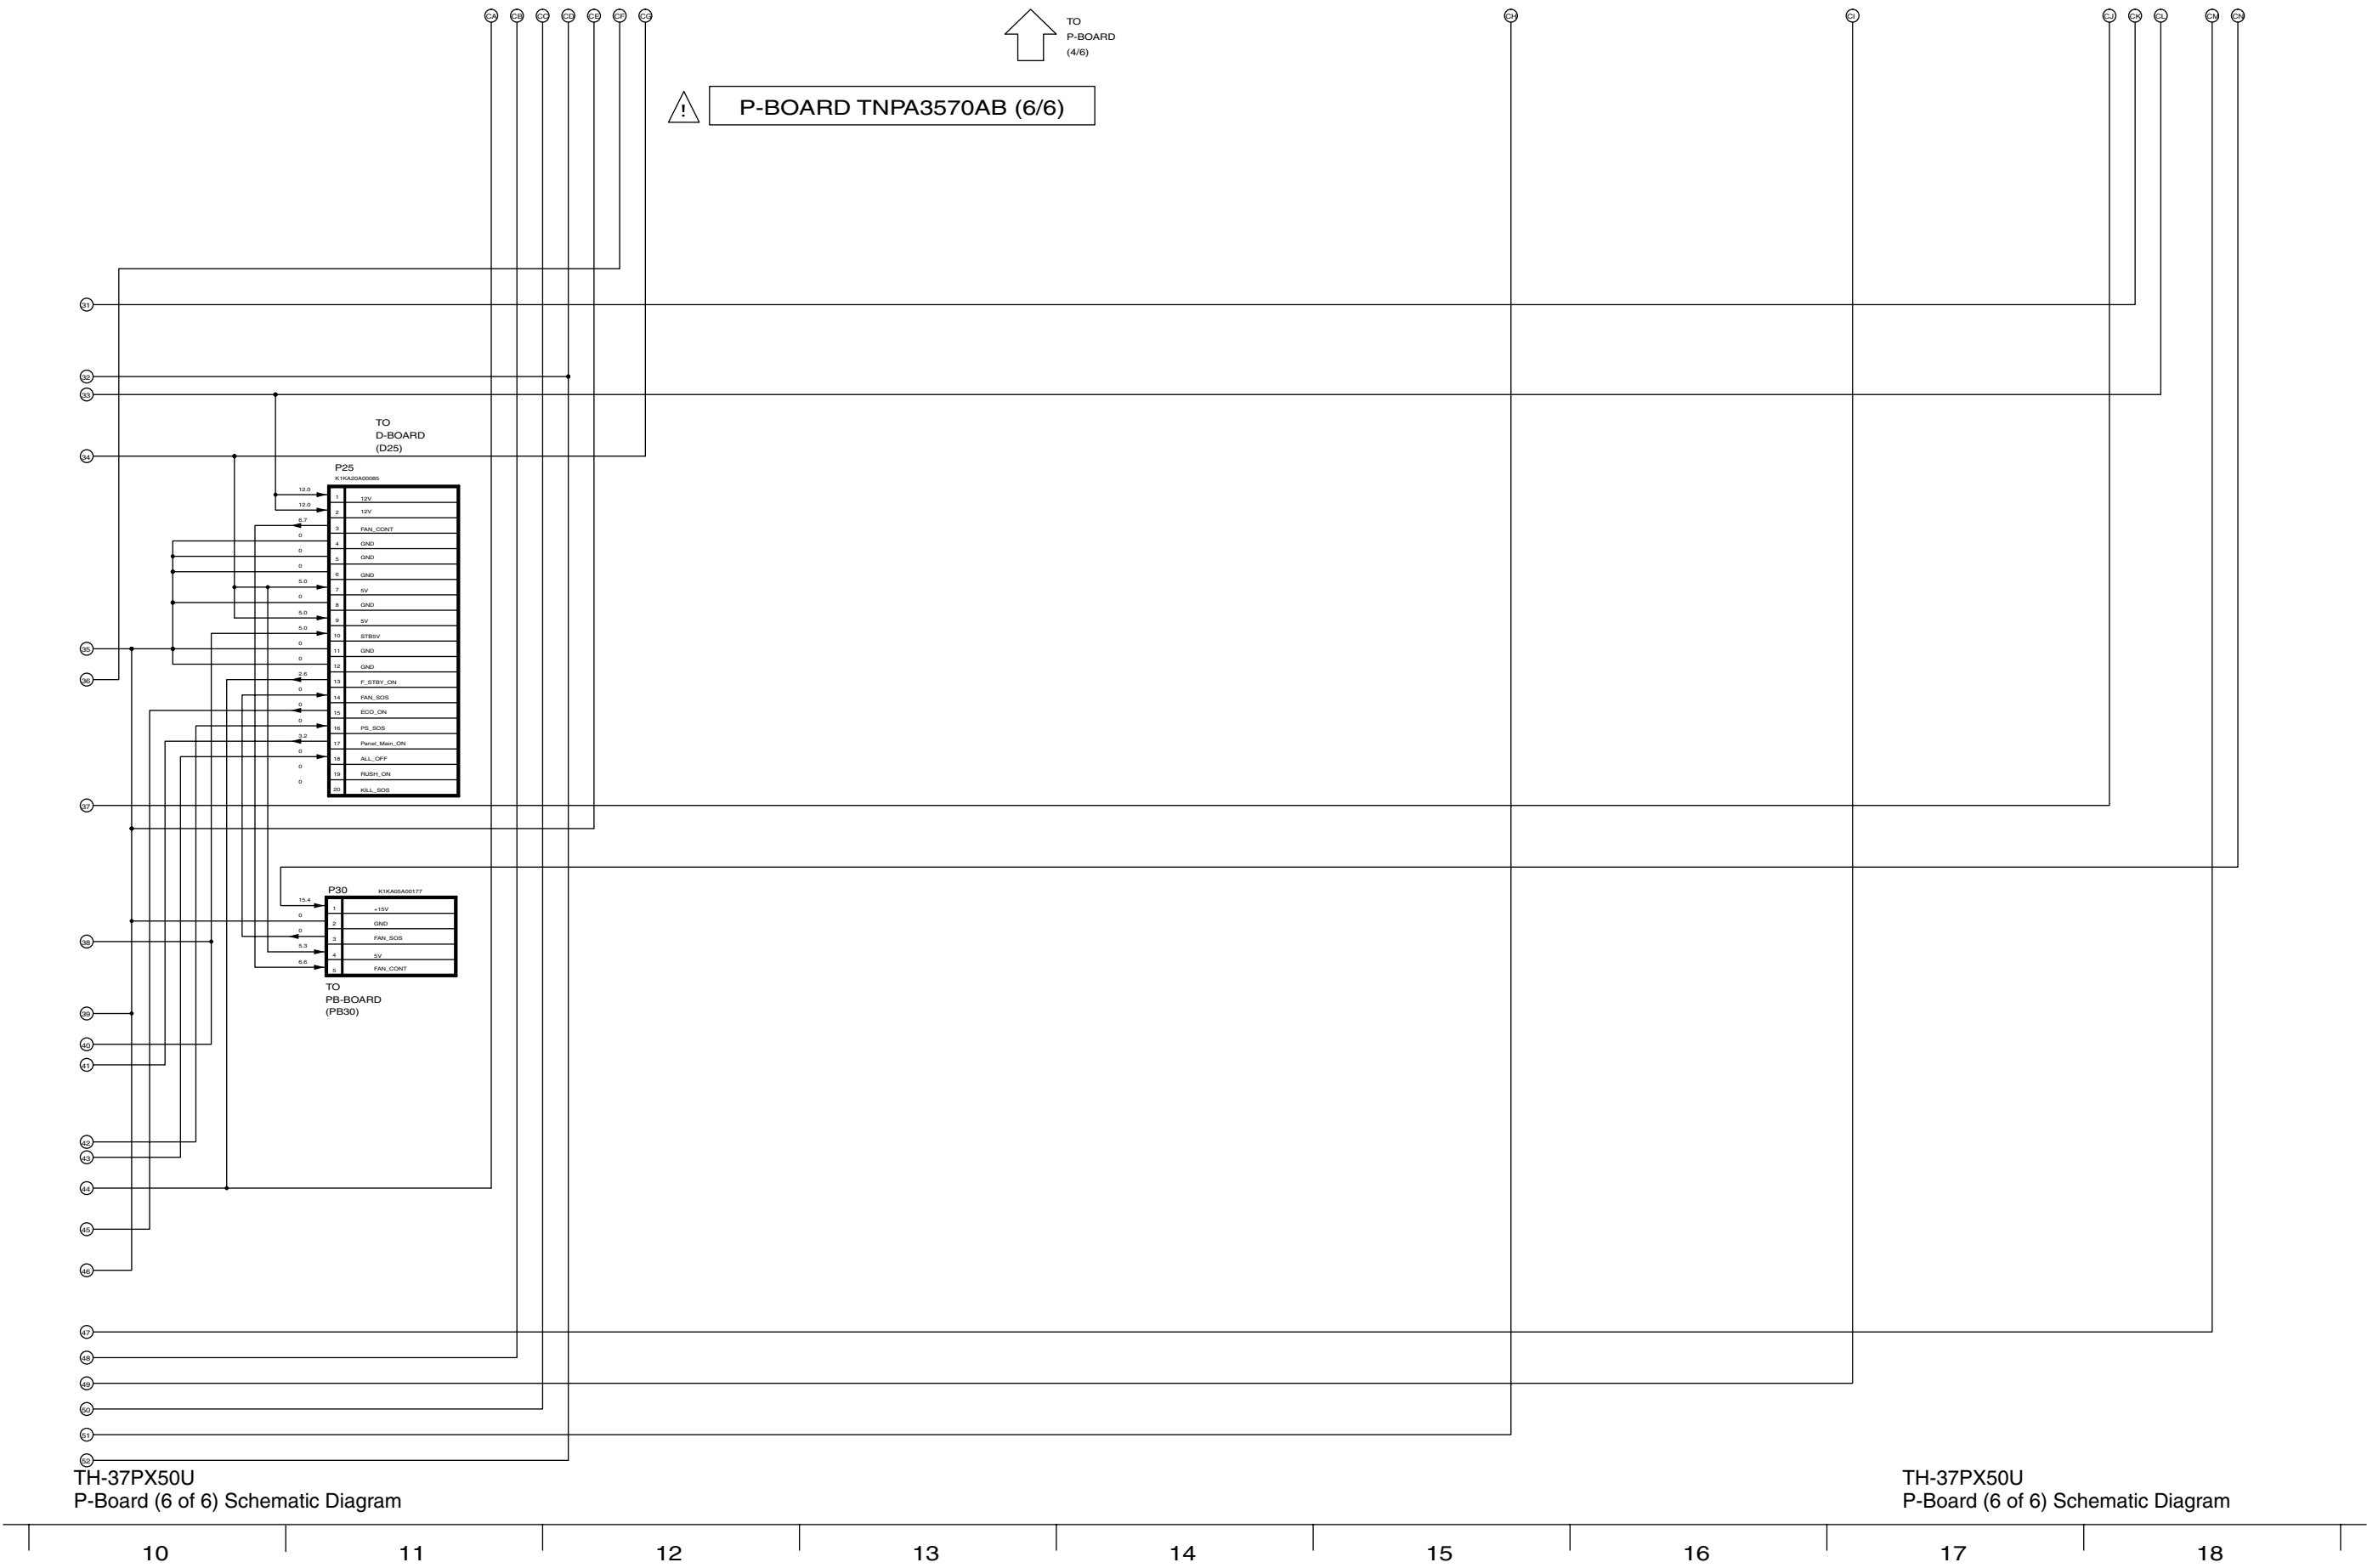

TH-37PX50U
P-Board (6 of 6) Schematic Diagram

TH-37PX50U
P-Board (6 of 6) Schematic Diagram


13.12. P-Board Block Diagram (42inch)

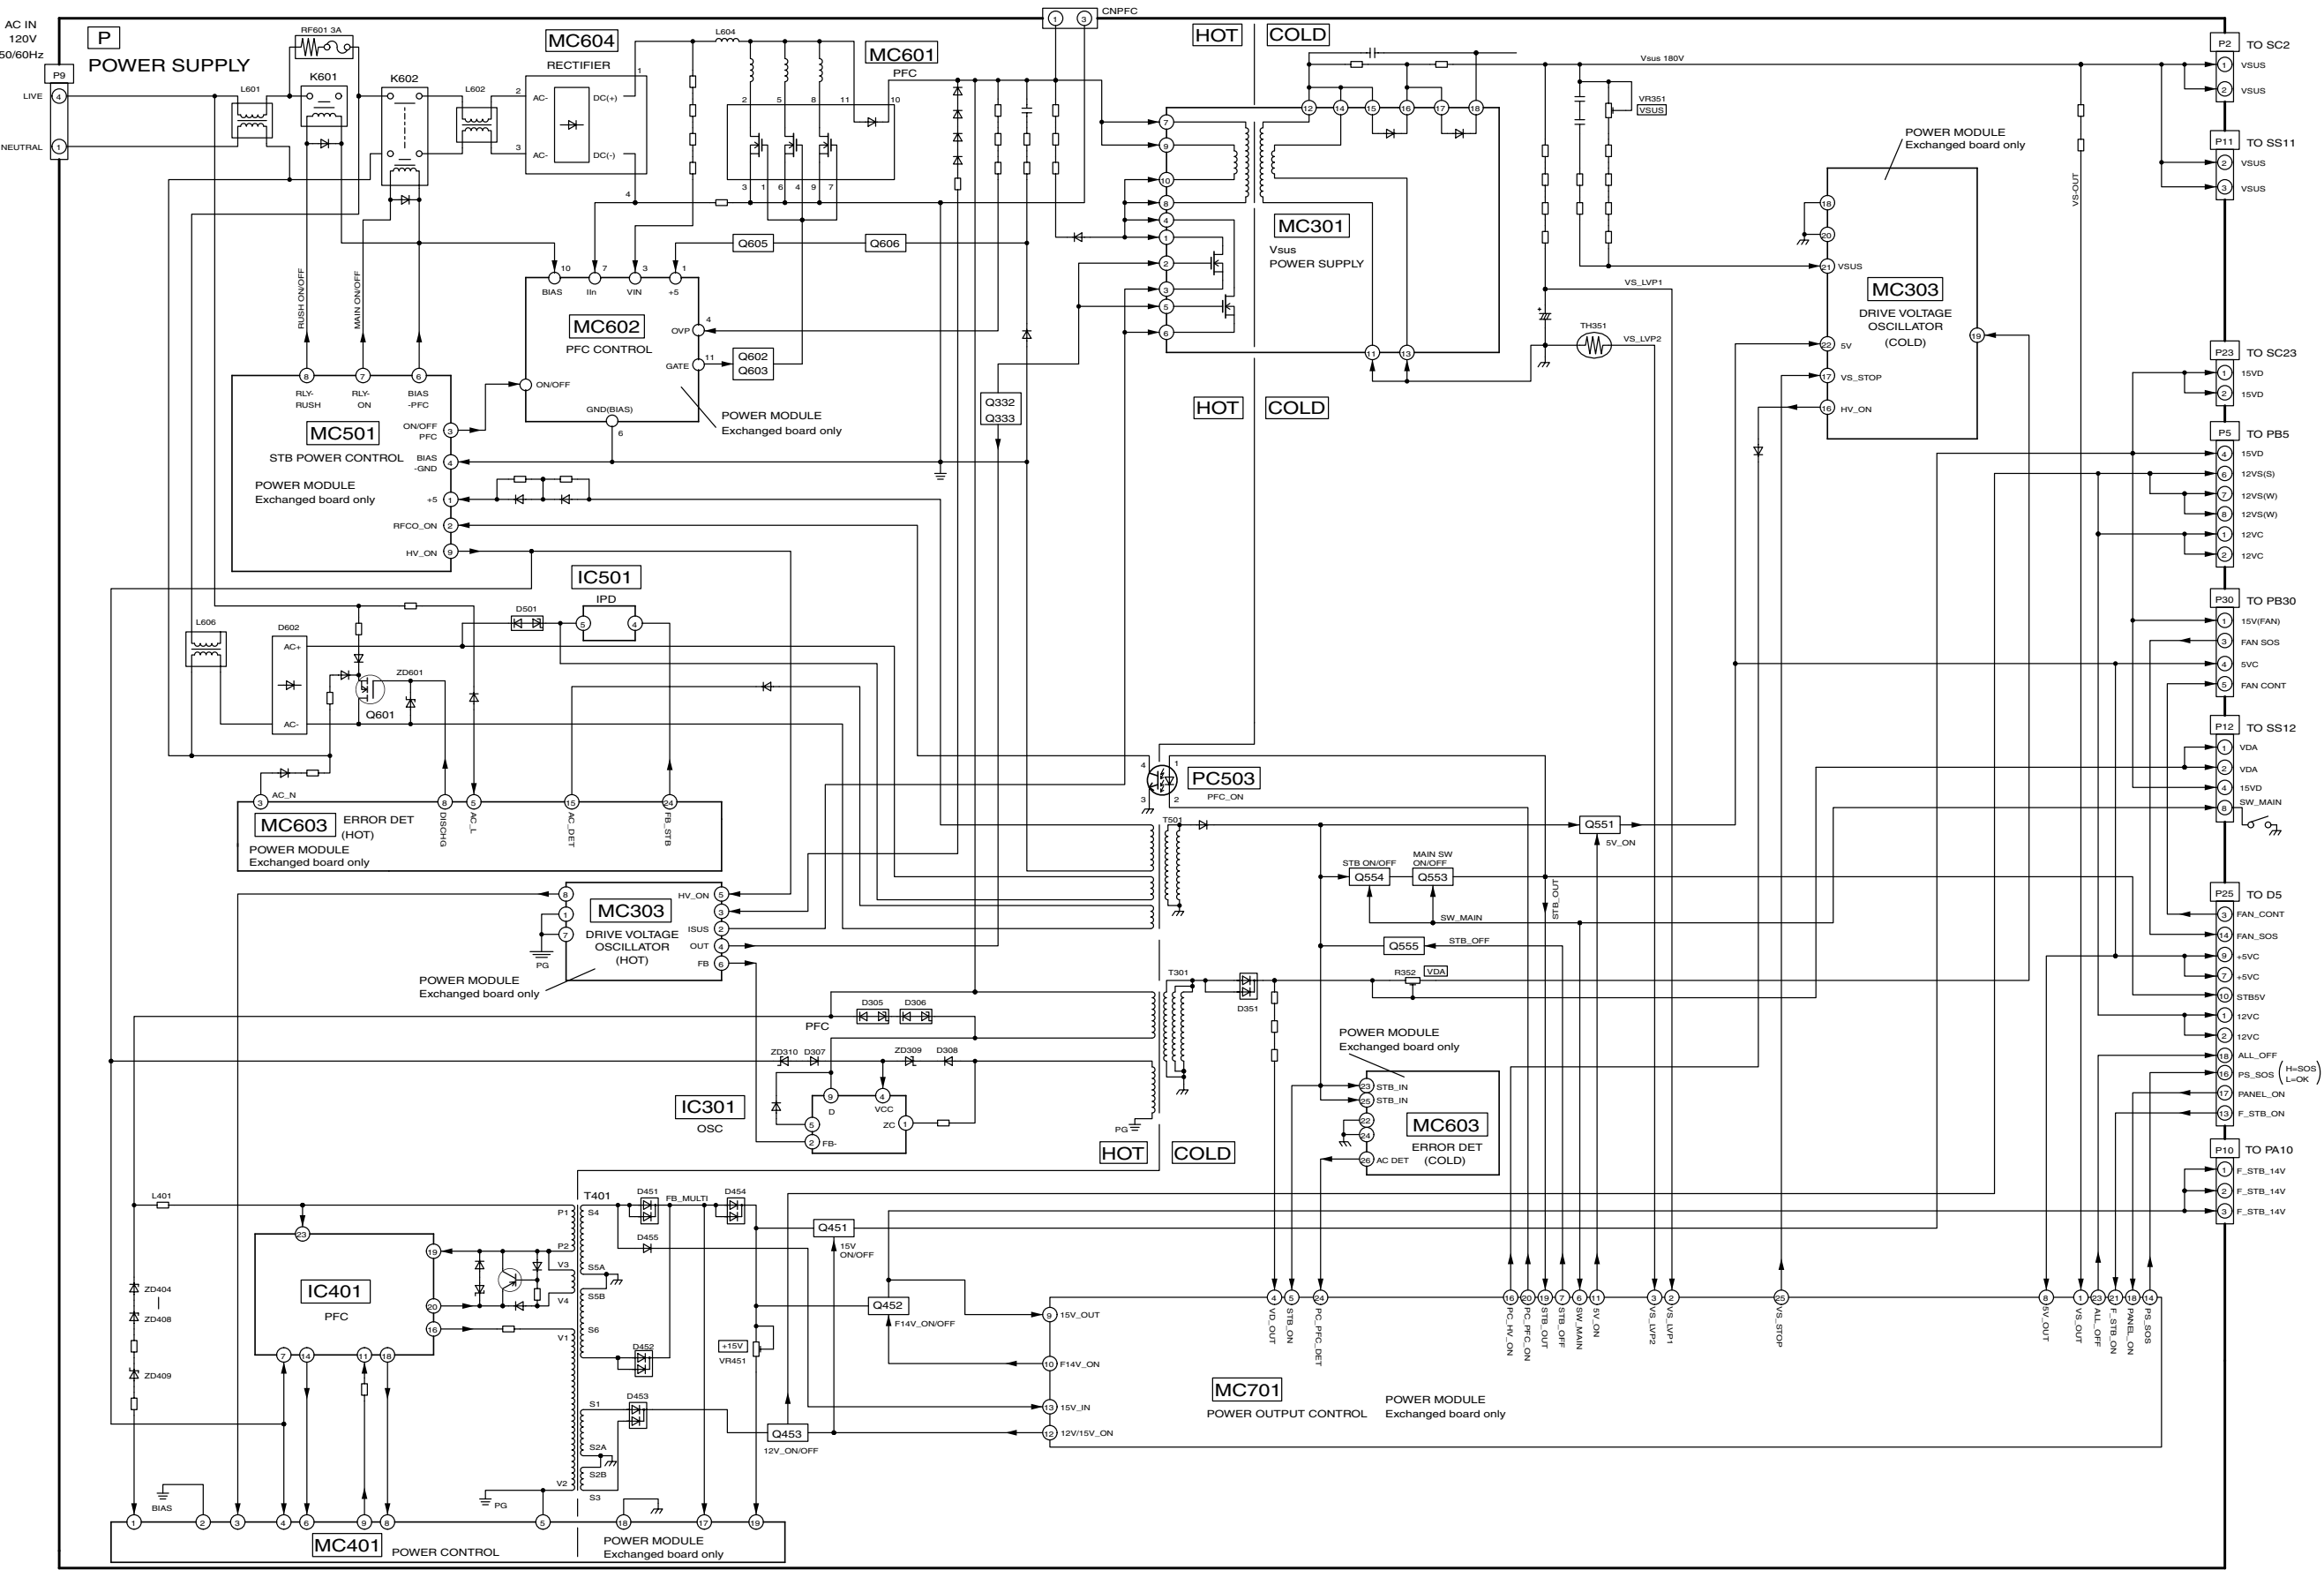


TH-42PX50U
P-Board Block Diagram

TH-42PX50U
P-Board Block Diagram


13.13. P-Board (1 of 2) Schematic Diagram (42inch)

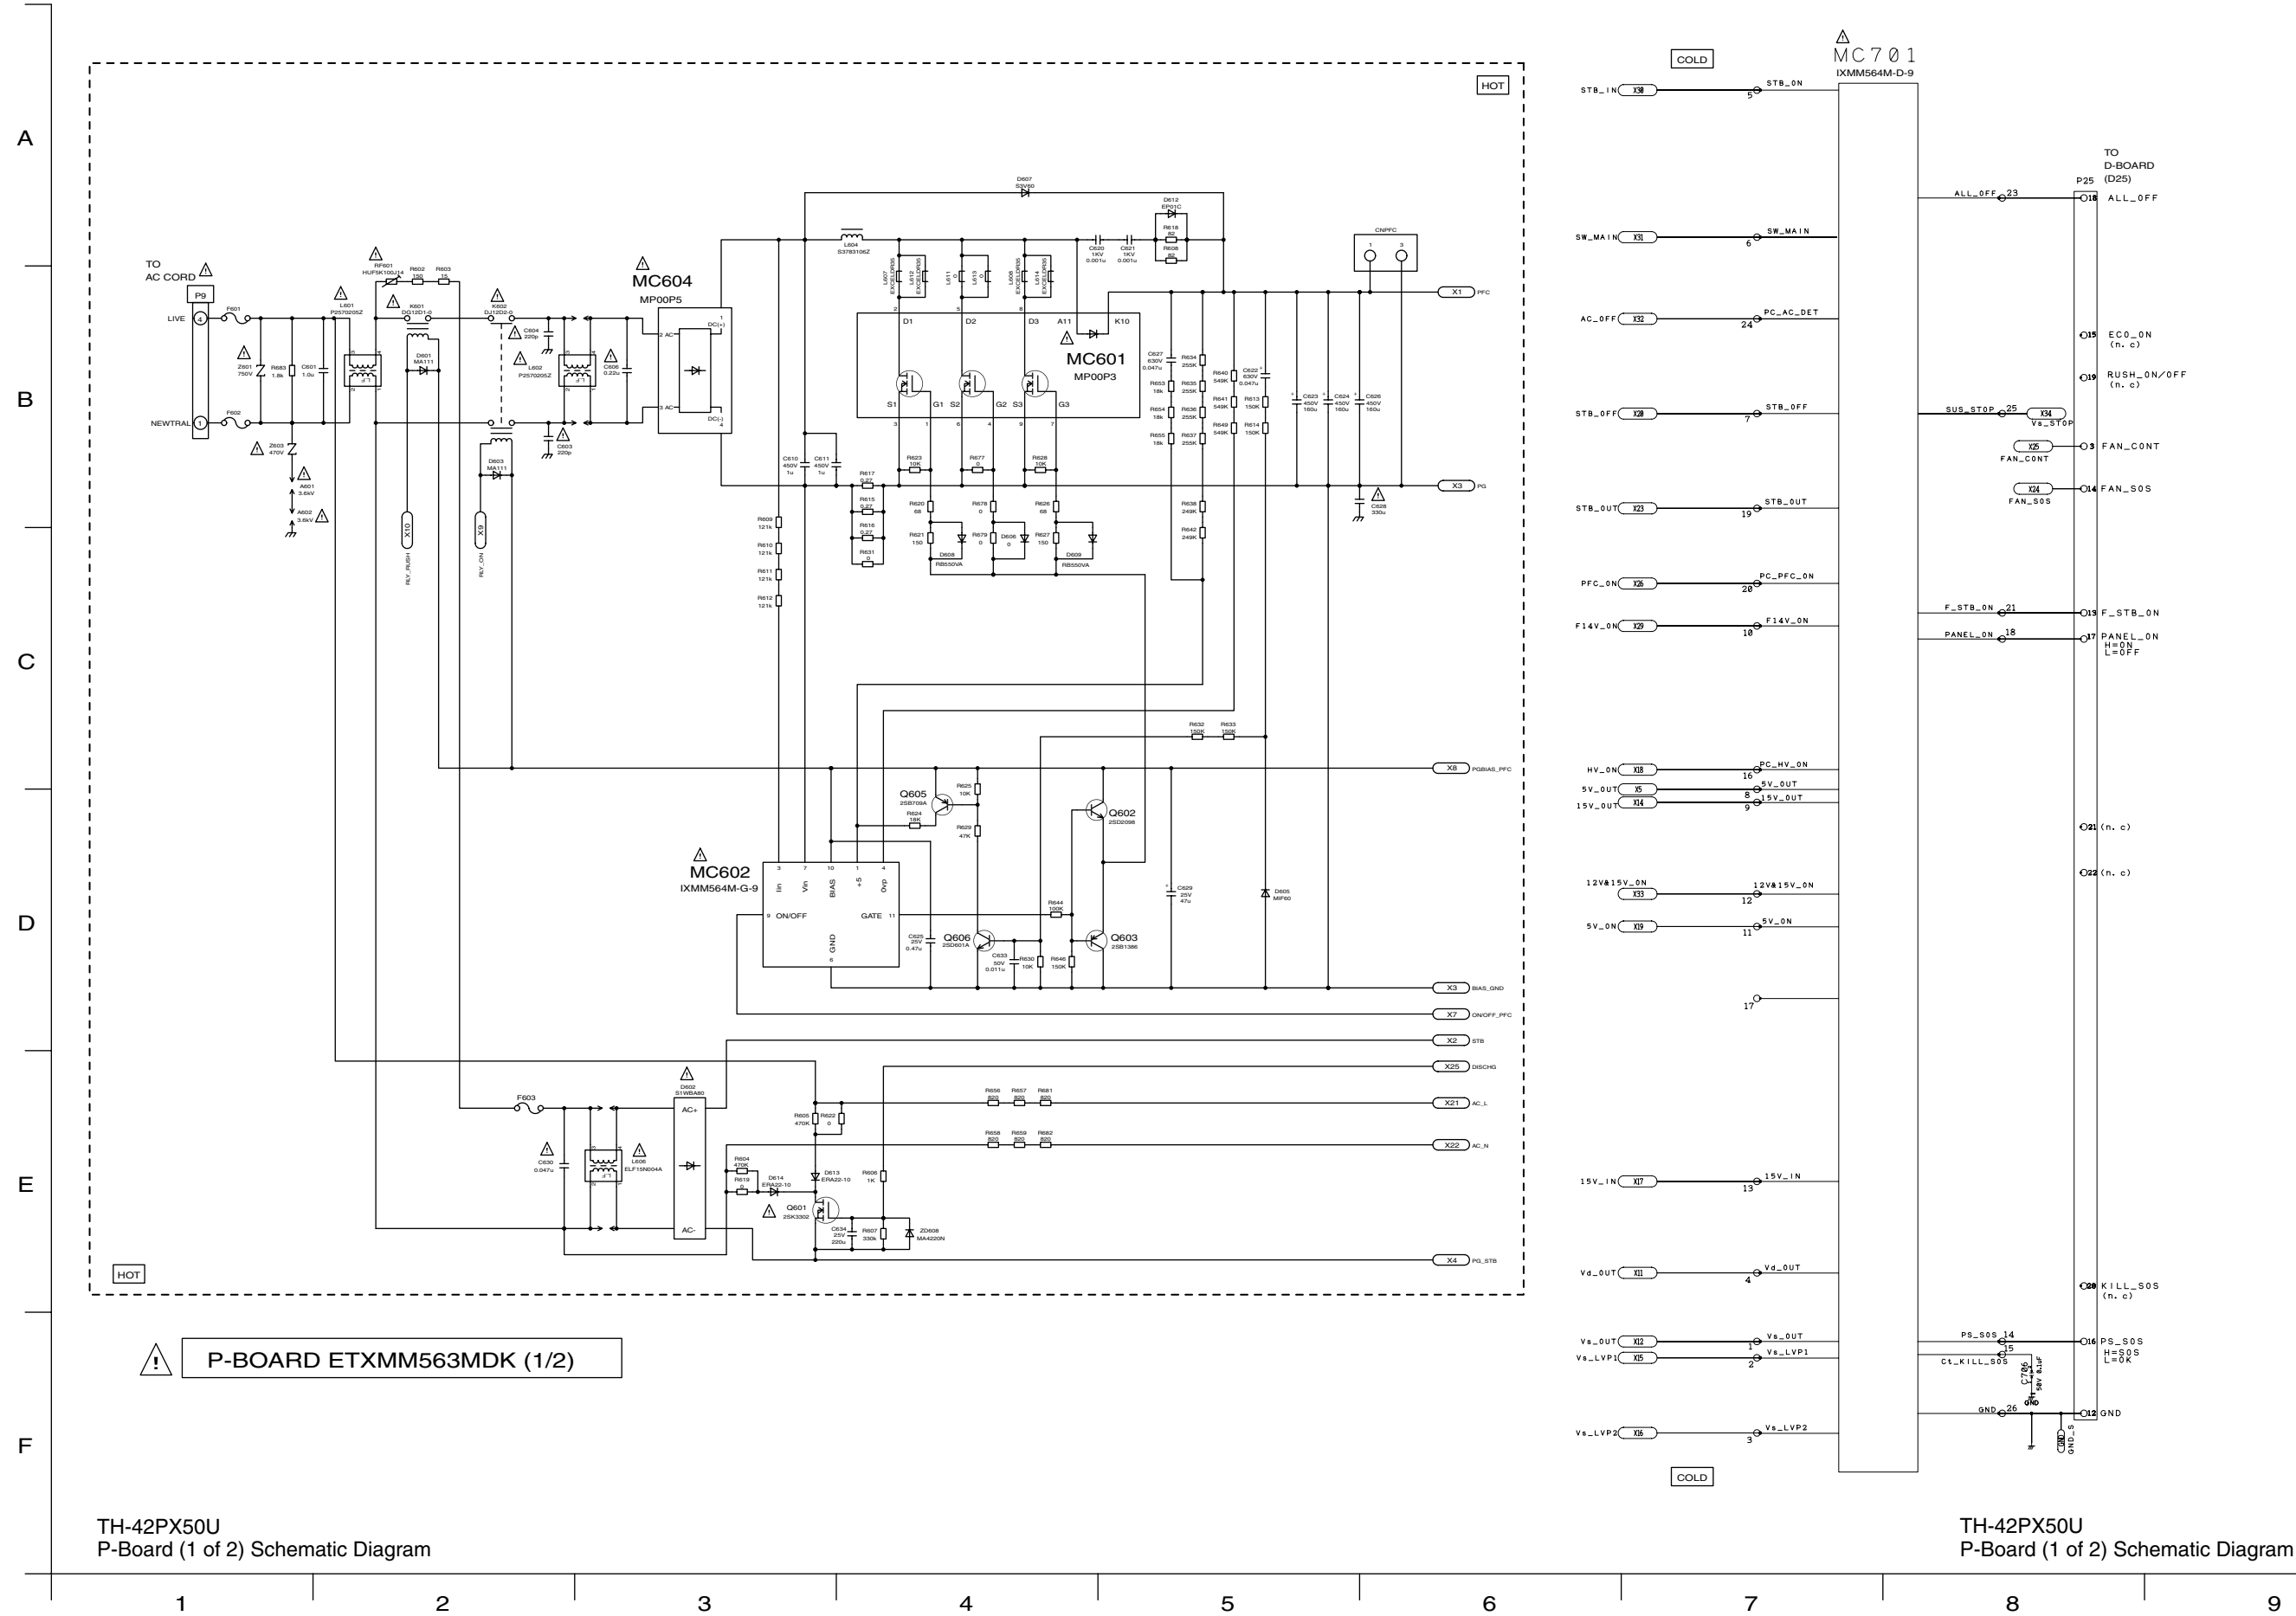

13.14. P-Board (2 of 2) Schematic Diagram (42inch)

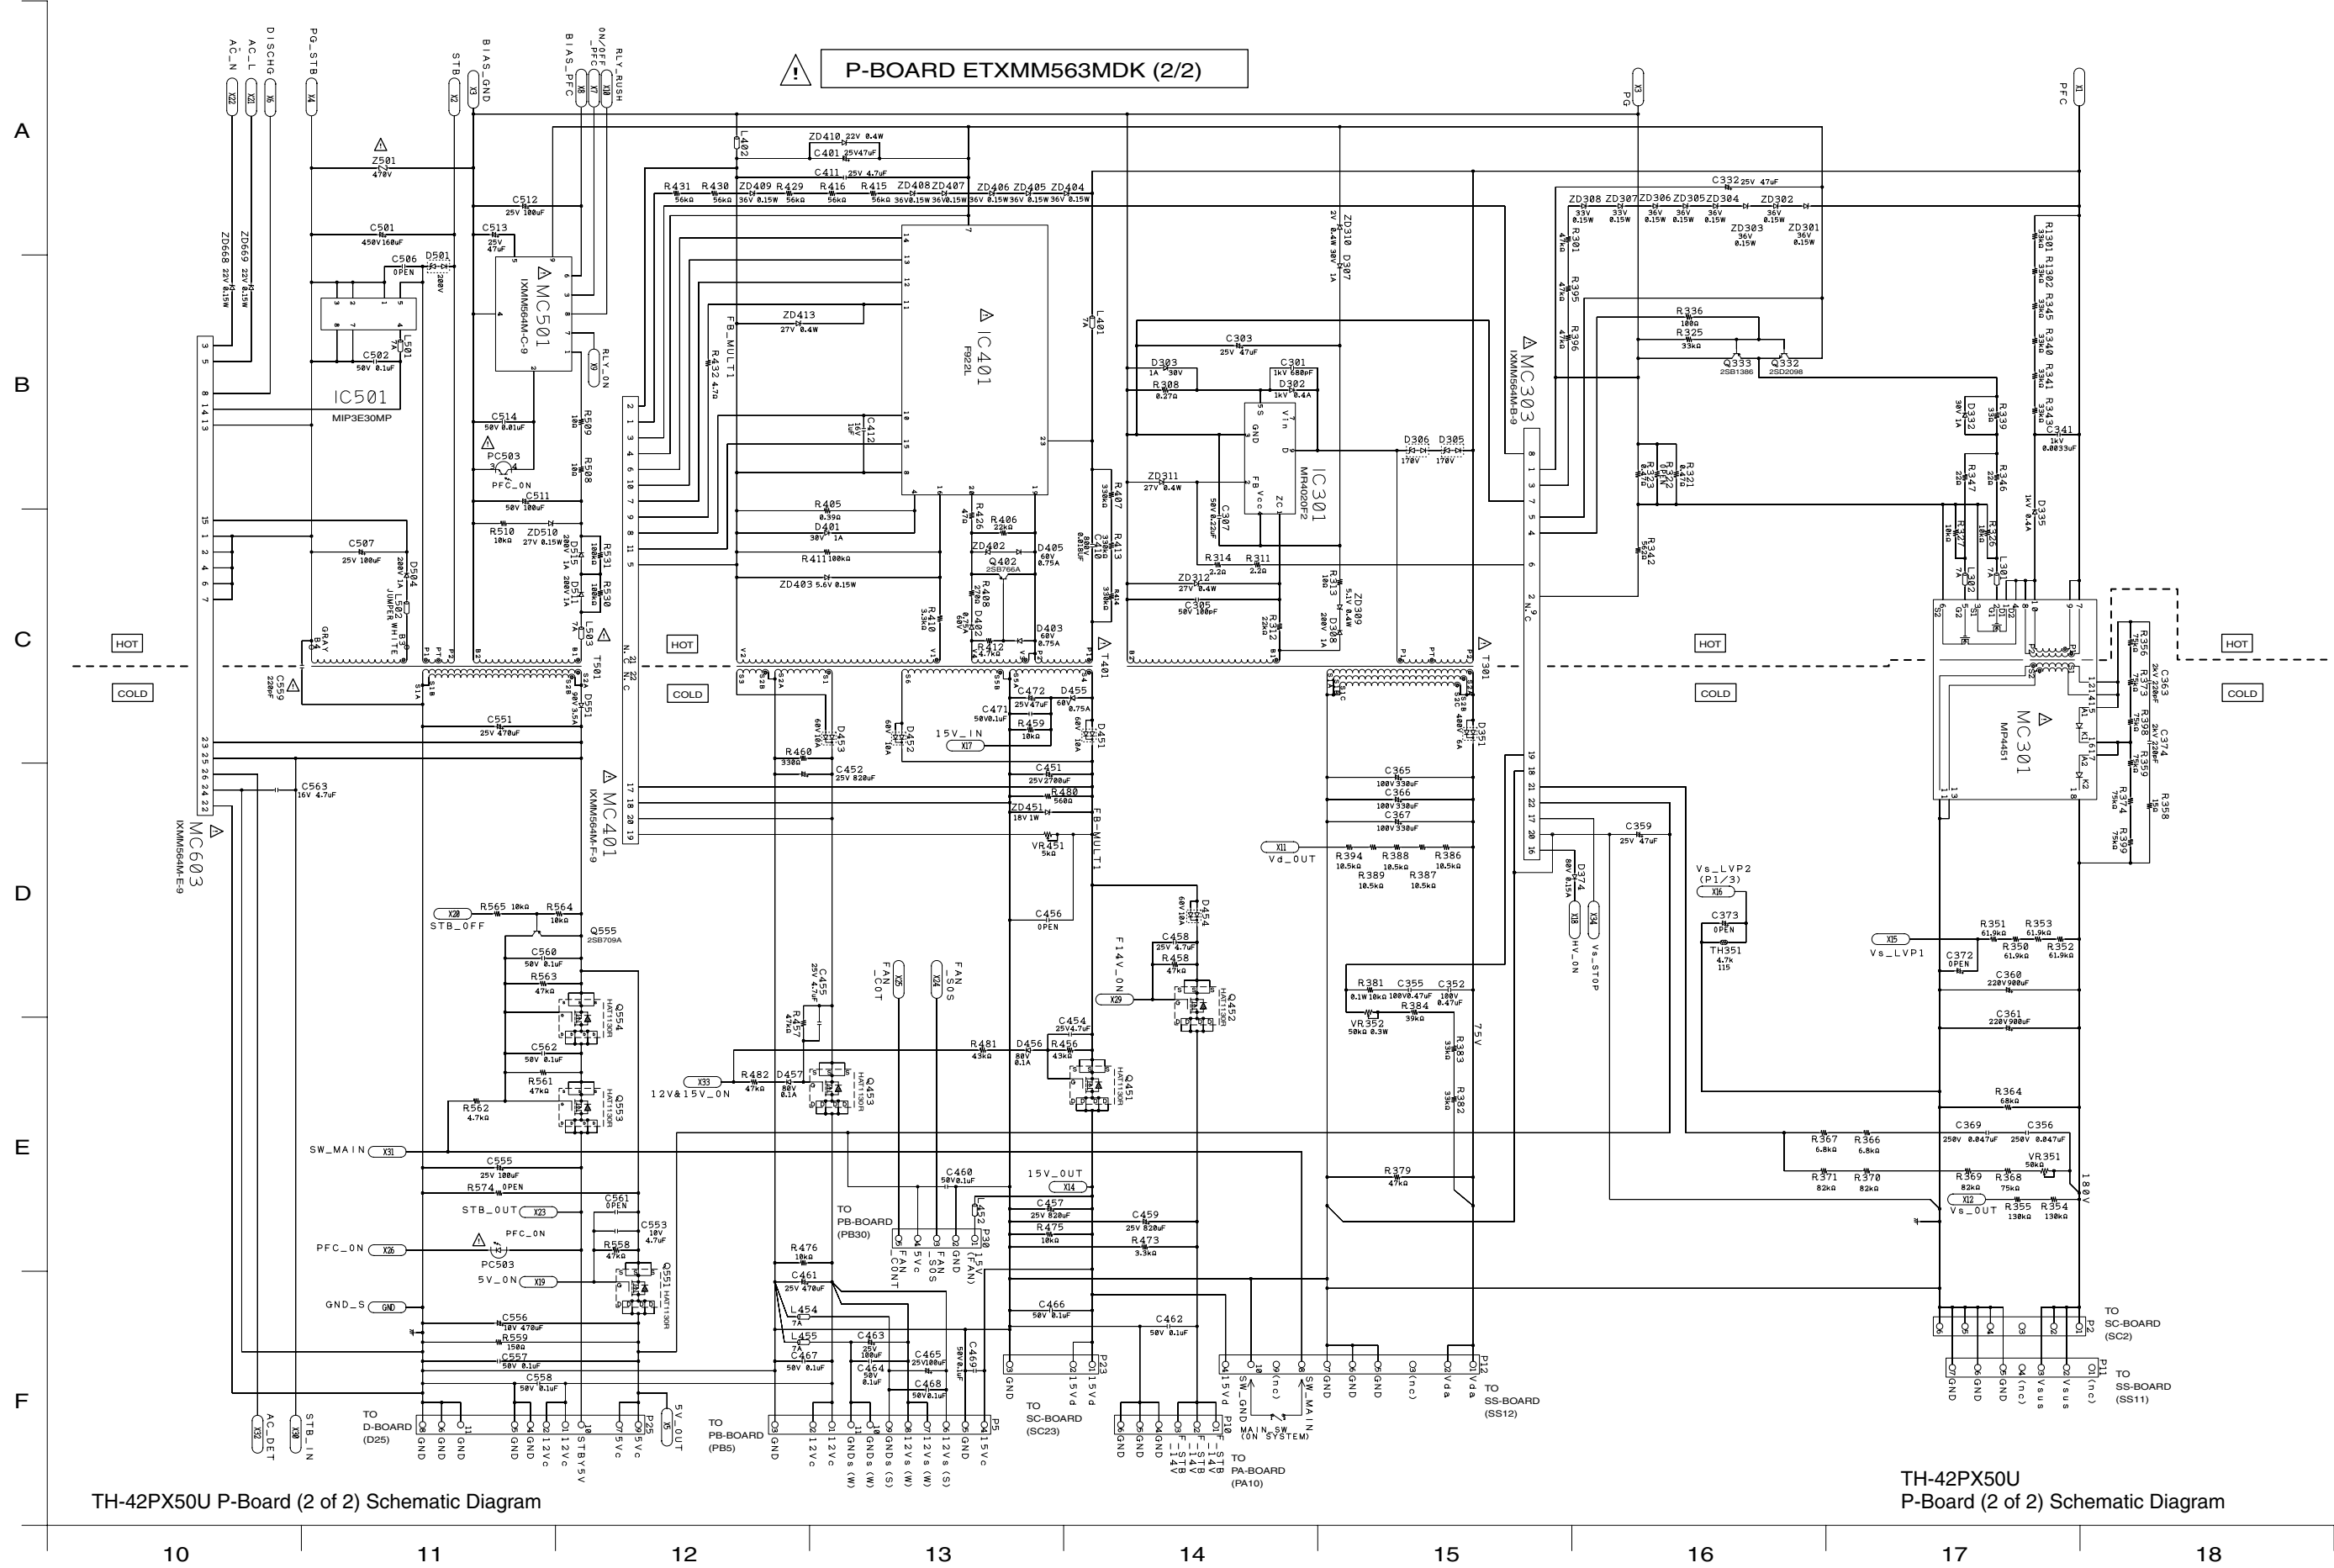

13.15. P-Board Block Diagram (50inch)

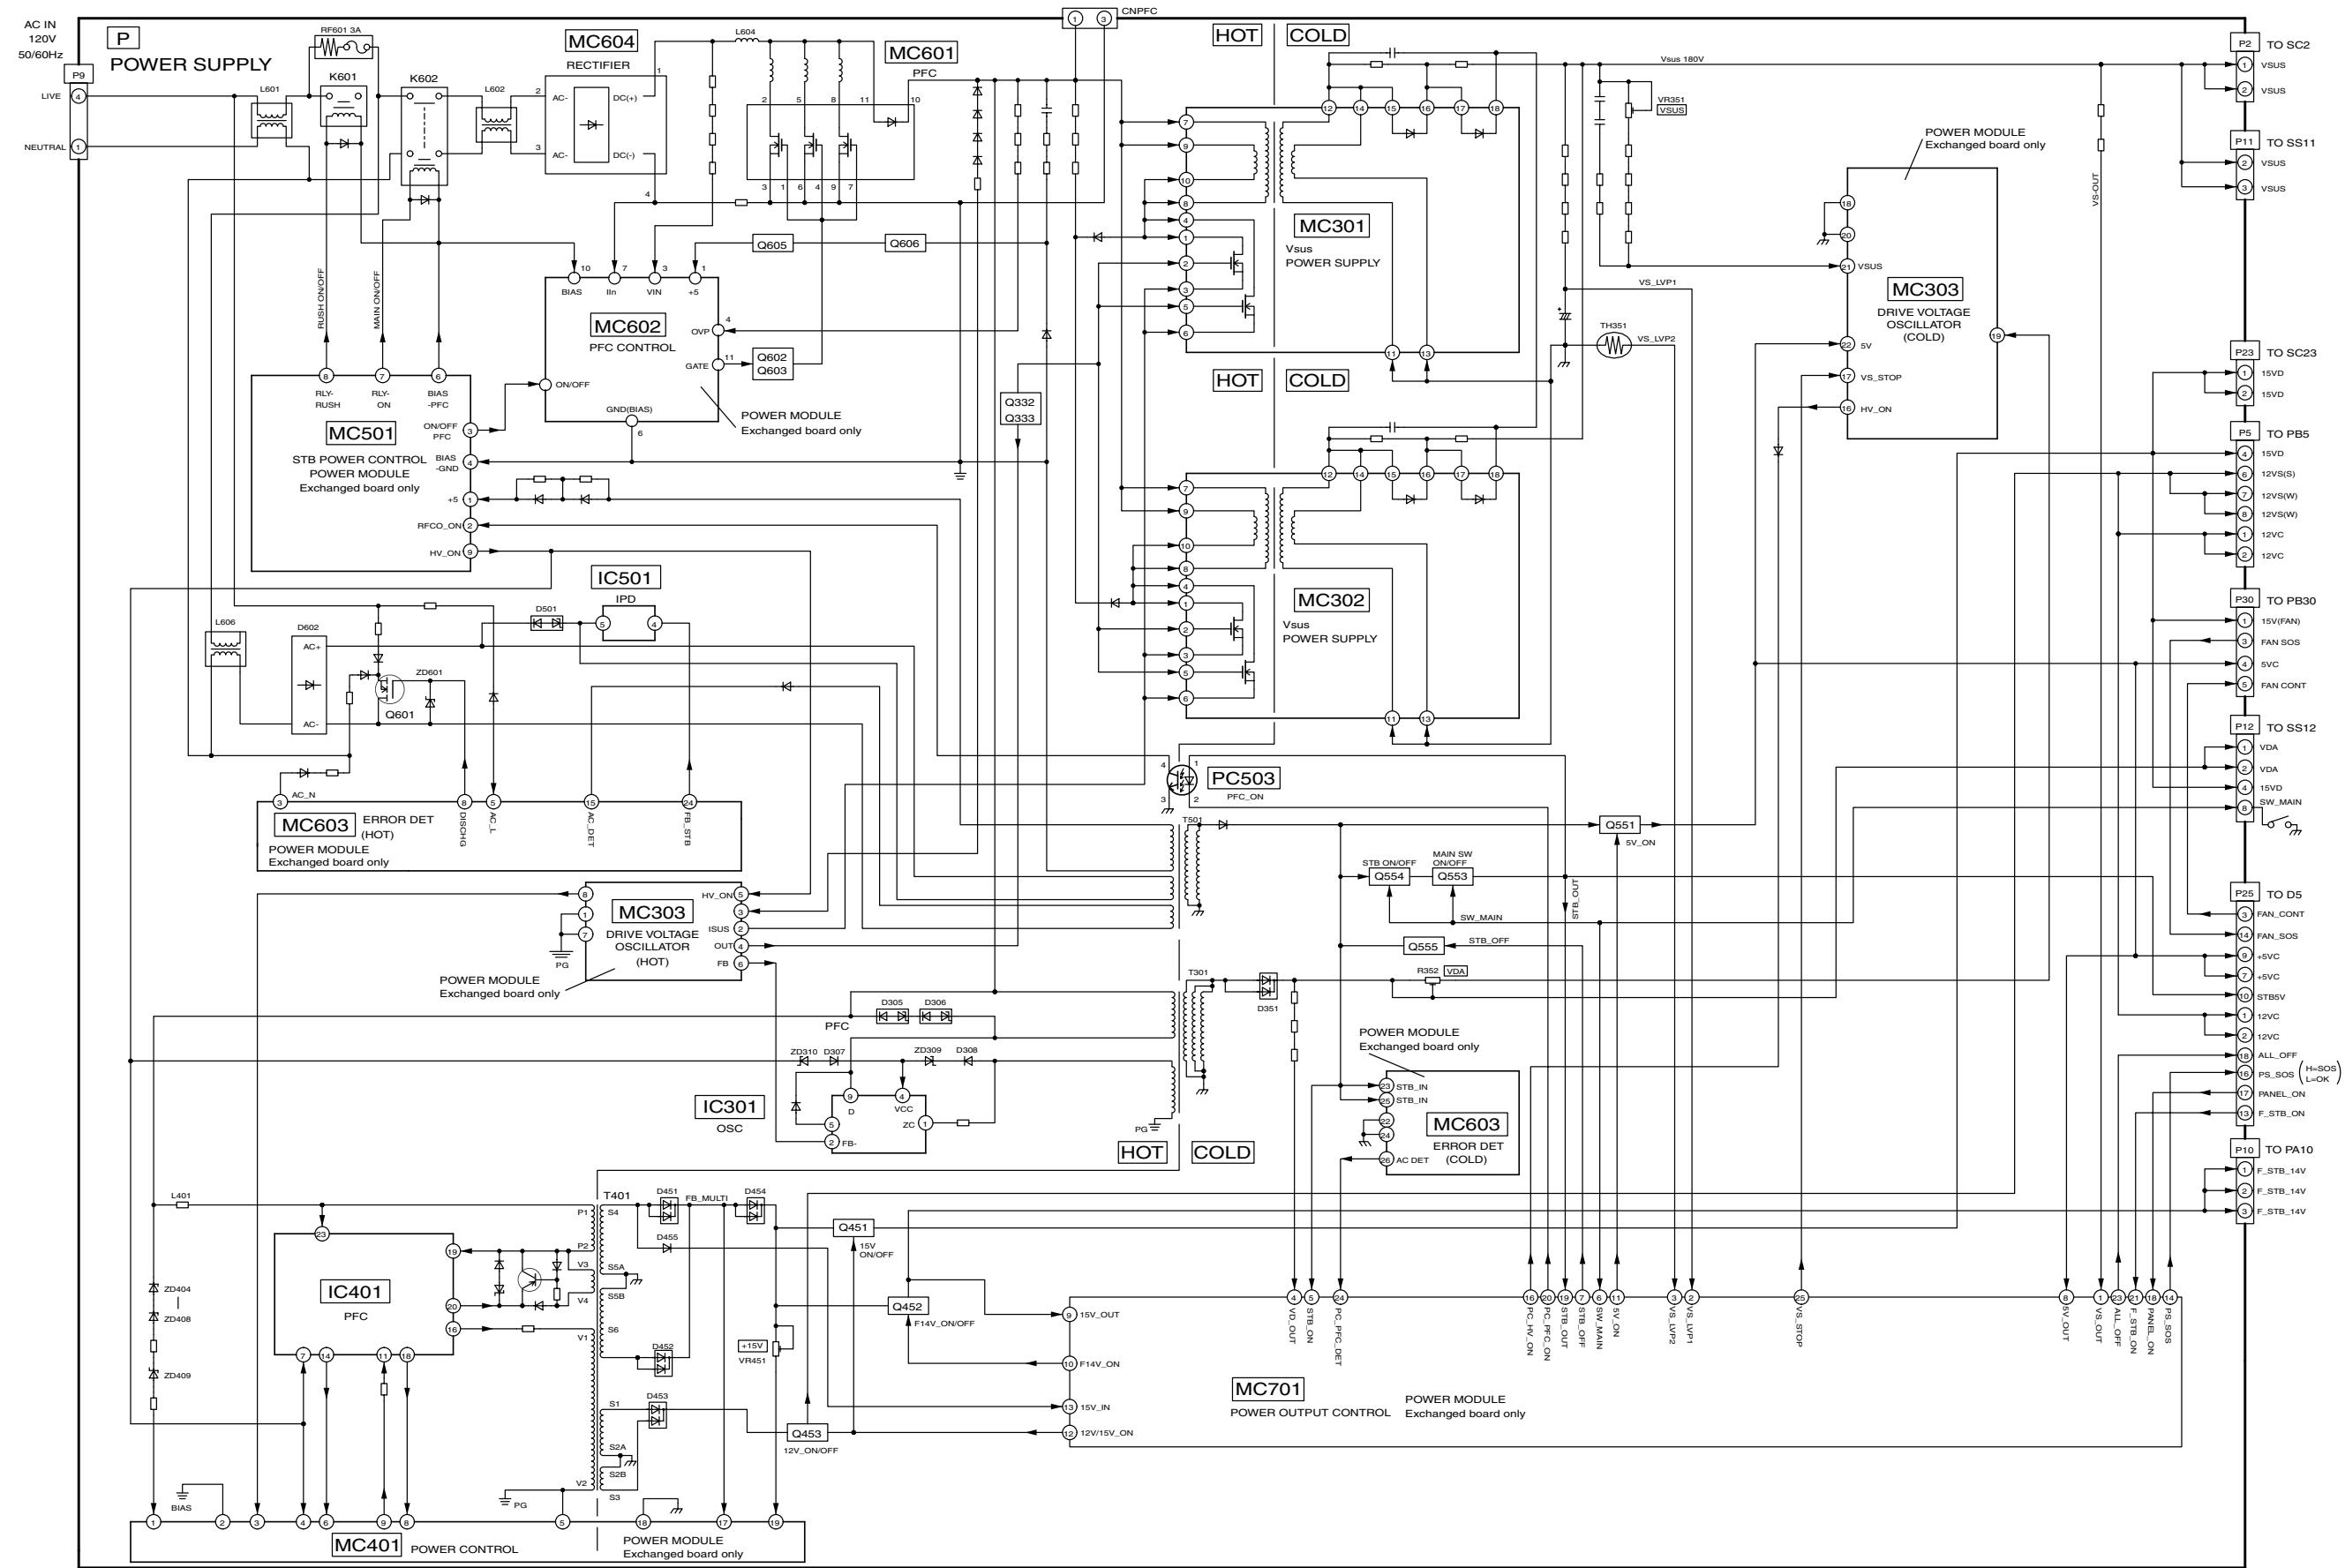


TH-50PX50U
P-Board Block Diagram

TH-50PX50U
P-Board Block Diagram




TH-50PX50U

P-Board (1 of 2) Schematic Diagram




13.17. P-Board (2 of 2) Schematic Diagram (50inch)

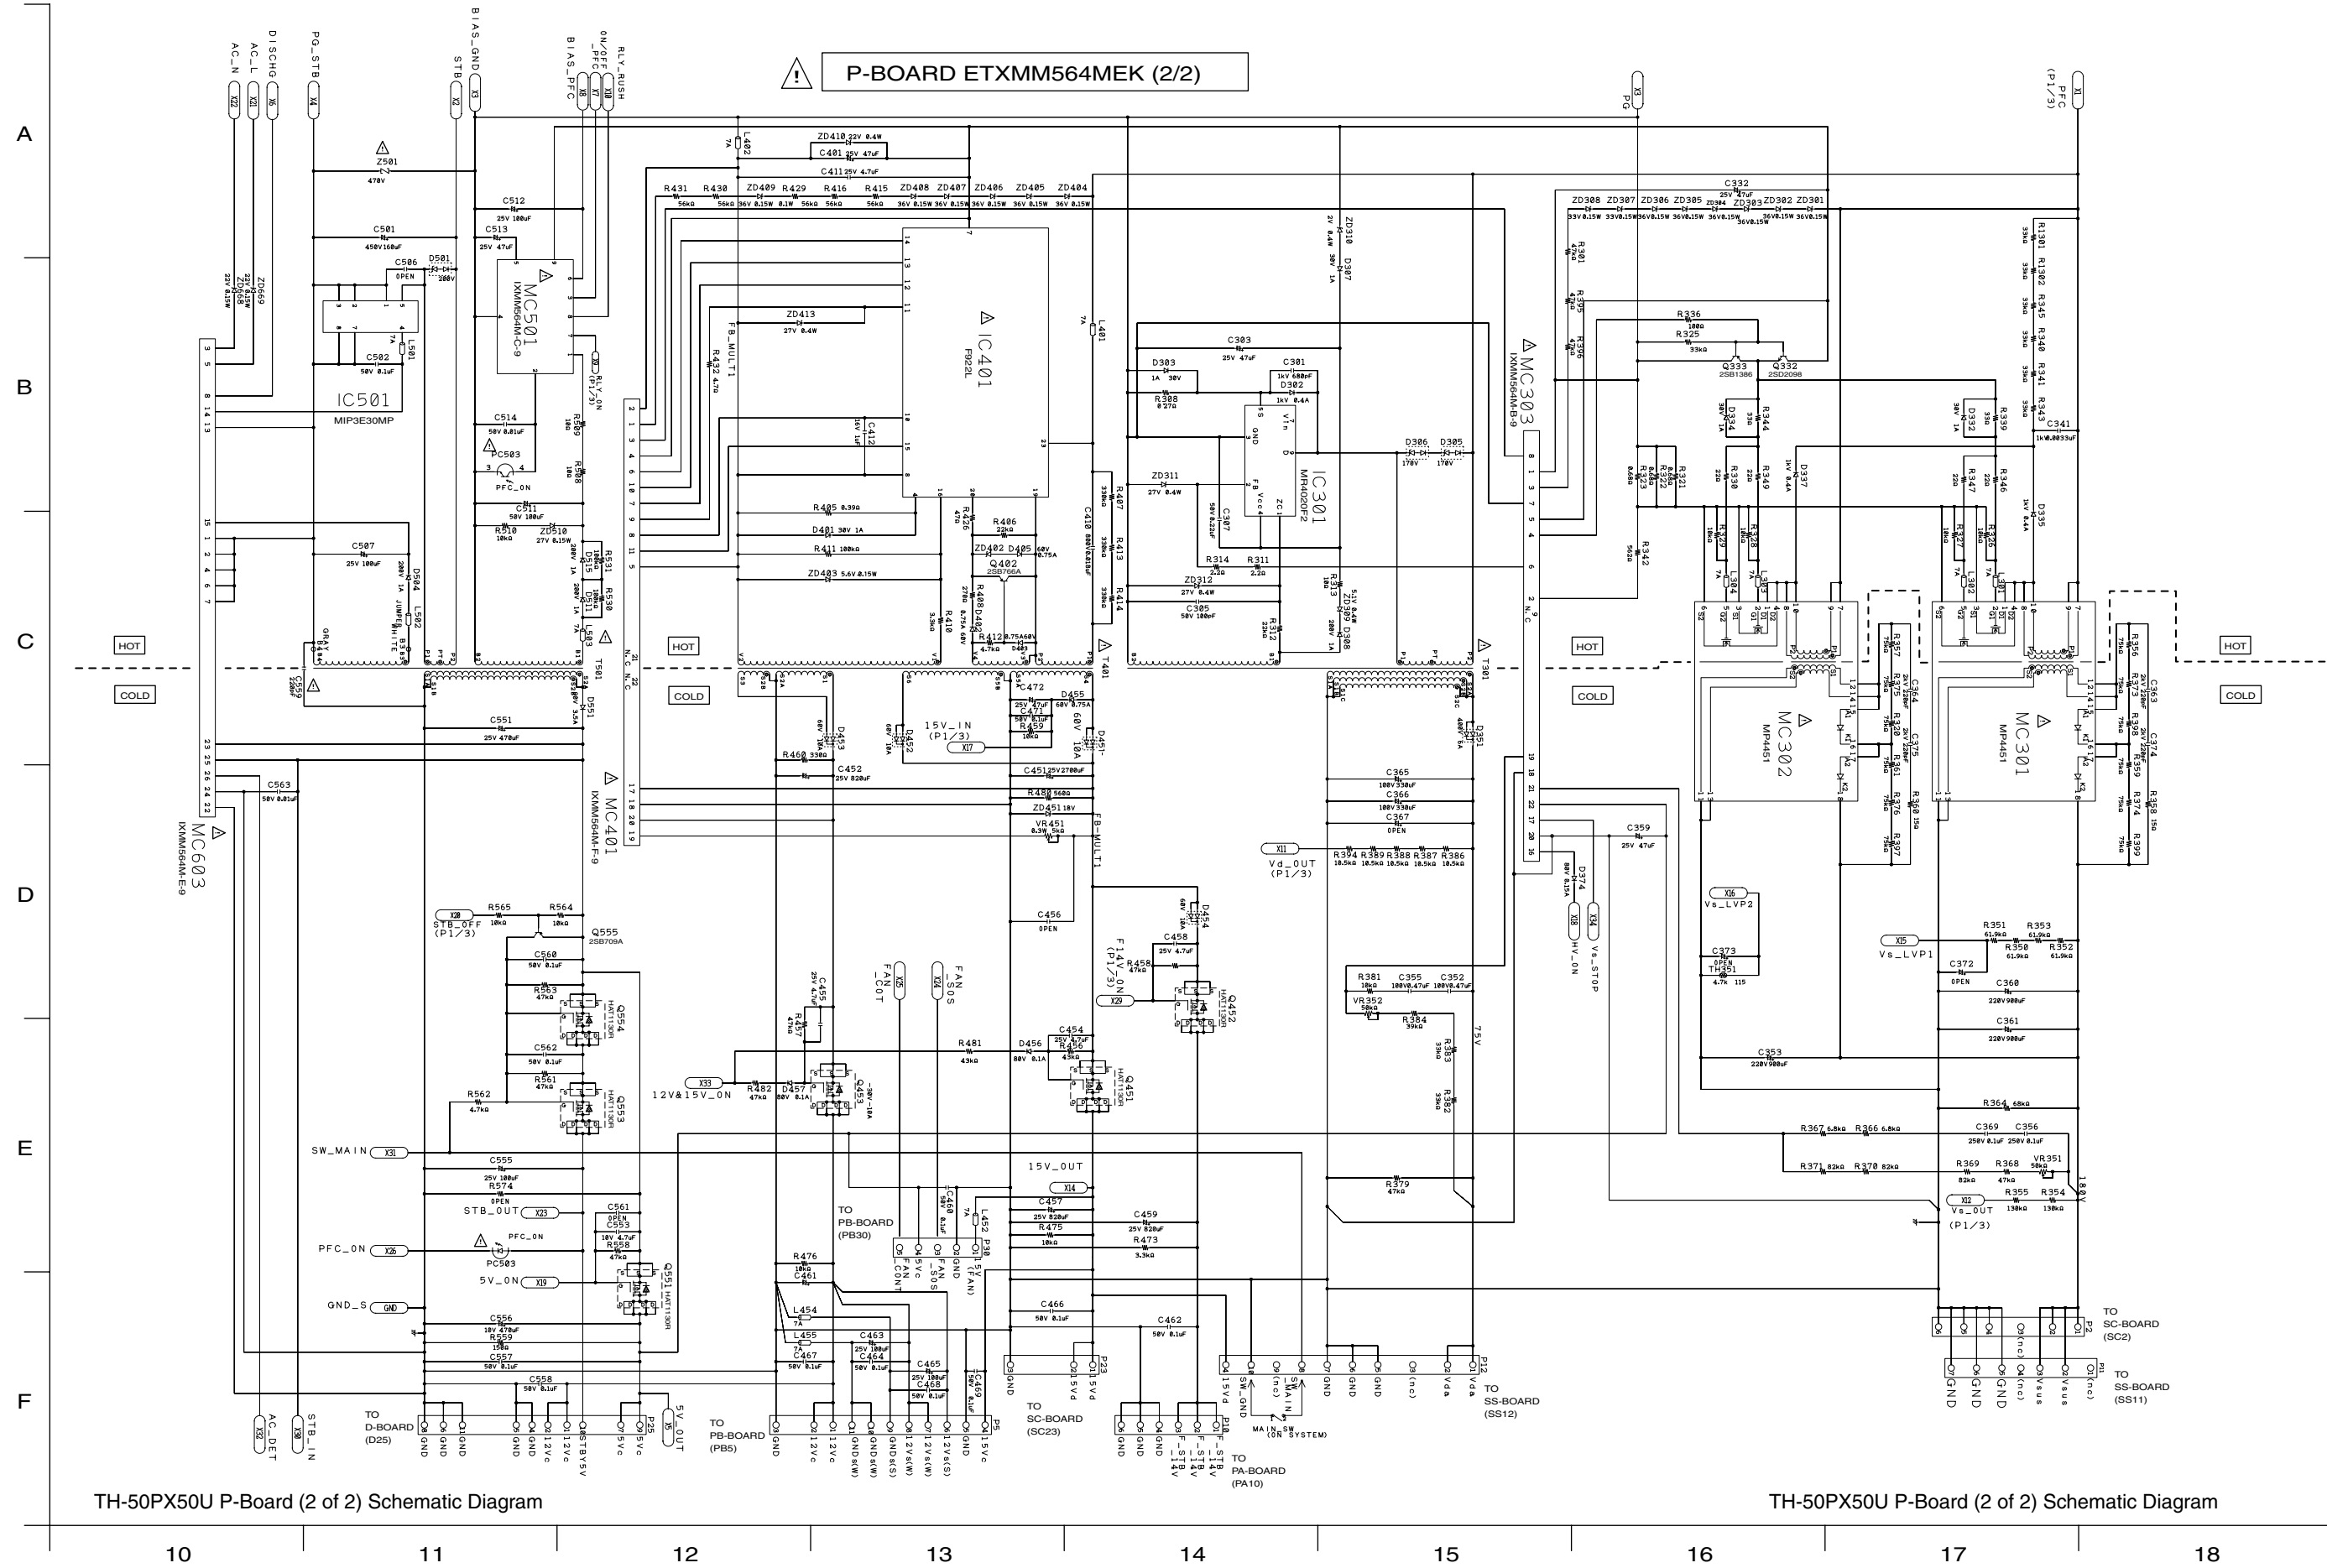

TH-50PX50U P-Board (2 of 2) Schematic Diagram


TH-50PX50U P-Board (2 of 2) Schematic Diagram

13.18. PA and PB Board Block Diagram

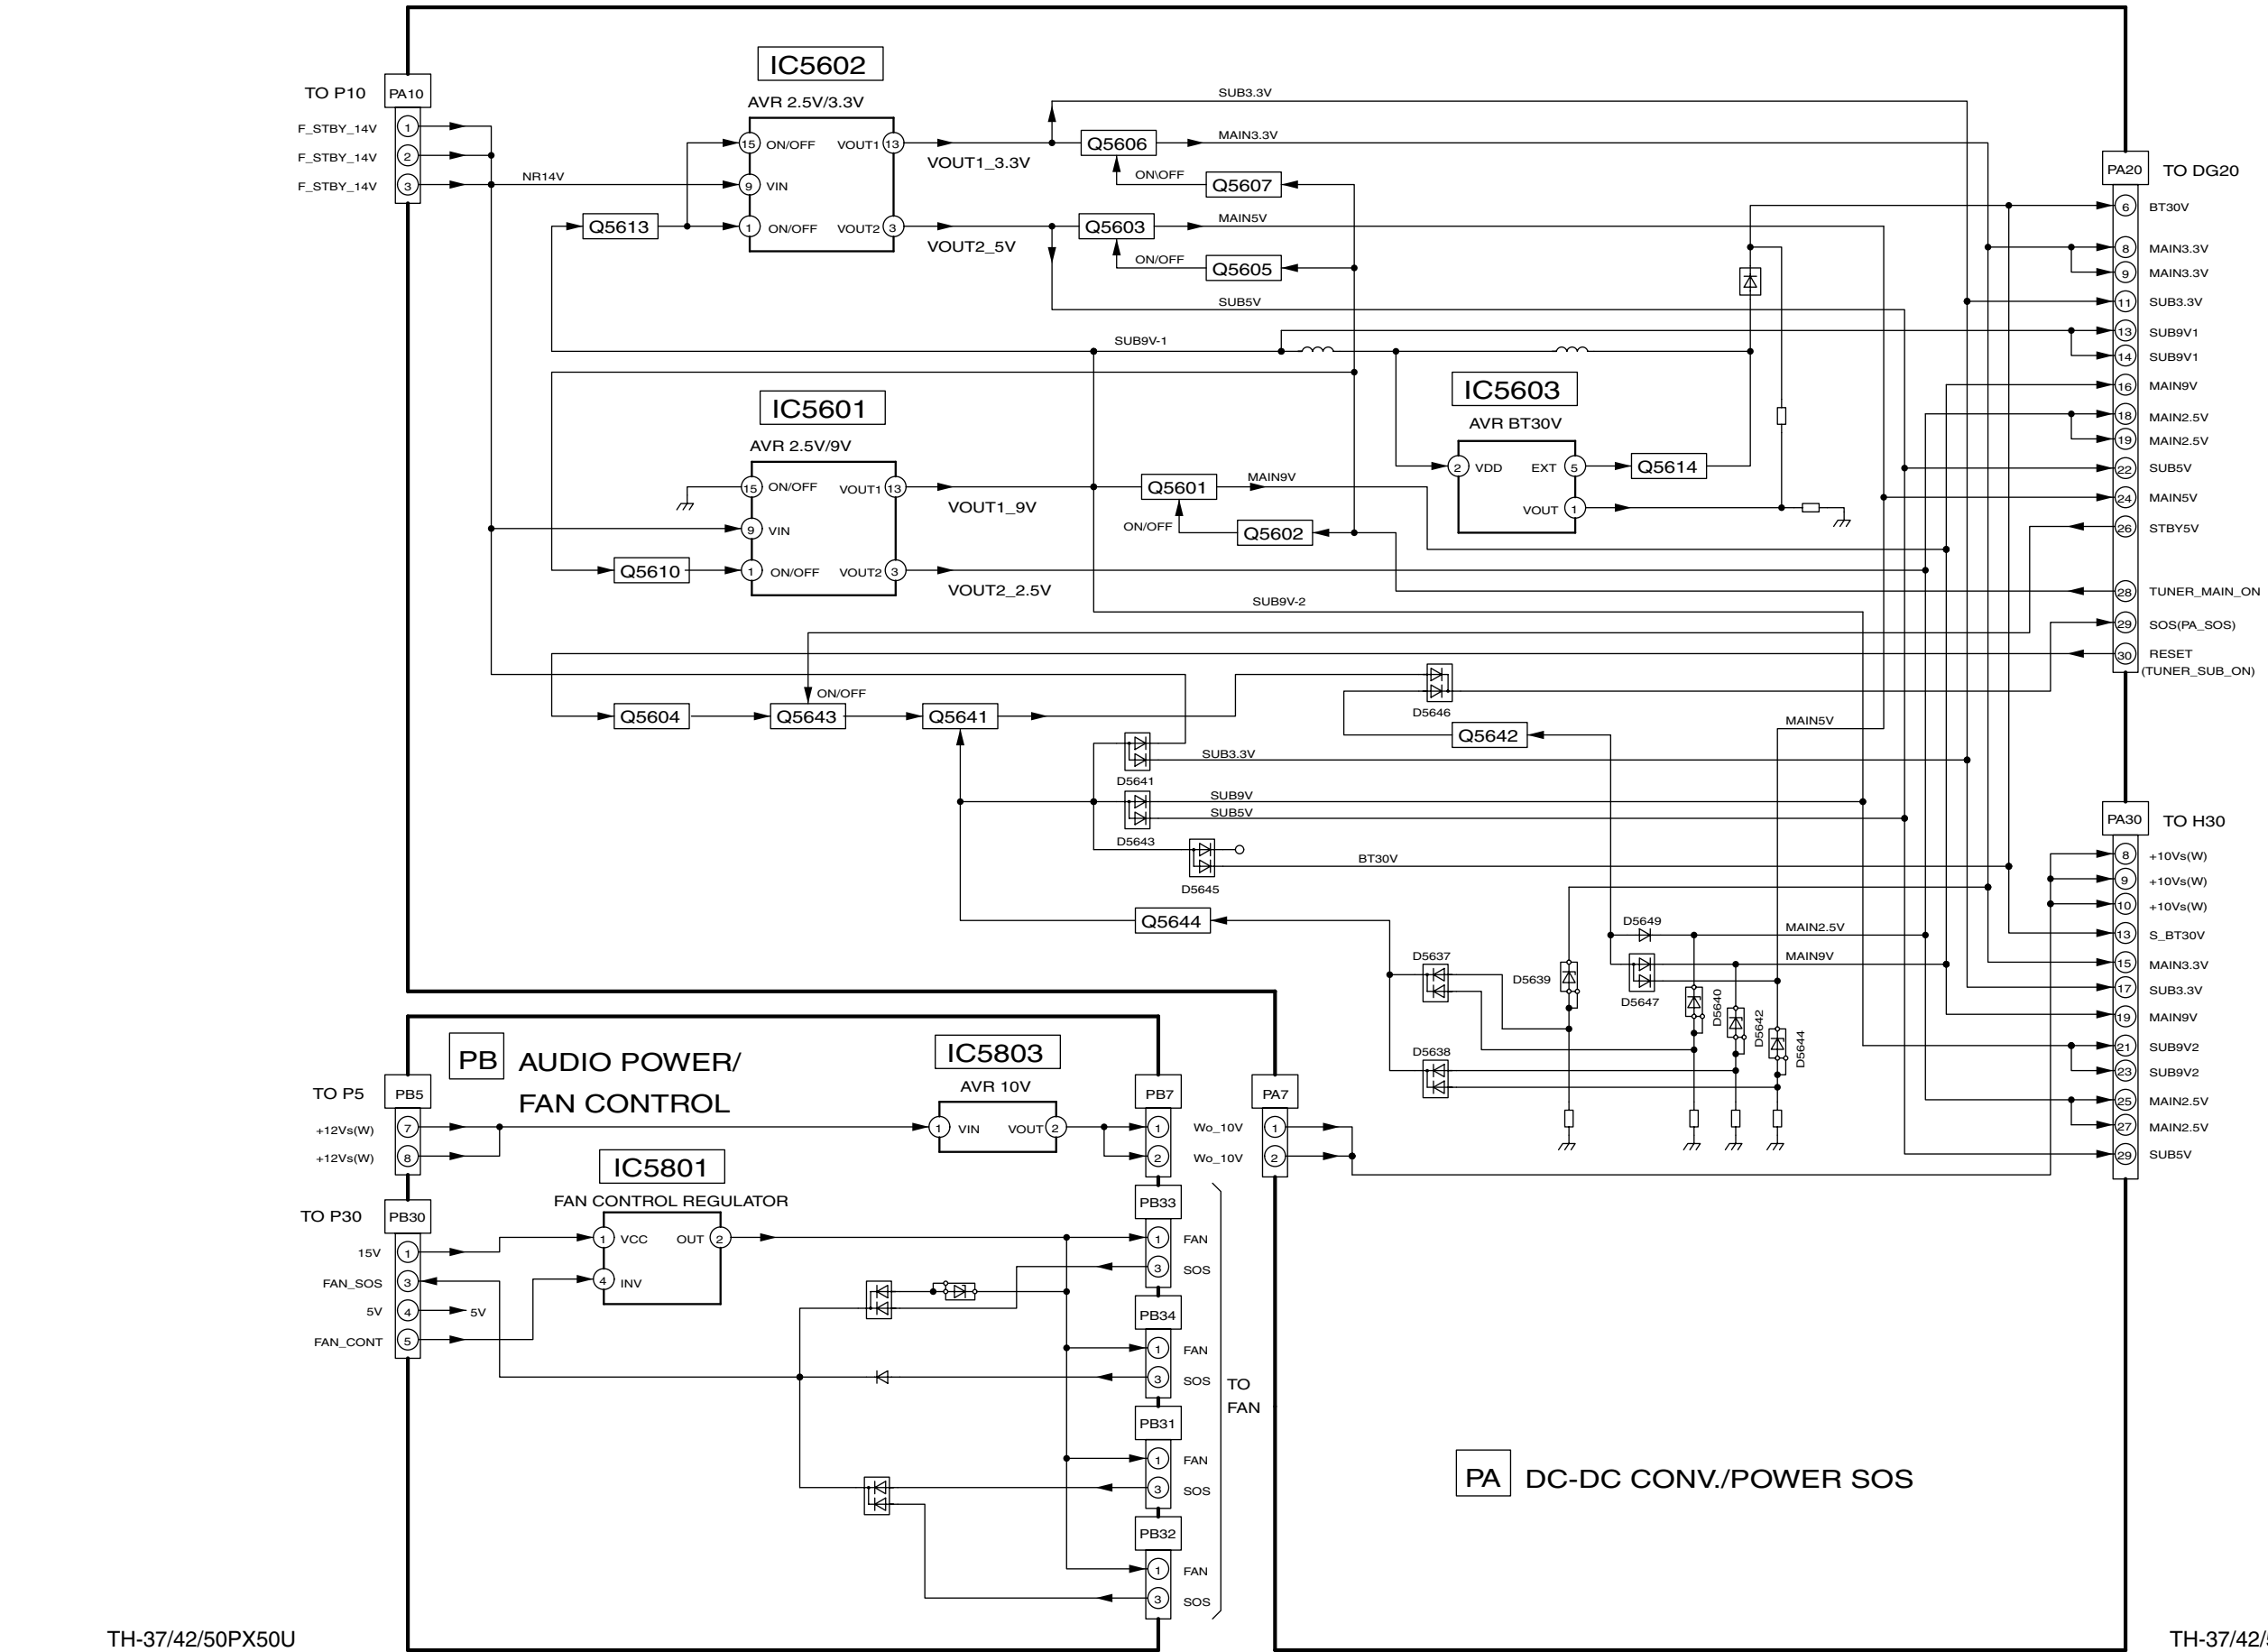

TH-37/42/50PX50U
PA and PB-Board Block Diagram

TH-37/42/50PX50U
PA and PB-Board Block Diagram




B


C

D

E


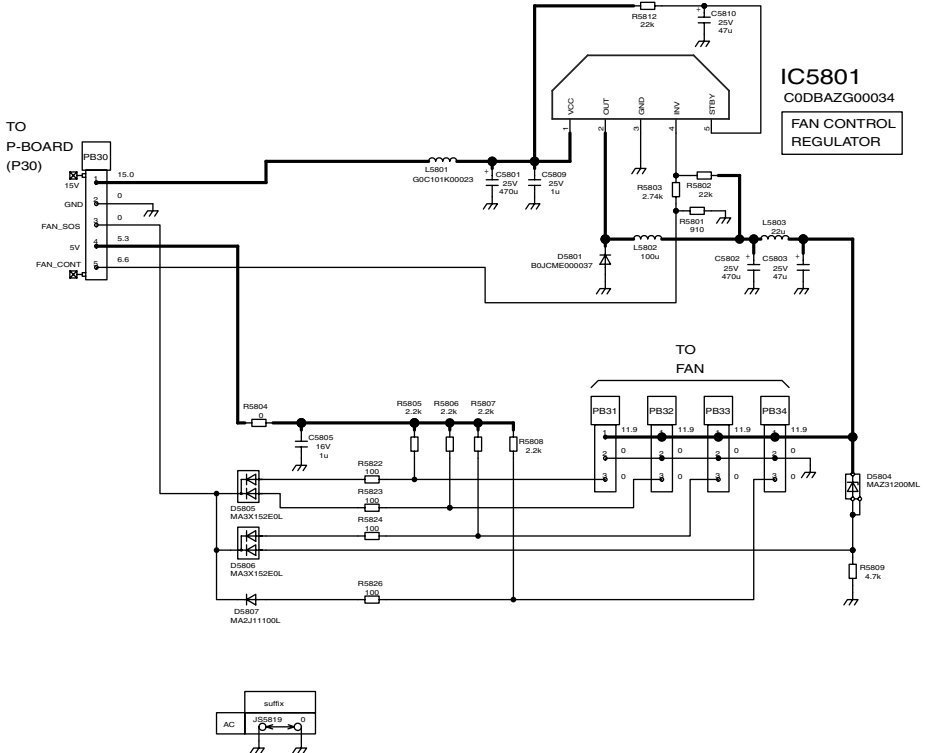



TH-37/42/50PX50U PB-Board Schematic Diagram

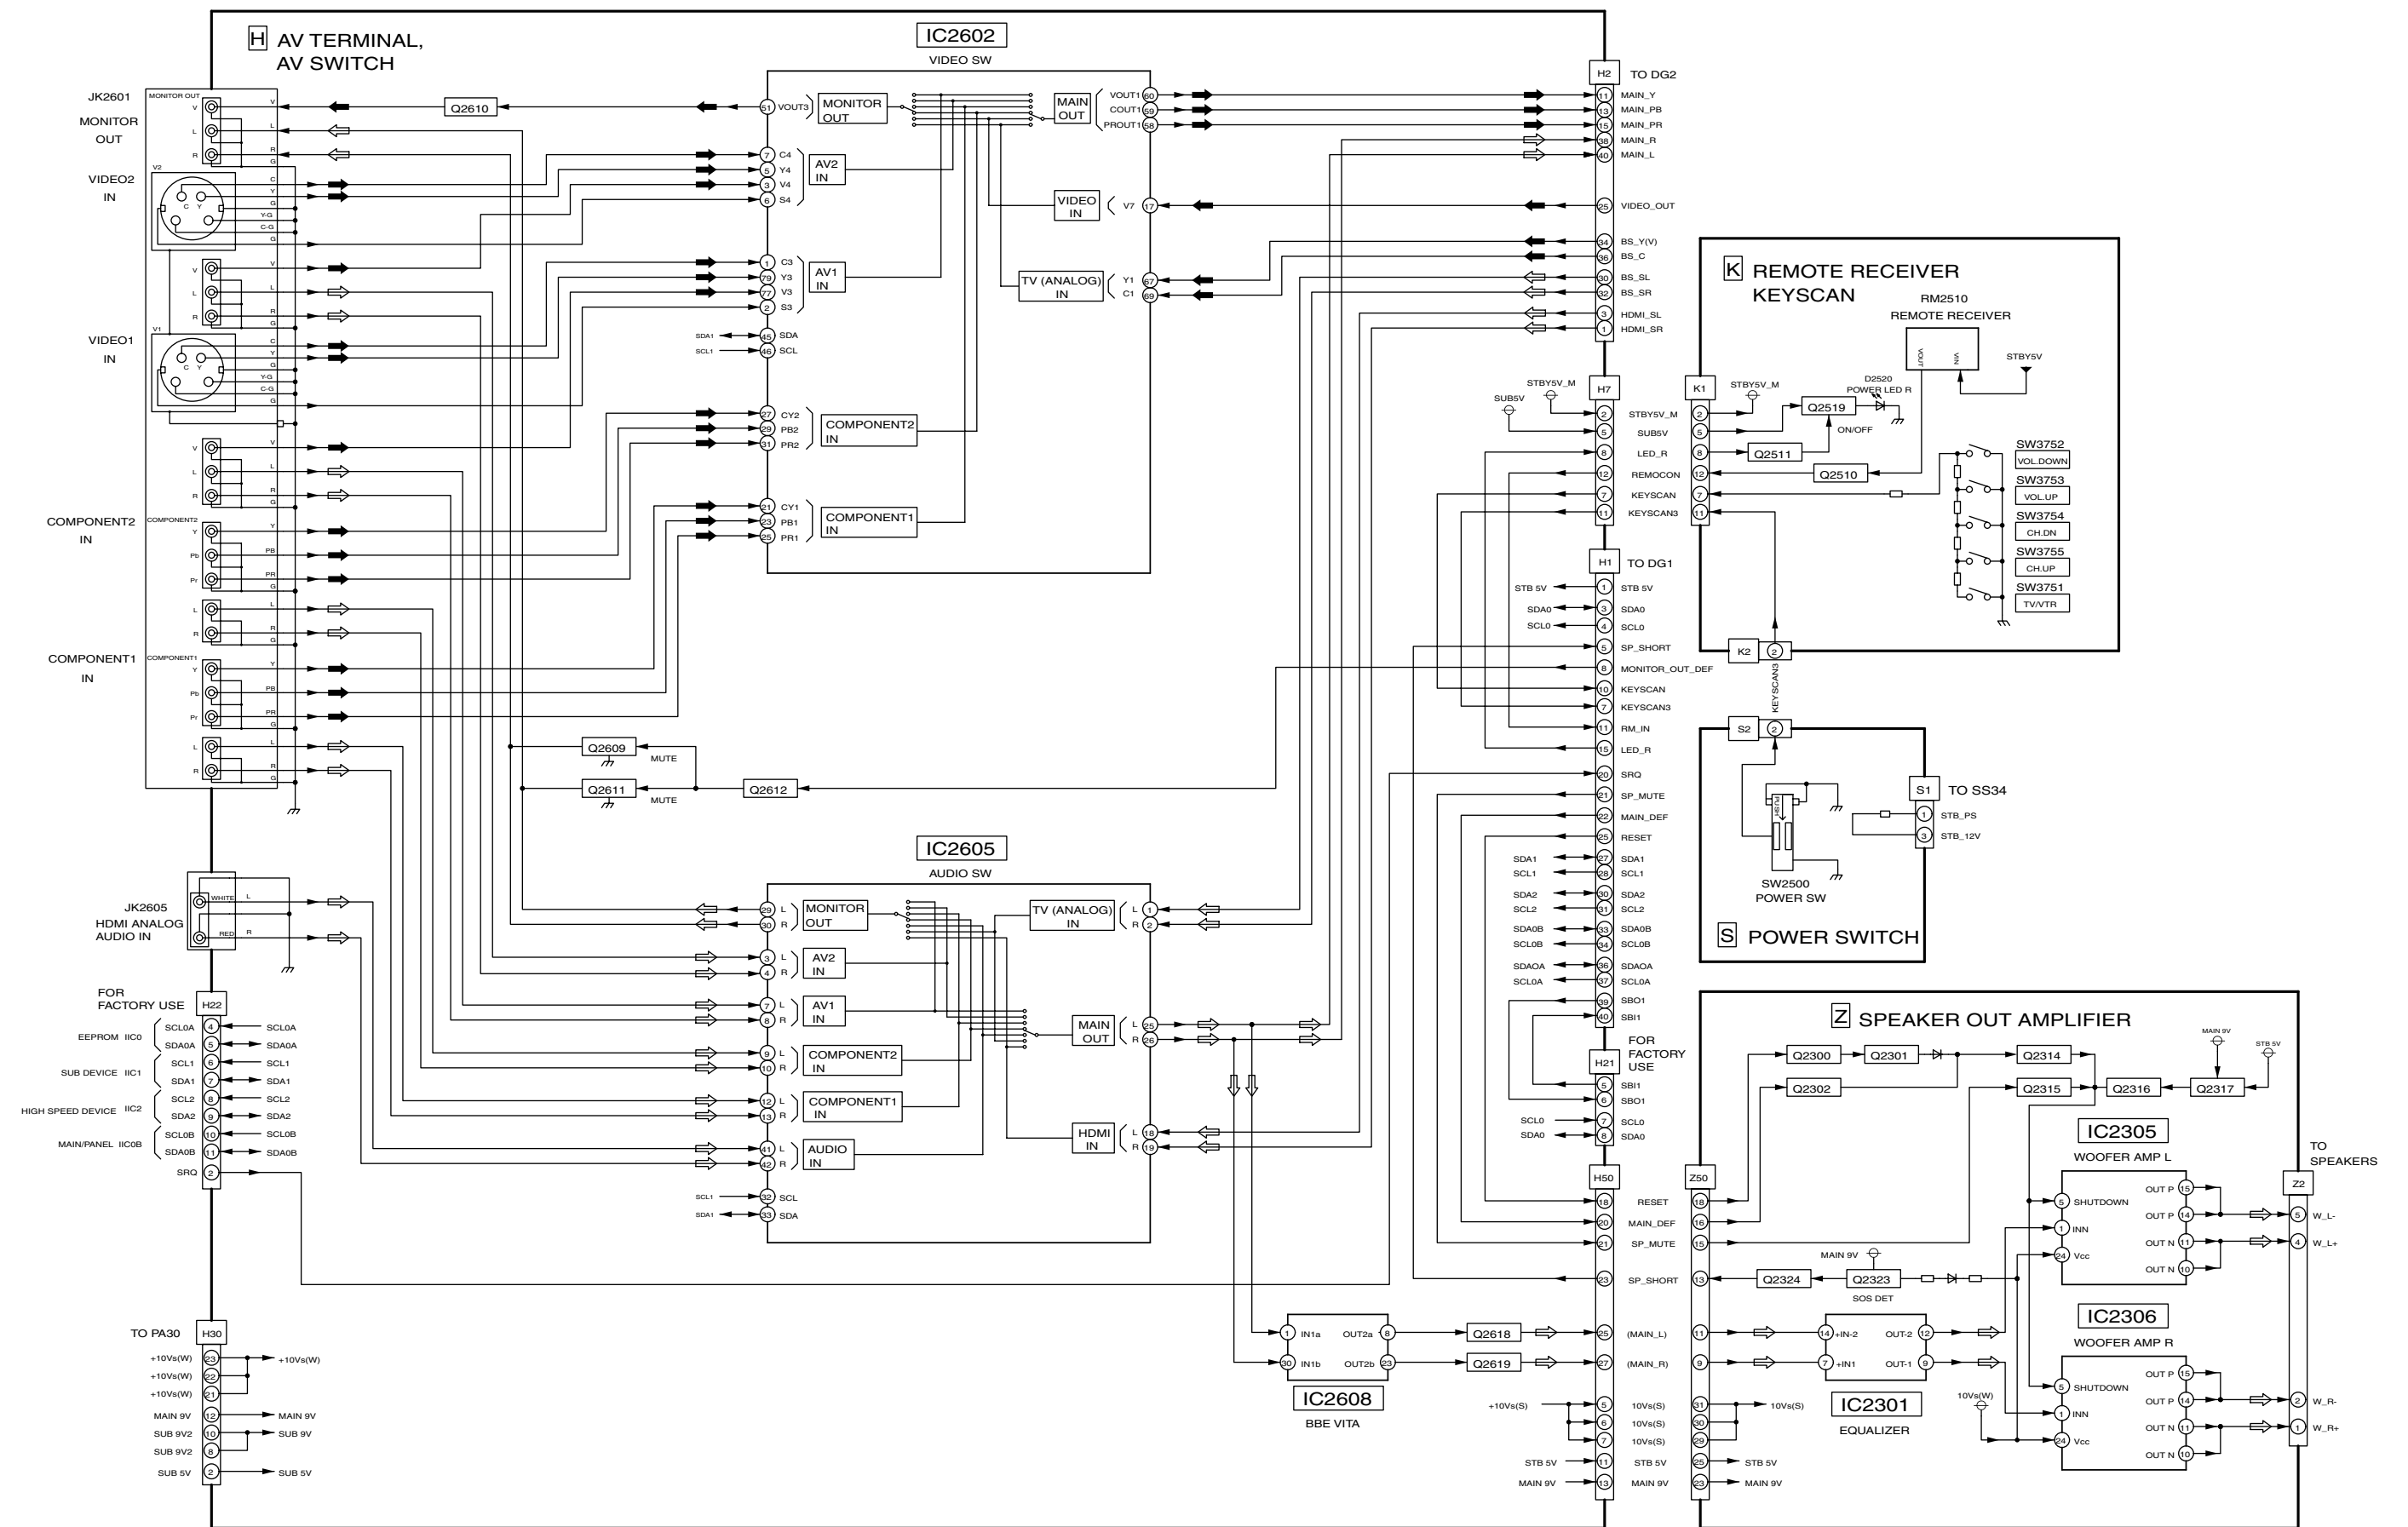

TH-37/42/50PX50U
H, K, S and Z-Board Block Diagram

TH-37/42/50PX50U
H, K, S and Z-Board Block Diagram







TH-37/42/50PX50U
H-Board (2 of 3) Schematic Diagram




13.25. Z-Board Schematic Diagram

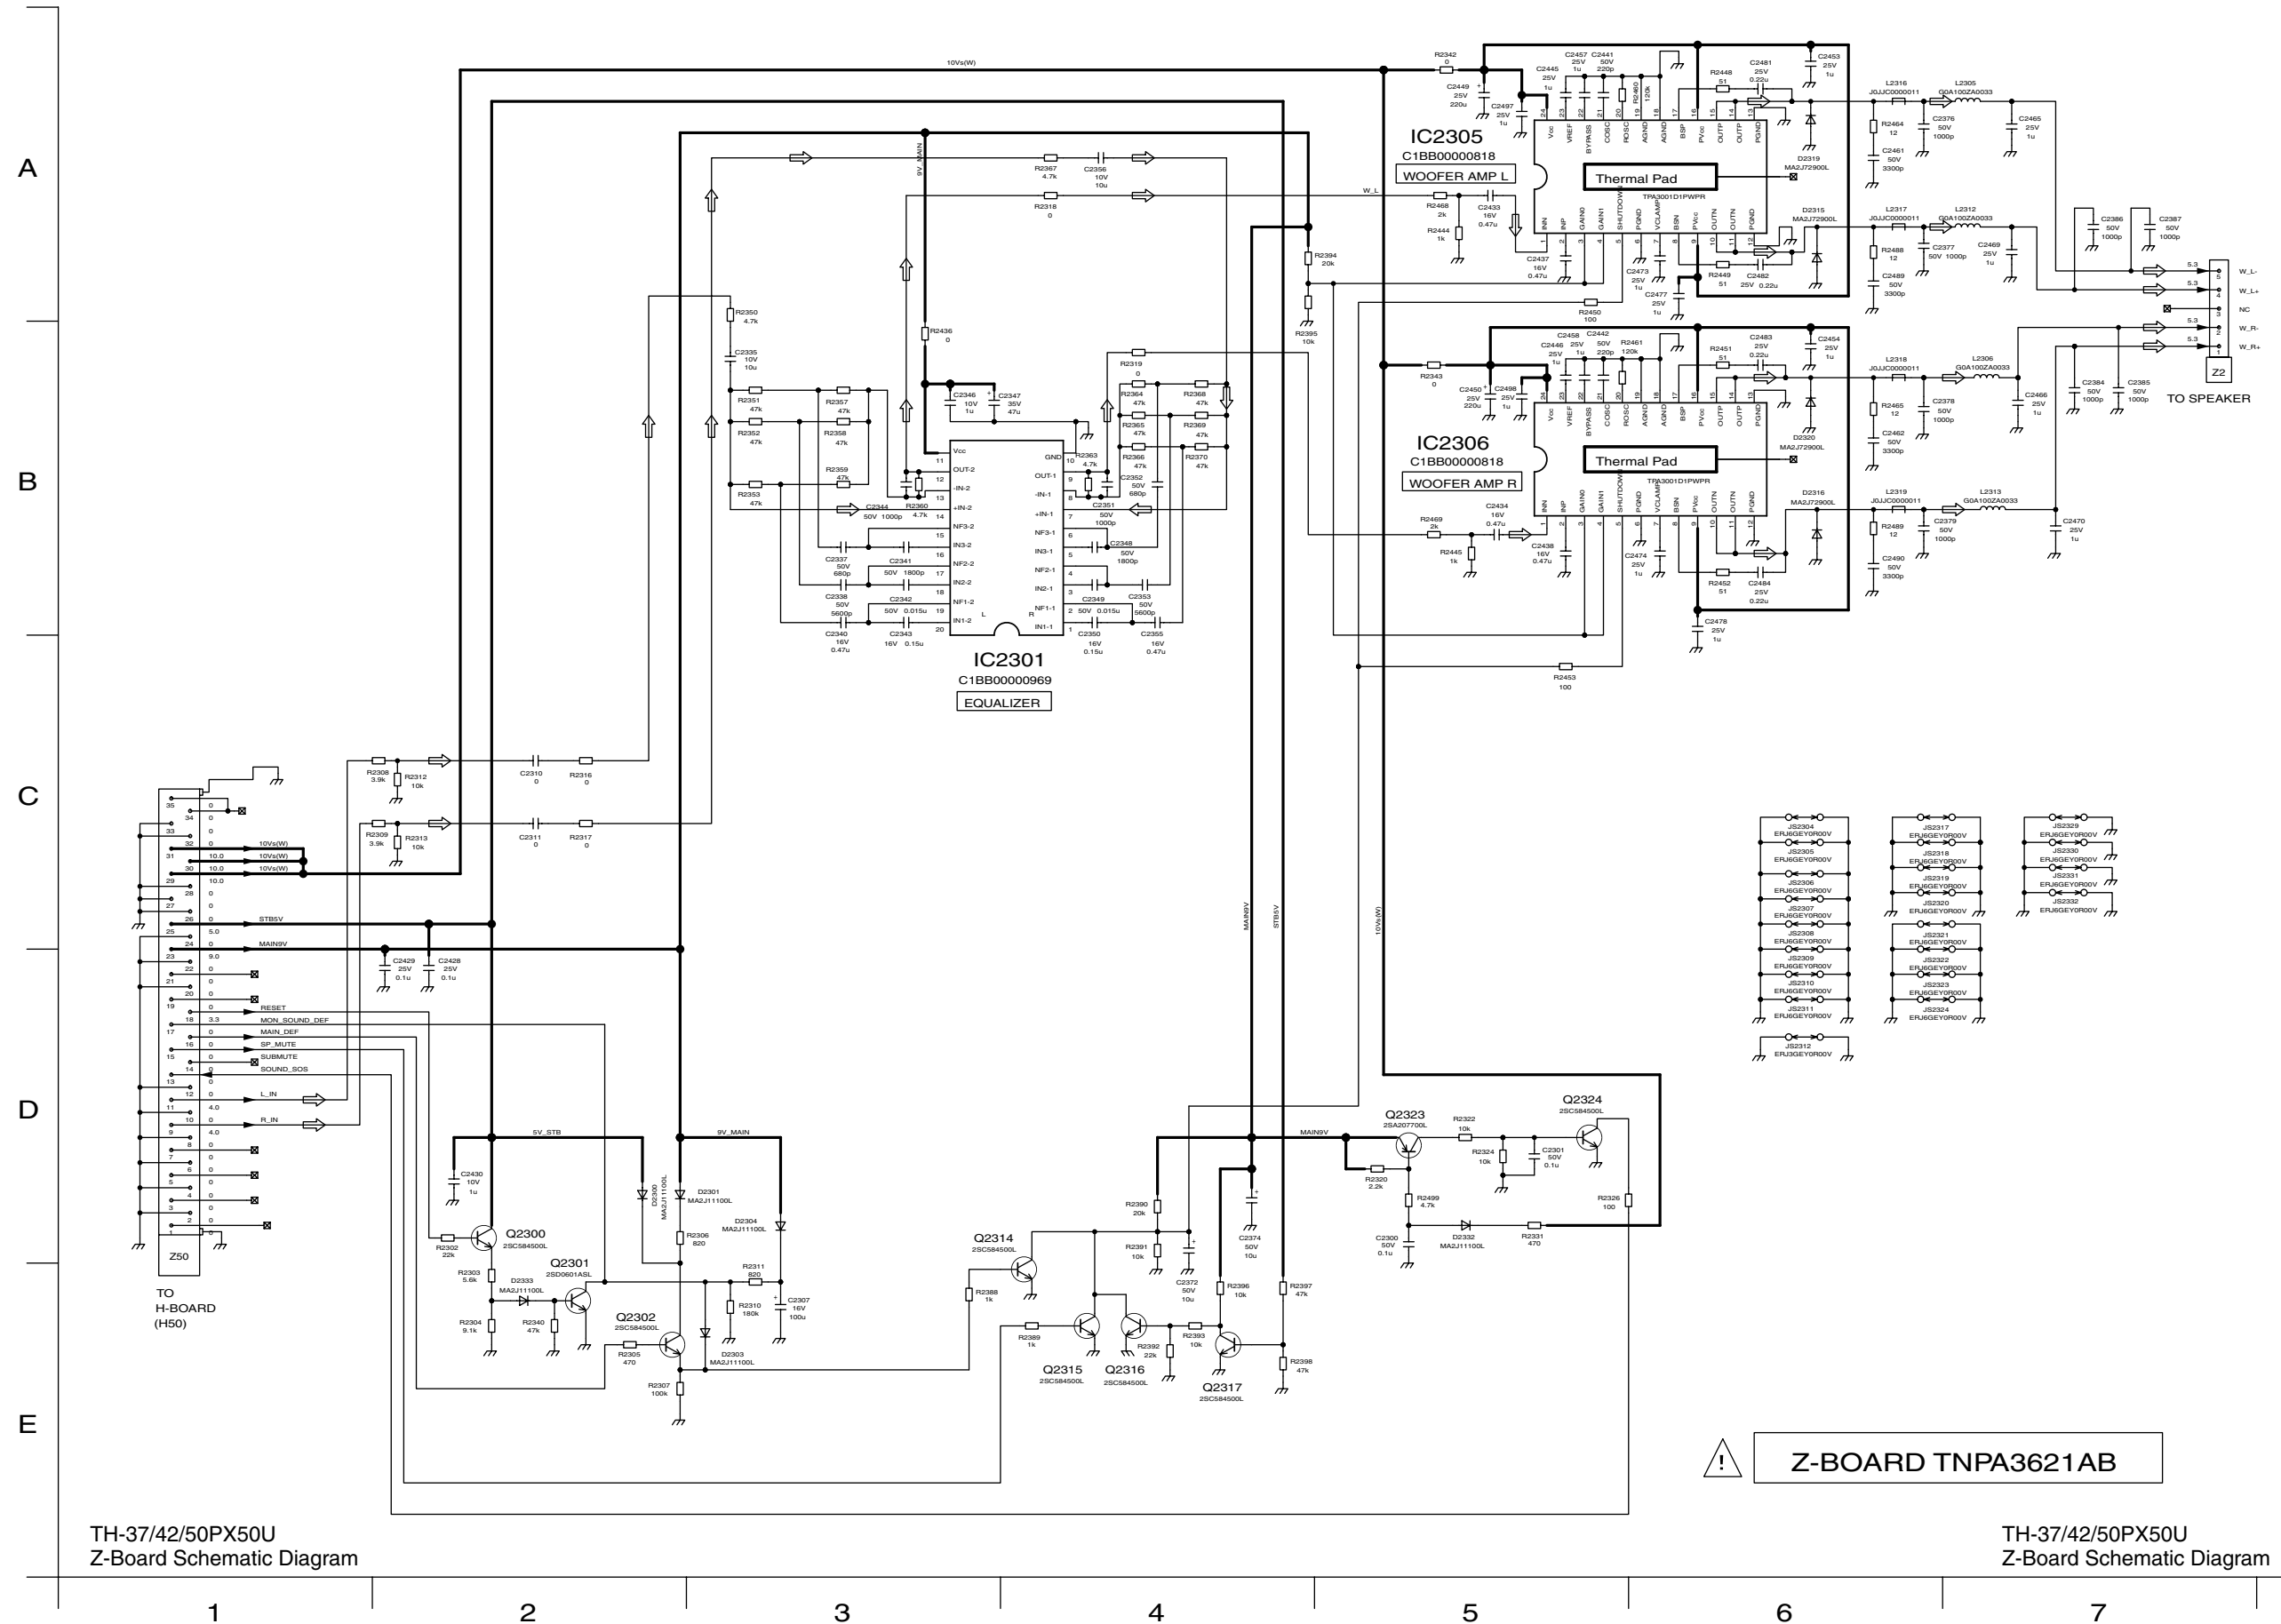






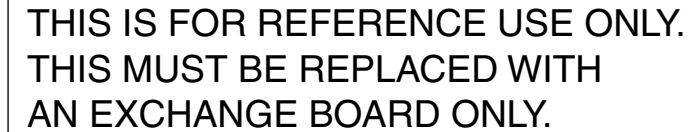


DV-BOARD TNPA3626


TH-37/42/50PX 50U DV-Board Schematic Diagram

13.29. DT-Board Block Diagram

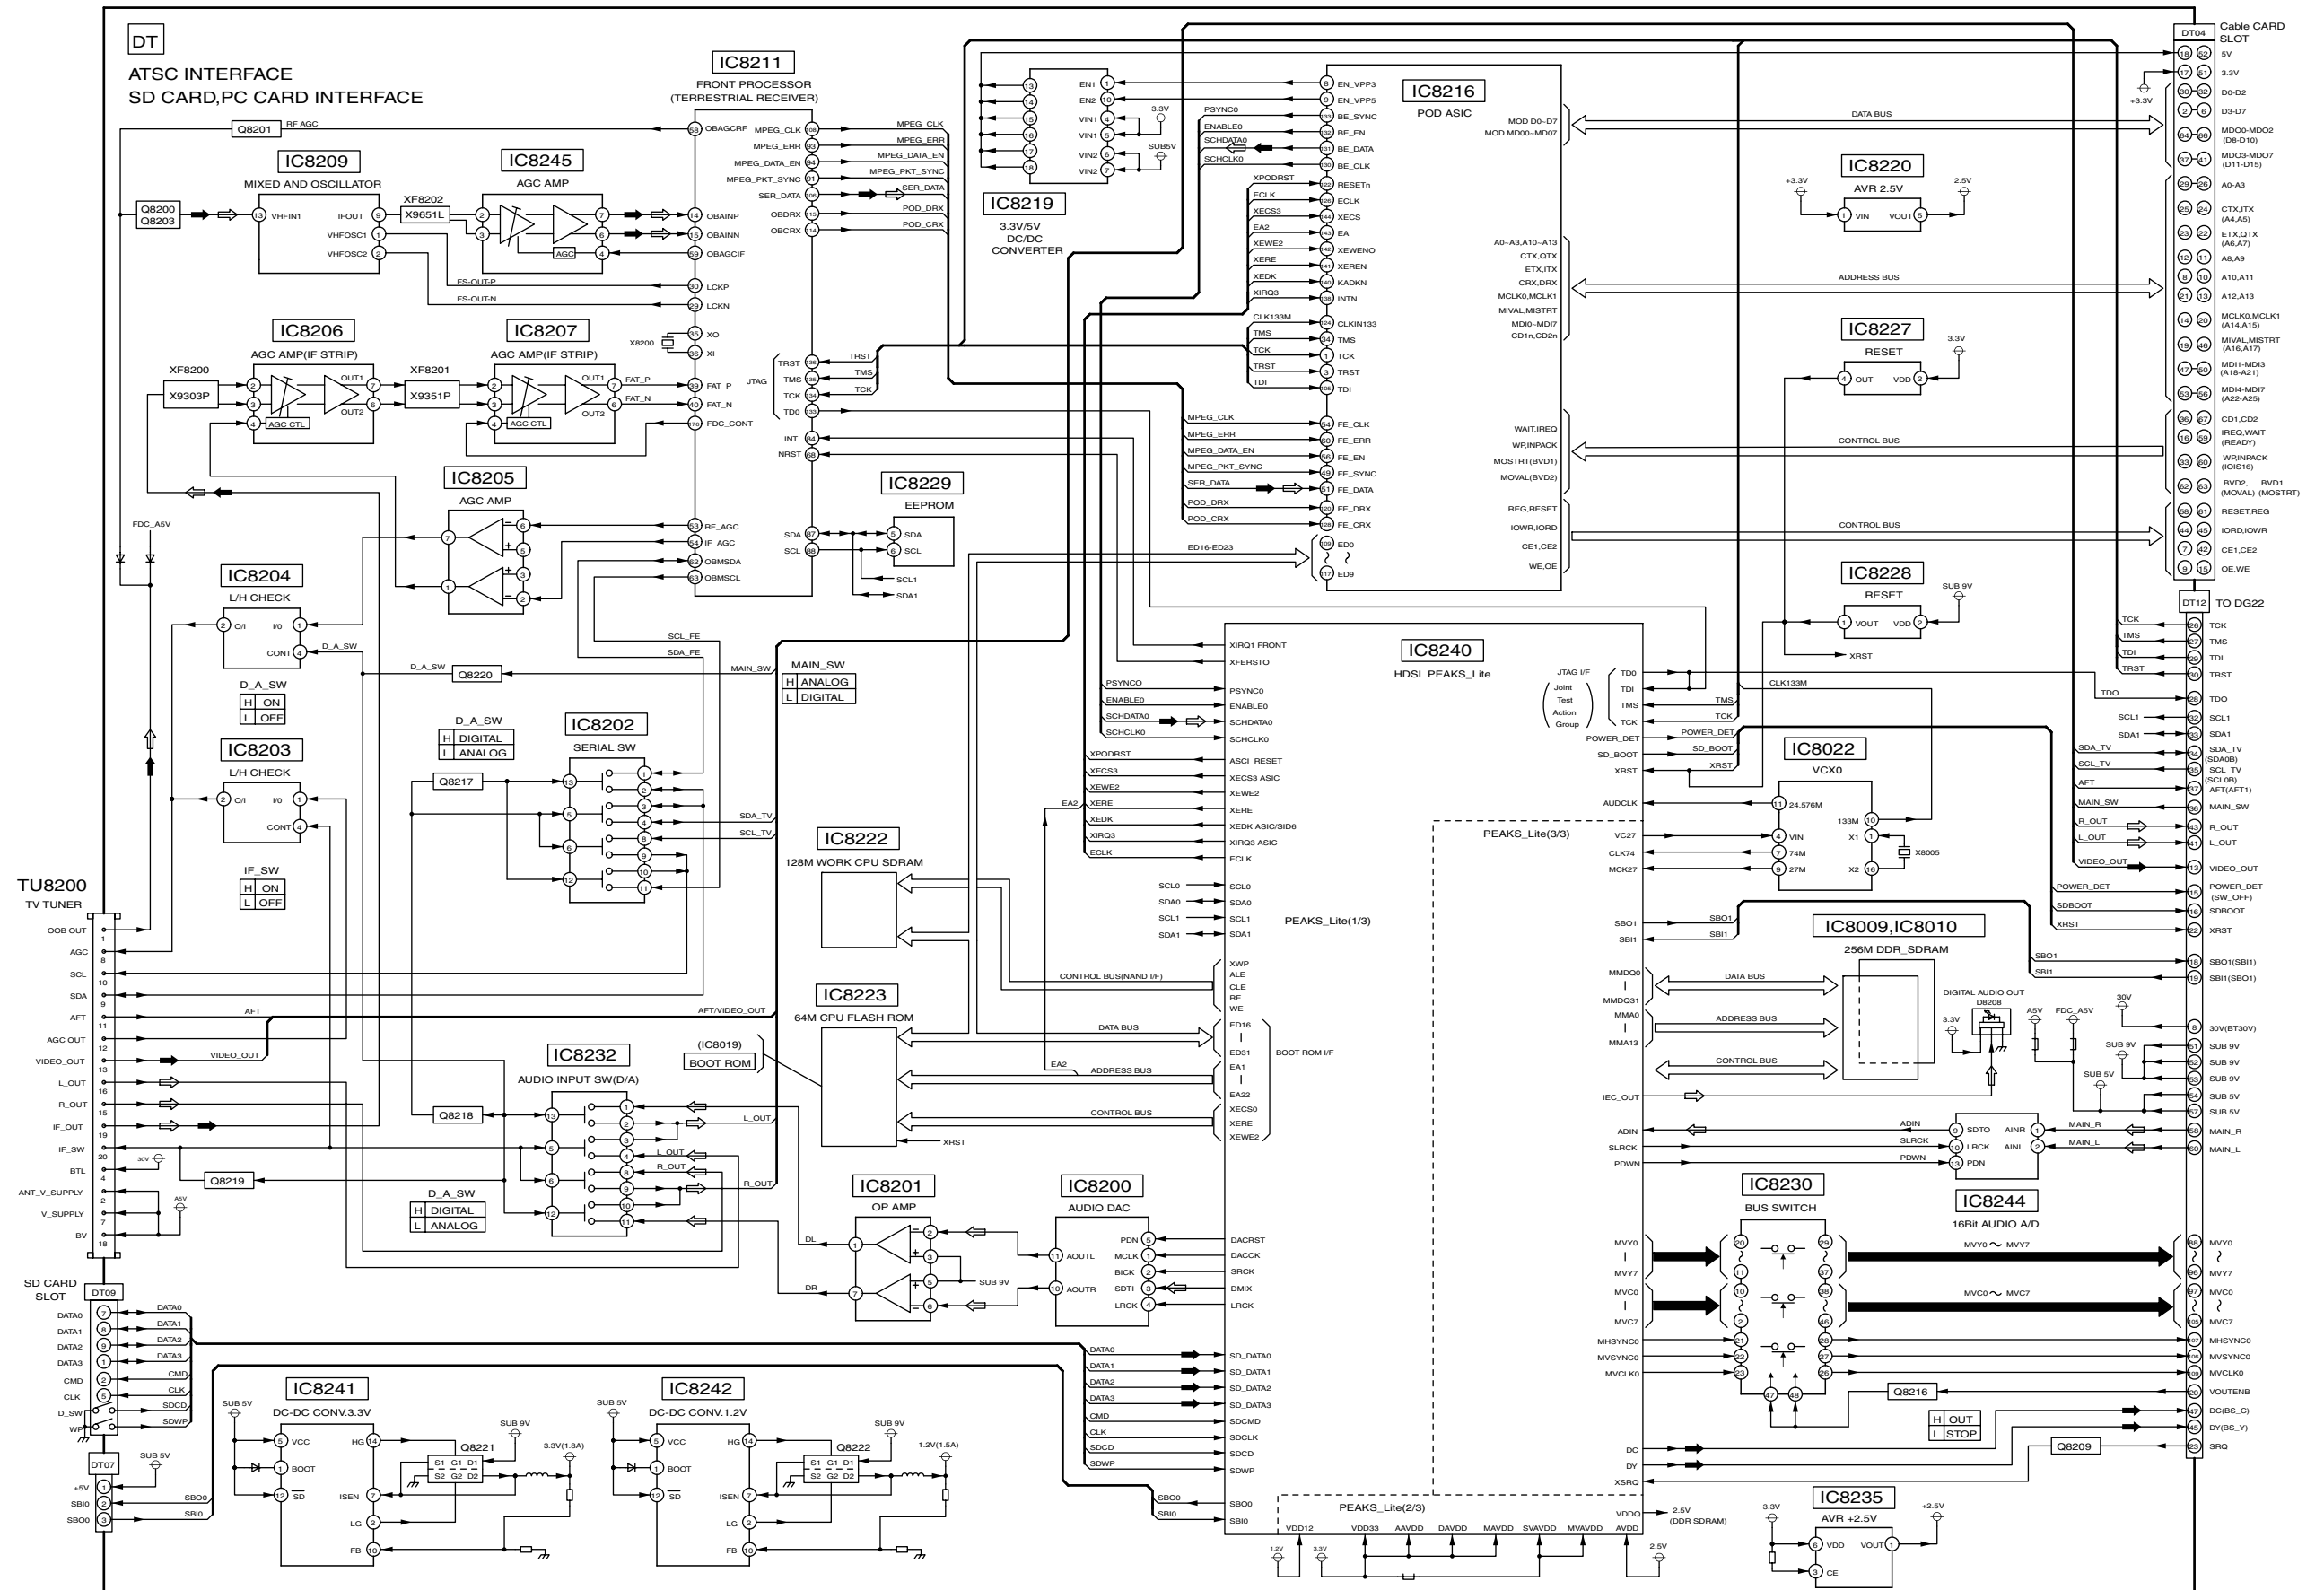
TH-37/42/50PX50U
DT-Board Block DiagramTH-37/42/50PX50U
DT-Board Block Diagram



13.31. DT-Board (2 of 5) Schematic Diagram

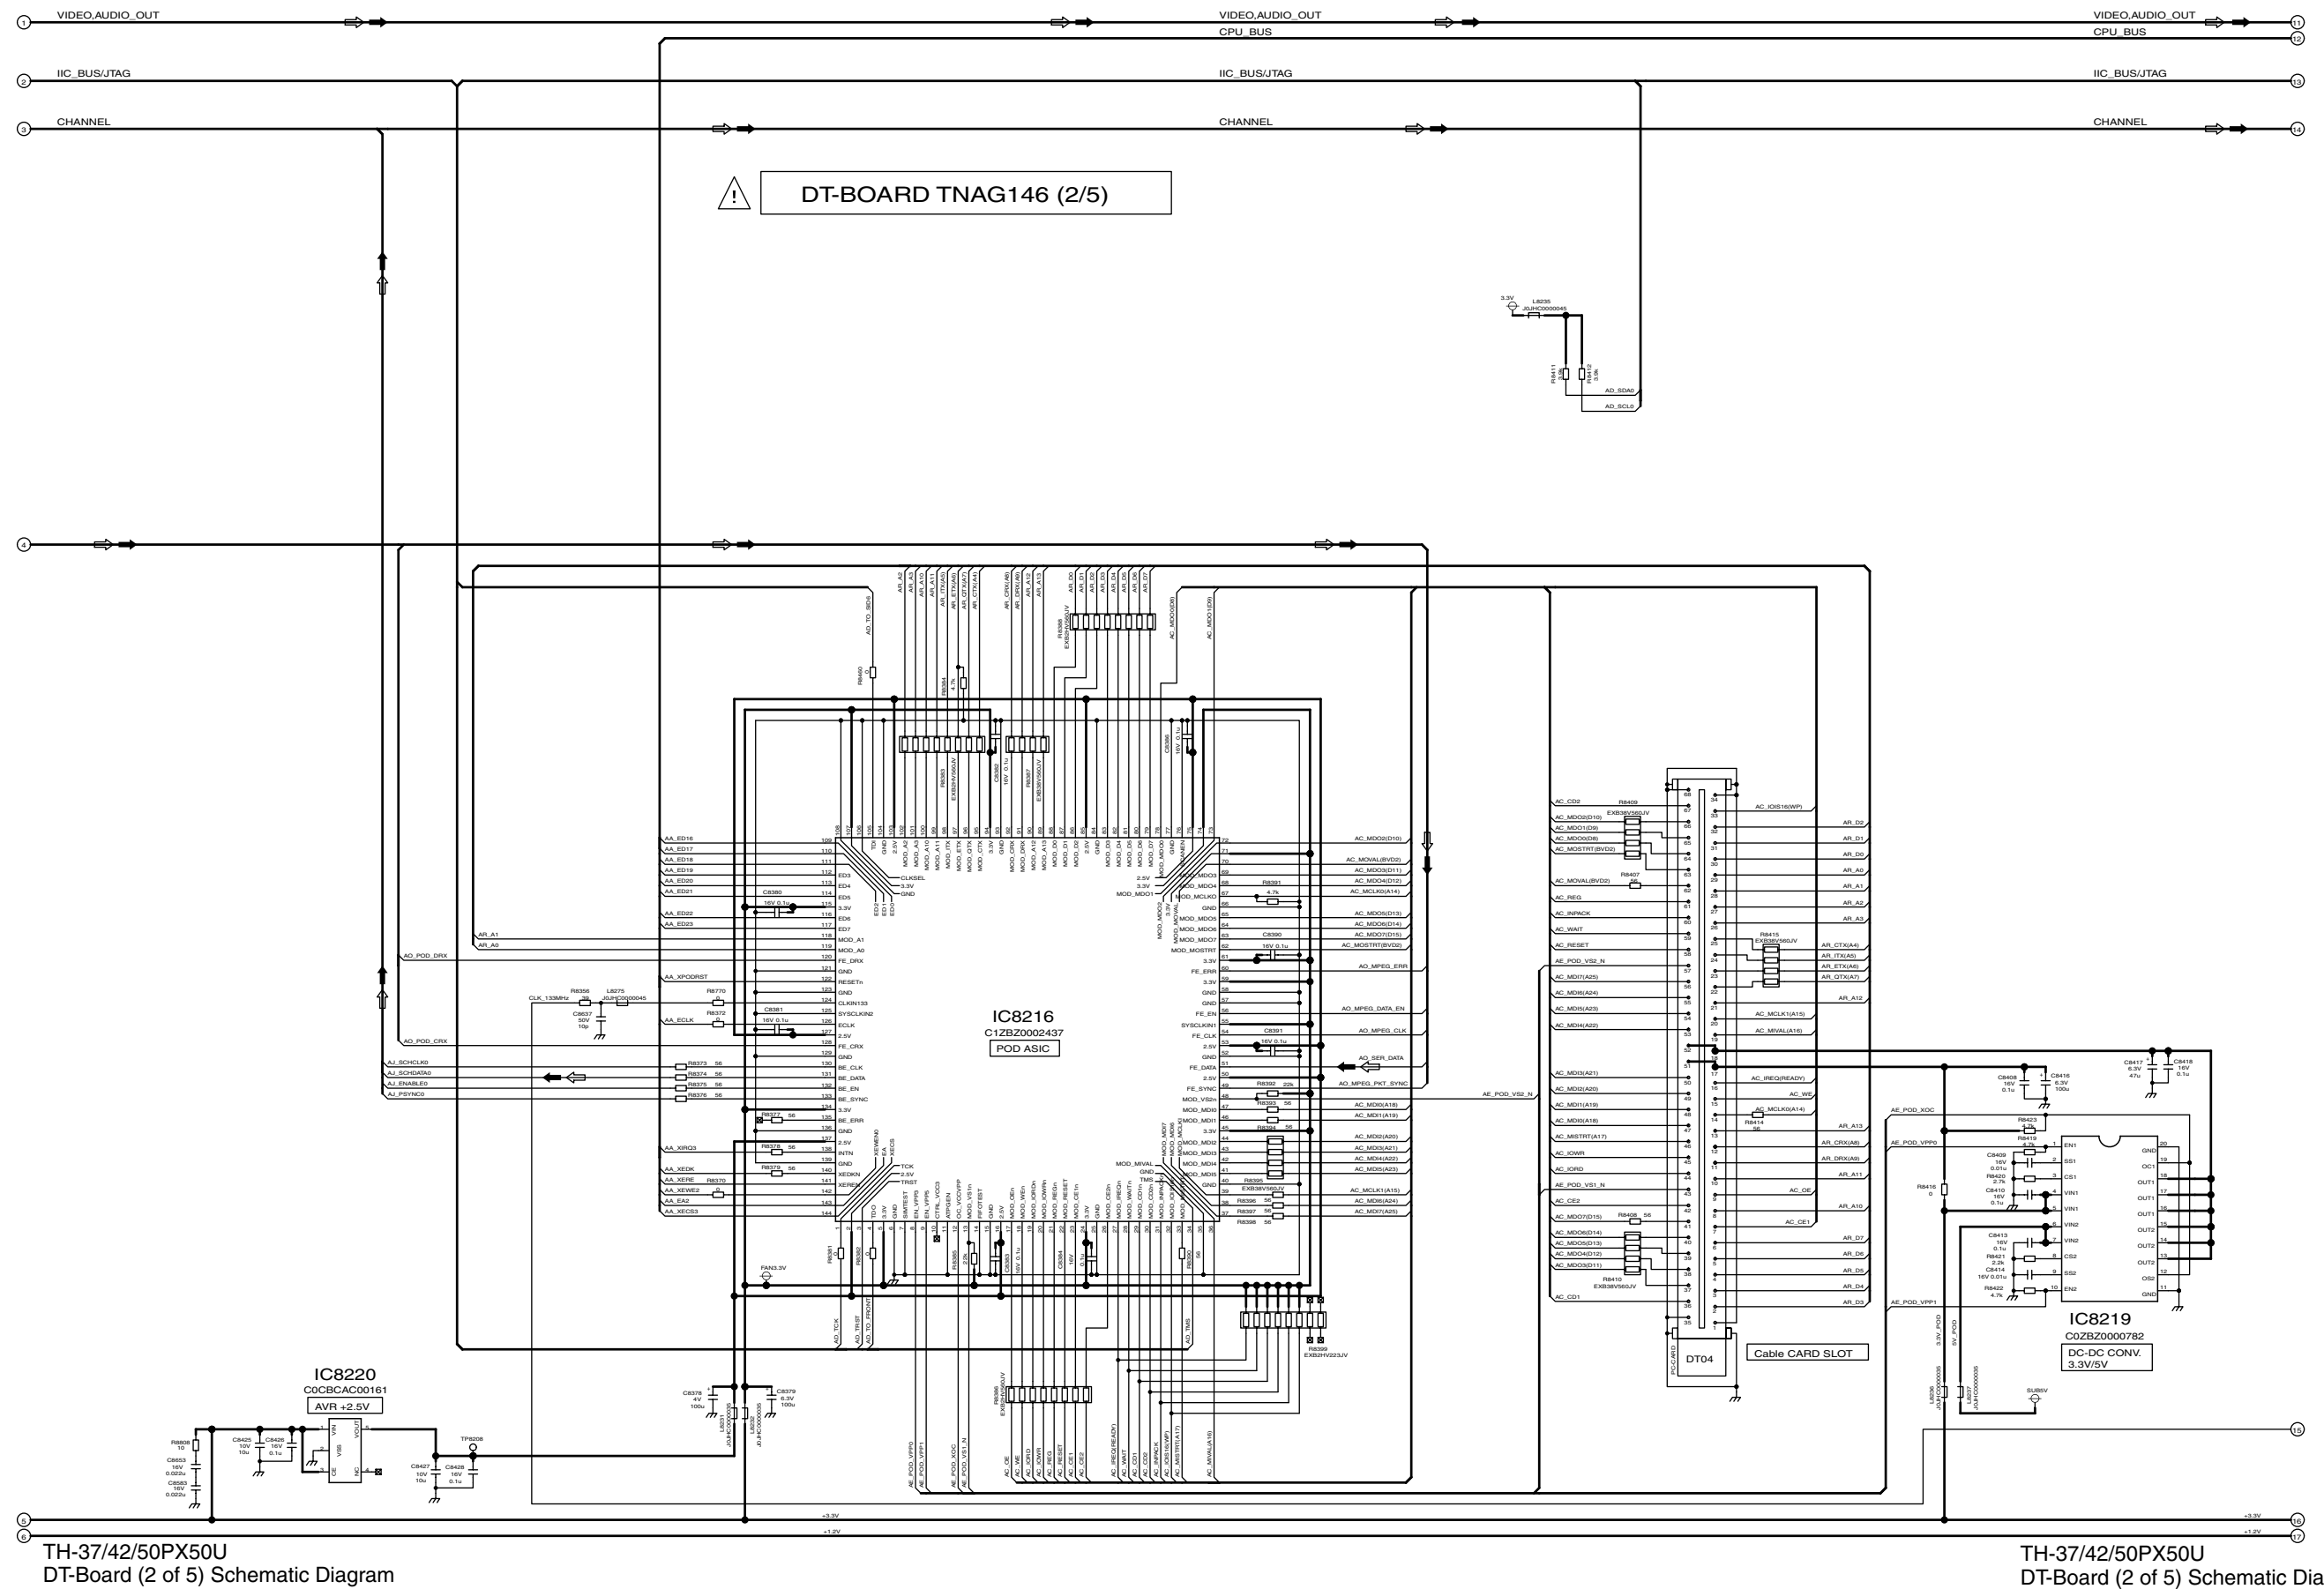

13.32. DT-Board (3 of 5) Schematic Diagram

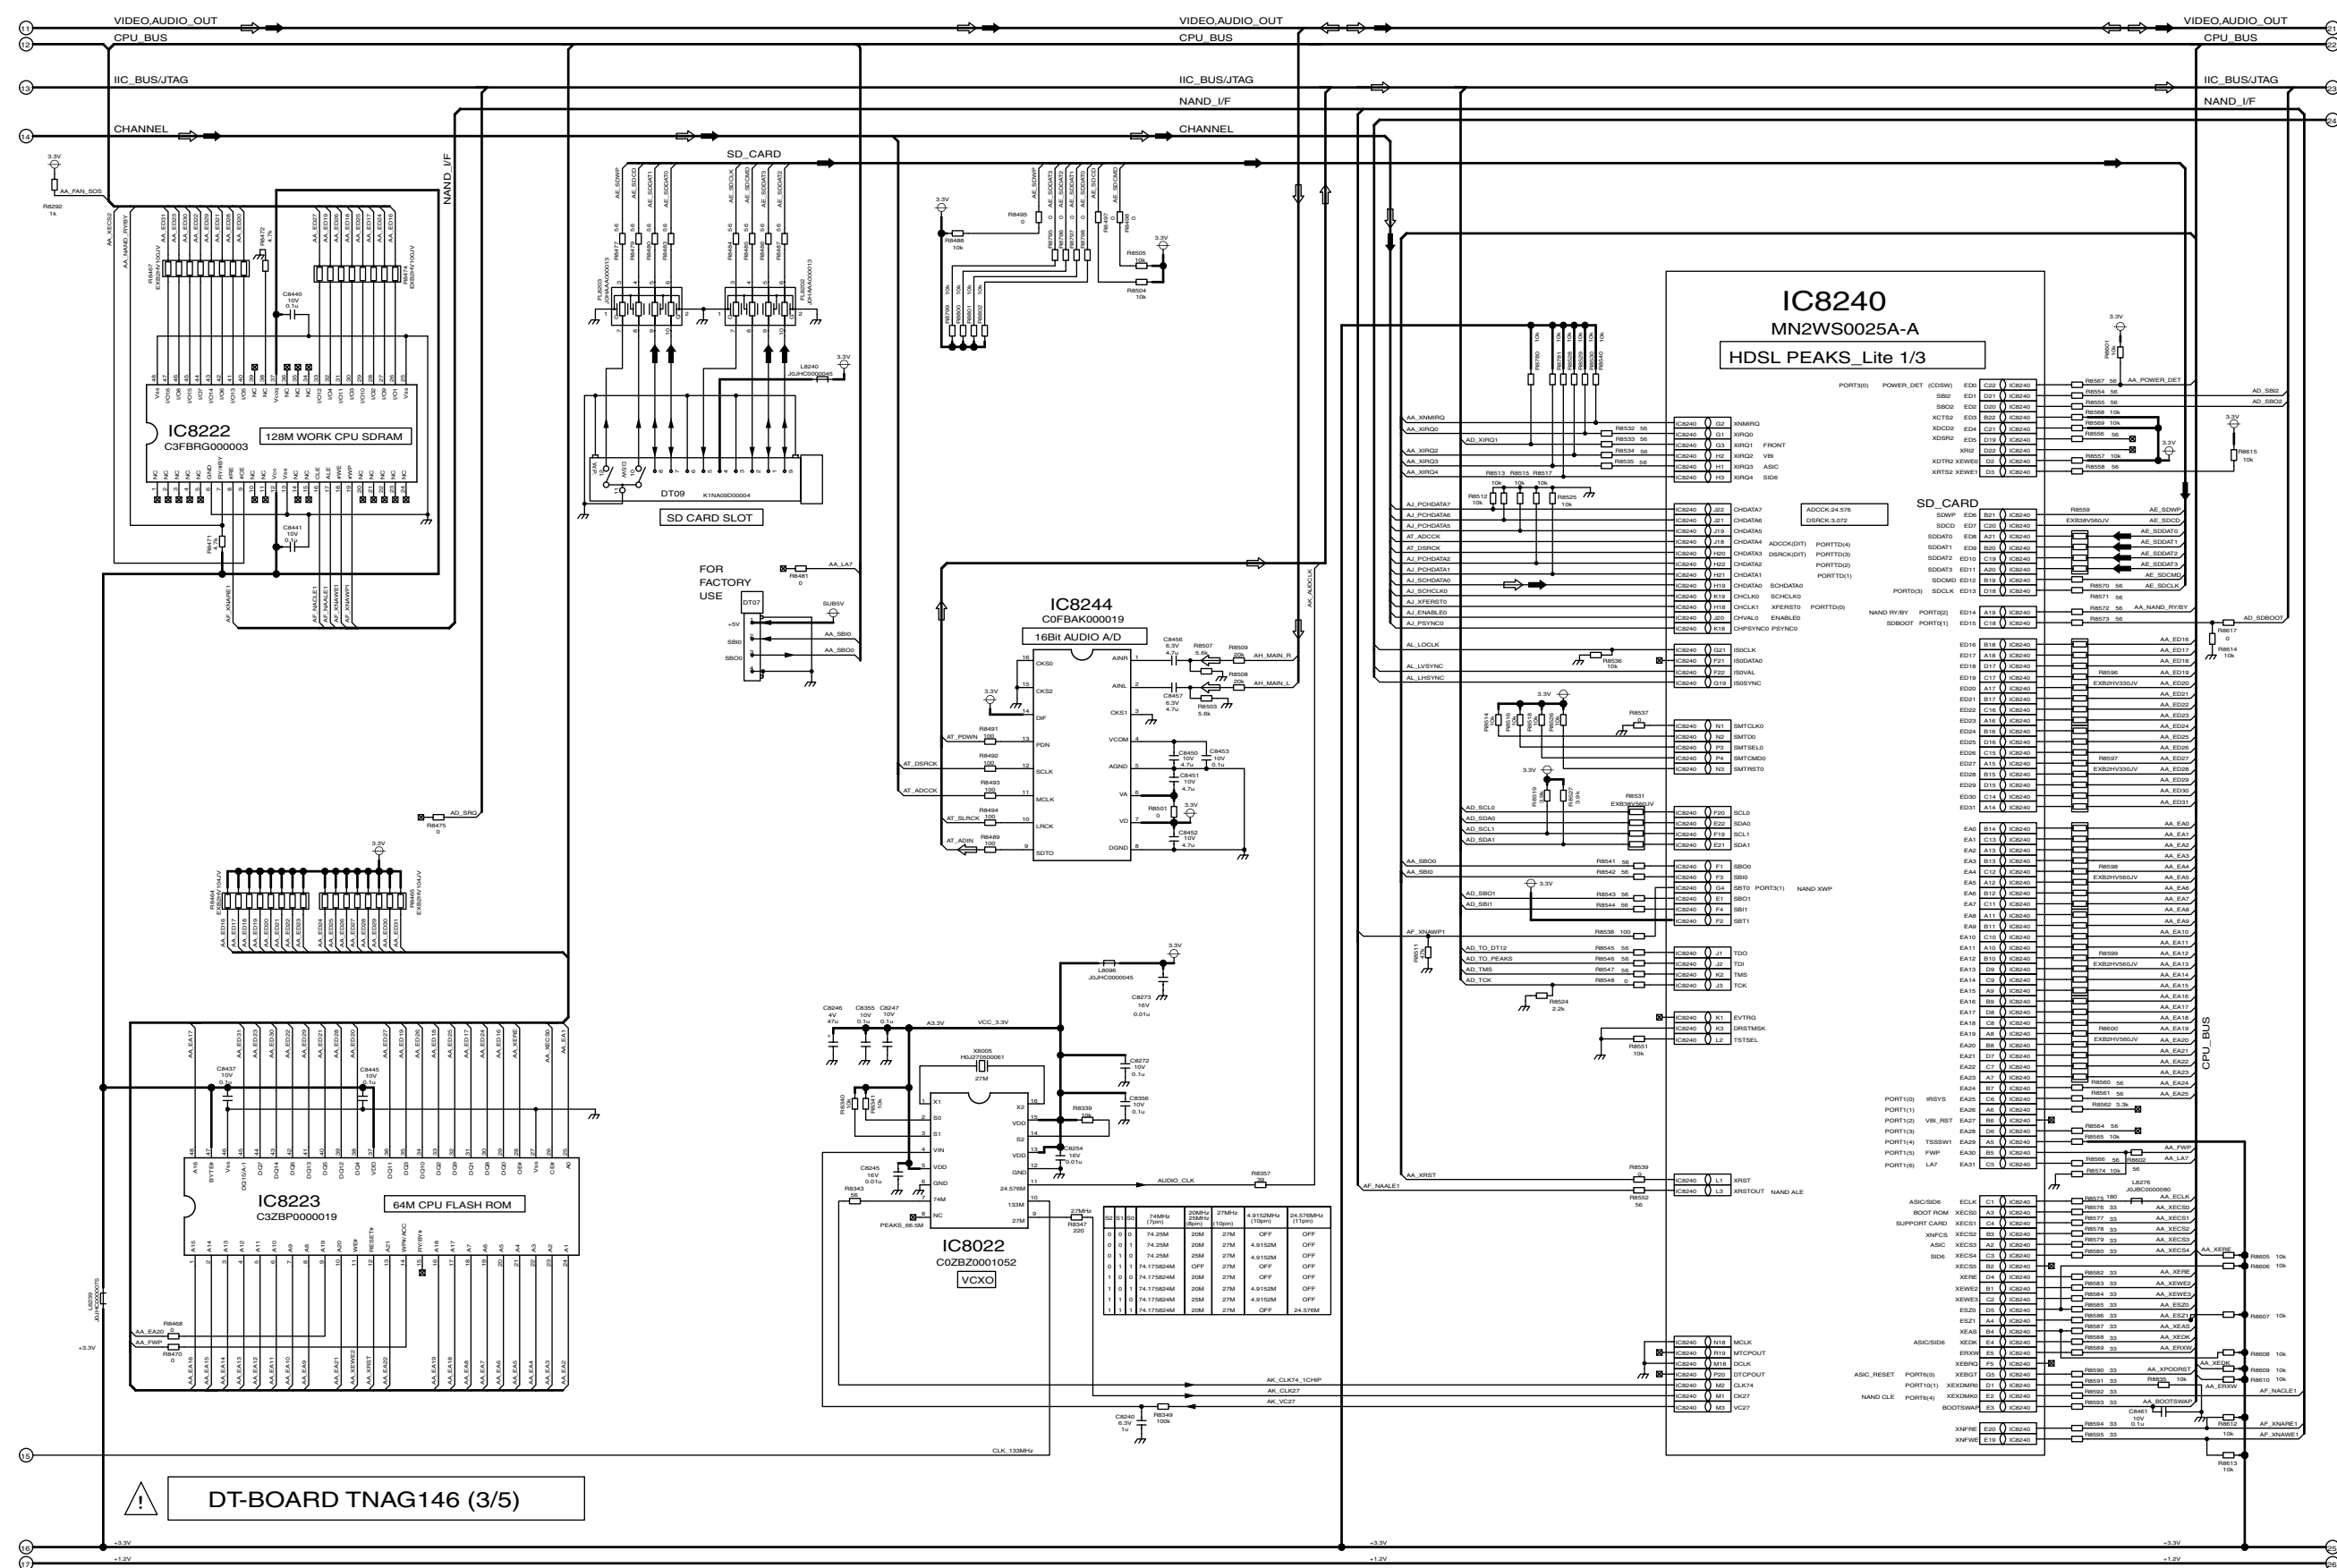


DT-BOARD TNAG146 (3/5)


TH-37/42/50PX50U
DT-Board (3 of 5) Schematic Diagram

TH-37/42/50PX50U
DT-Board (3 of 5) Schematic Diagram

13.33. DT-Board (4 of 5) Schematic Diagram

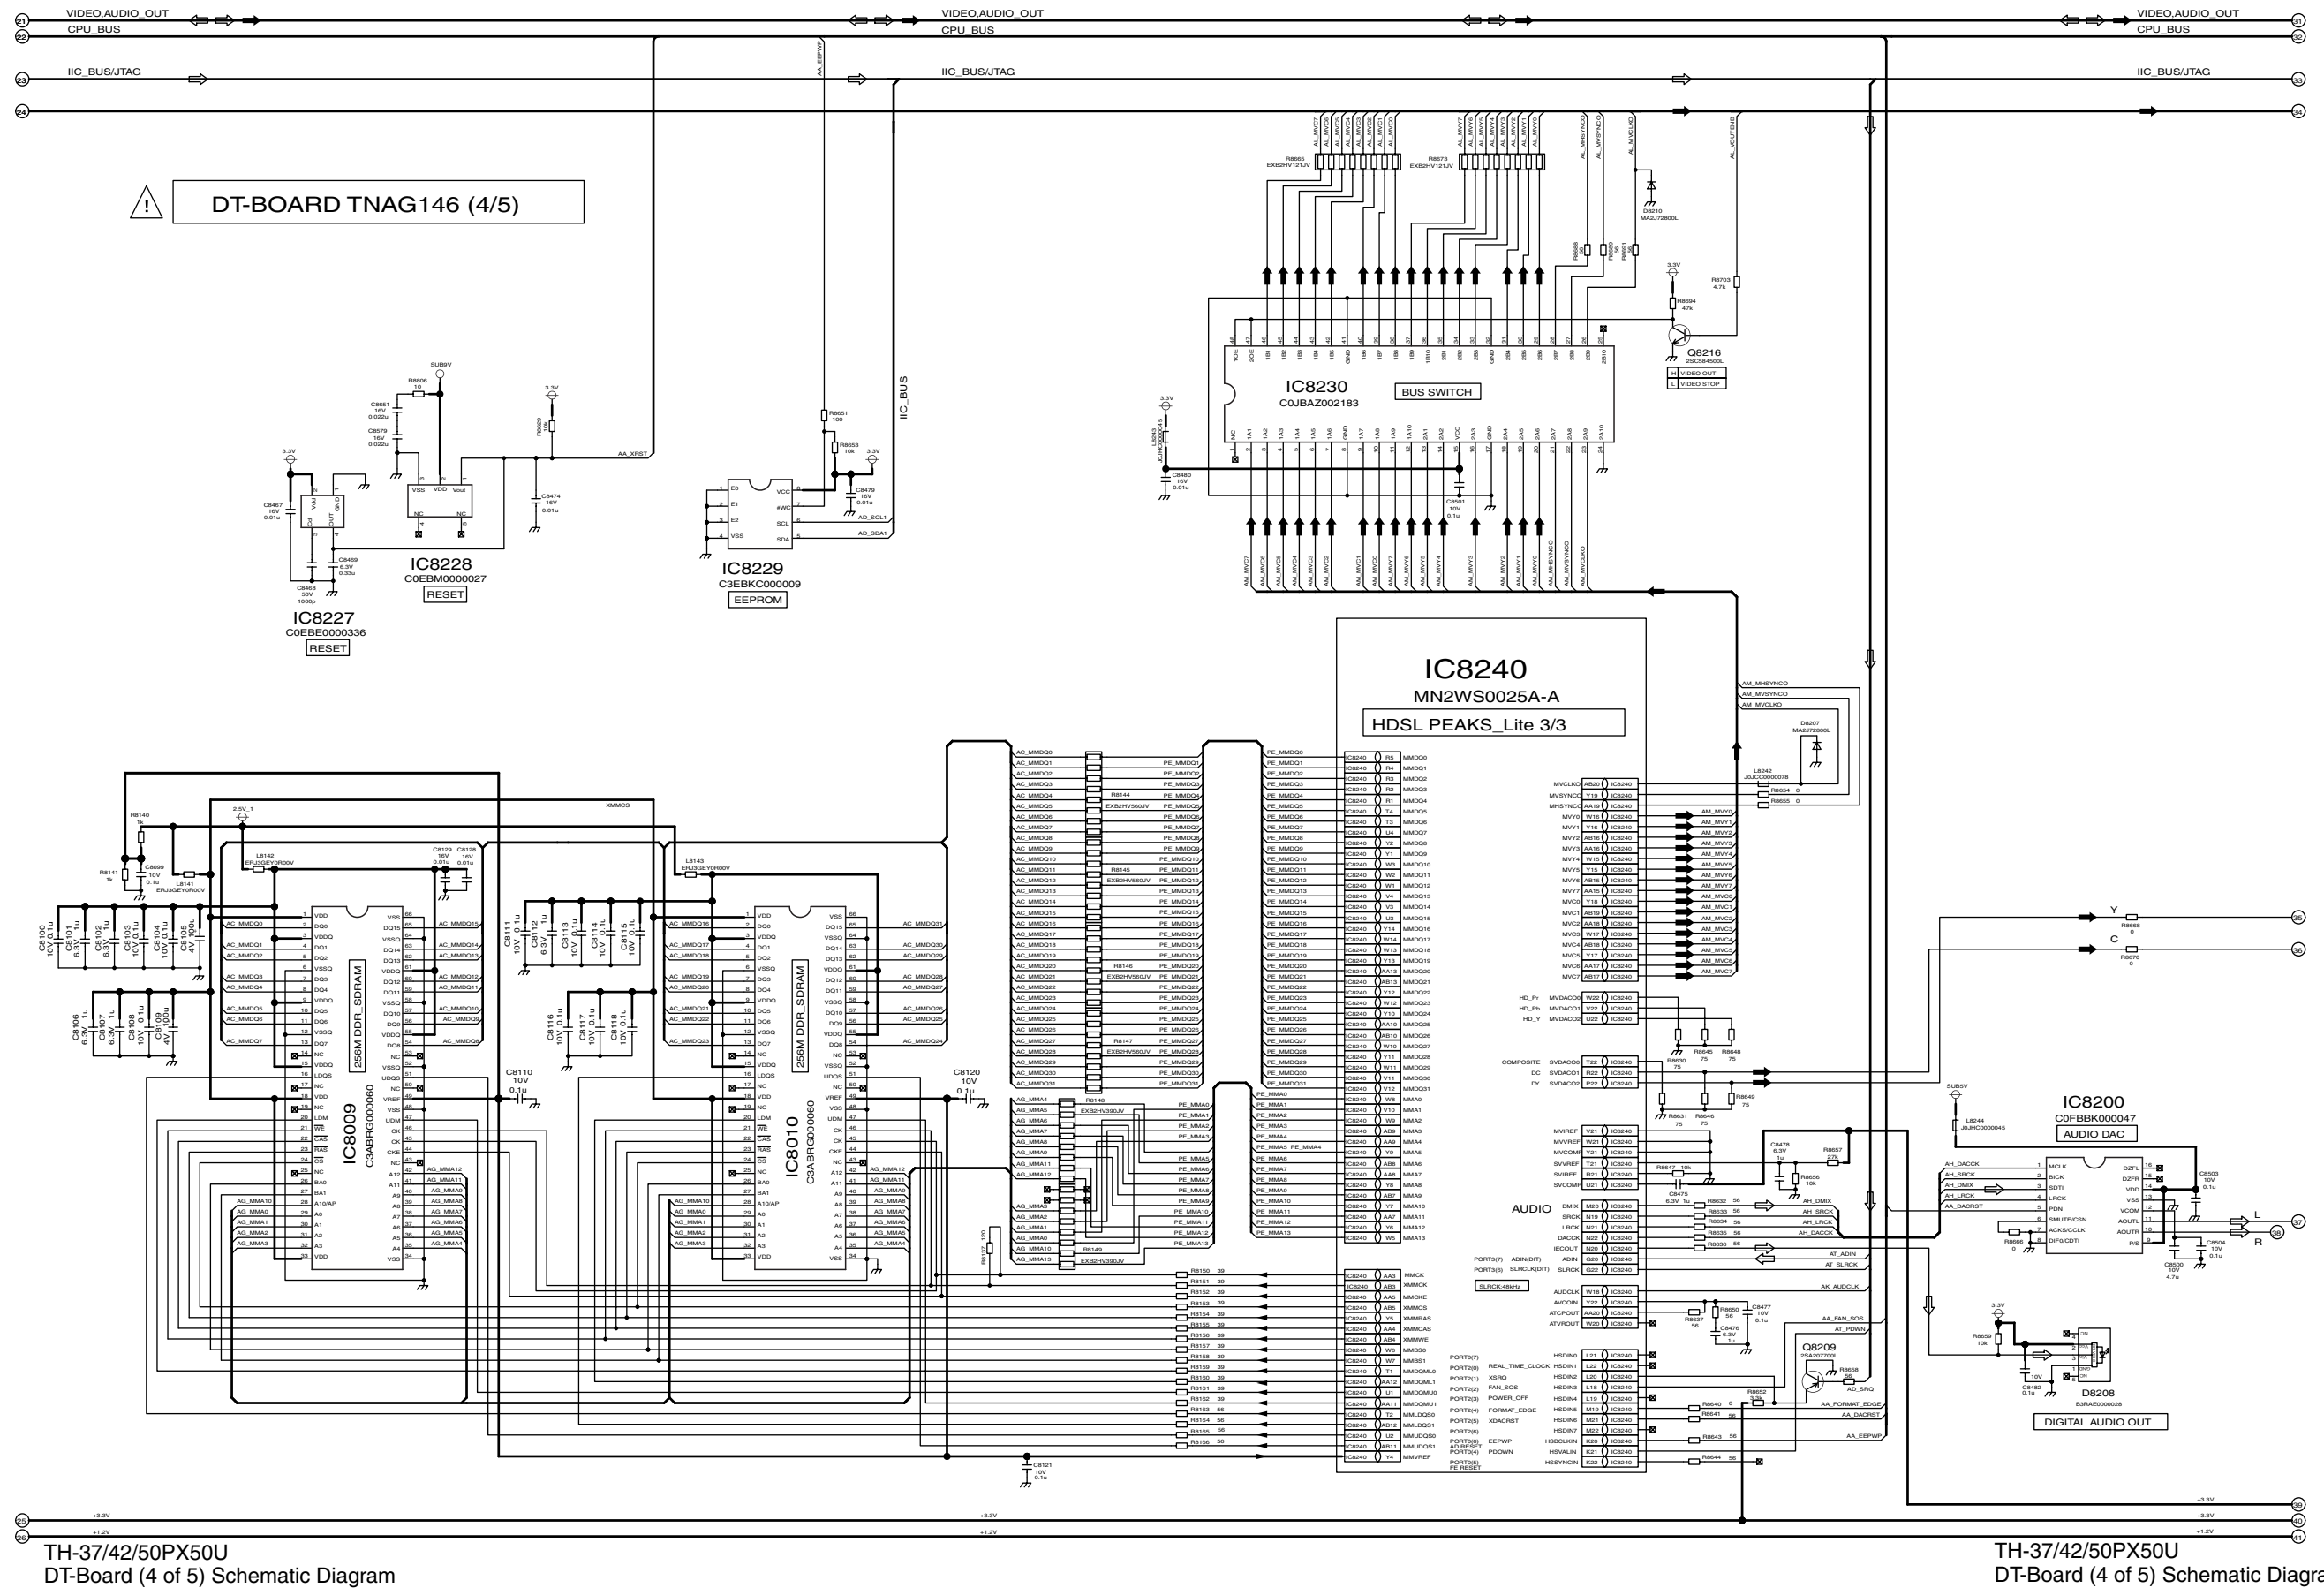TH-37/42/50PX50U
DT-Board (4 of 5) Schematic DiagramTH-37/42/50PX50U
DT-Board (4 of 5) Schematic Diagram


13.34. DT-Board (5 of 5) Schematic Diagram

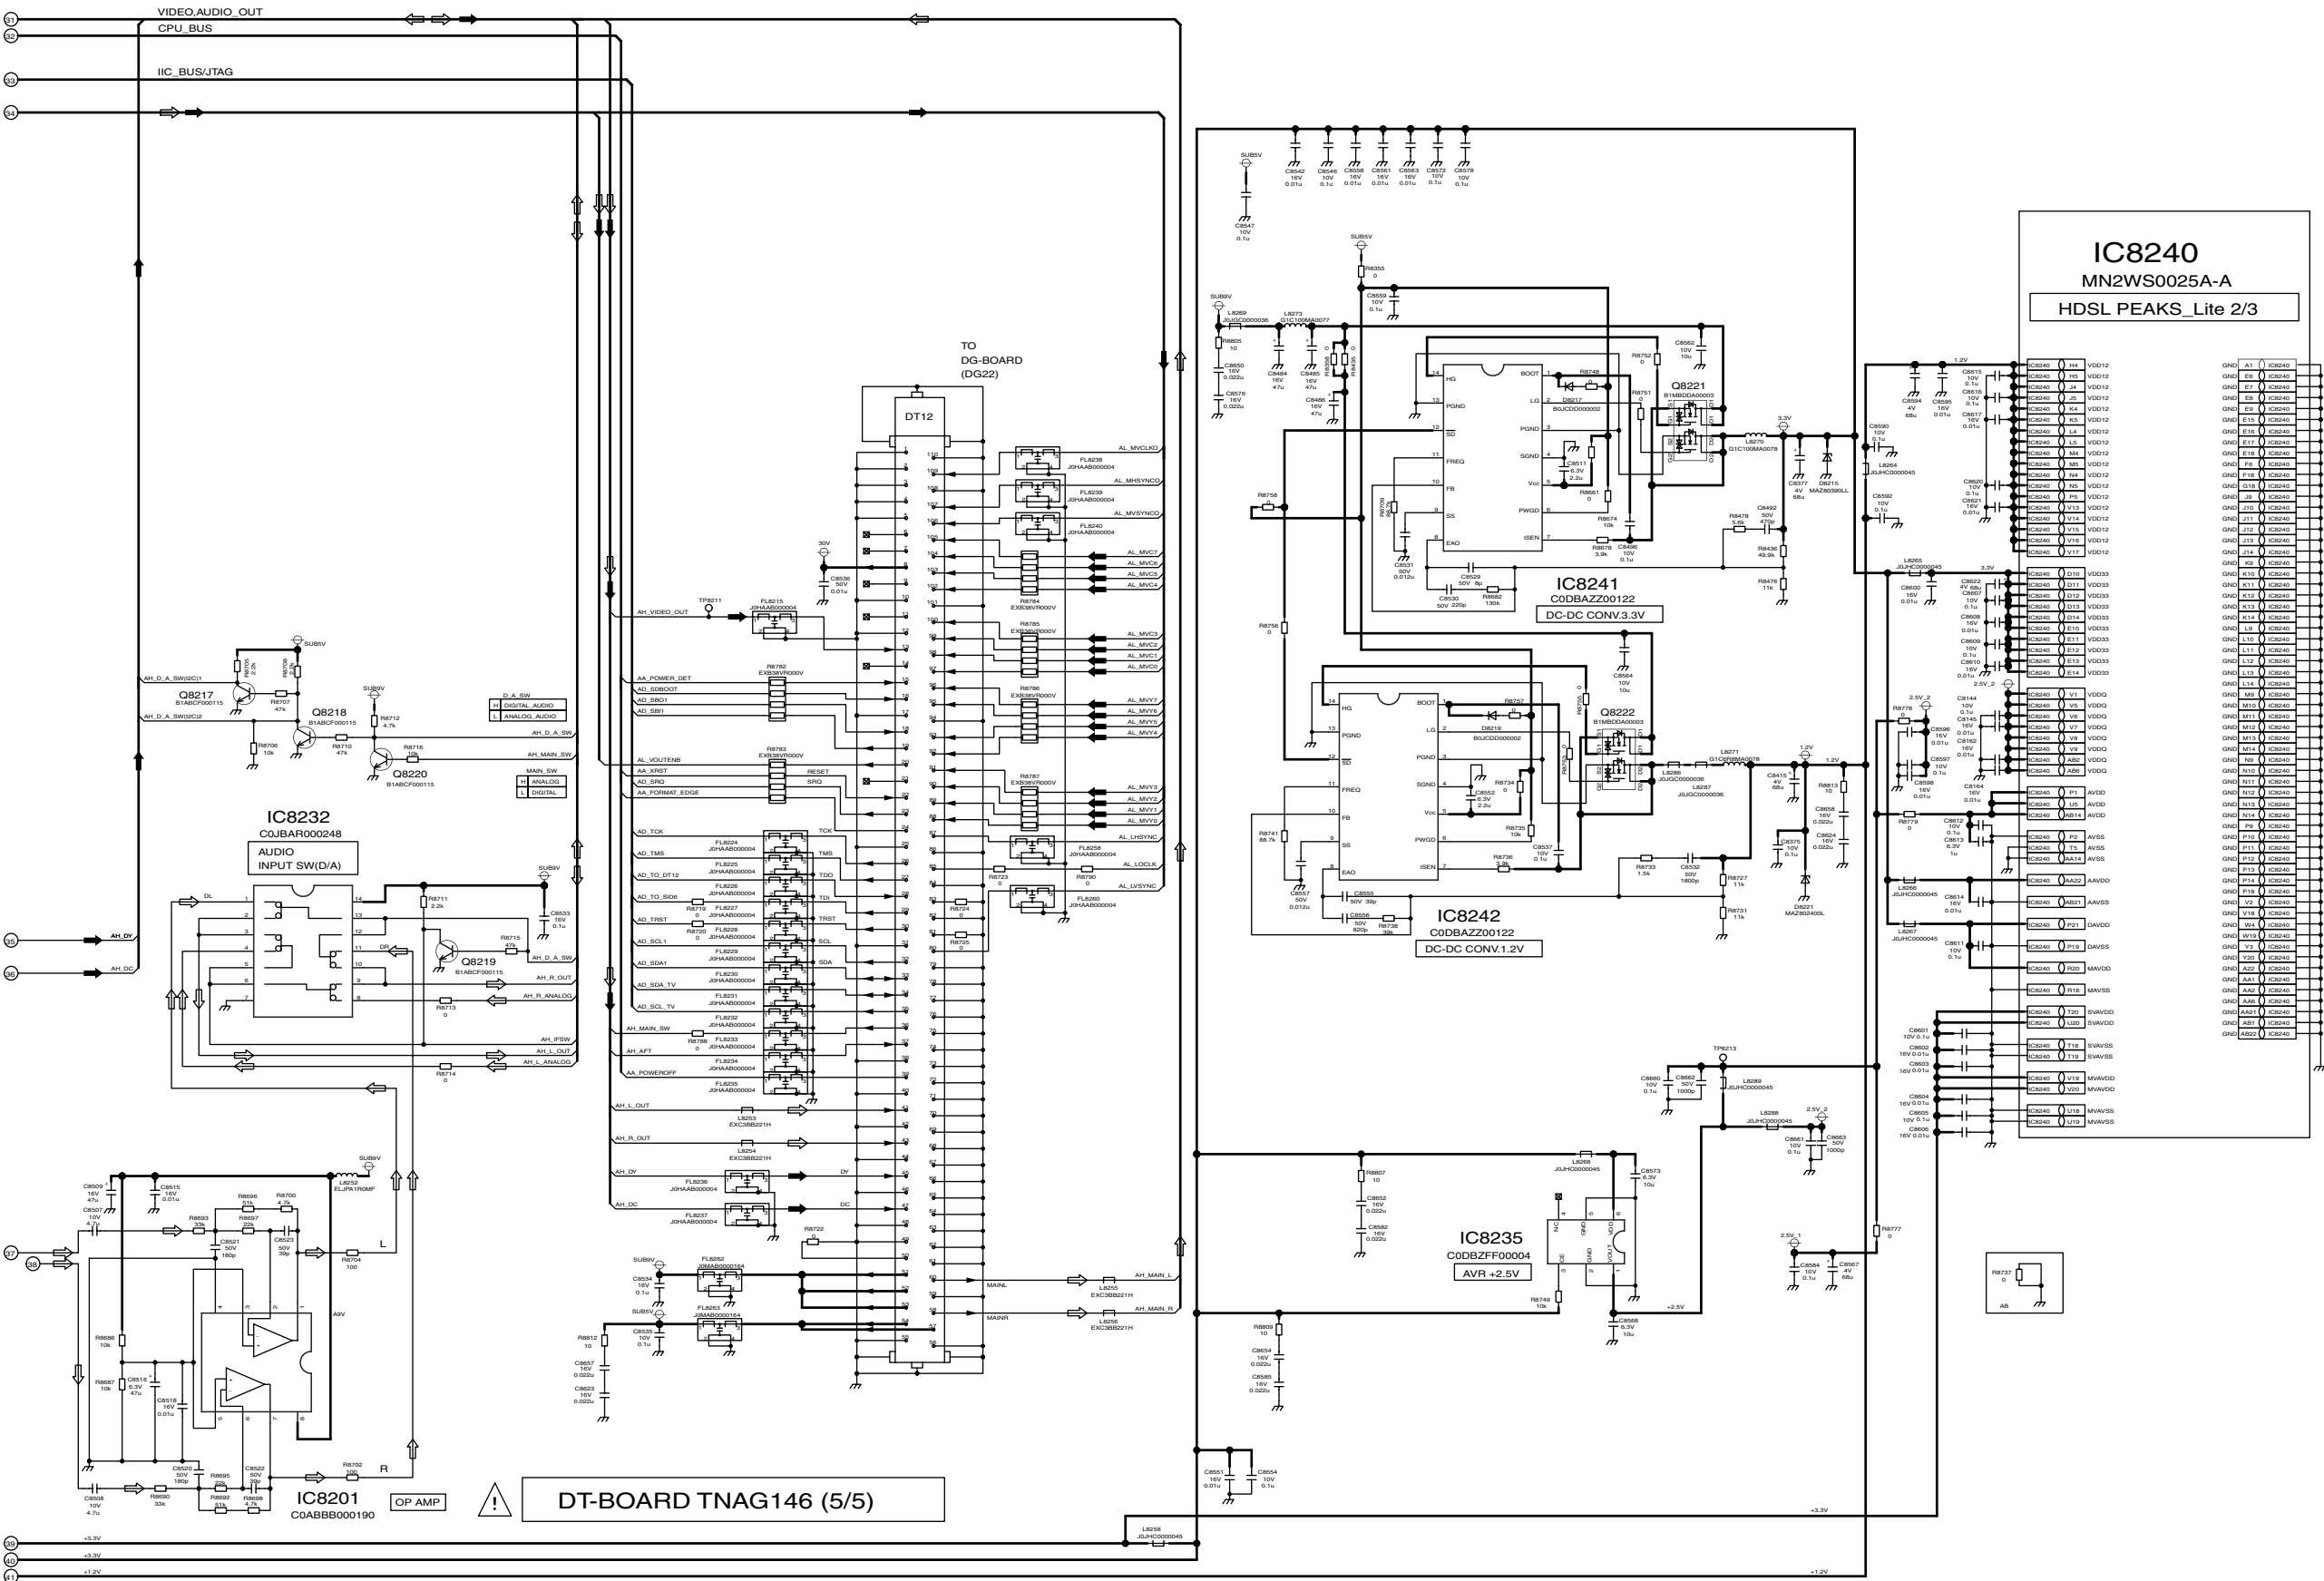


TH-37/42/50PX50U
DT-Board (5 of 5) Schematic Diagram

TH-37/42/50PX50U
DT-Board (5 of 5) Schematic Diagram


13.35. DG-Board (1 of 2) Block Diagram

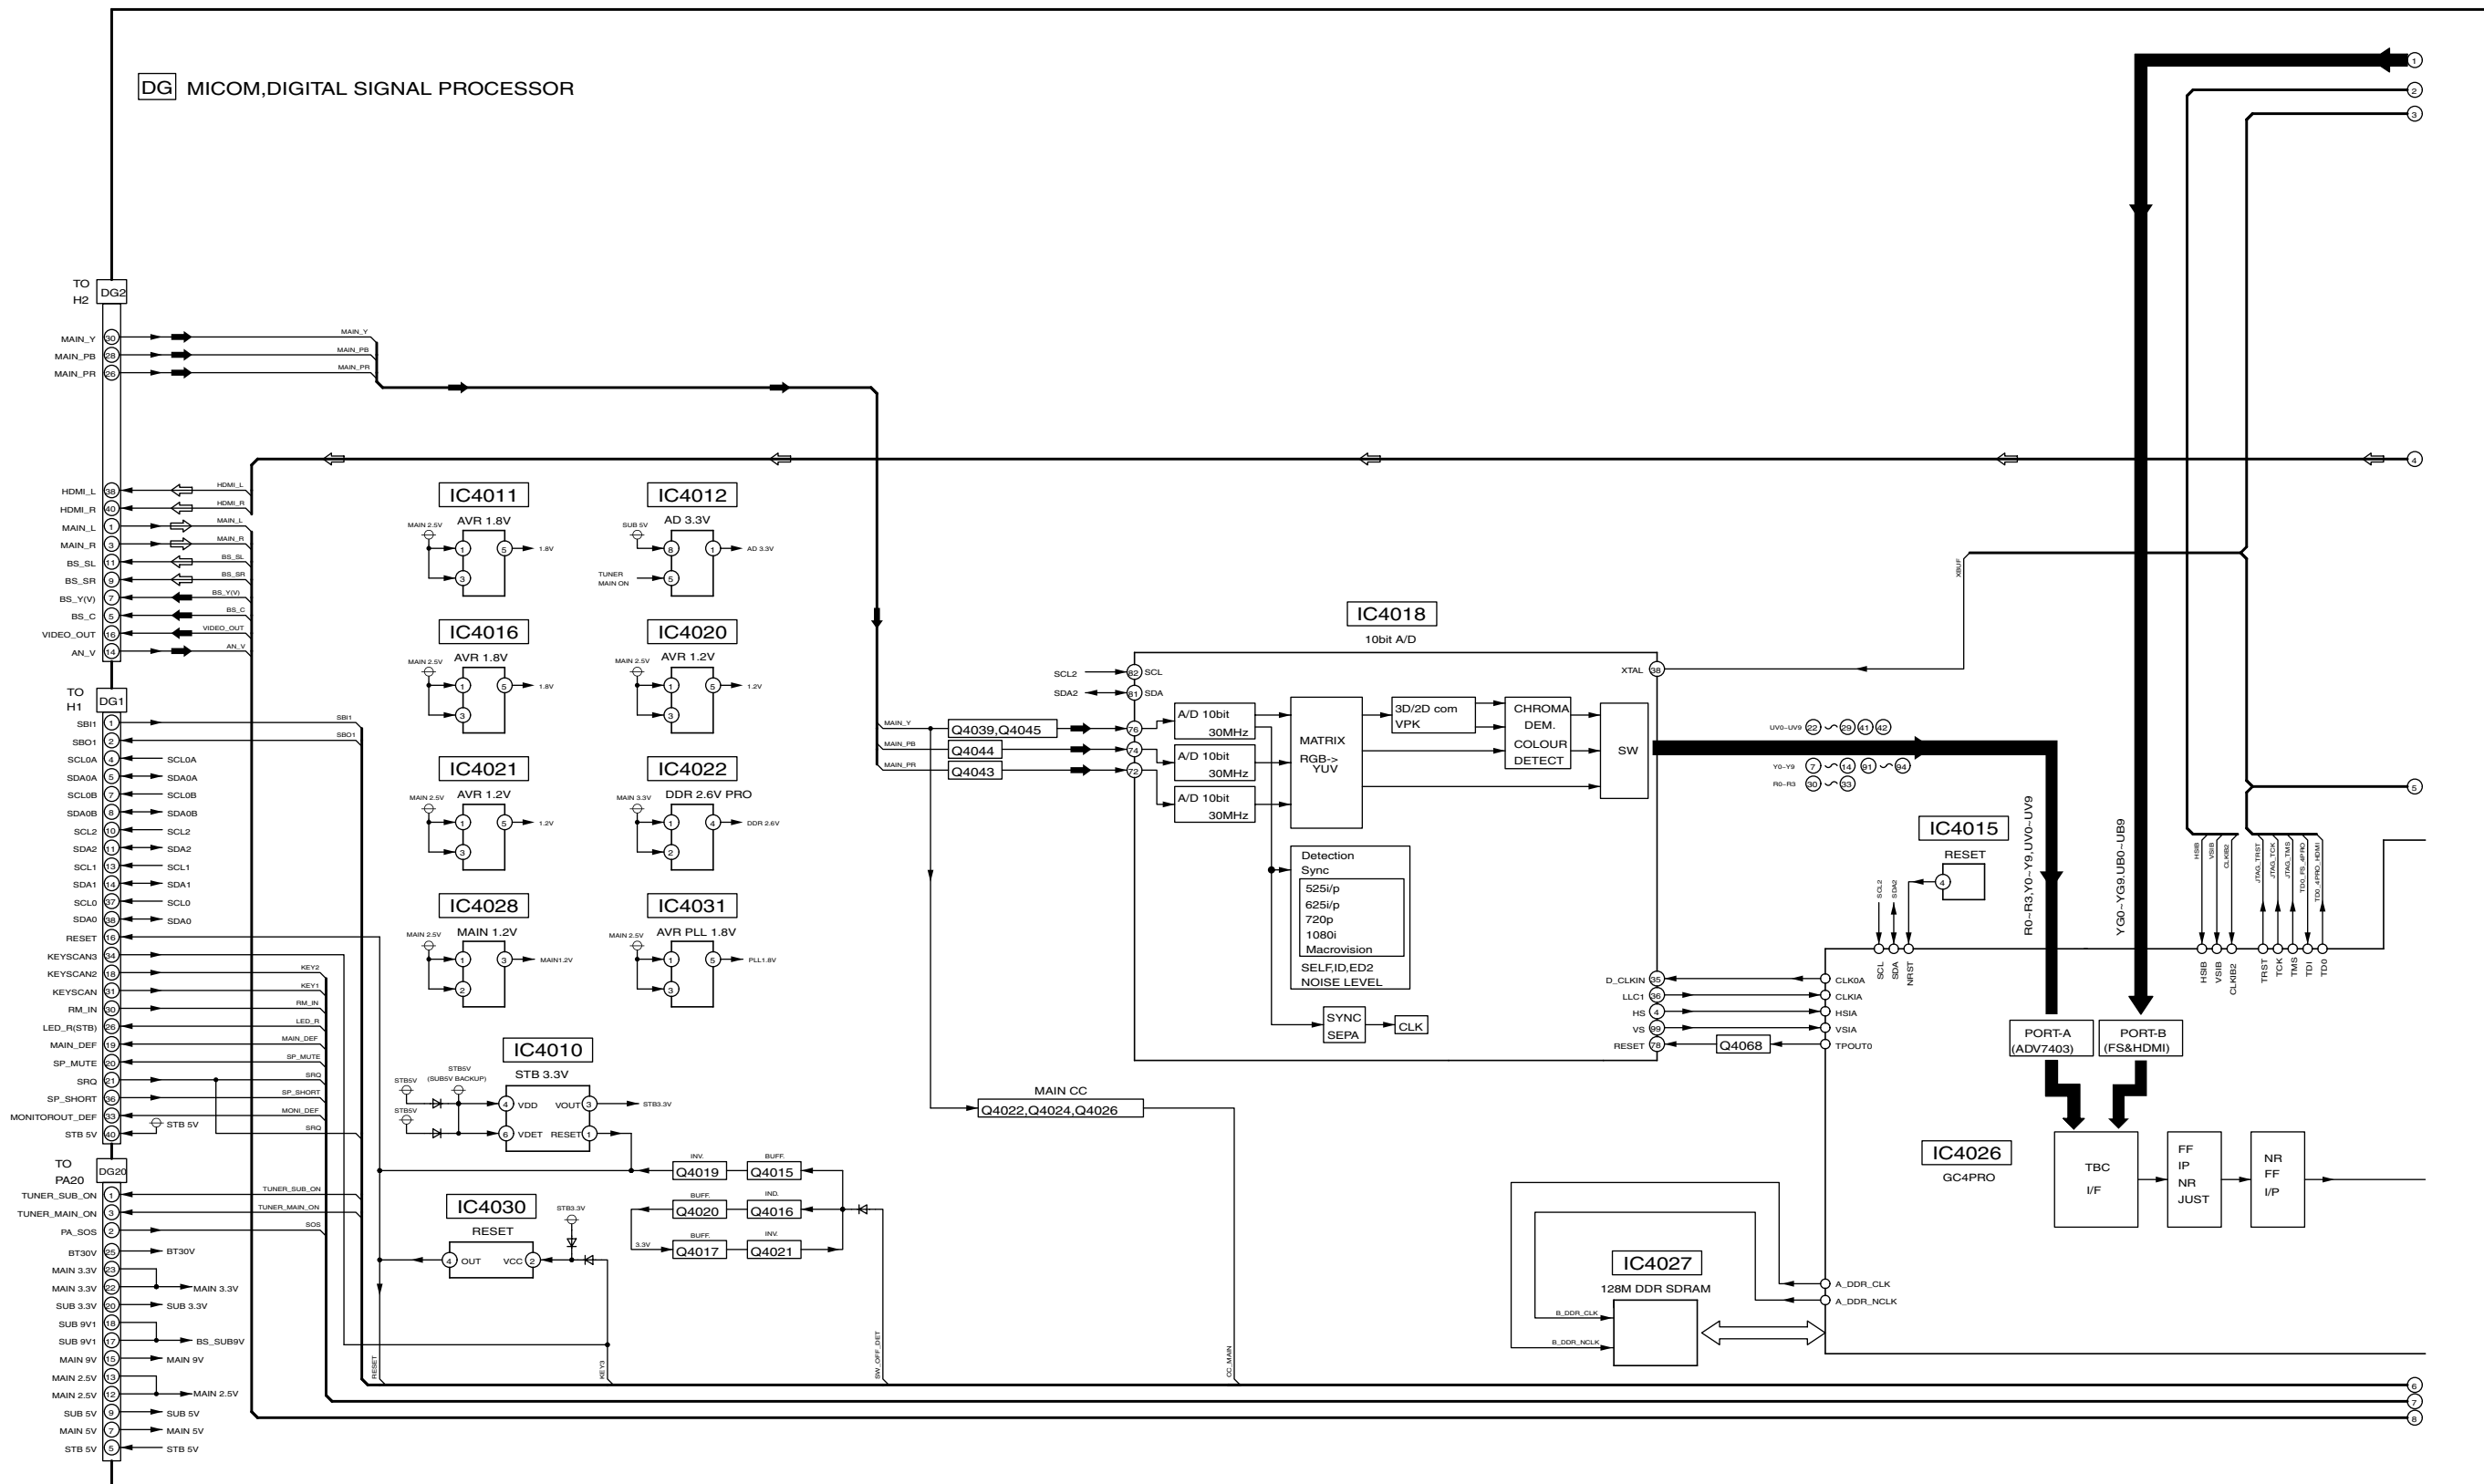








13.38. DG-Board (2 of 11) Schematic Diagram

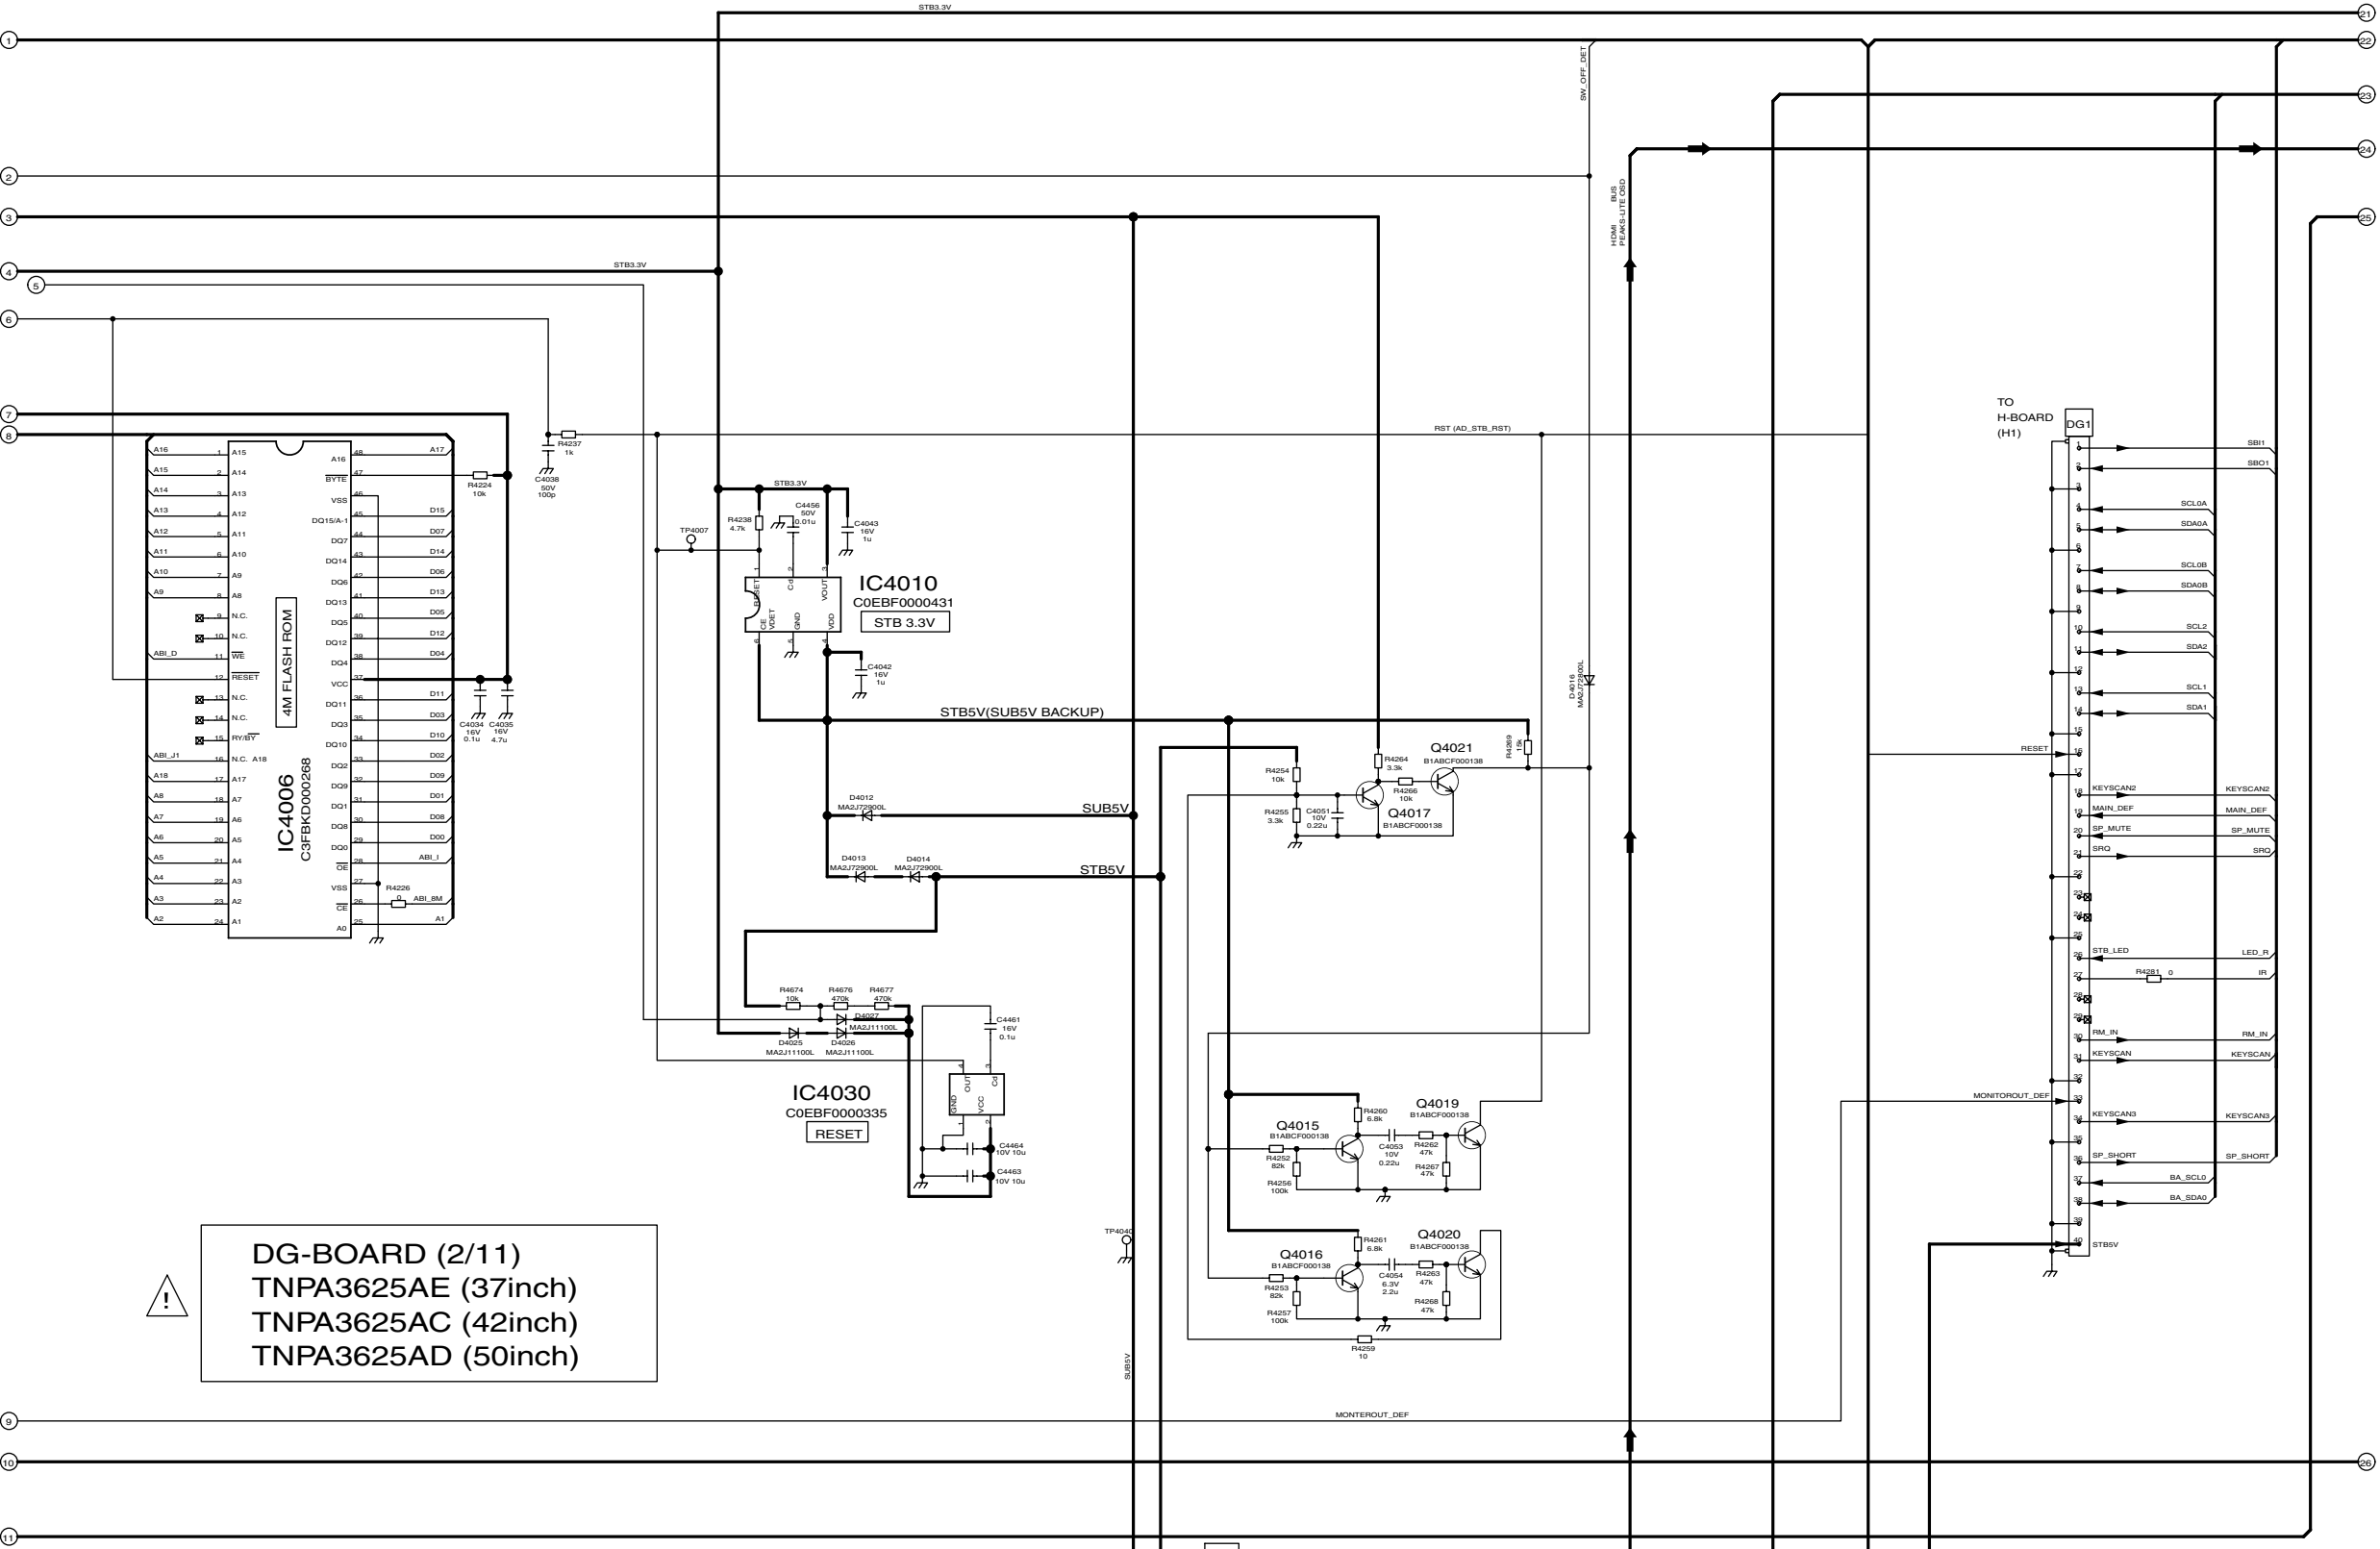


! DG-BOARD (2/11)
TNPA3625AE (37inch)
TNPA3625AC (42inch)
TNPA3625AD (50inch)








13.42. DG-Board (6 of 11) Schematic Diagram

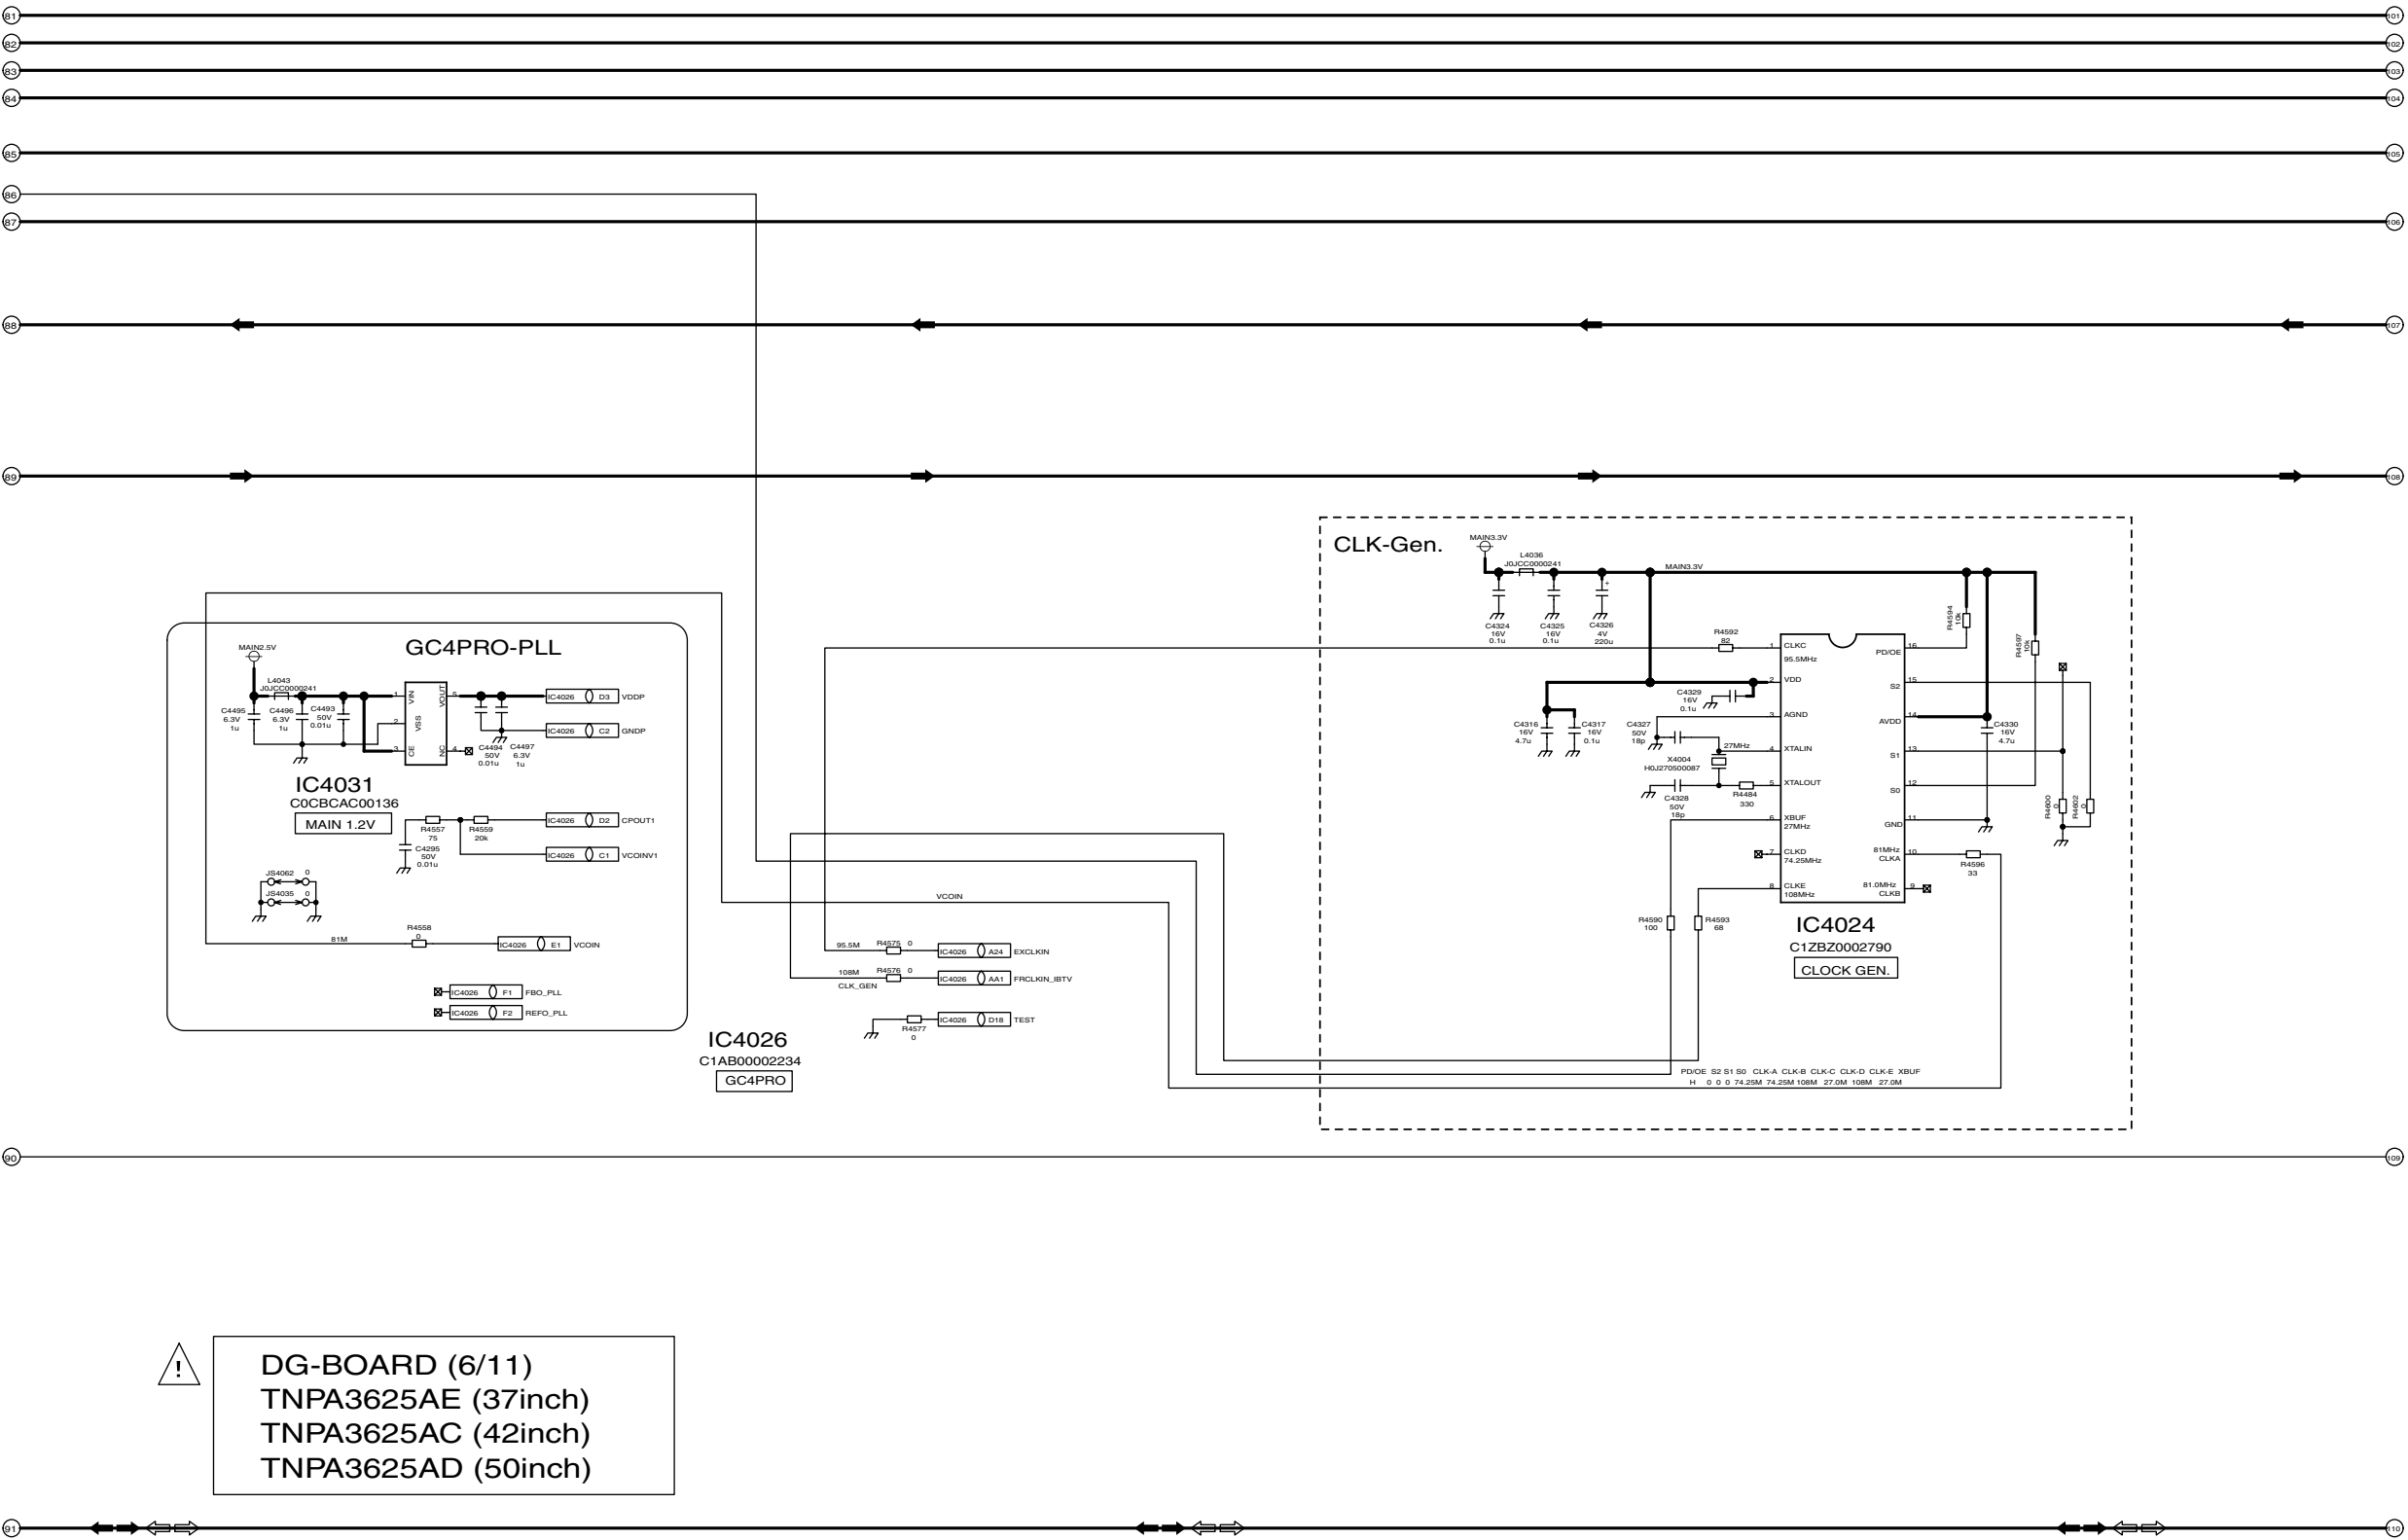

! DG-BOARD (6/11)
TNPA3625AE (37inch)
TNPA3625AC (42inch)
TNPA3625AD (50inch)

13.43. DG-Board (7 of 11) Schematic Diagram

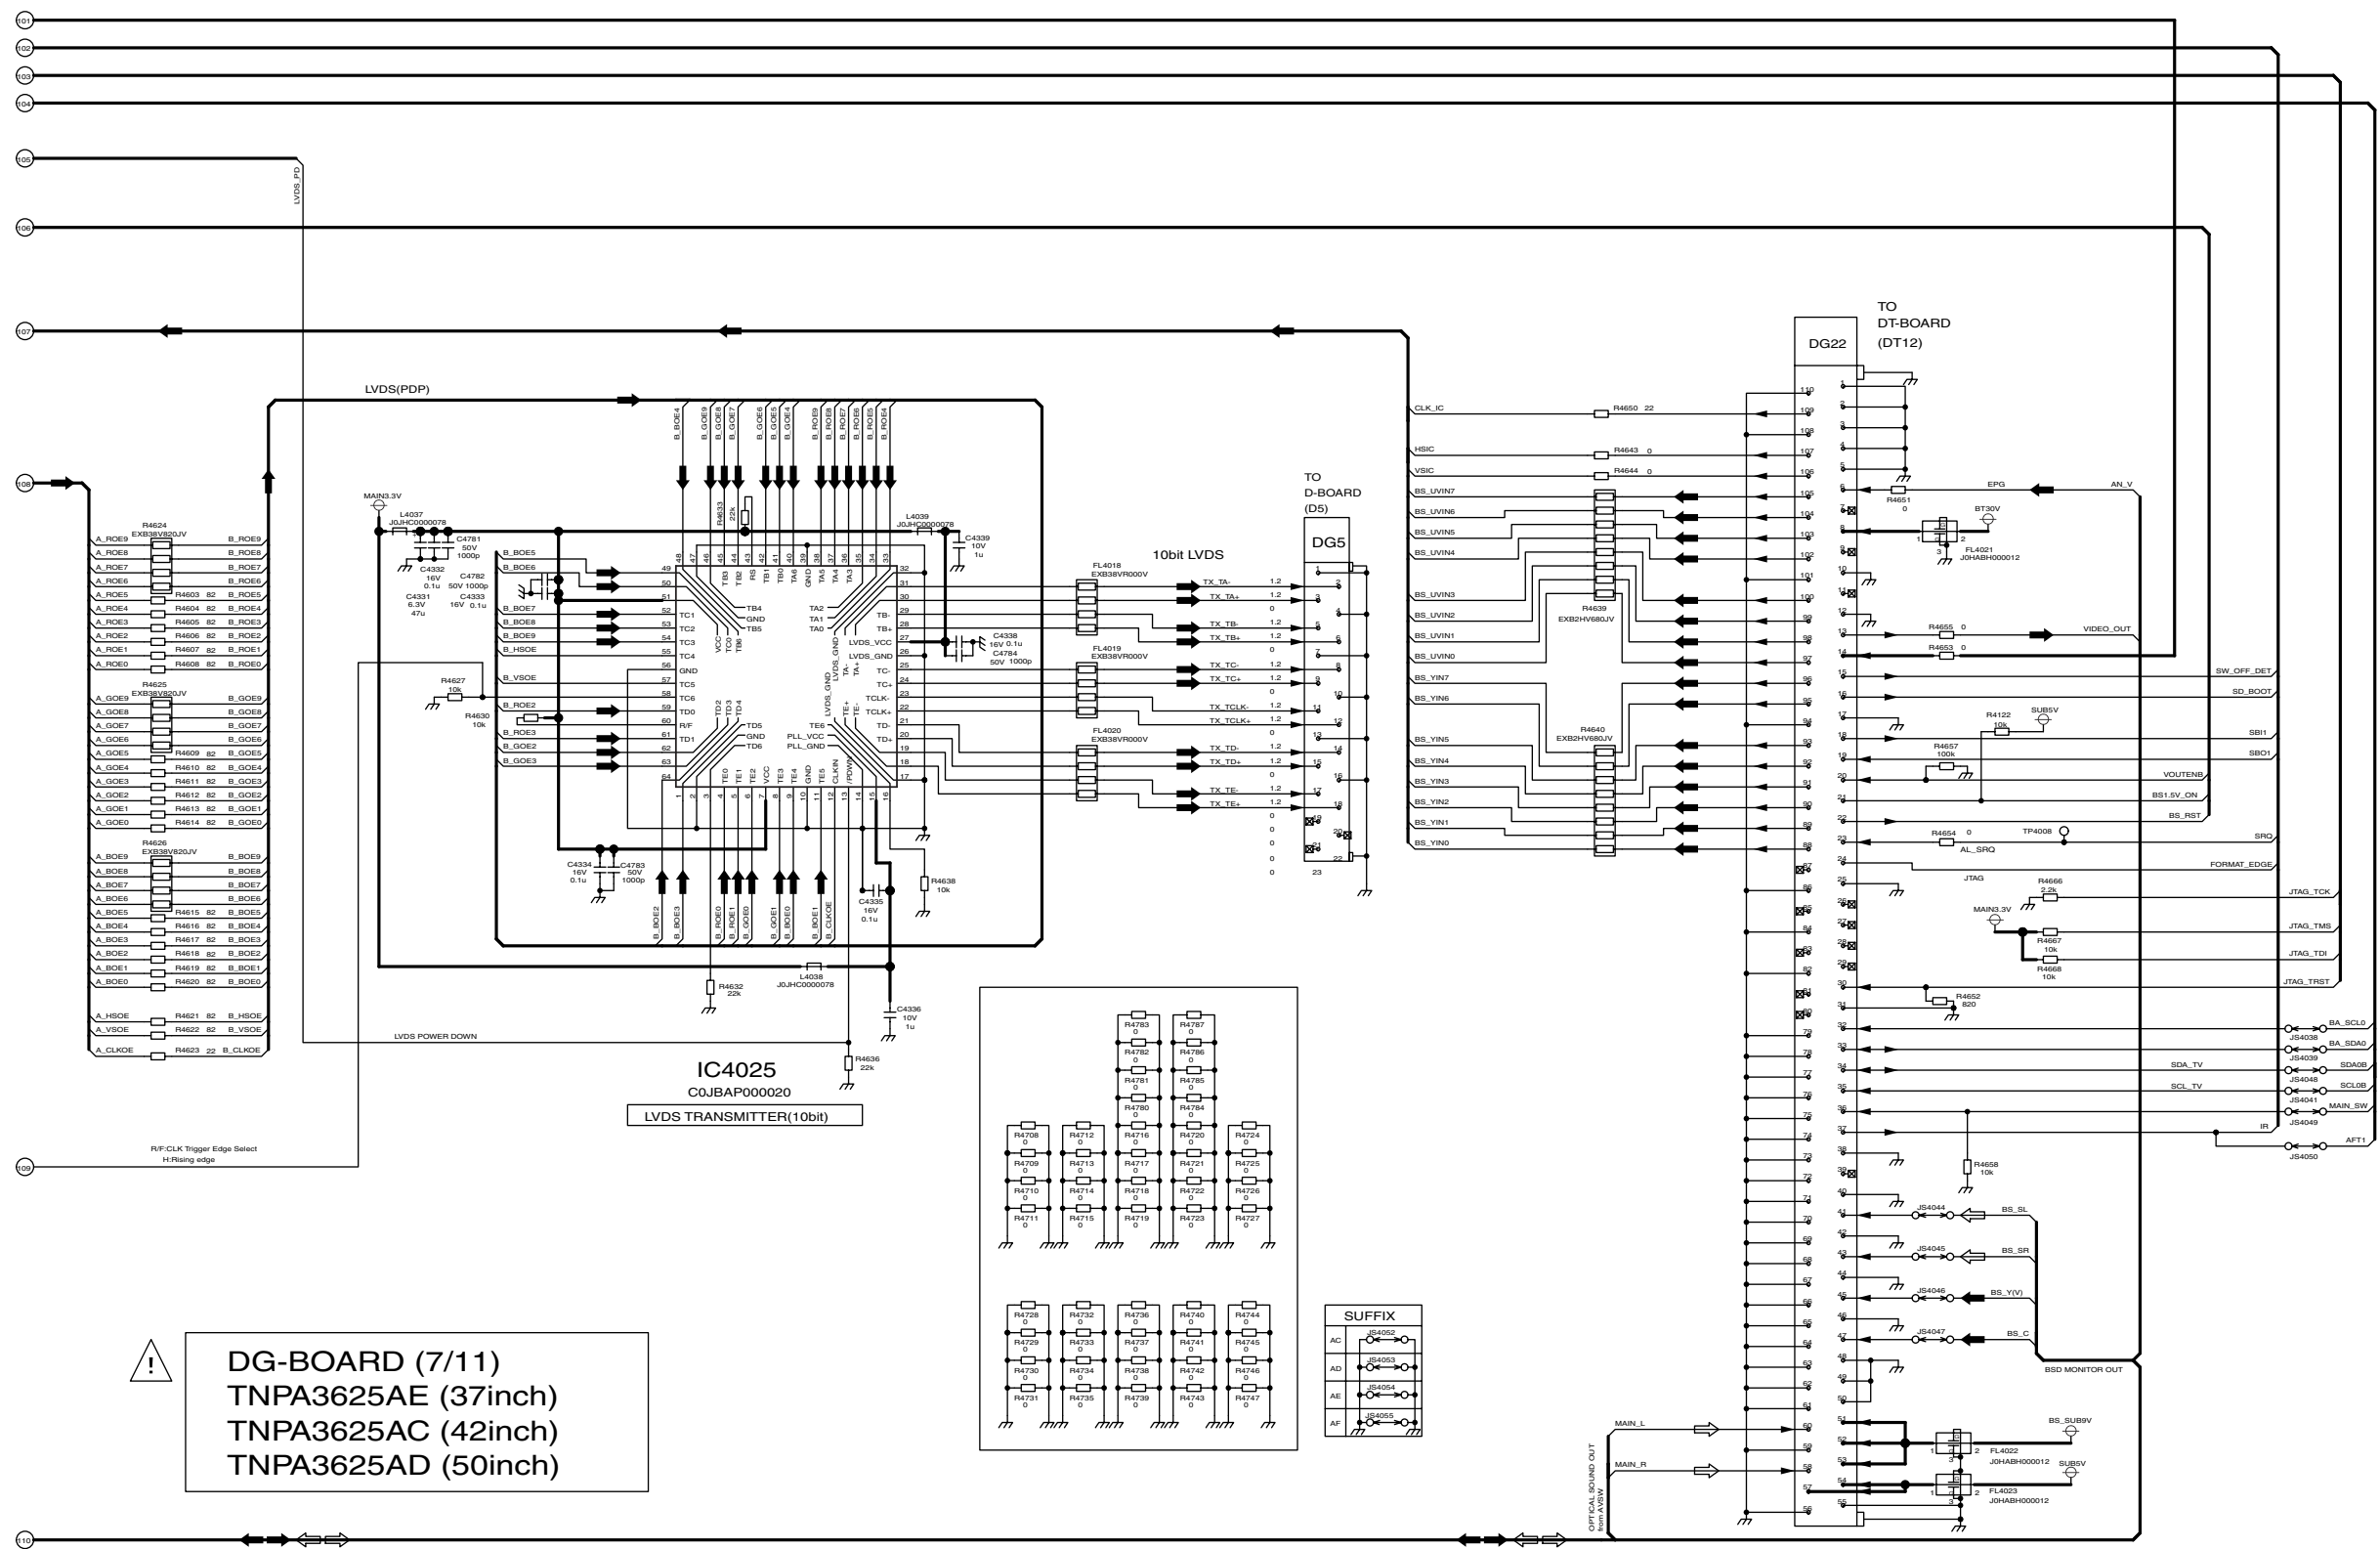



TH-37/42/50PX50U
DG-Board (7 of 11) Schematic Diagram

TH-37/42/50PX50U
DG-Board (7 of 11) Schematic Diagram




13.45. DG-Board (9 of 11) Schematic Diagram

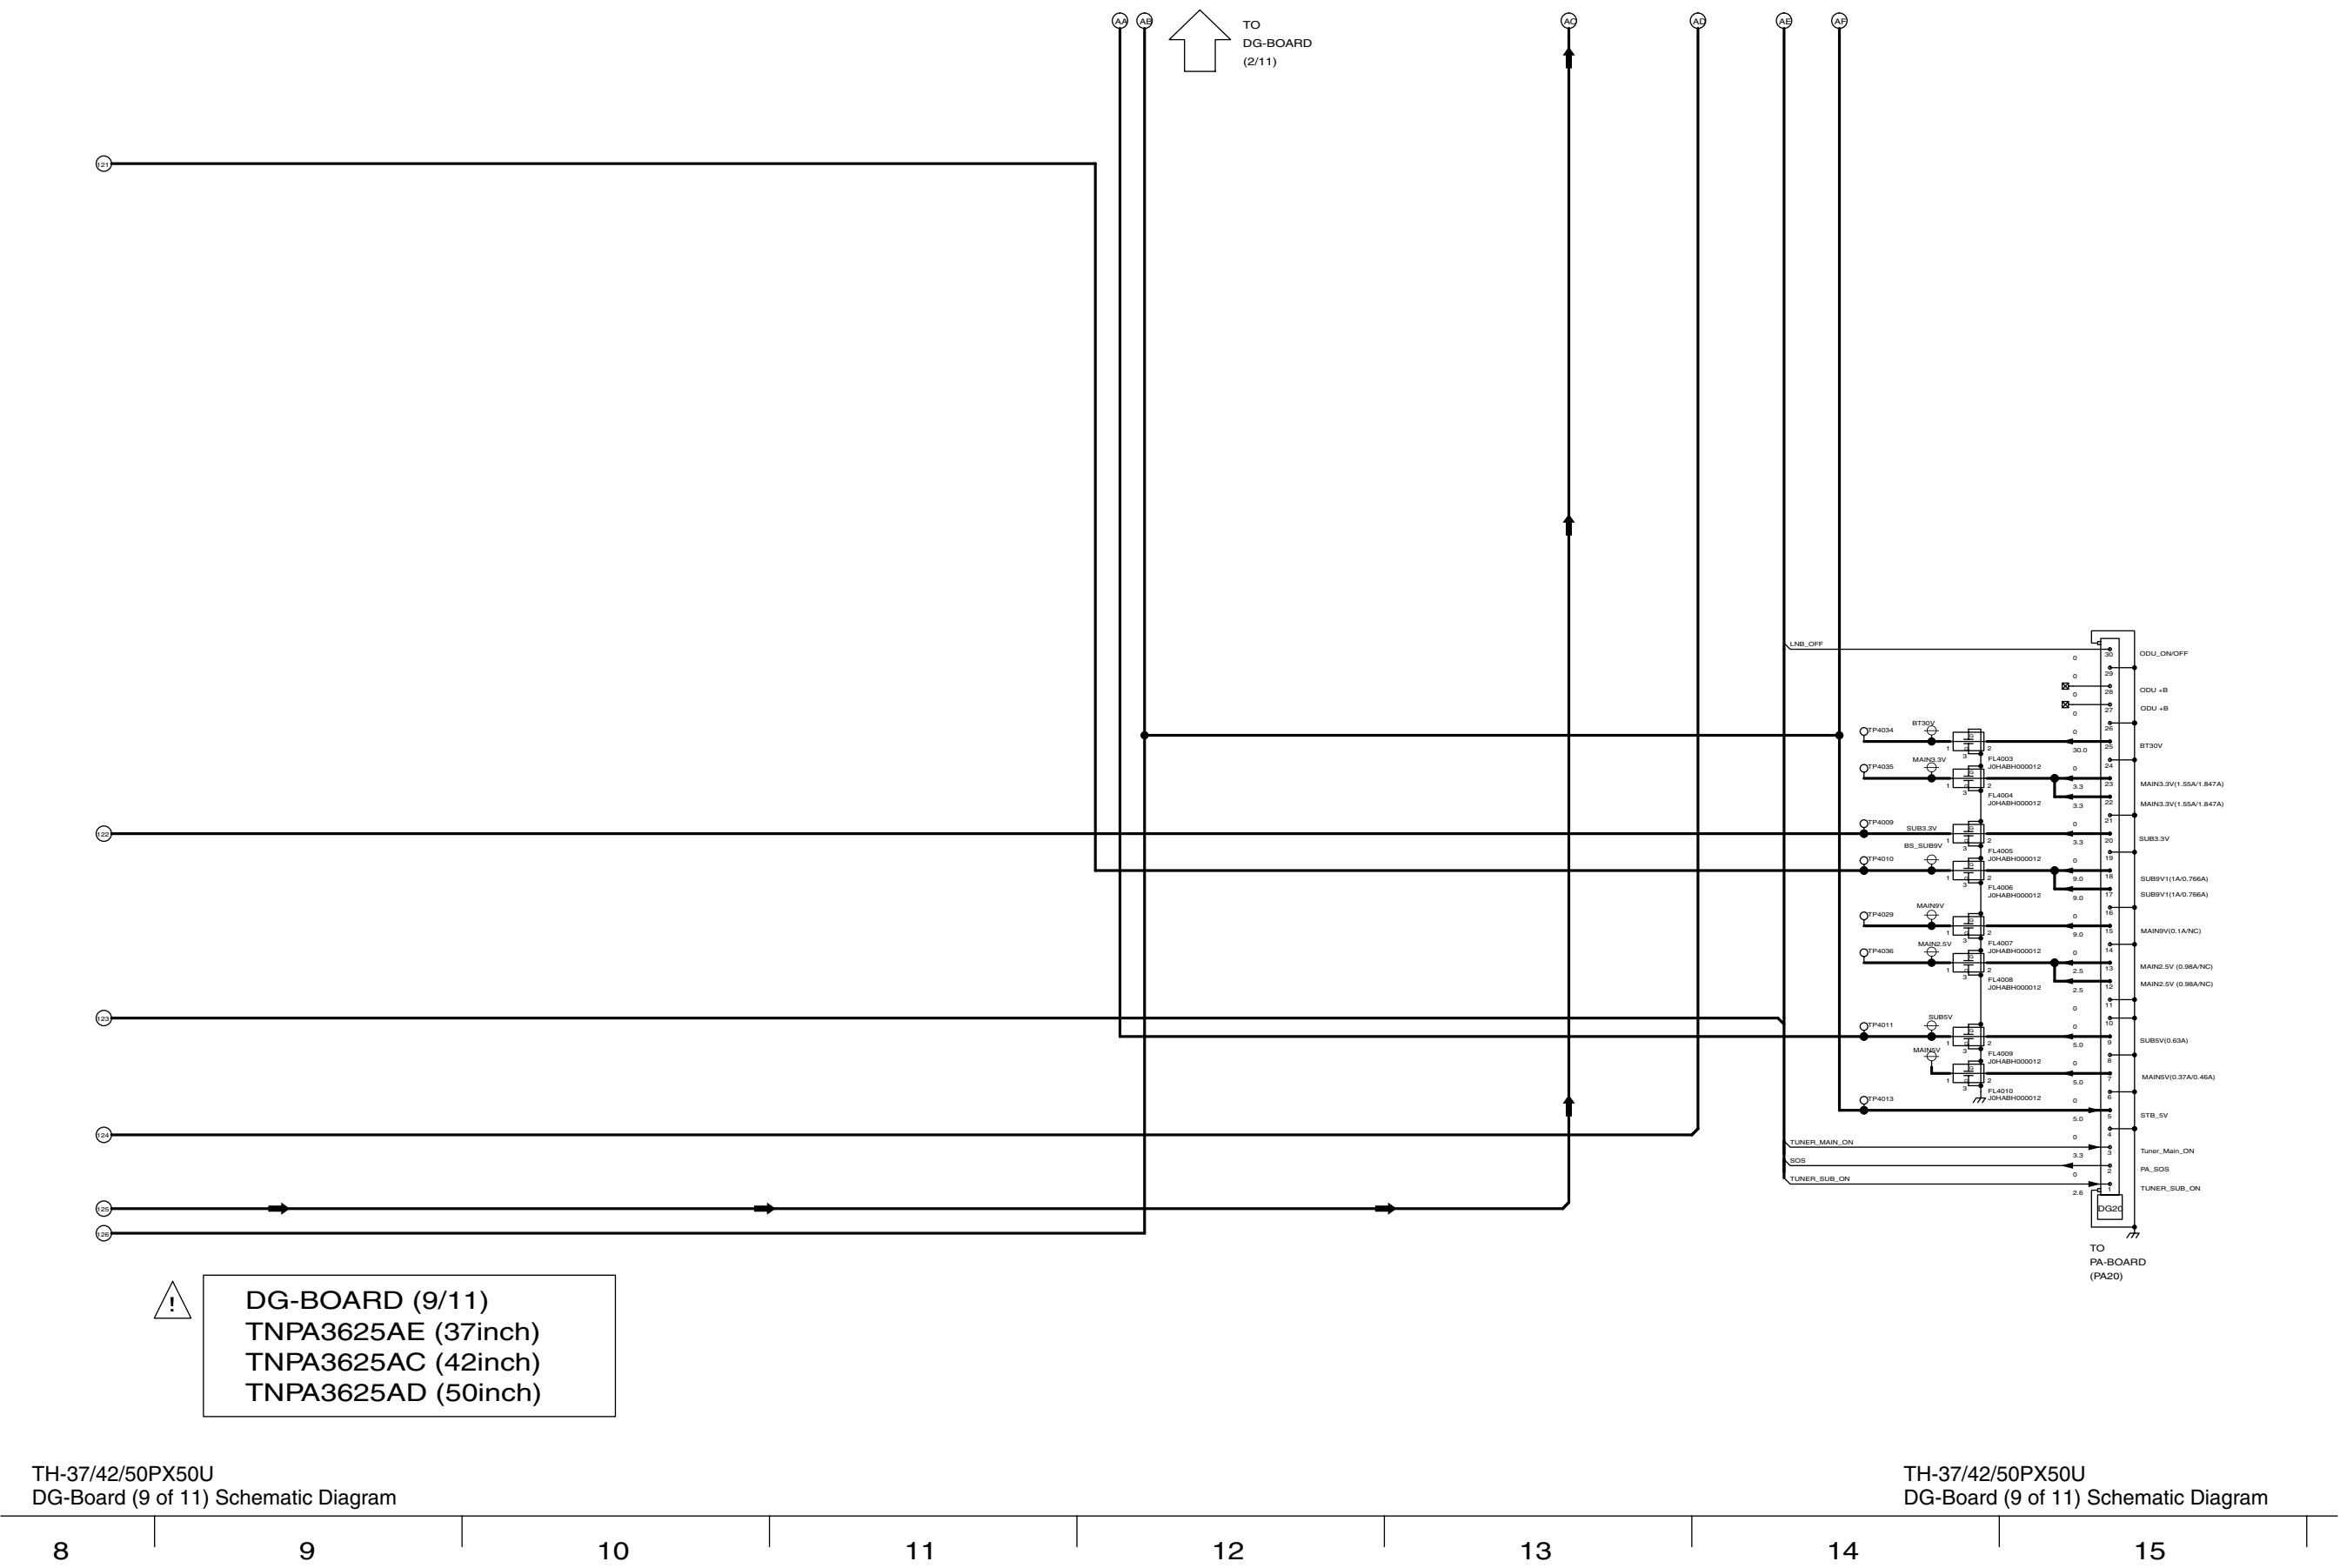



13.47. DG-Board (11 of 11) Schematic Diagram

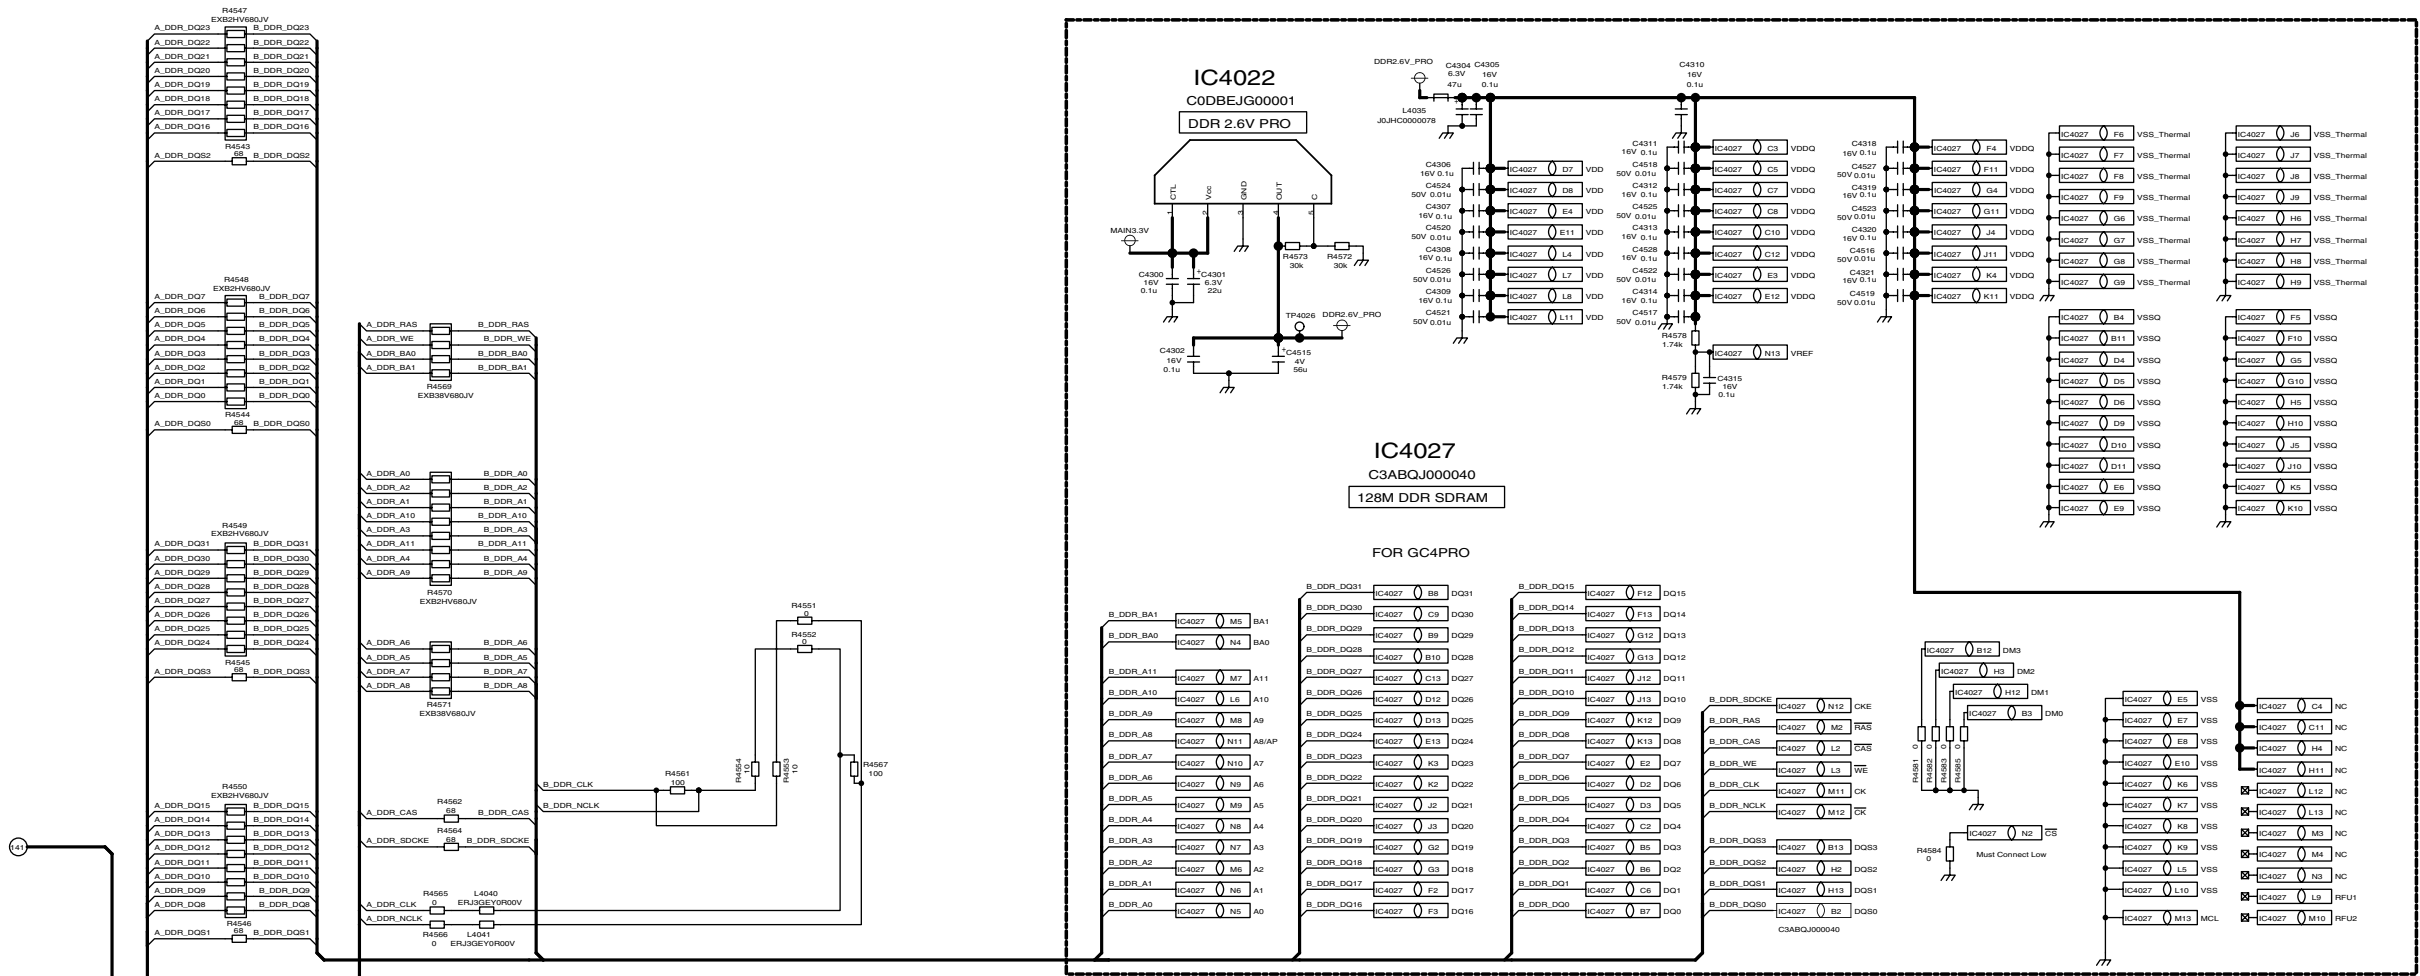


⚠
DG-BOARD (4/11)
TNPA3625AE (37inch)
TNPA3625AC (42inch)
TNPA3625AD (50inch)





TH-37/42PX50U D-Board Block Diagram






TH-37/42/50PX50U
D-Board (1 of 6) Schematic Diagram



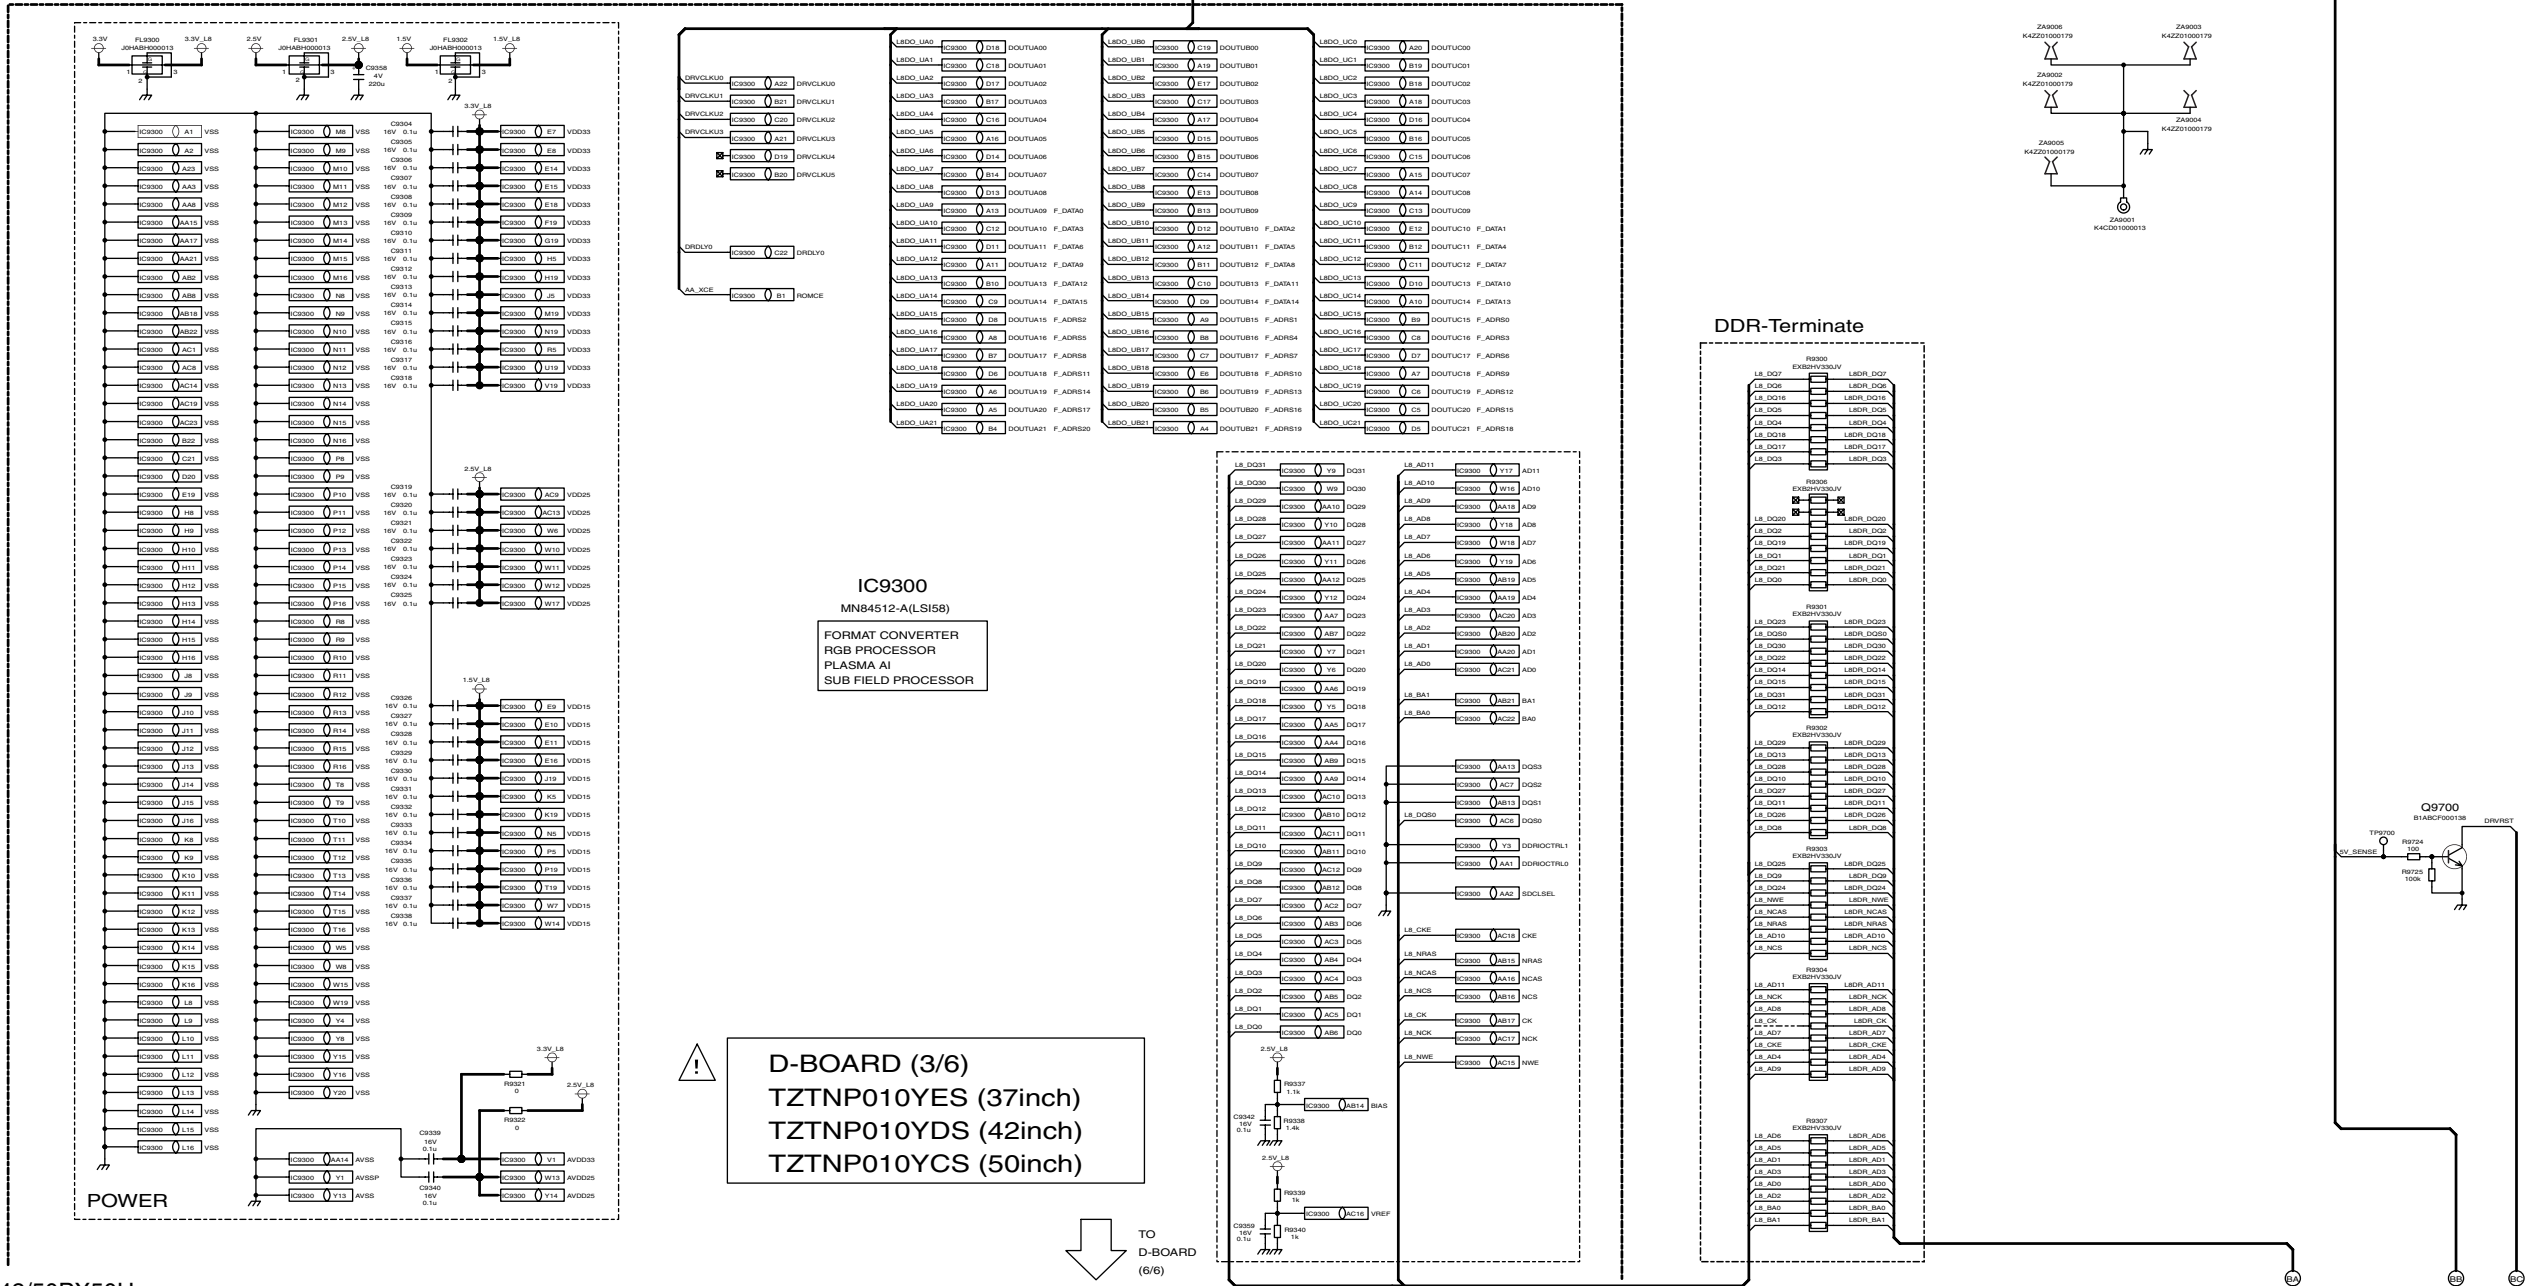


TH-37/42/50PX50U D-Board (3 of 6) Schematic Diagram

13.53. D-Board (4 of 6) Schematic Diagram

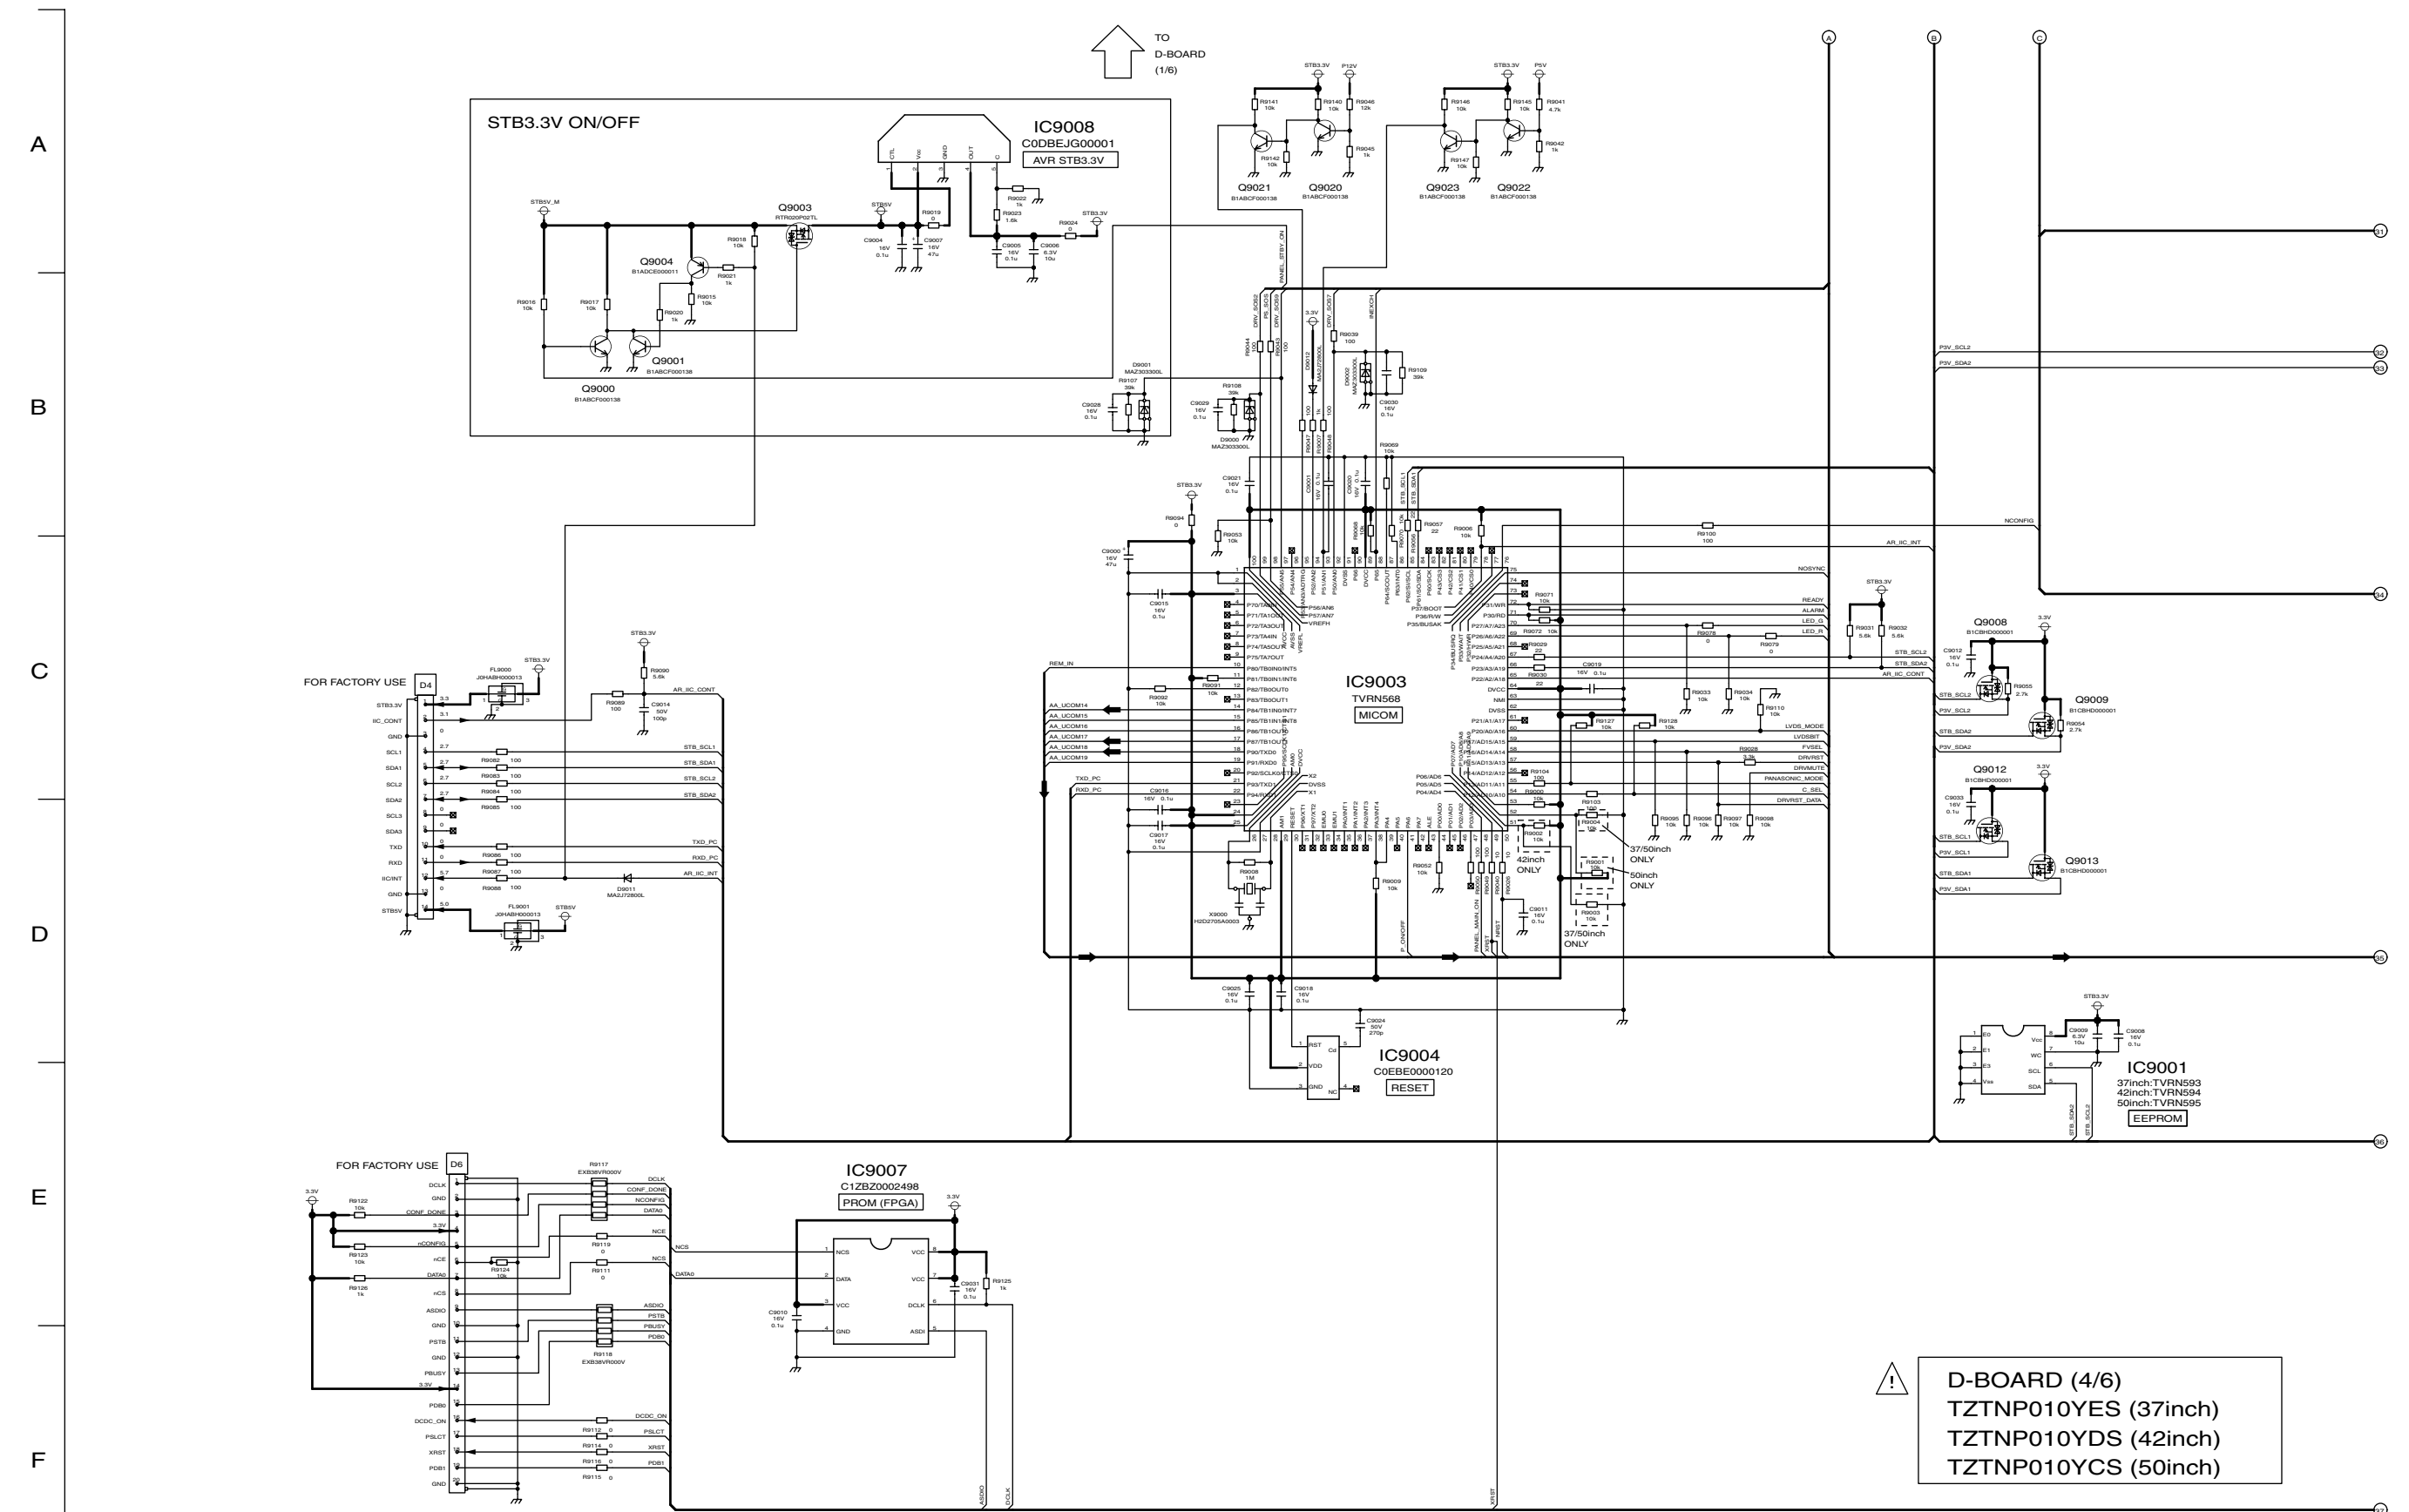


13.54. D-Board (5 of 6) Schematic Diagram

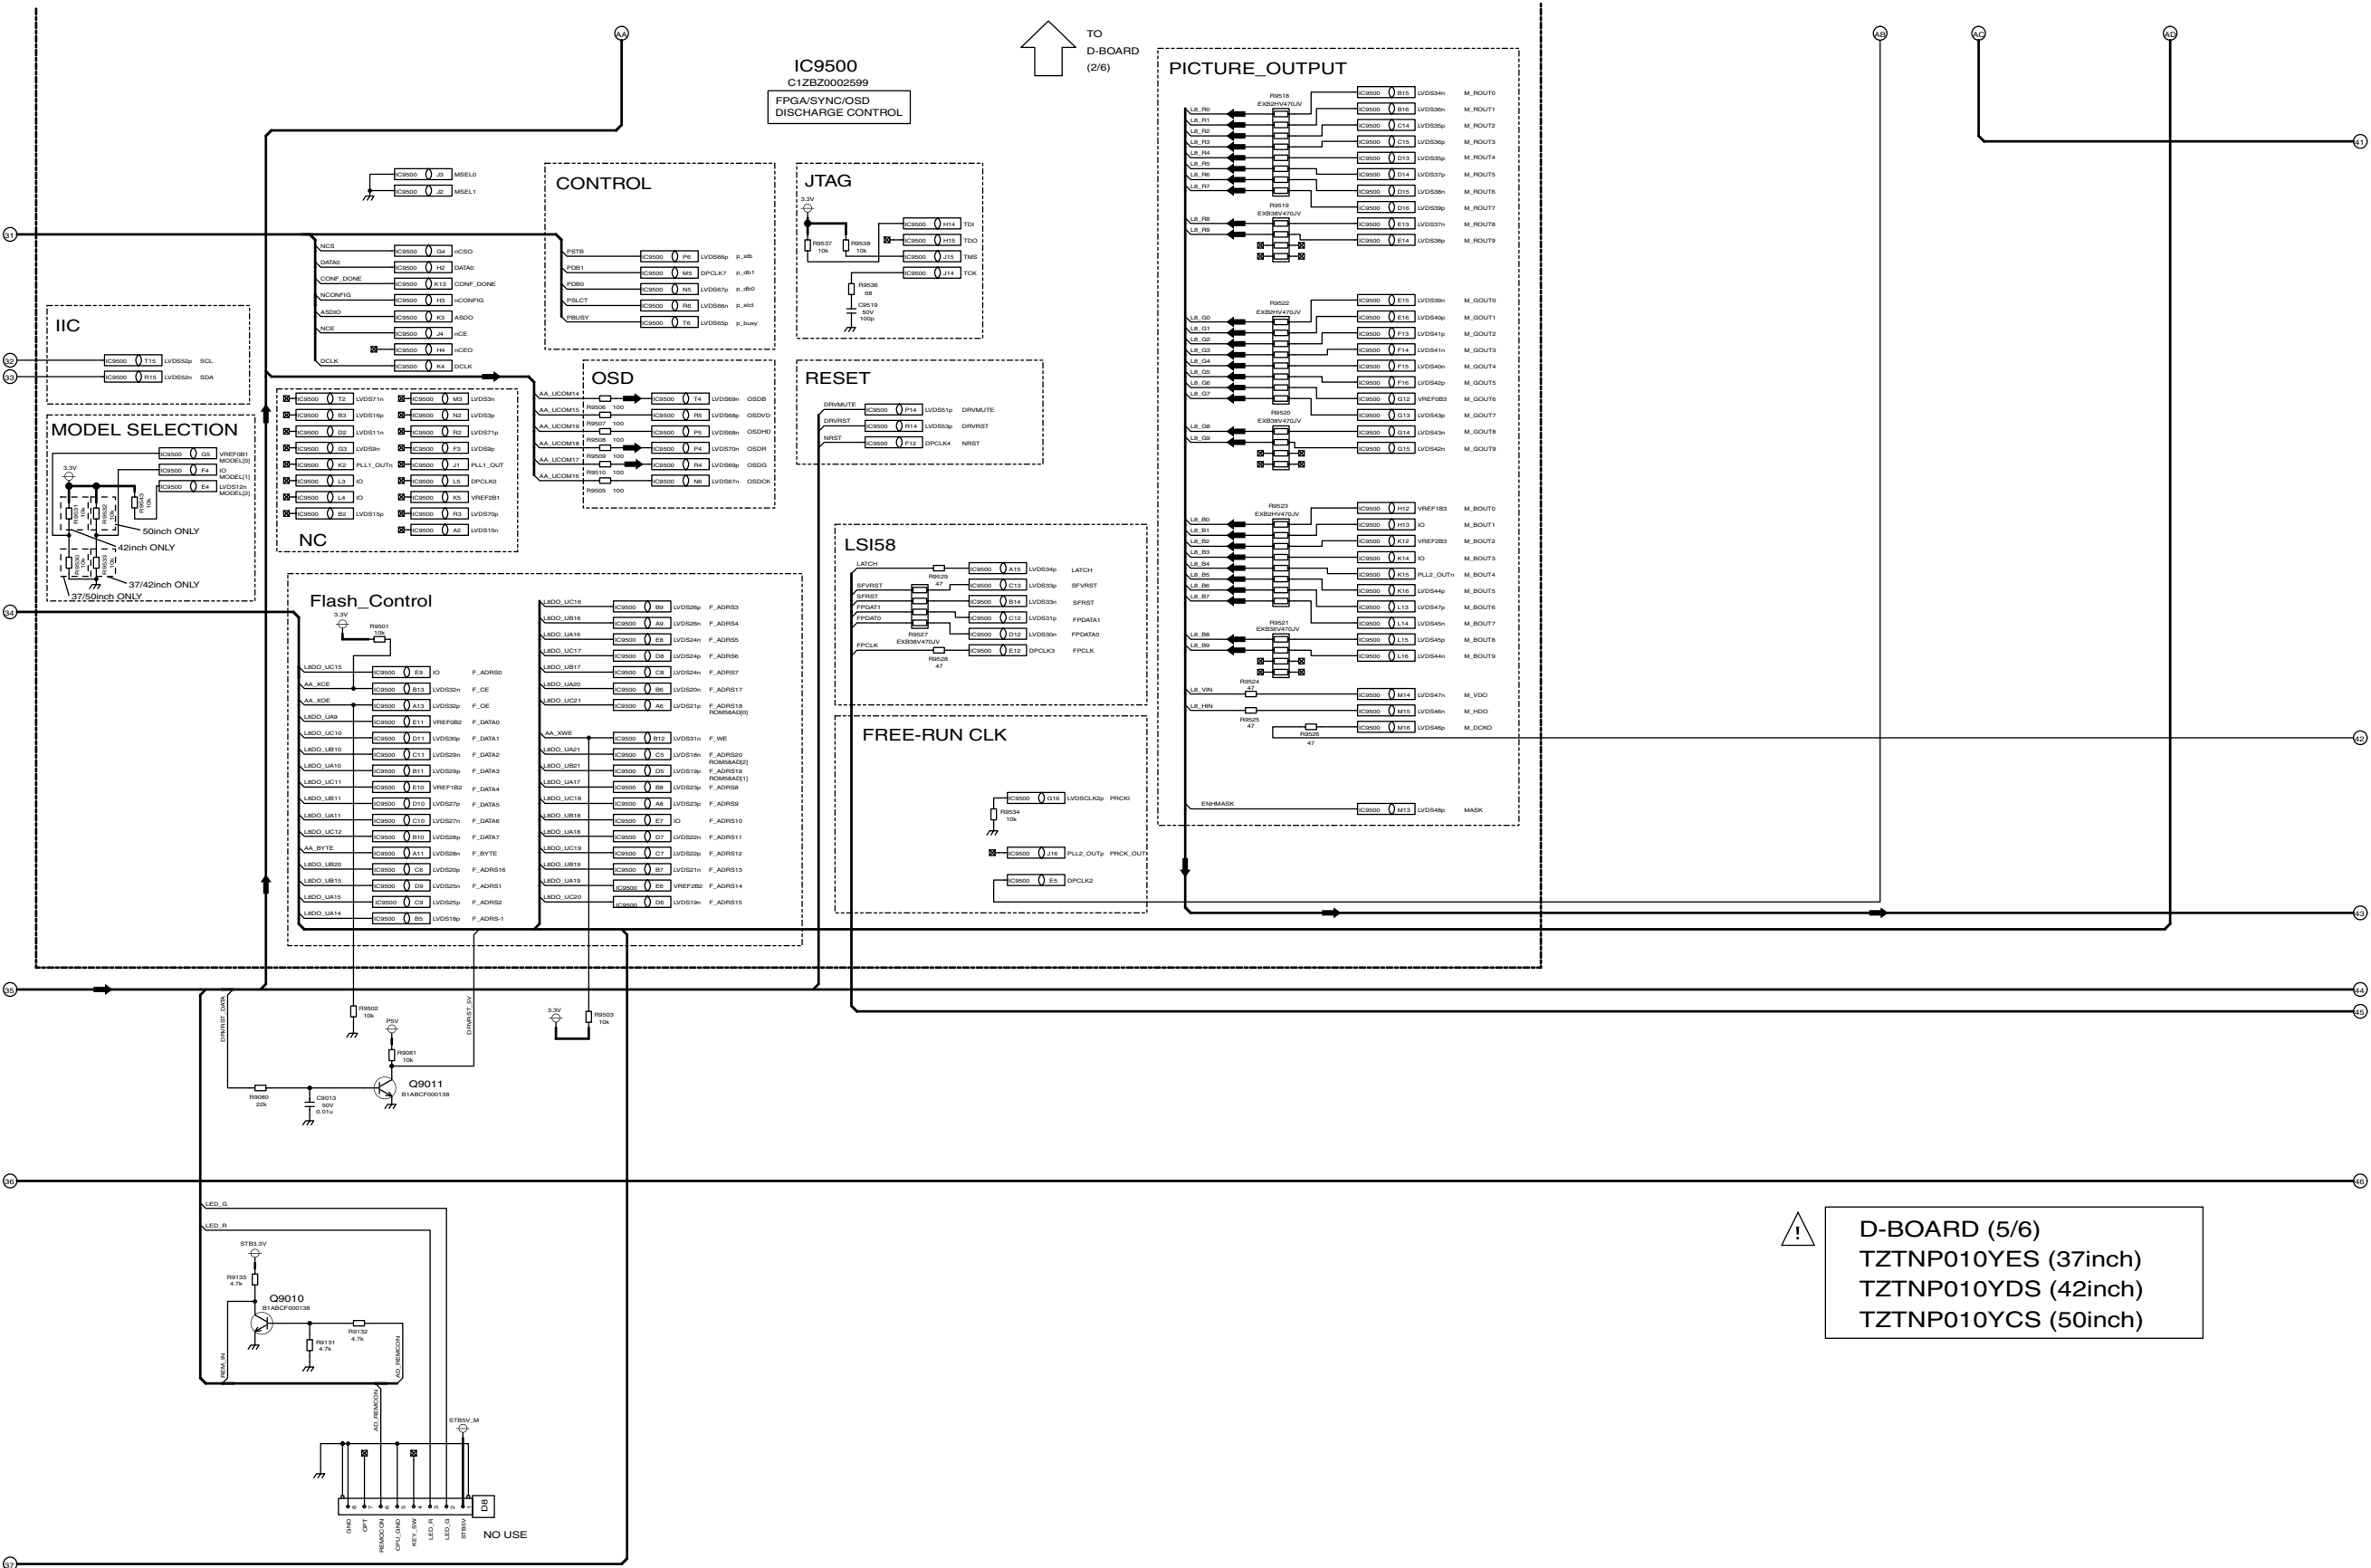


TH-37/42/50PX50U
D-Board (5 of 6) Schematic Diagram

TH-37/42/50PX50U
D-Board (5 of 6) Schematic Diagram

13.55. D-Board (6 of 6) Schematic Diagram

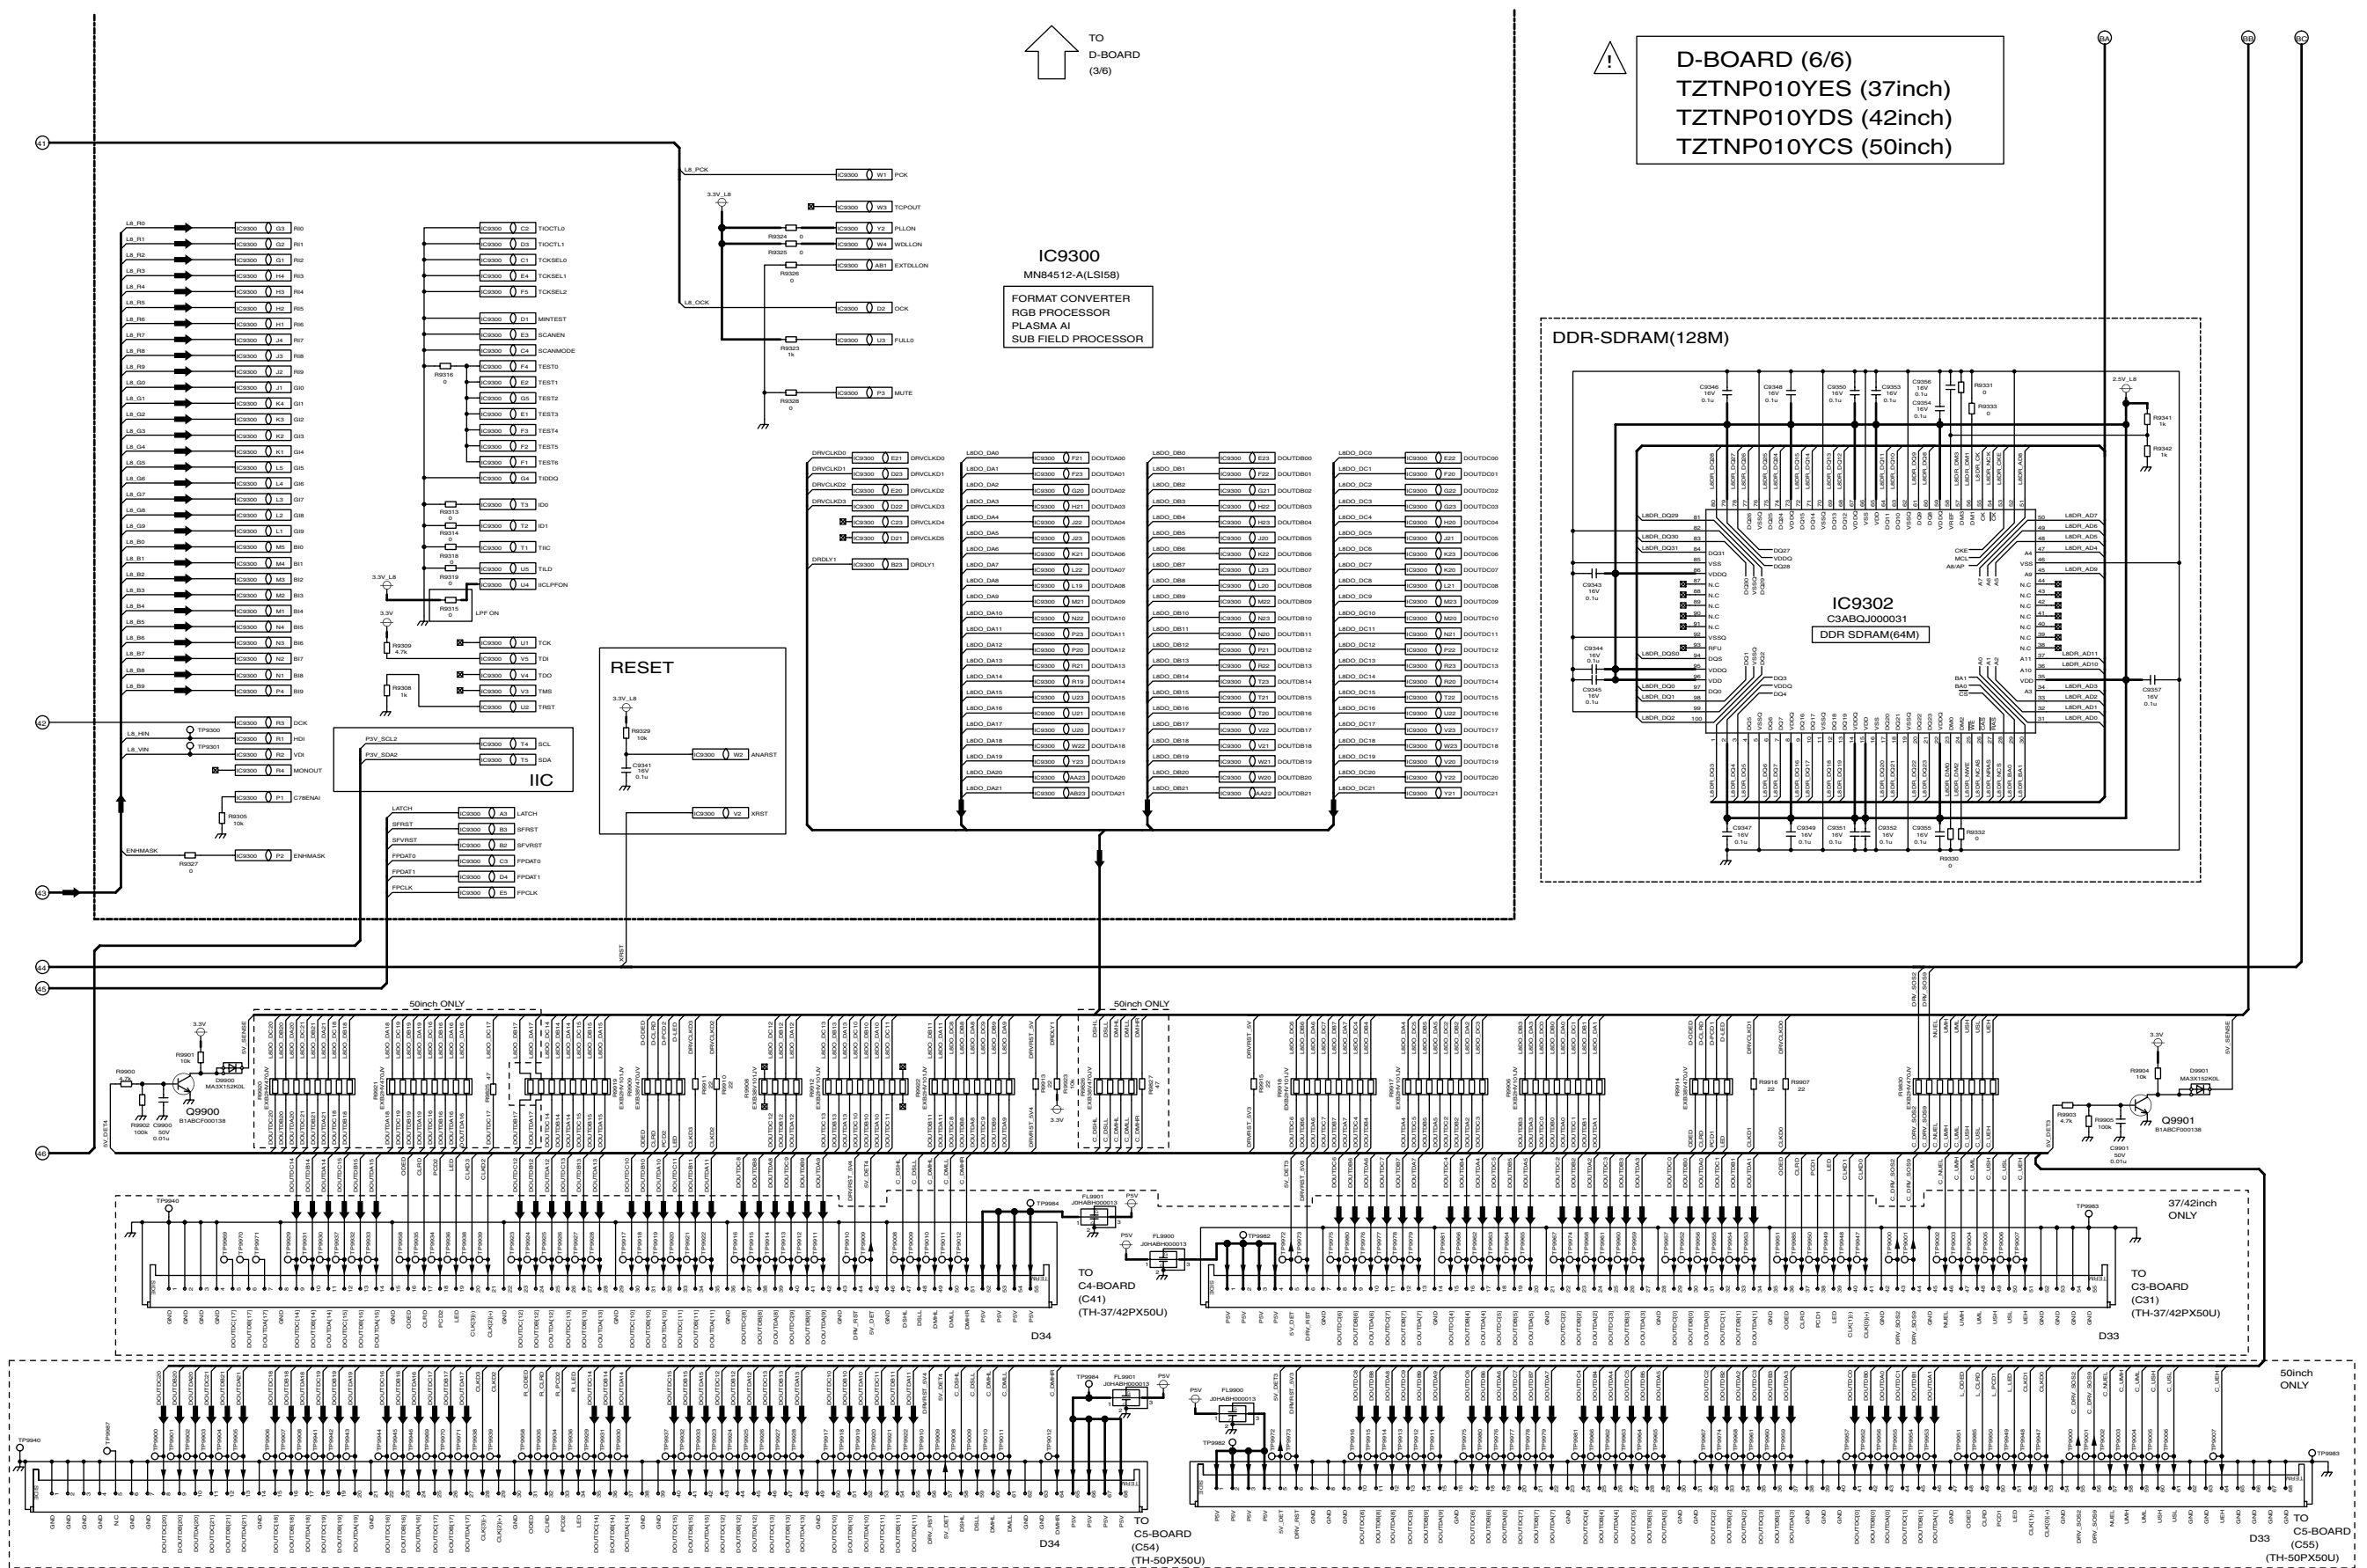



13.56. C1, C2, C3 and C4-Board Block Diagram (37, 42inch)

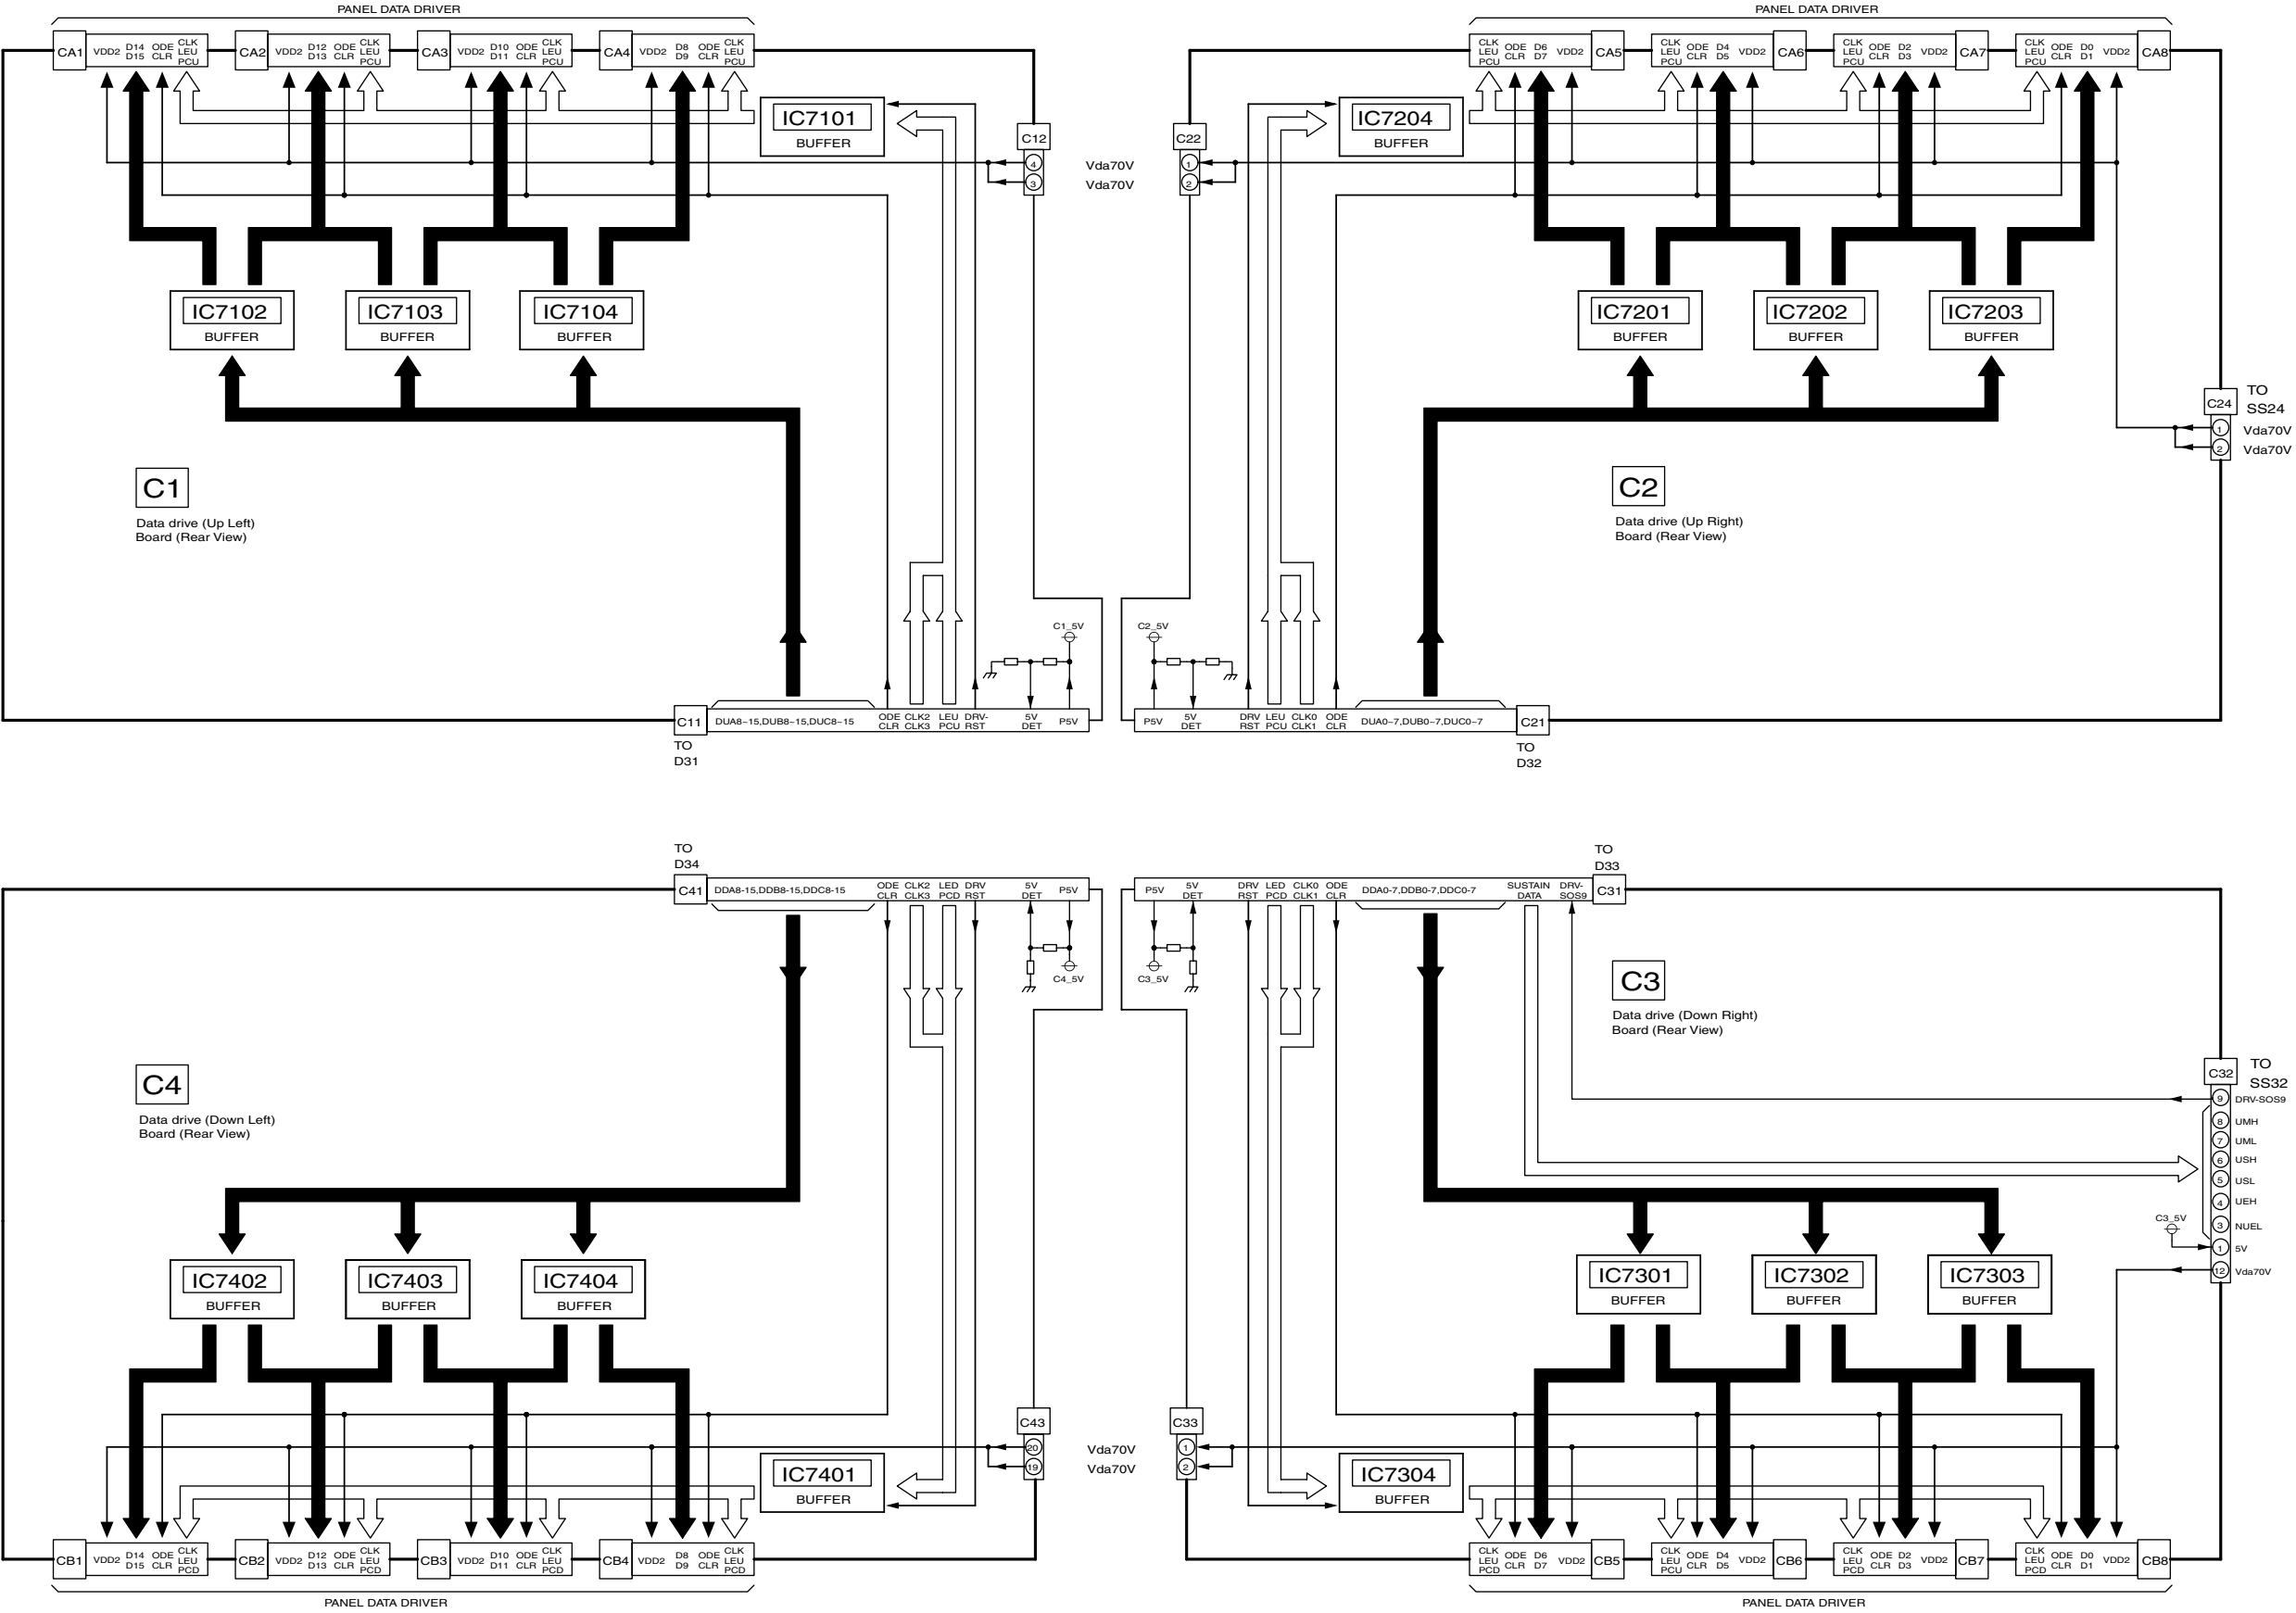

TH-37/42PX50U
C1, C2, C3 and C4-Board Block Diagram


TH-37/42PX50U
C1, C2, C3 and C4-Board Block Diagram






TH-37PX50U


C1-Board (2 of 2) Schematic Diagram




13.60. C2-Board (2 of 2) Schematic Diagram (37inch)

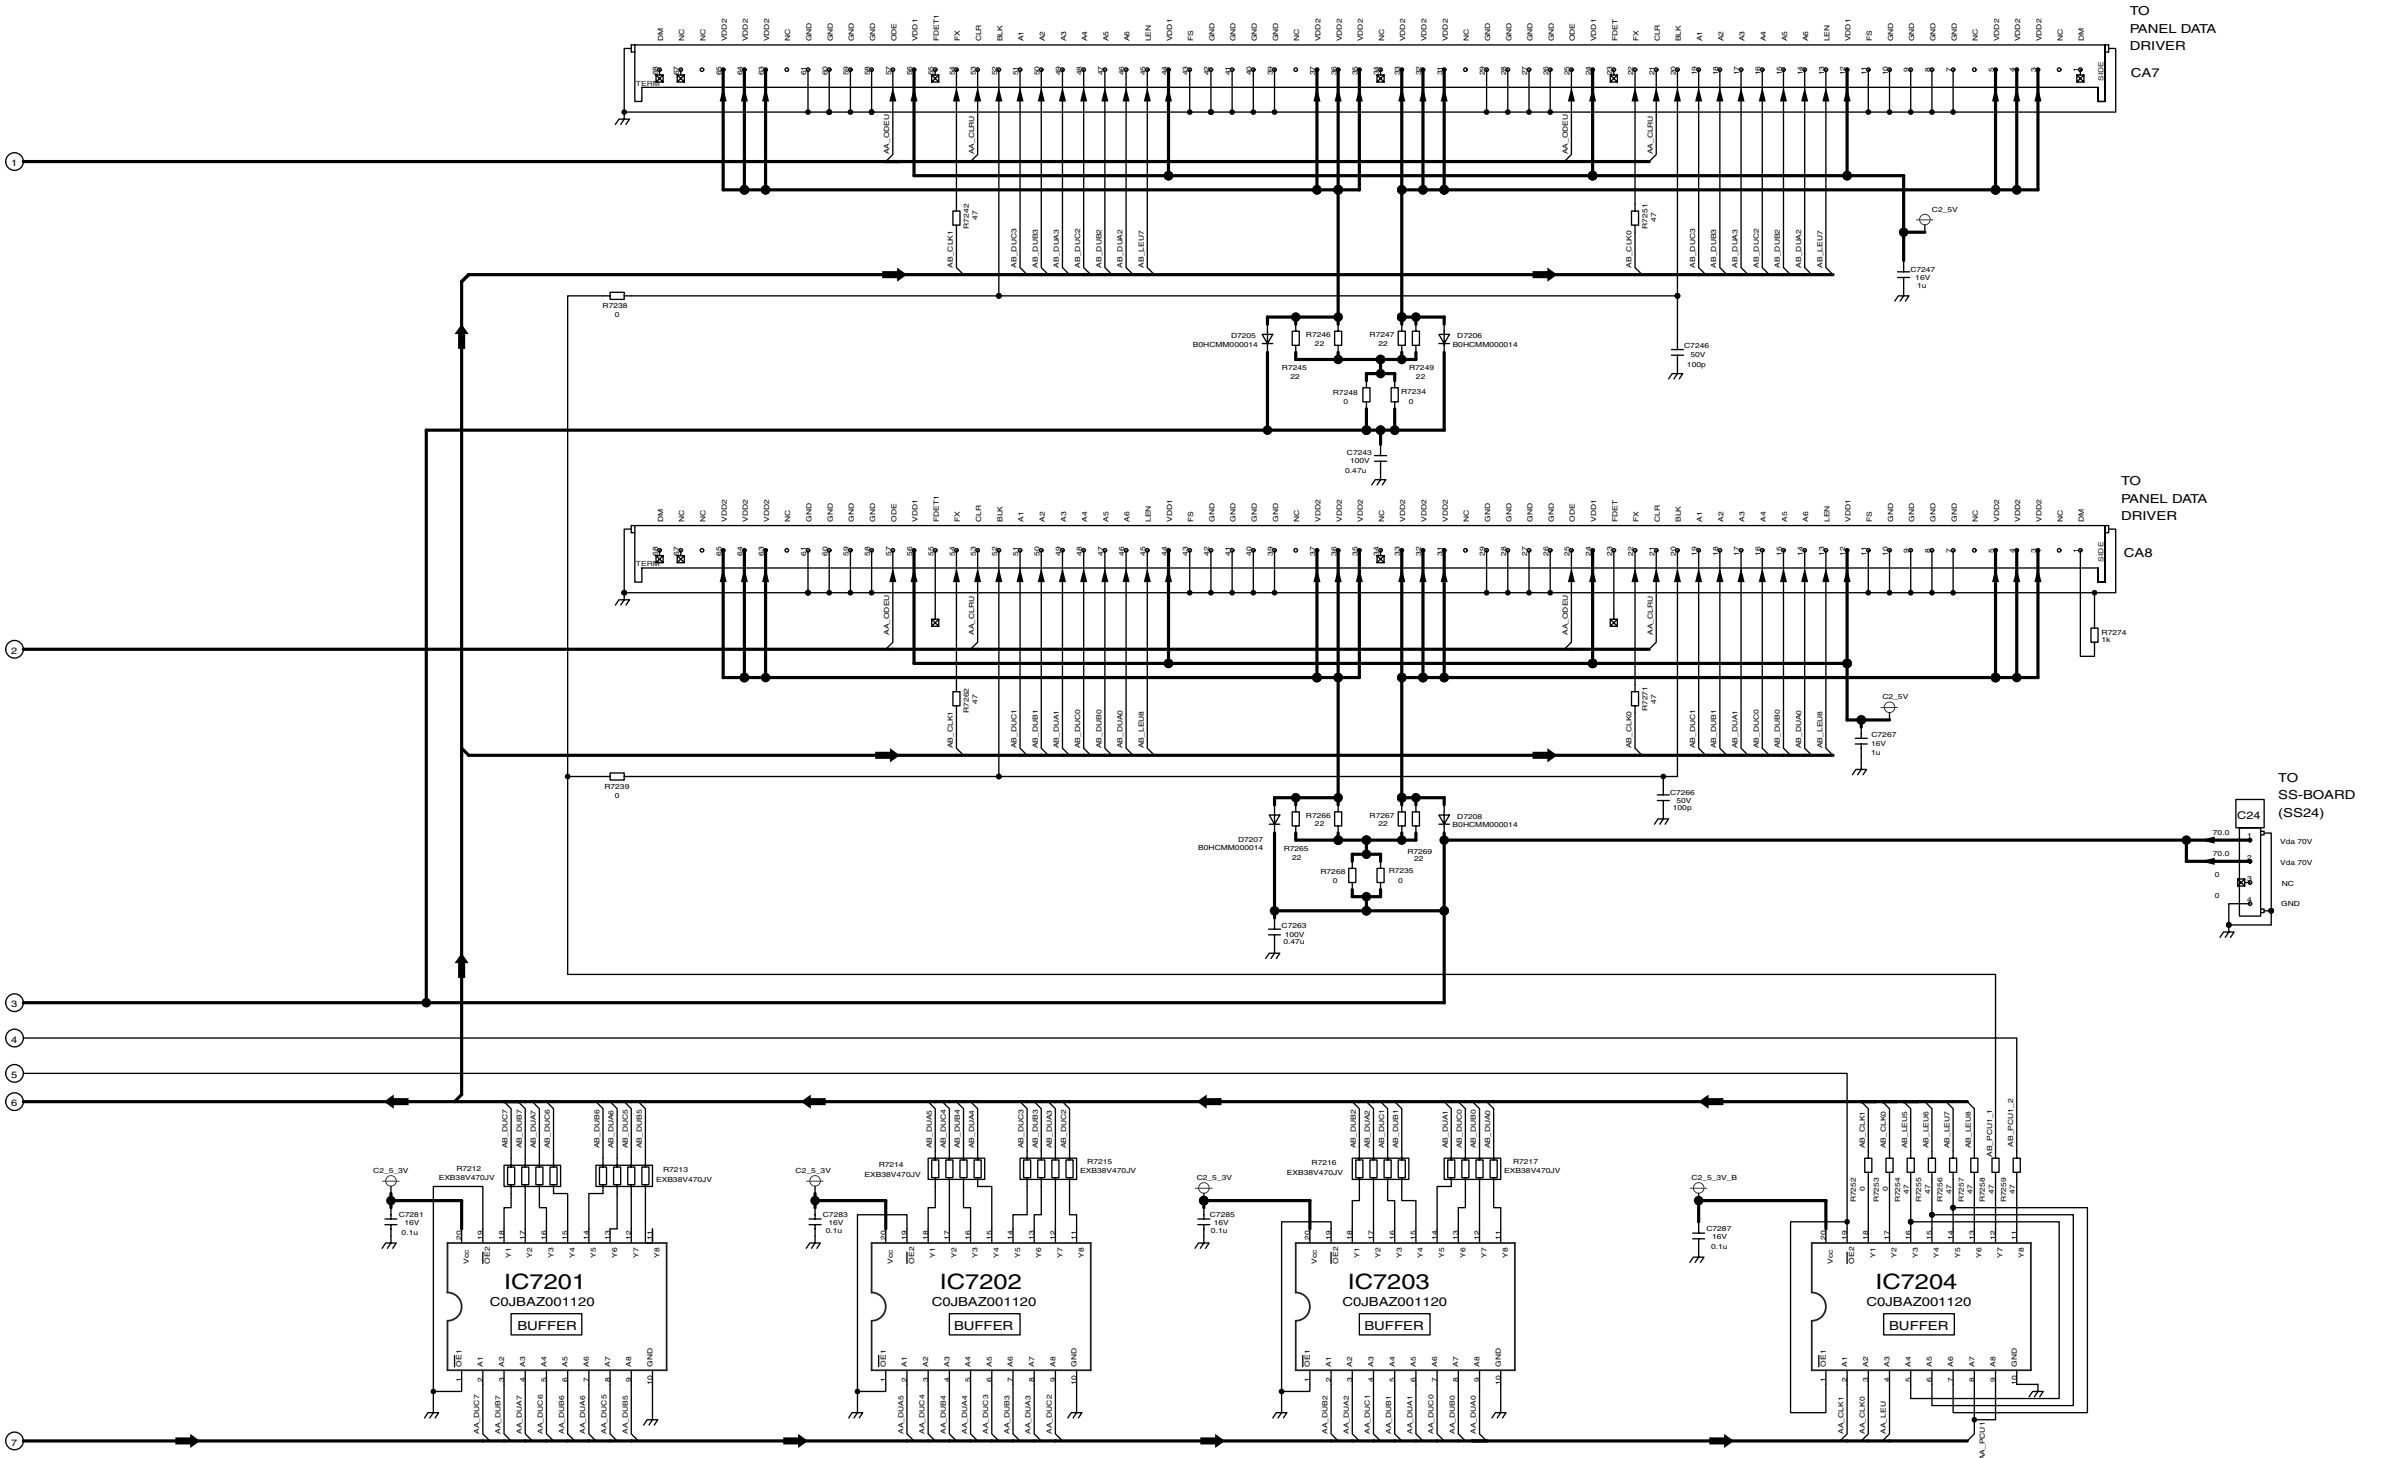

! C2-BOARD TNPA3548 (2/2)




13.62. C3-Board (2 of 2) Schematic Diagram (37inch)

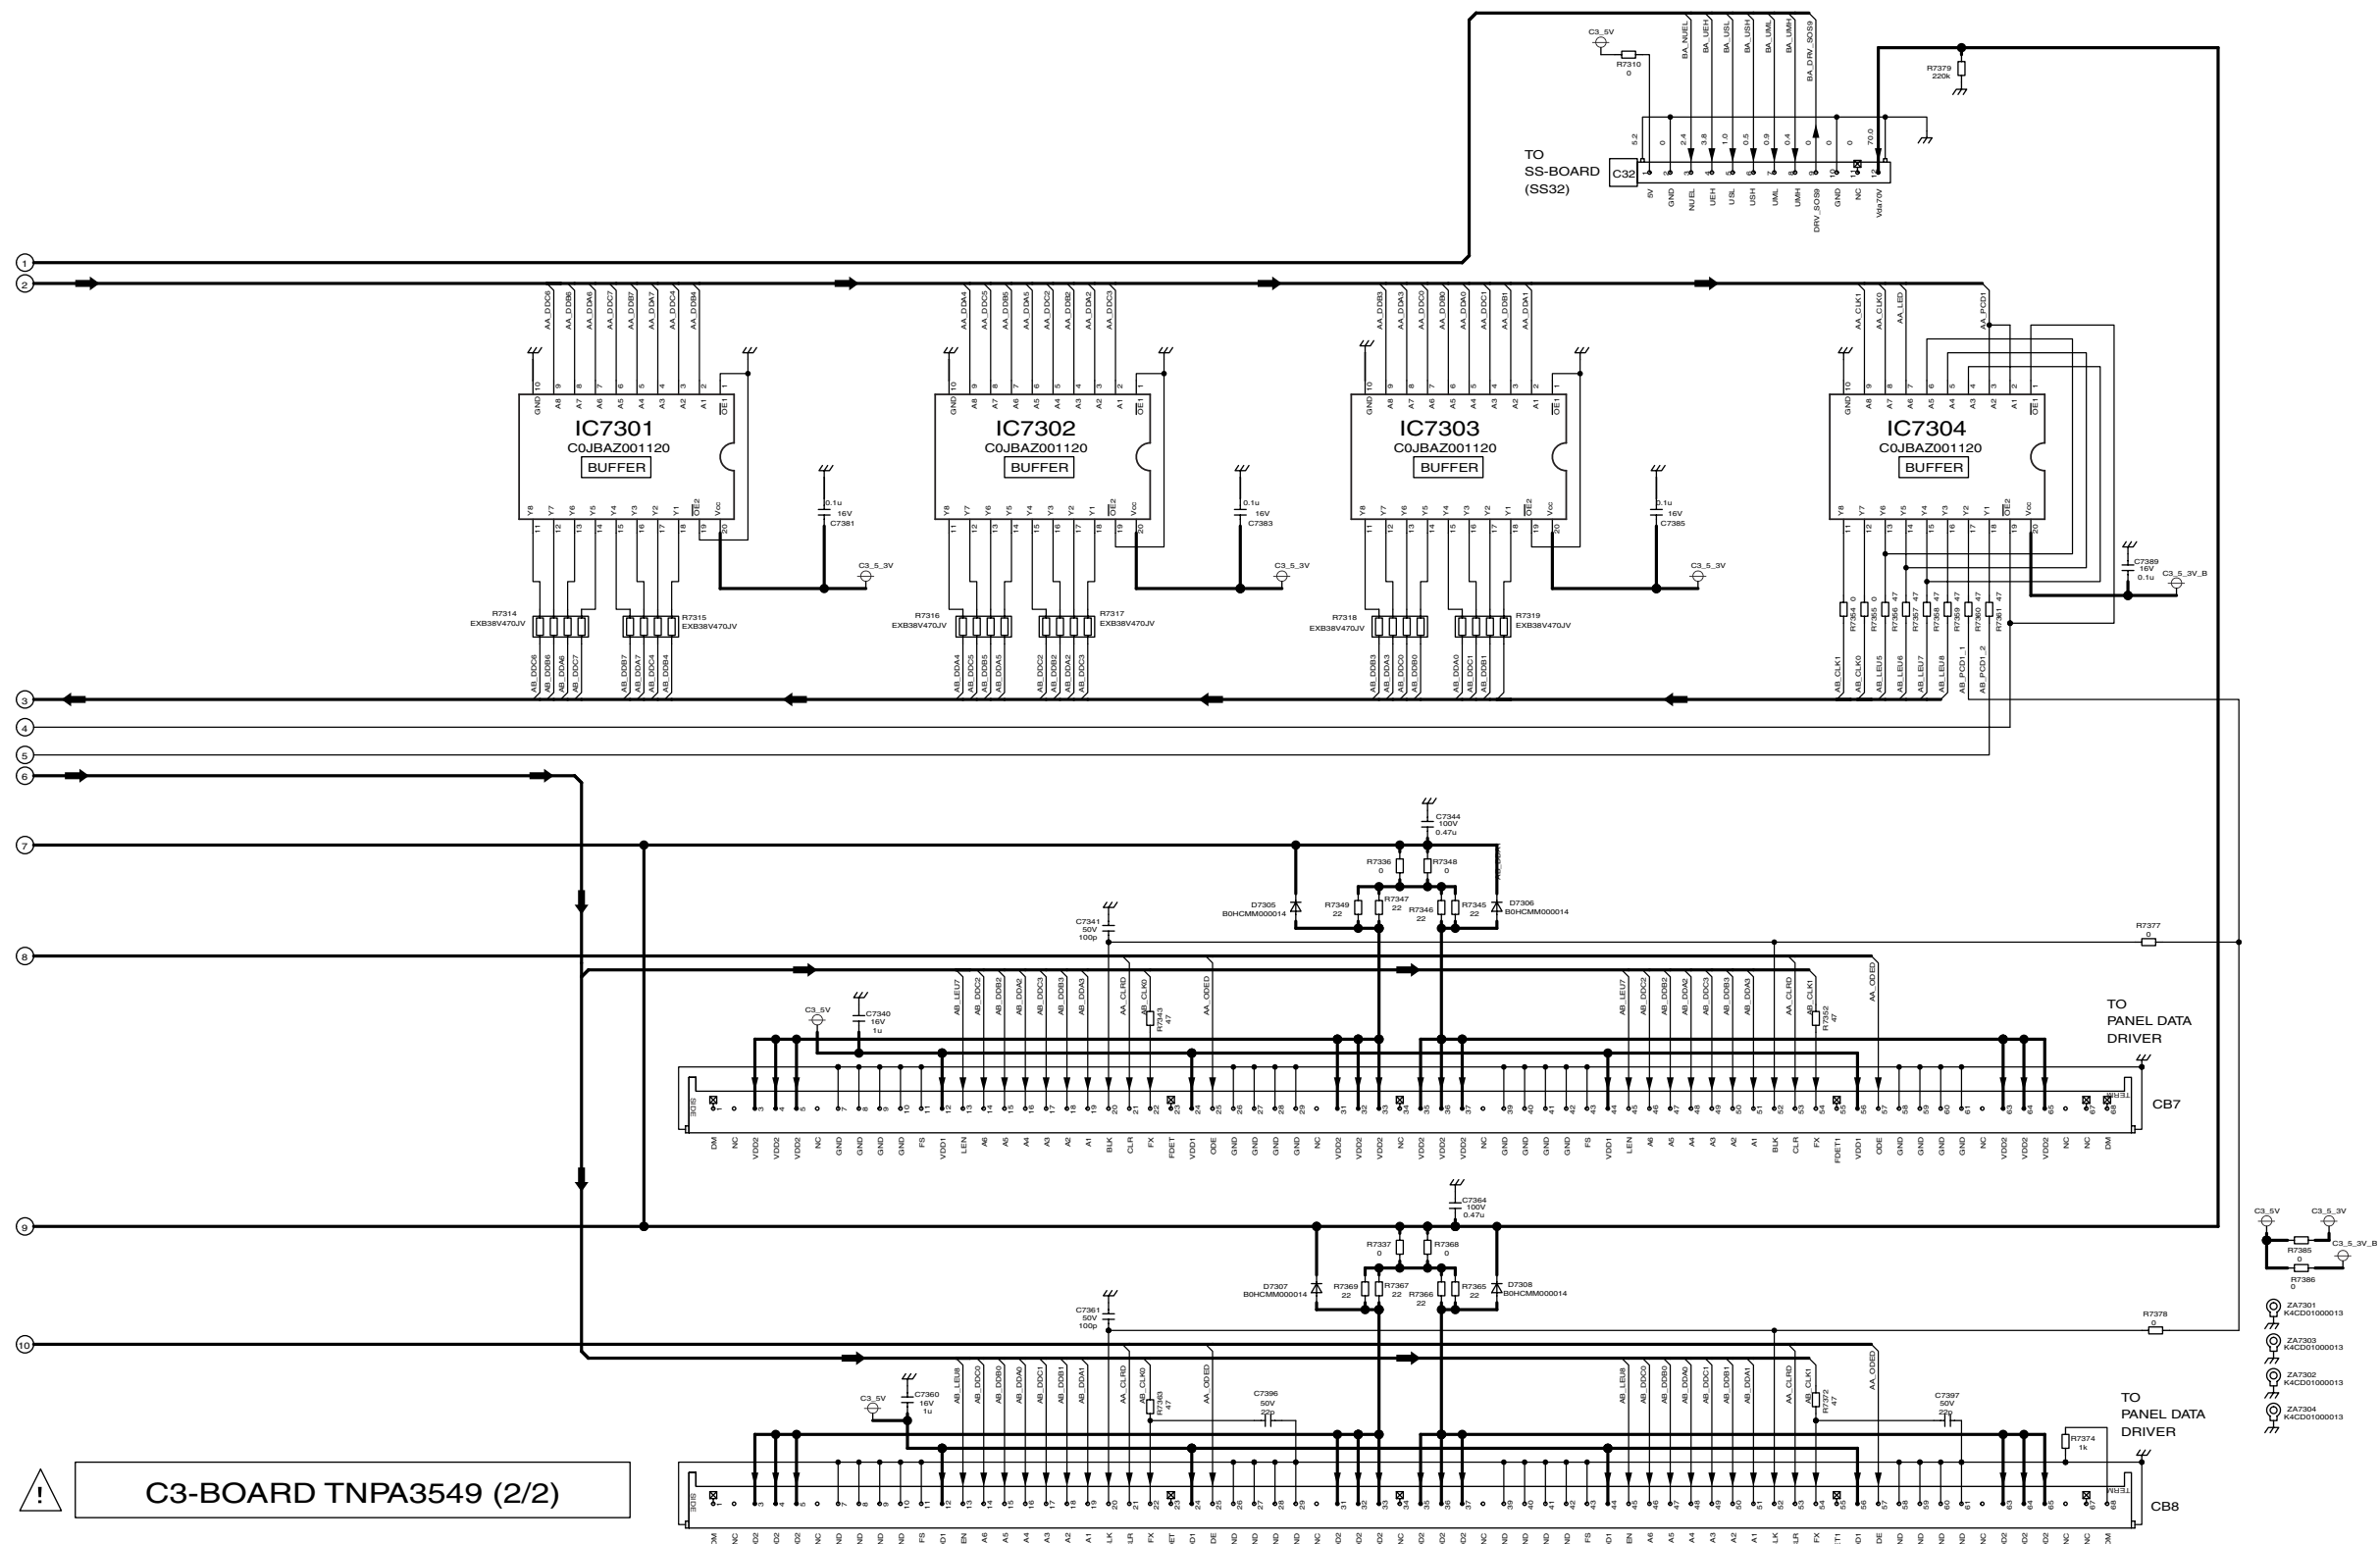


TH-37PX50U
C3-Board (2 of 2) Schematic Diagram

TH-37PX50U
C3-Board (2 of 2) Schematic Diagram




13.64. C4-Board (2 of 2) Schematic Diagram (37inch)

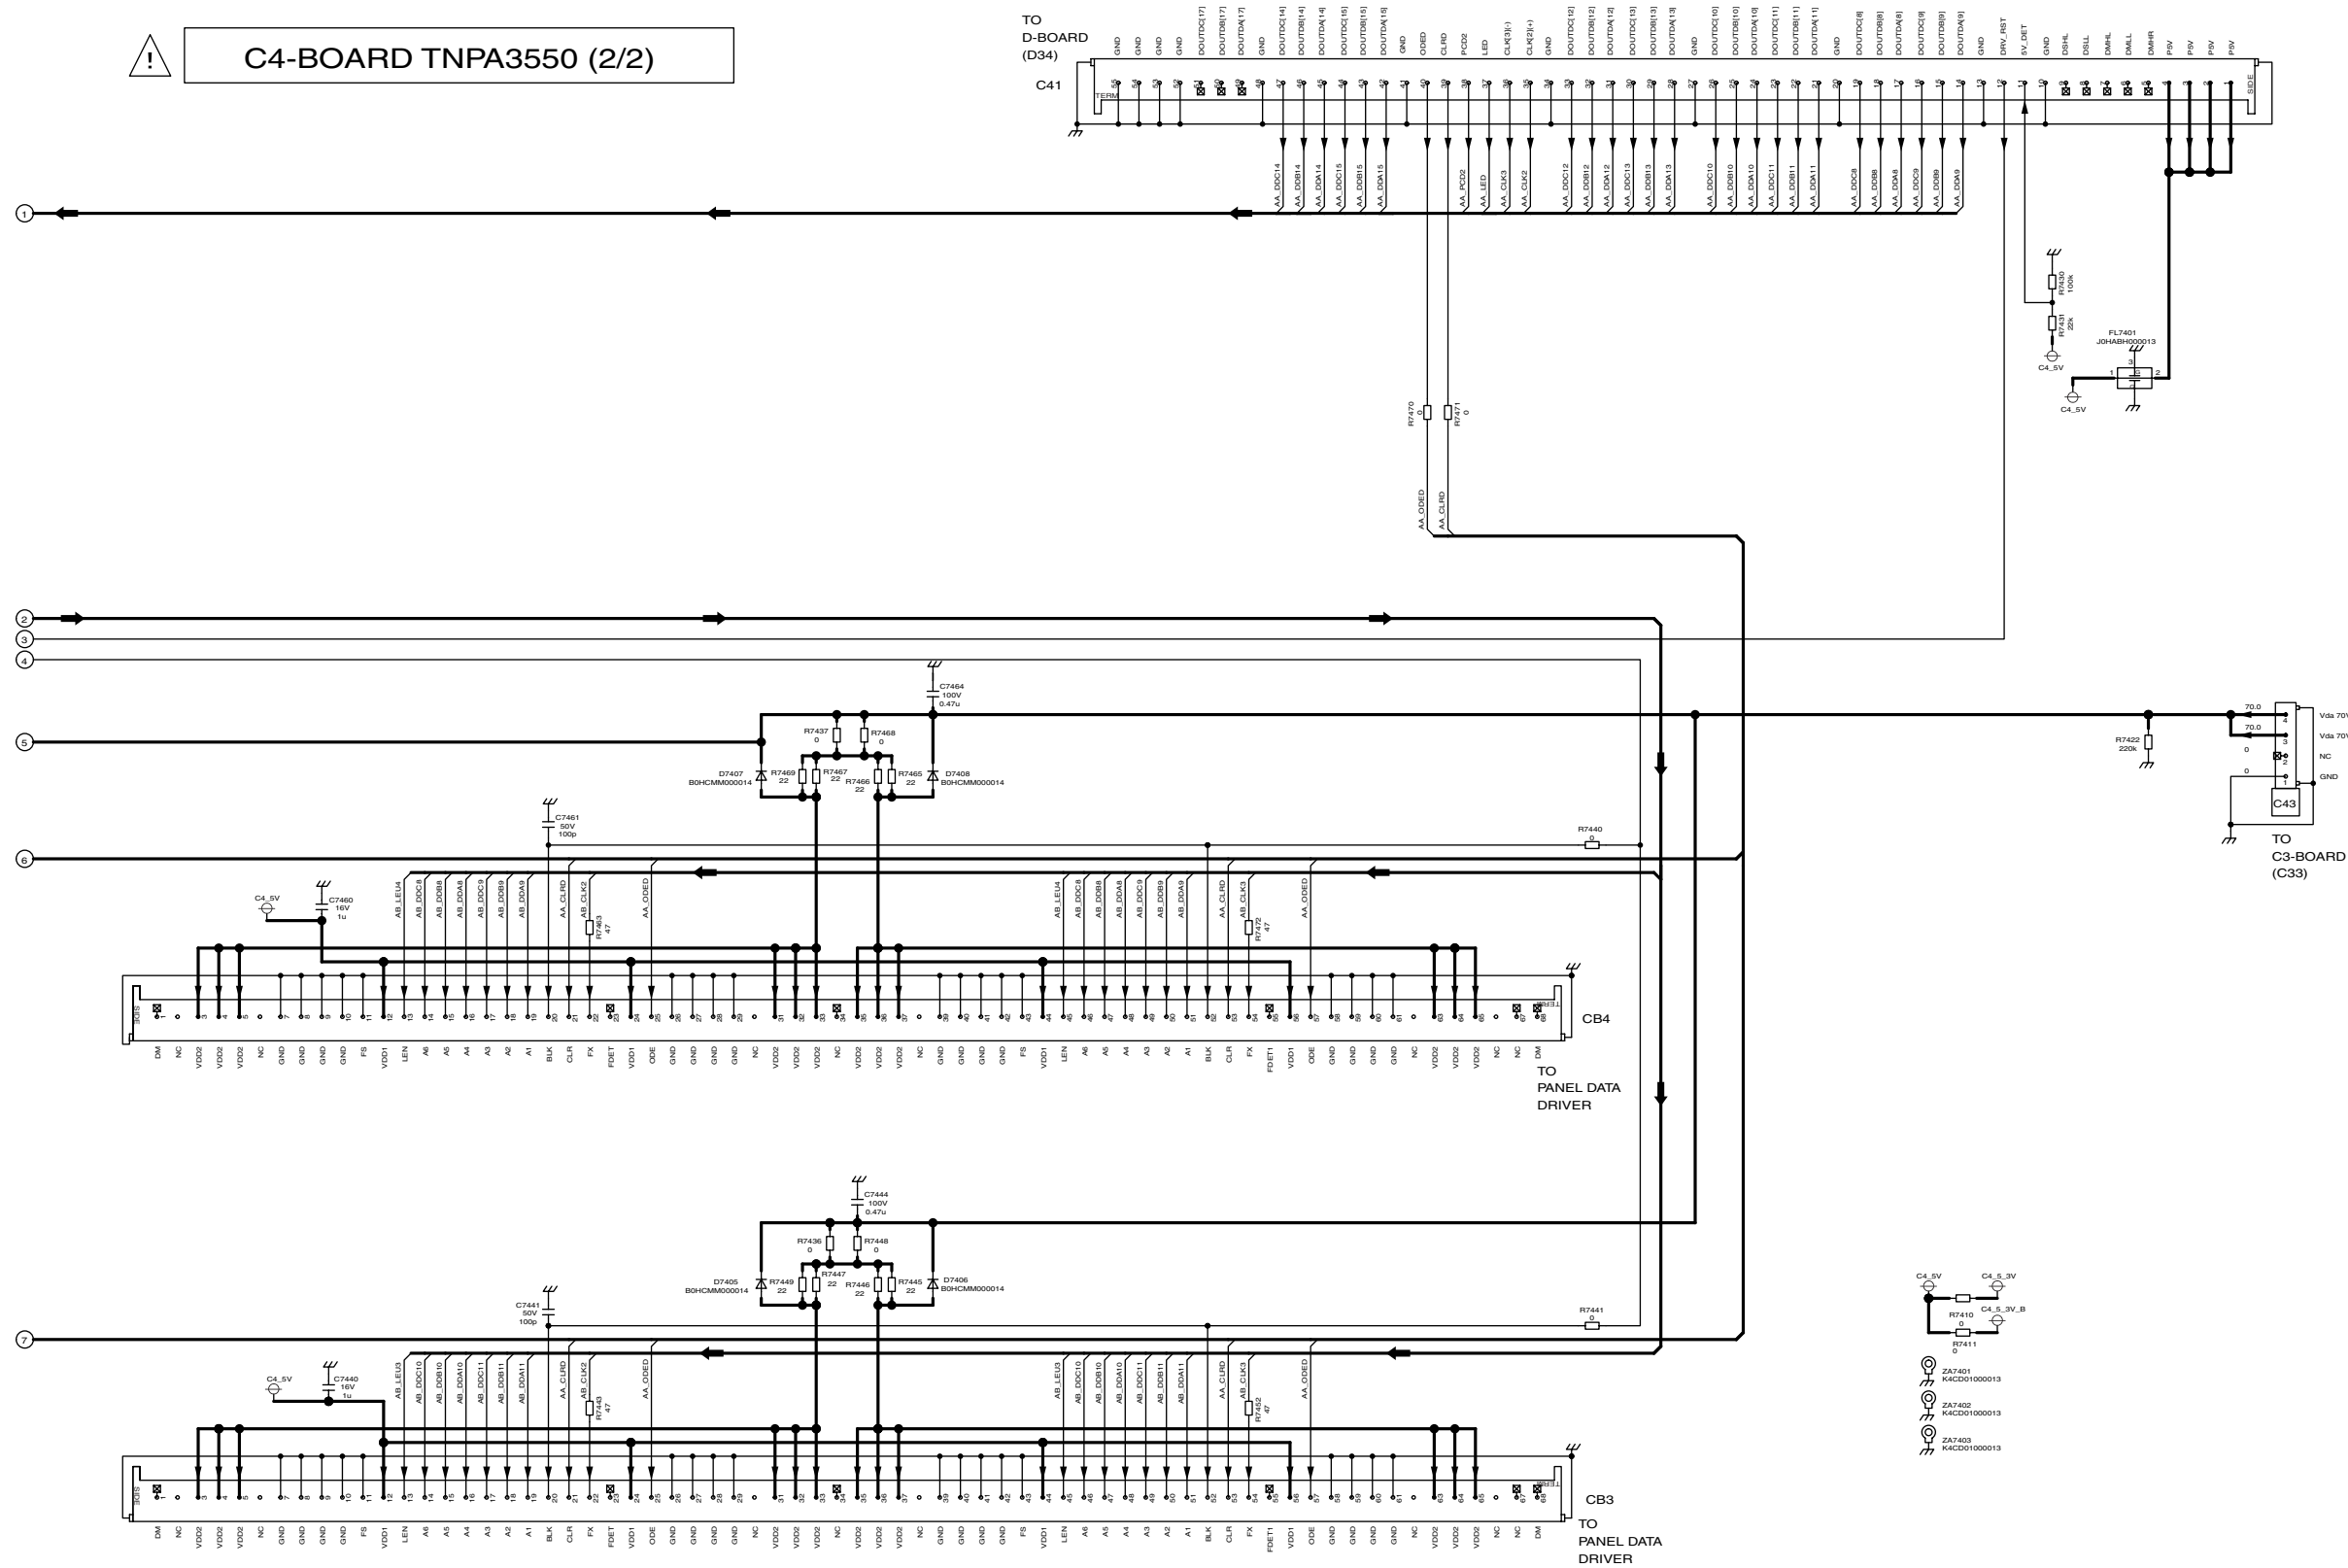


TH-37PX50U C4-Board (2 of 2) Schematic Diagram

TH-37PX50U C4-Board (2 of 2) Schematic Diagram

13.65. C1-Board (1 of 2) Schematic Diagram (42inch)

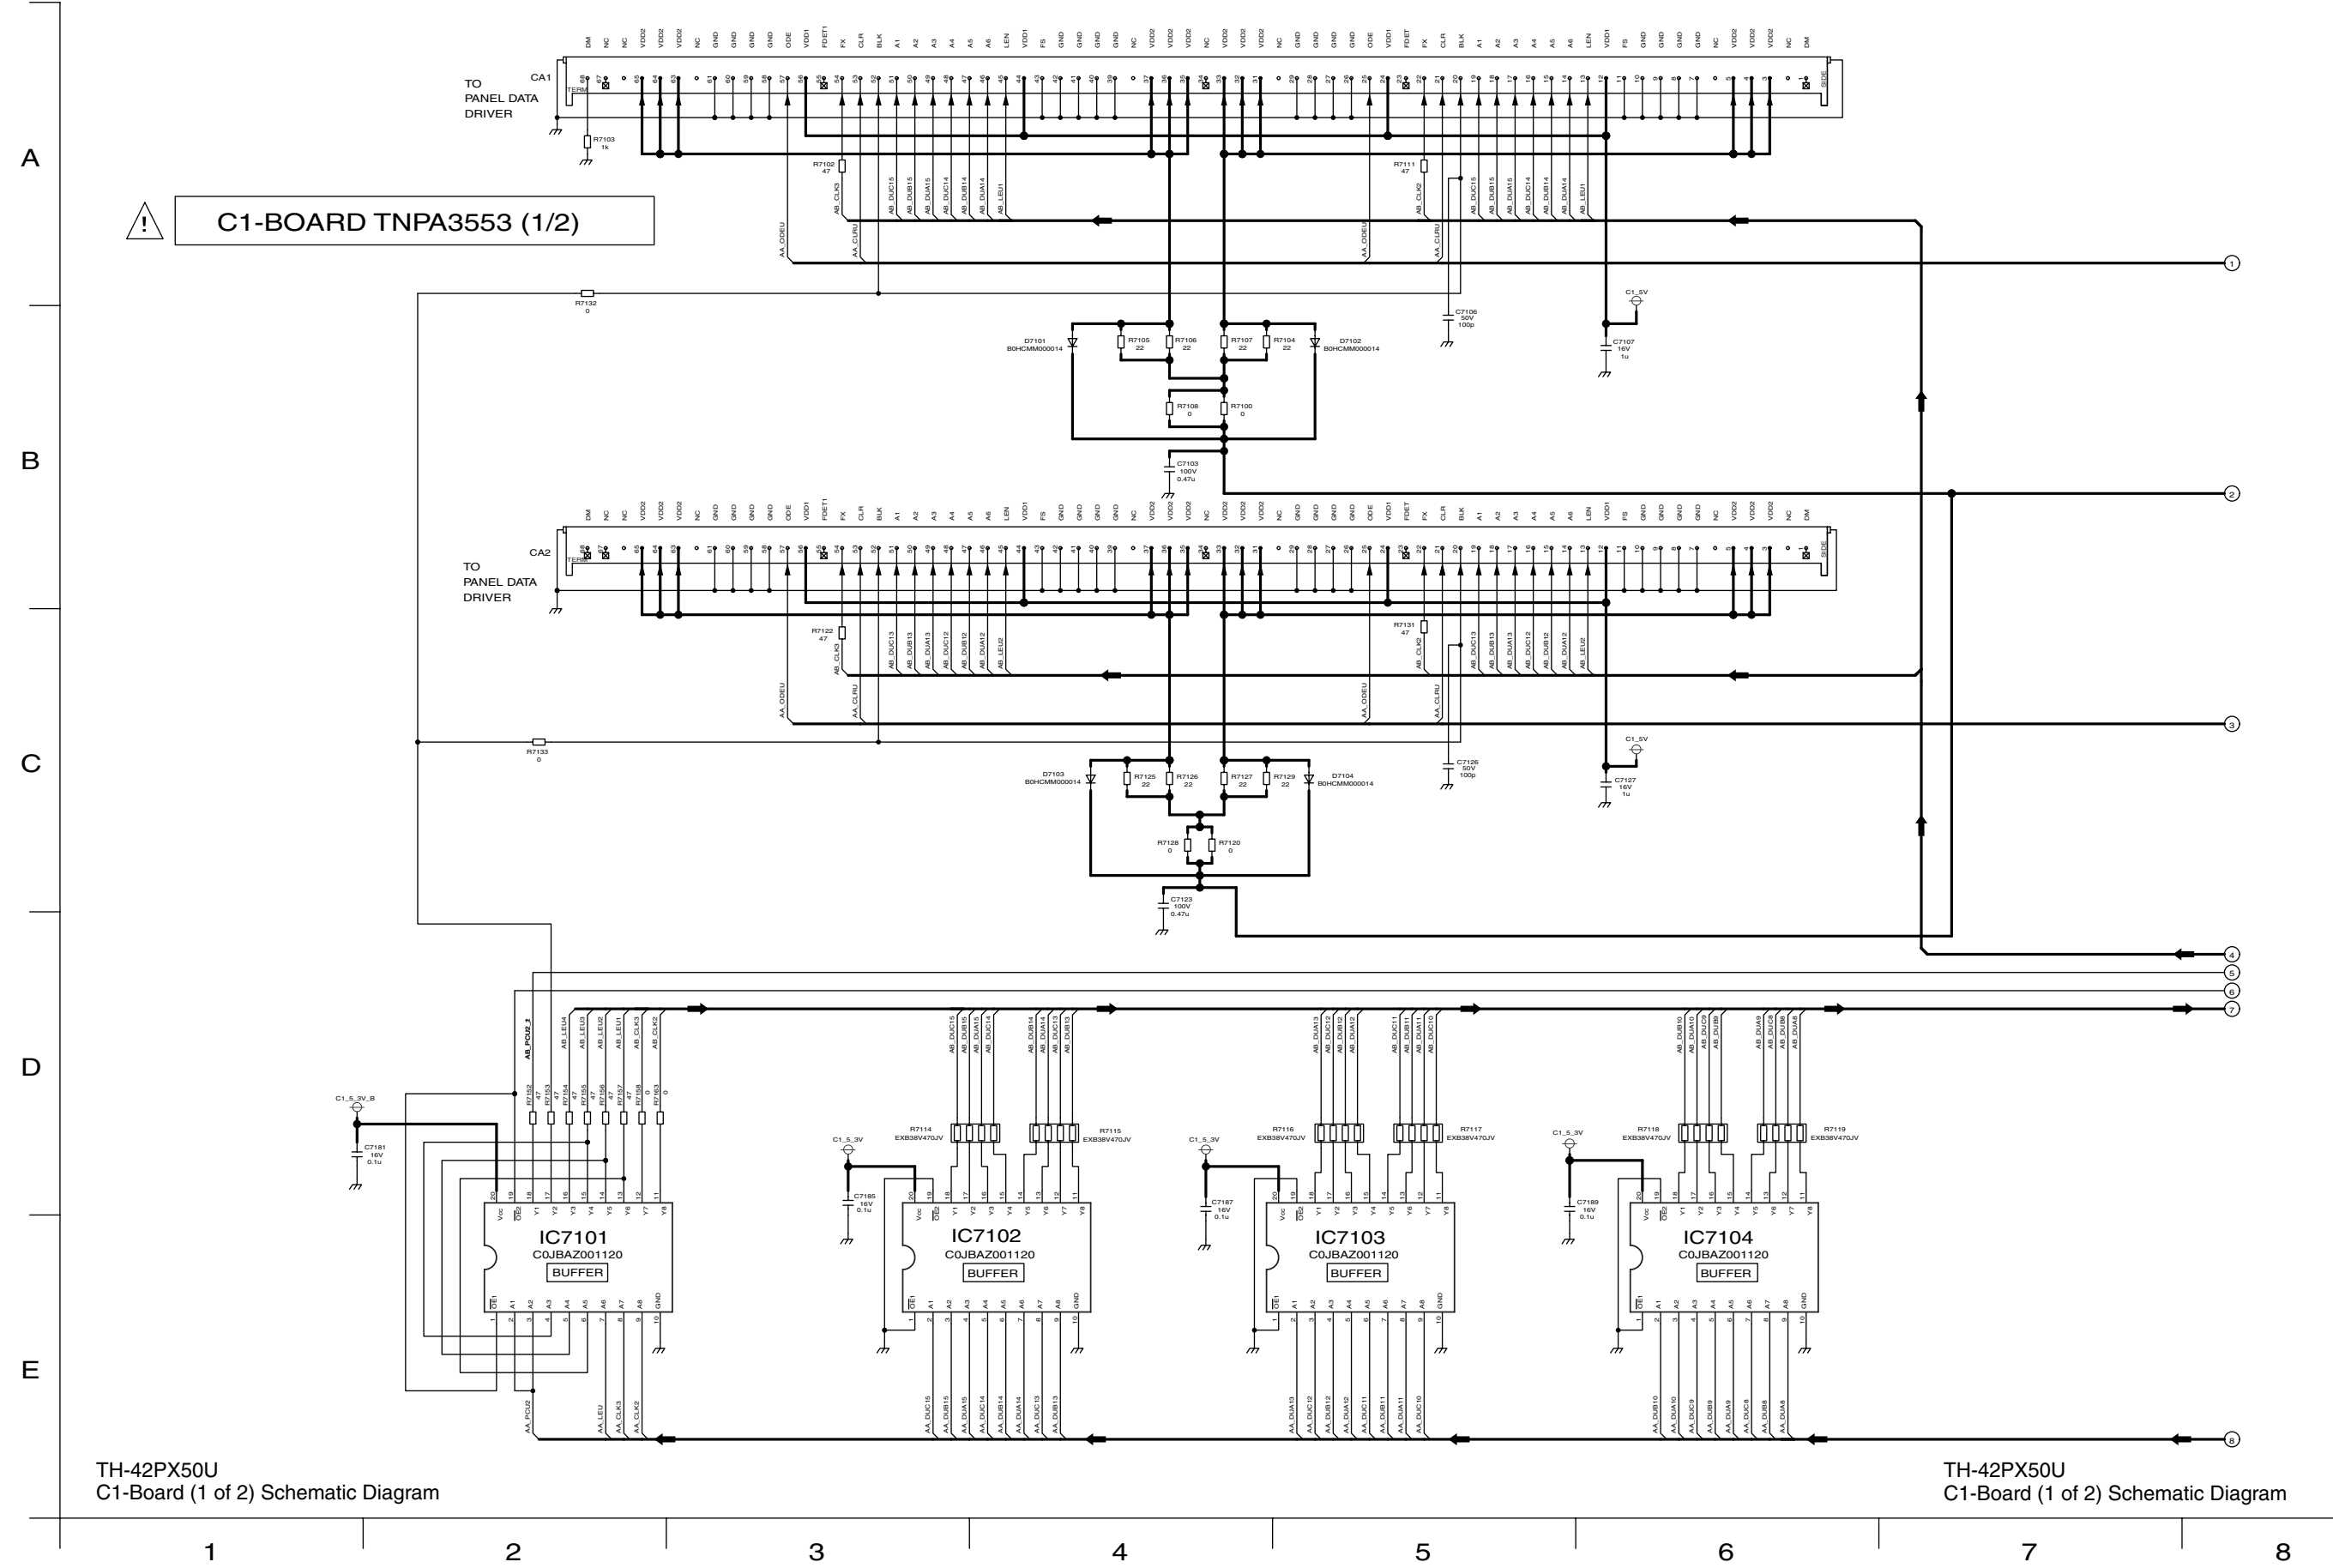


13.66. C1-Board (2 of 2) Schematic Diagram (42inch)

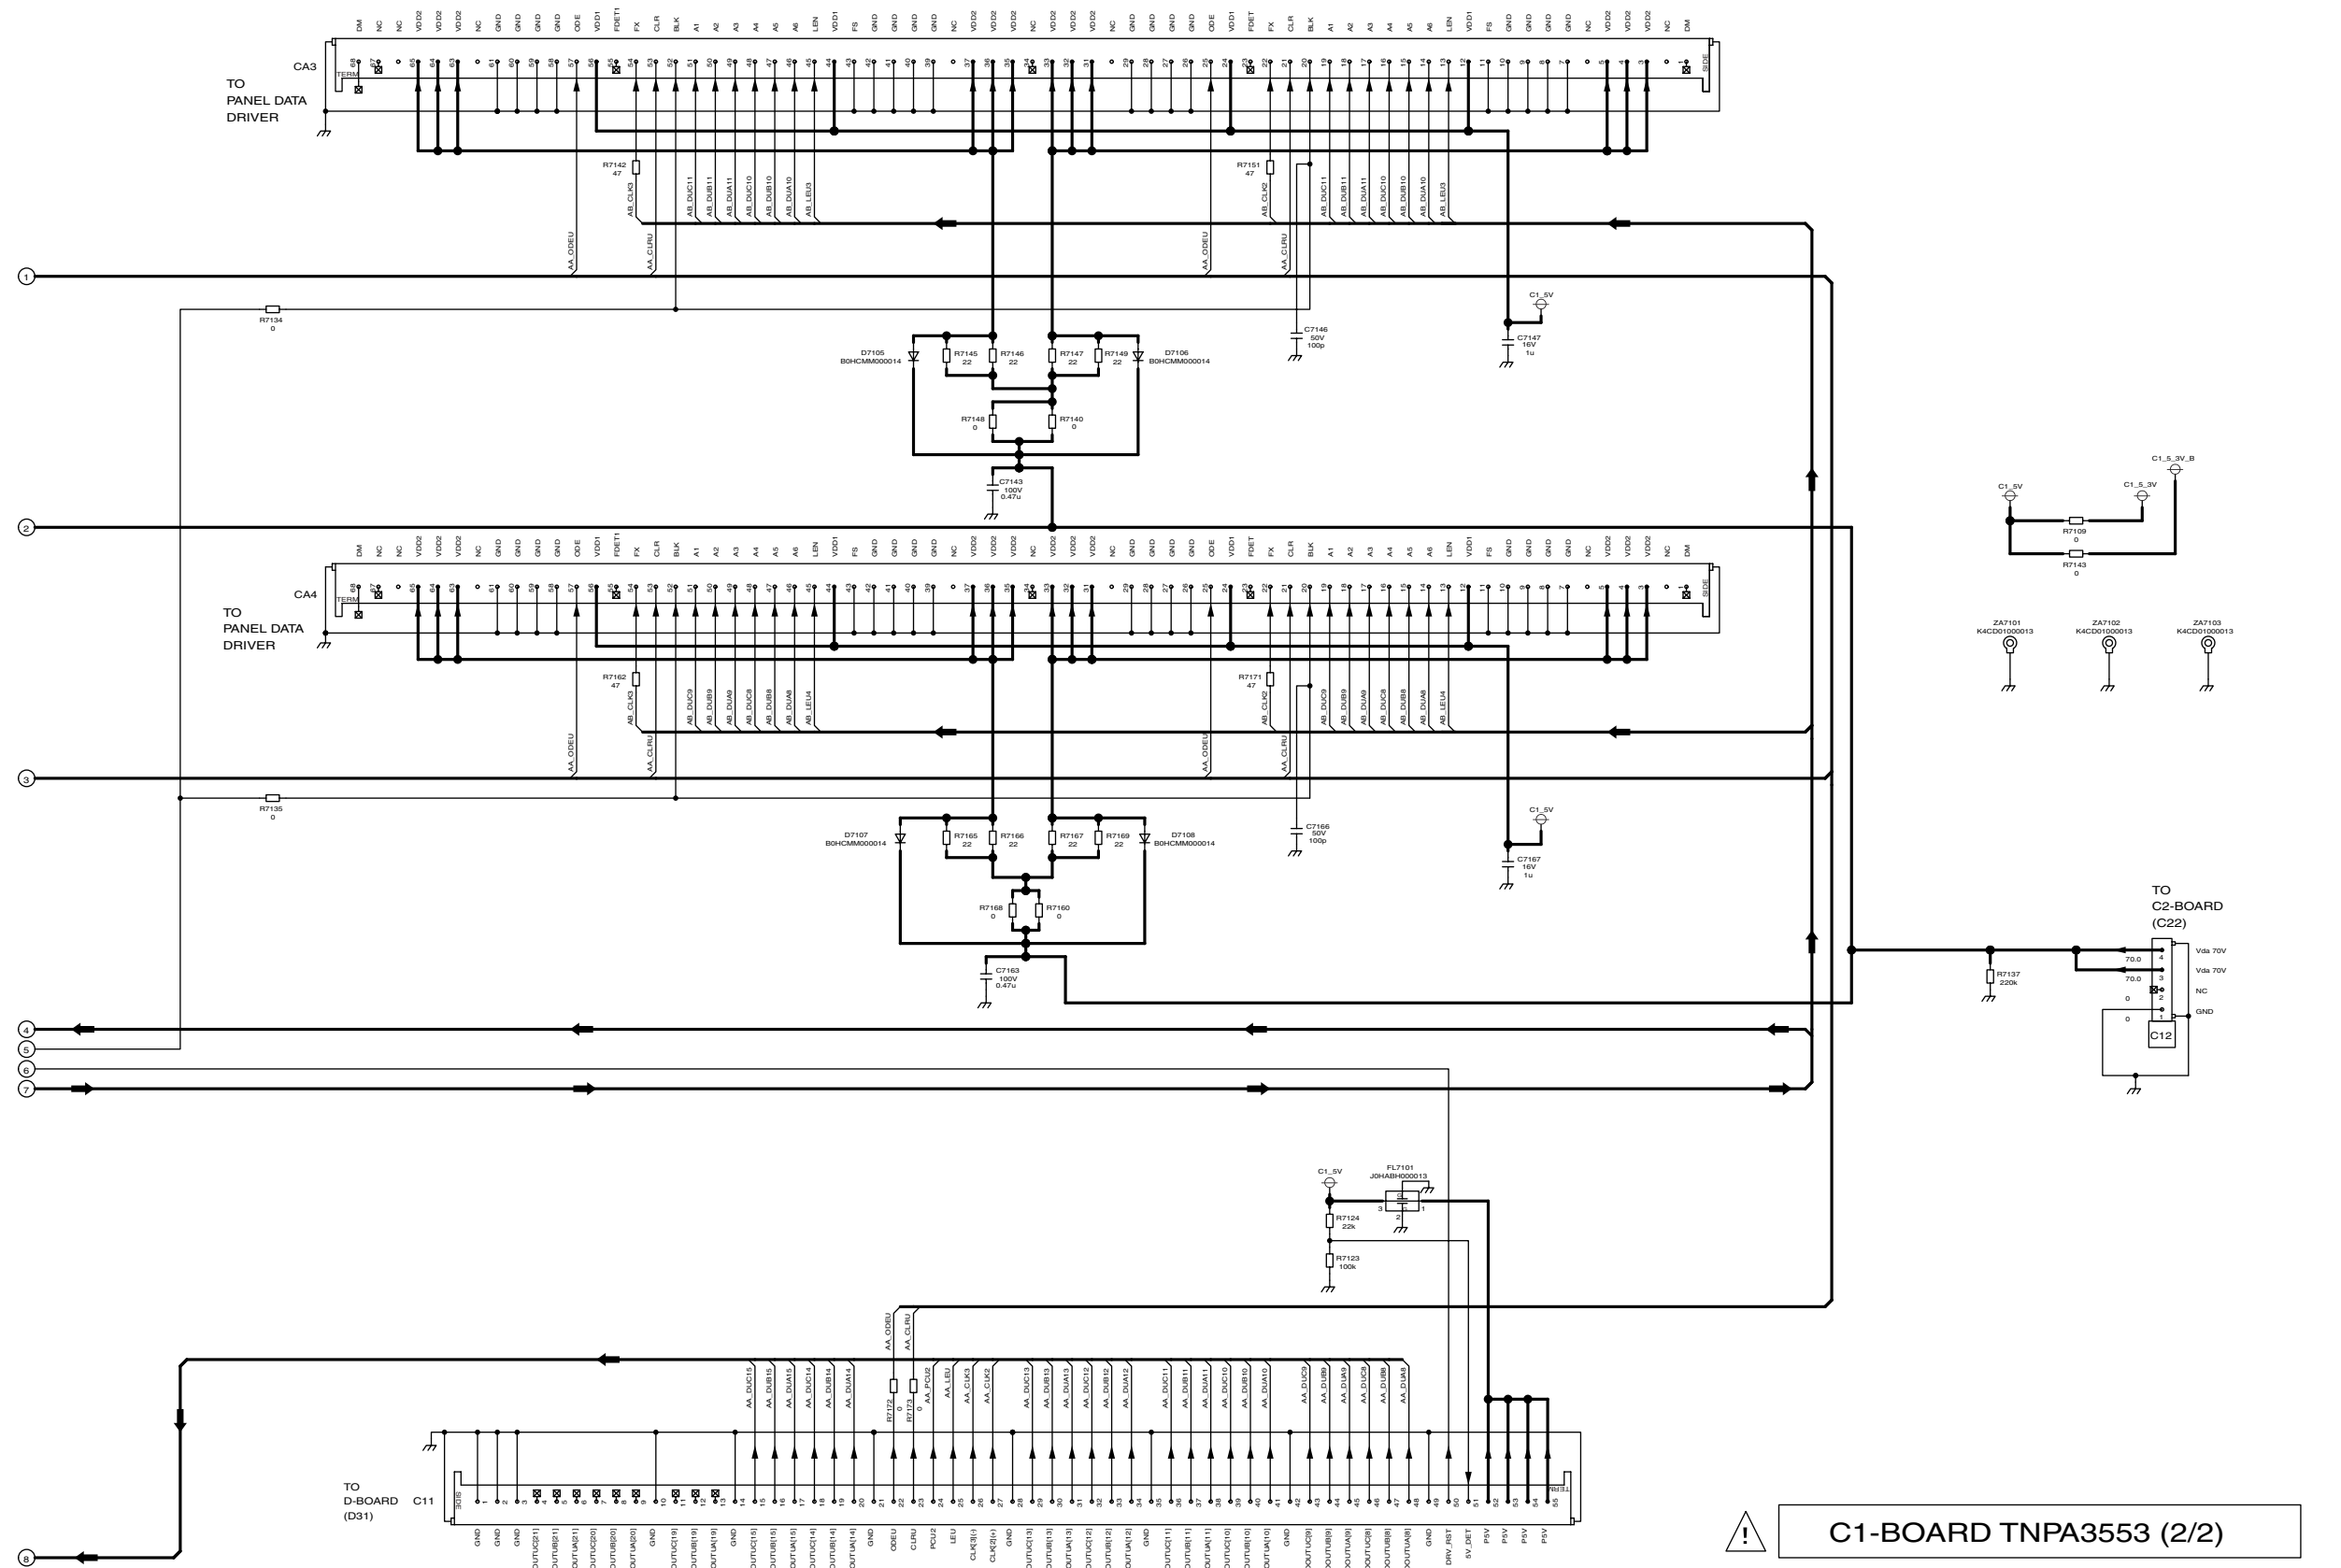


TH-42PX50U
C1-Board (2 of 2) Schematic Diagram

TH-42PX50U C1-Board (2 of 2) Schematic Diagram


13.67. C2-Board (1 of 2) Schematic Diagram (42inch)

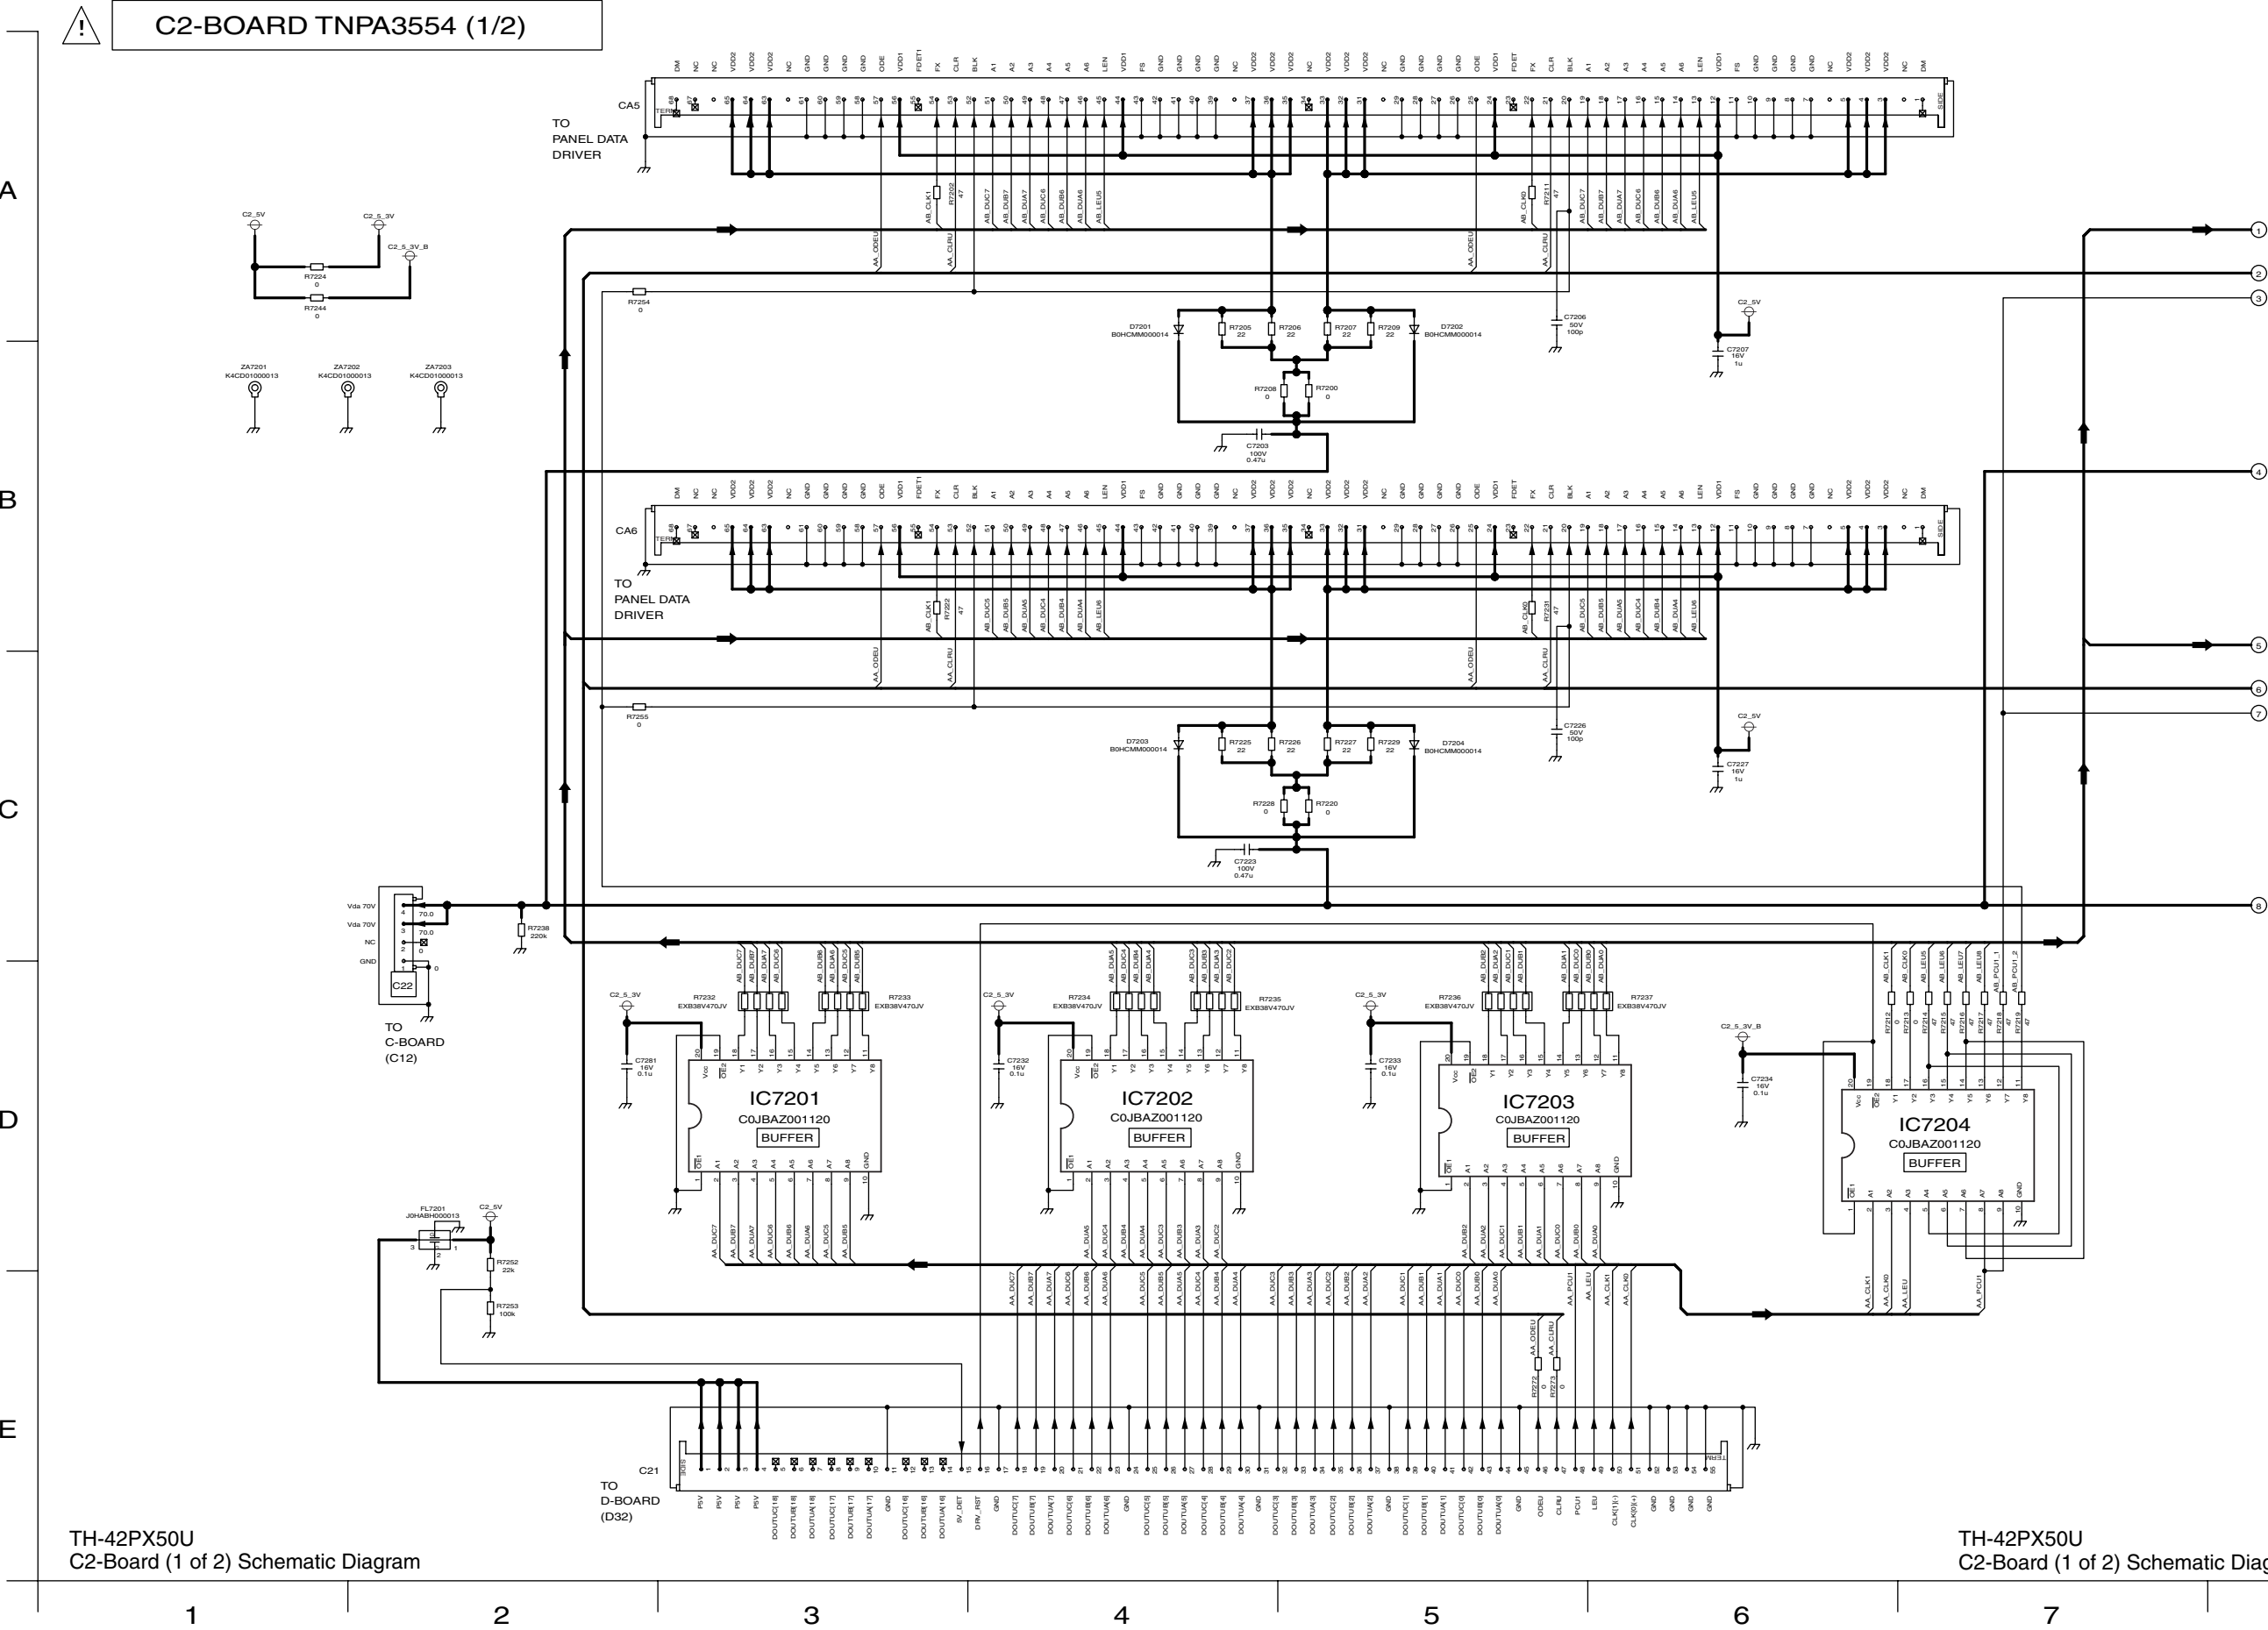






13.70. C3-Board (2 of 2) Schematic Diagram (42inch)

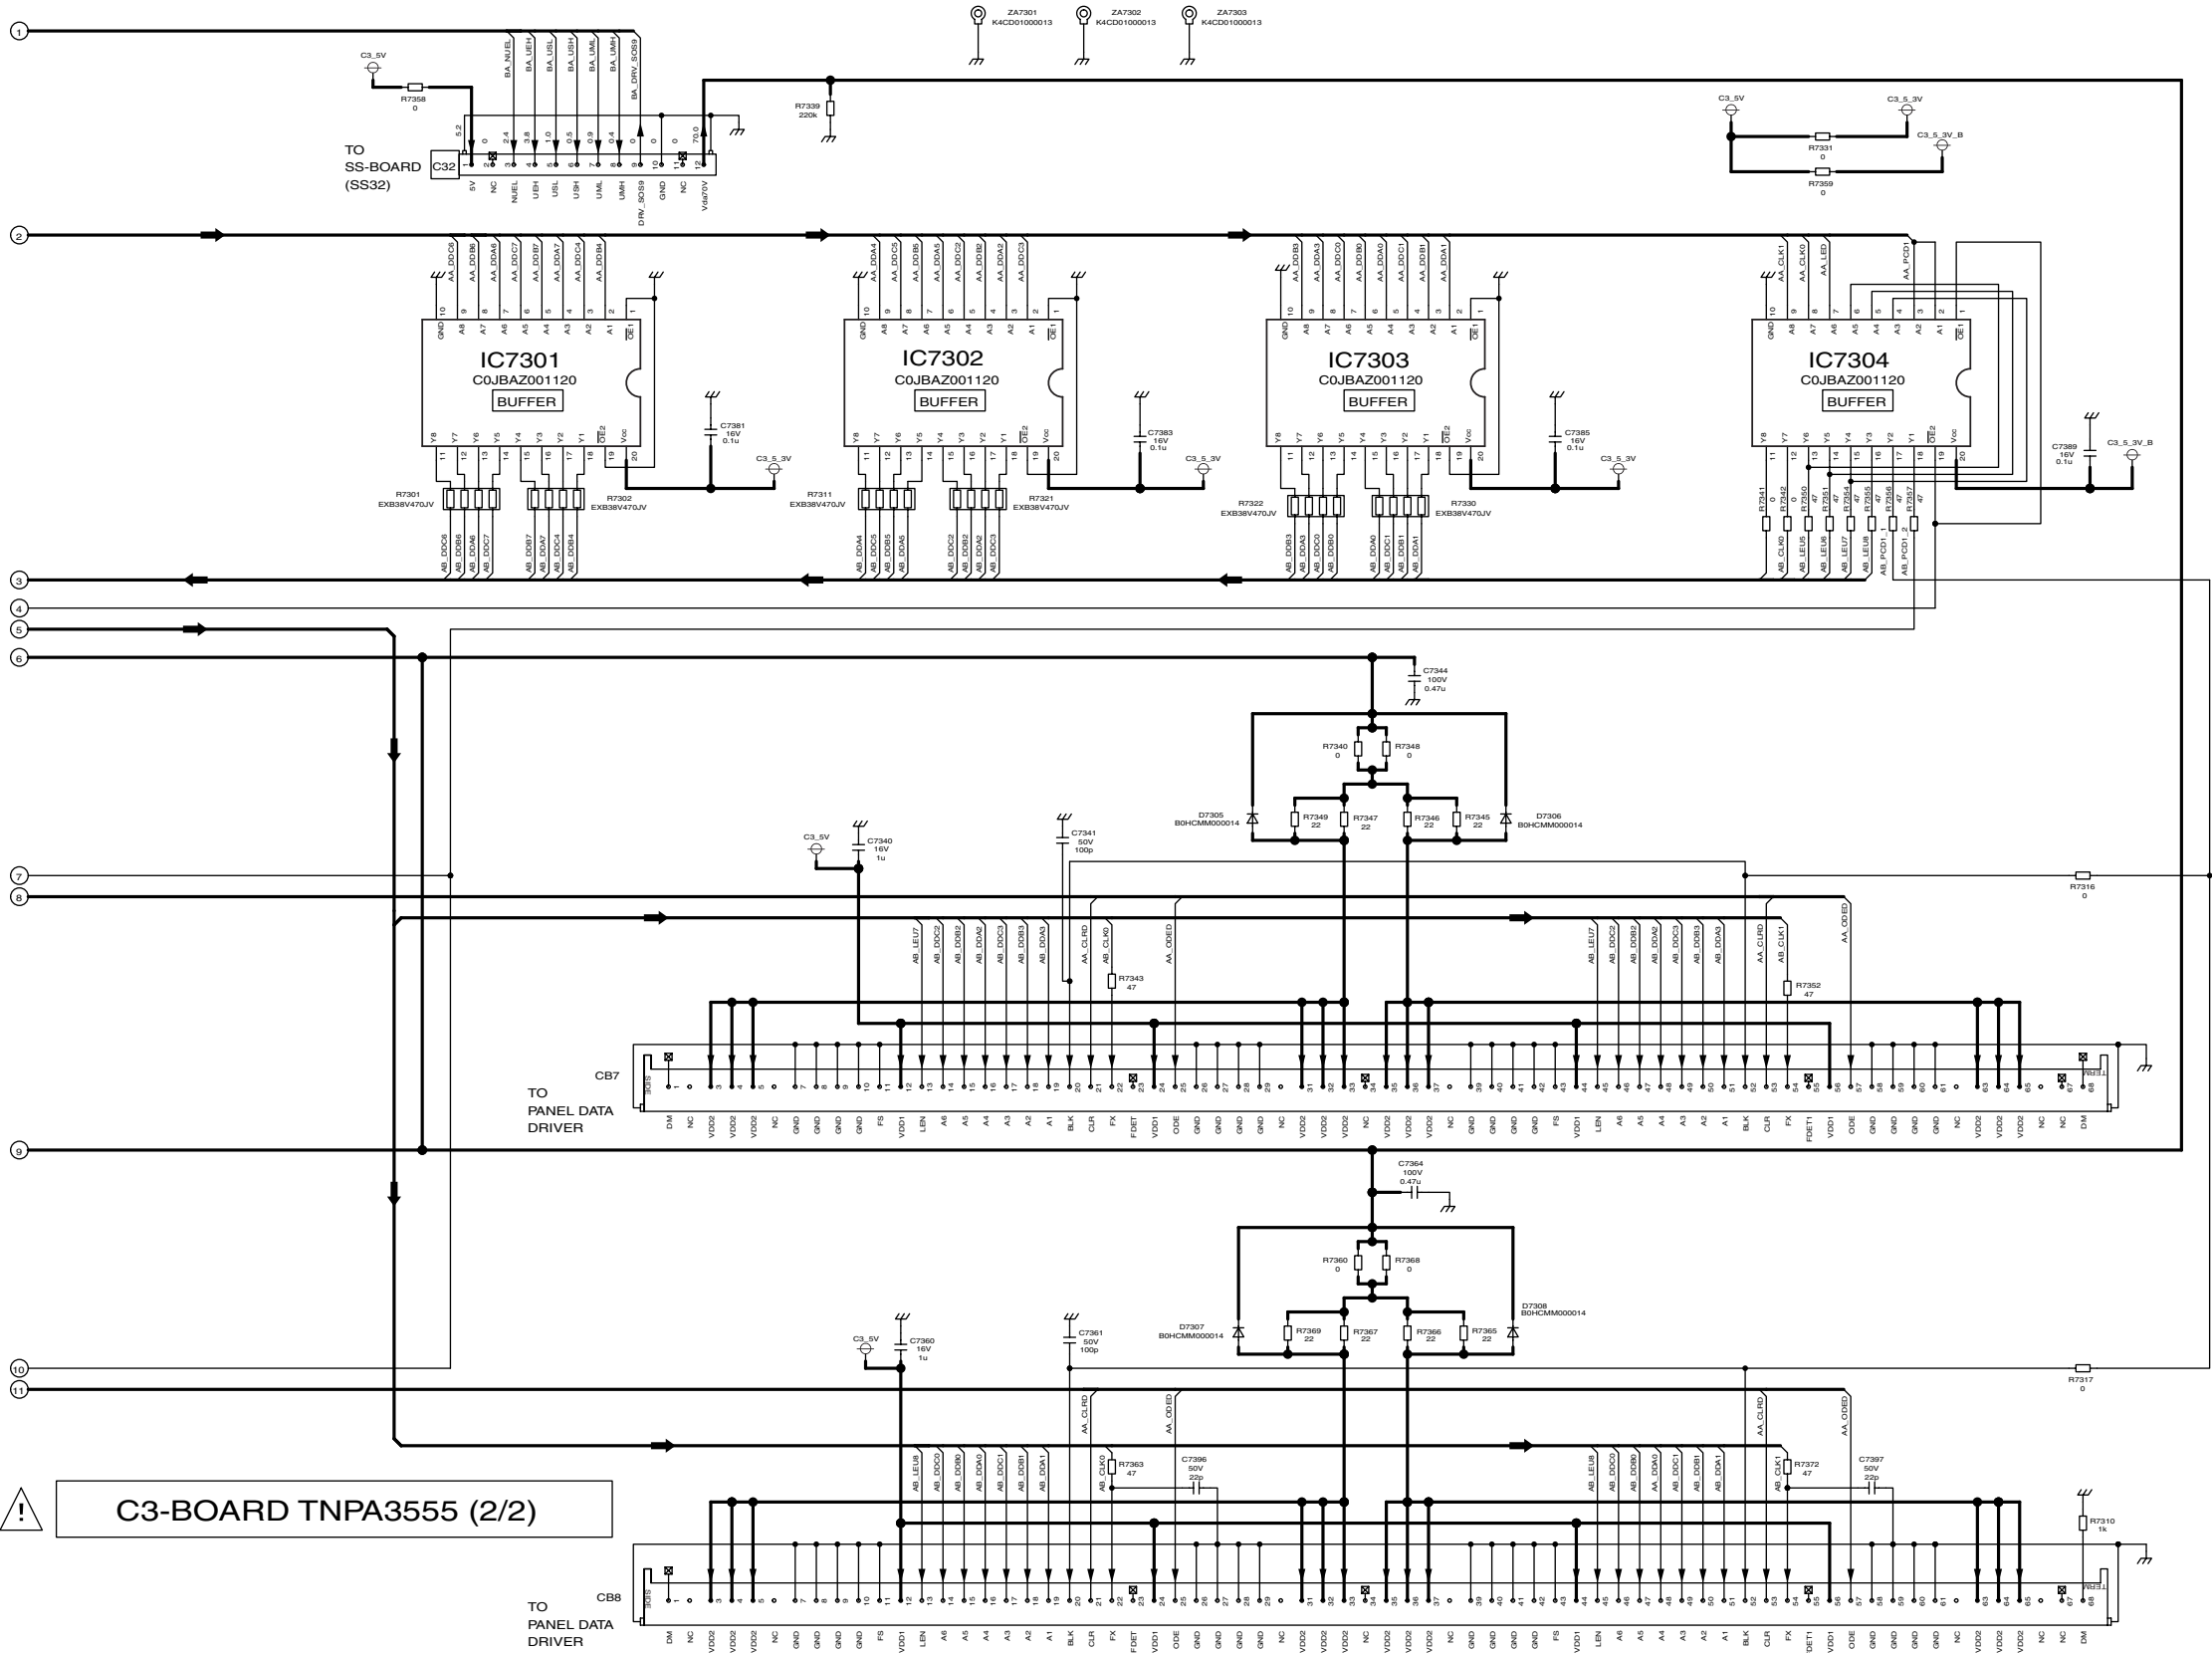


! C3-BOARD TNPA3555 (2/2)

TH-42PX50U
C3-Board (2 of 2) Schematic Diagram


TH-42PX50U
C3-Board (2 of 2) Schematic Diagram





TH-42PX50U C4-Board (2 of 2) Schematic Diagram



13.73. C1, C2,C5 and C6-Board Block Diagram (50inch)

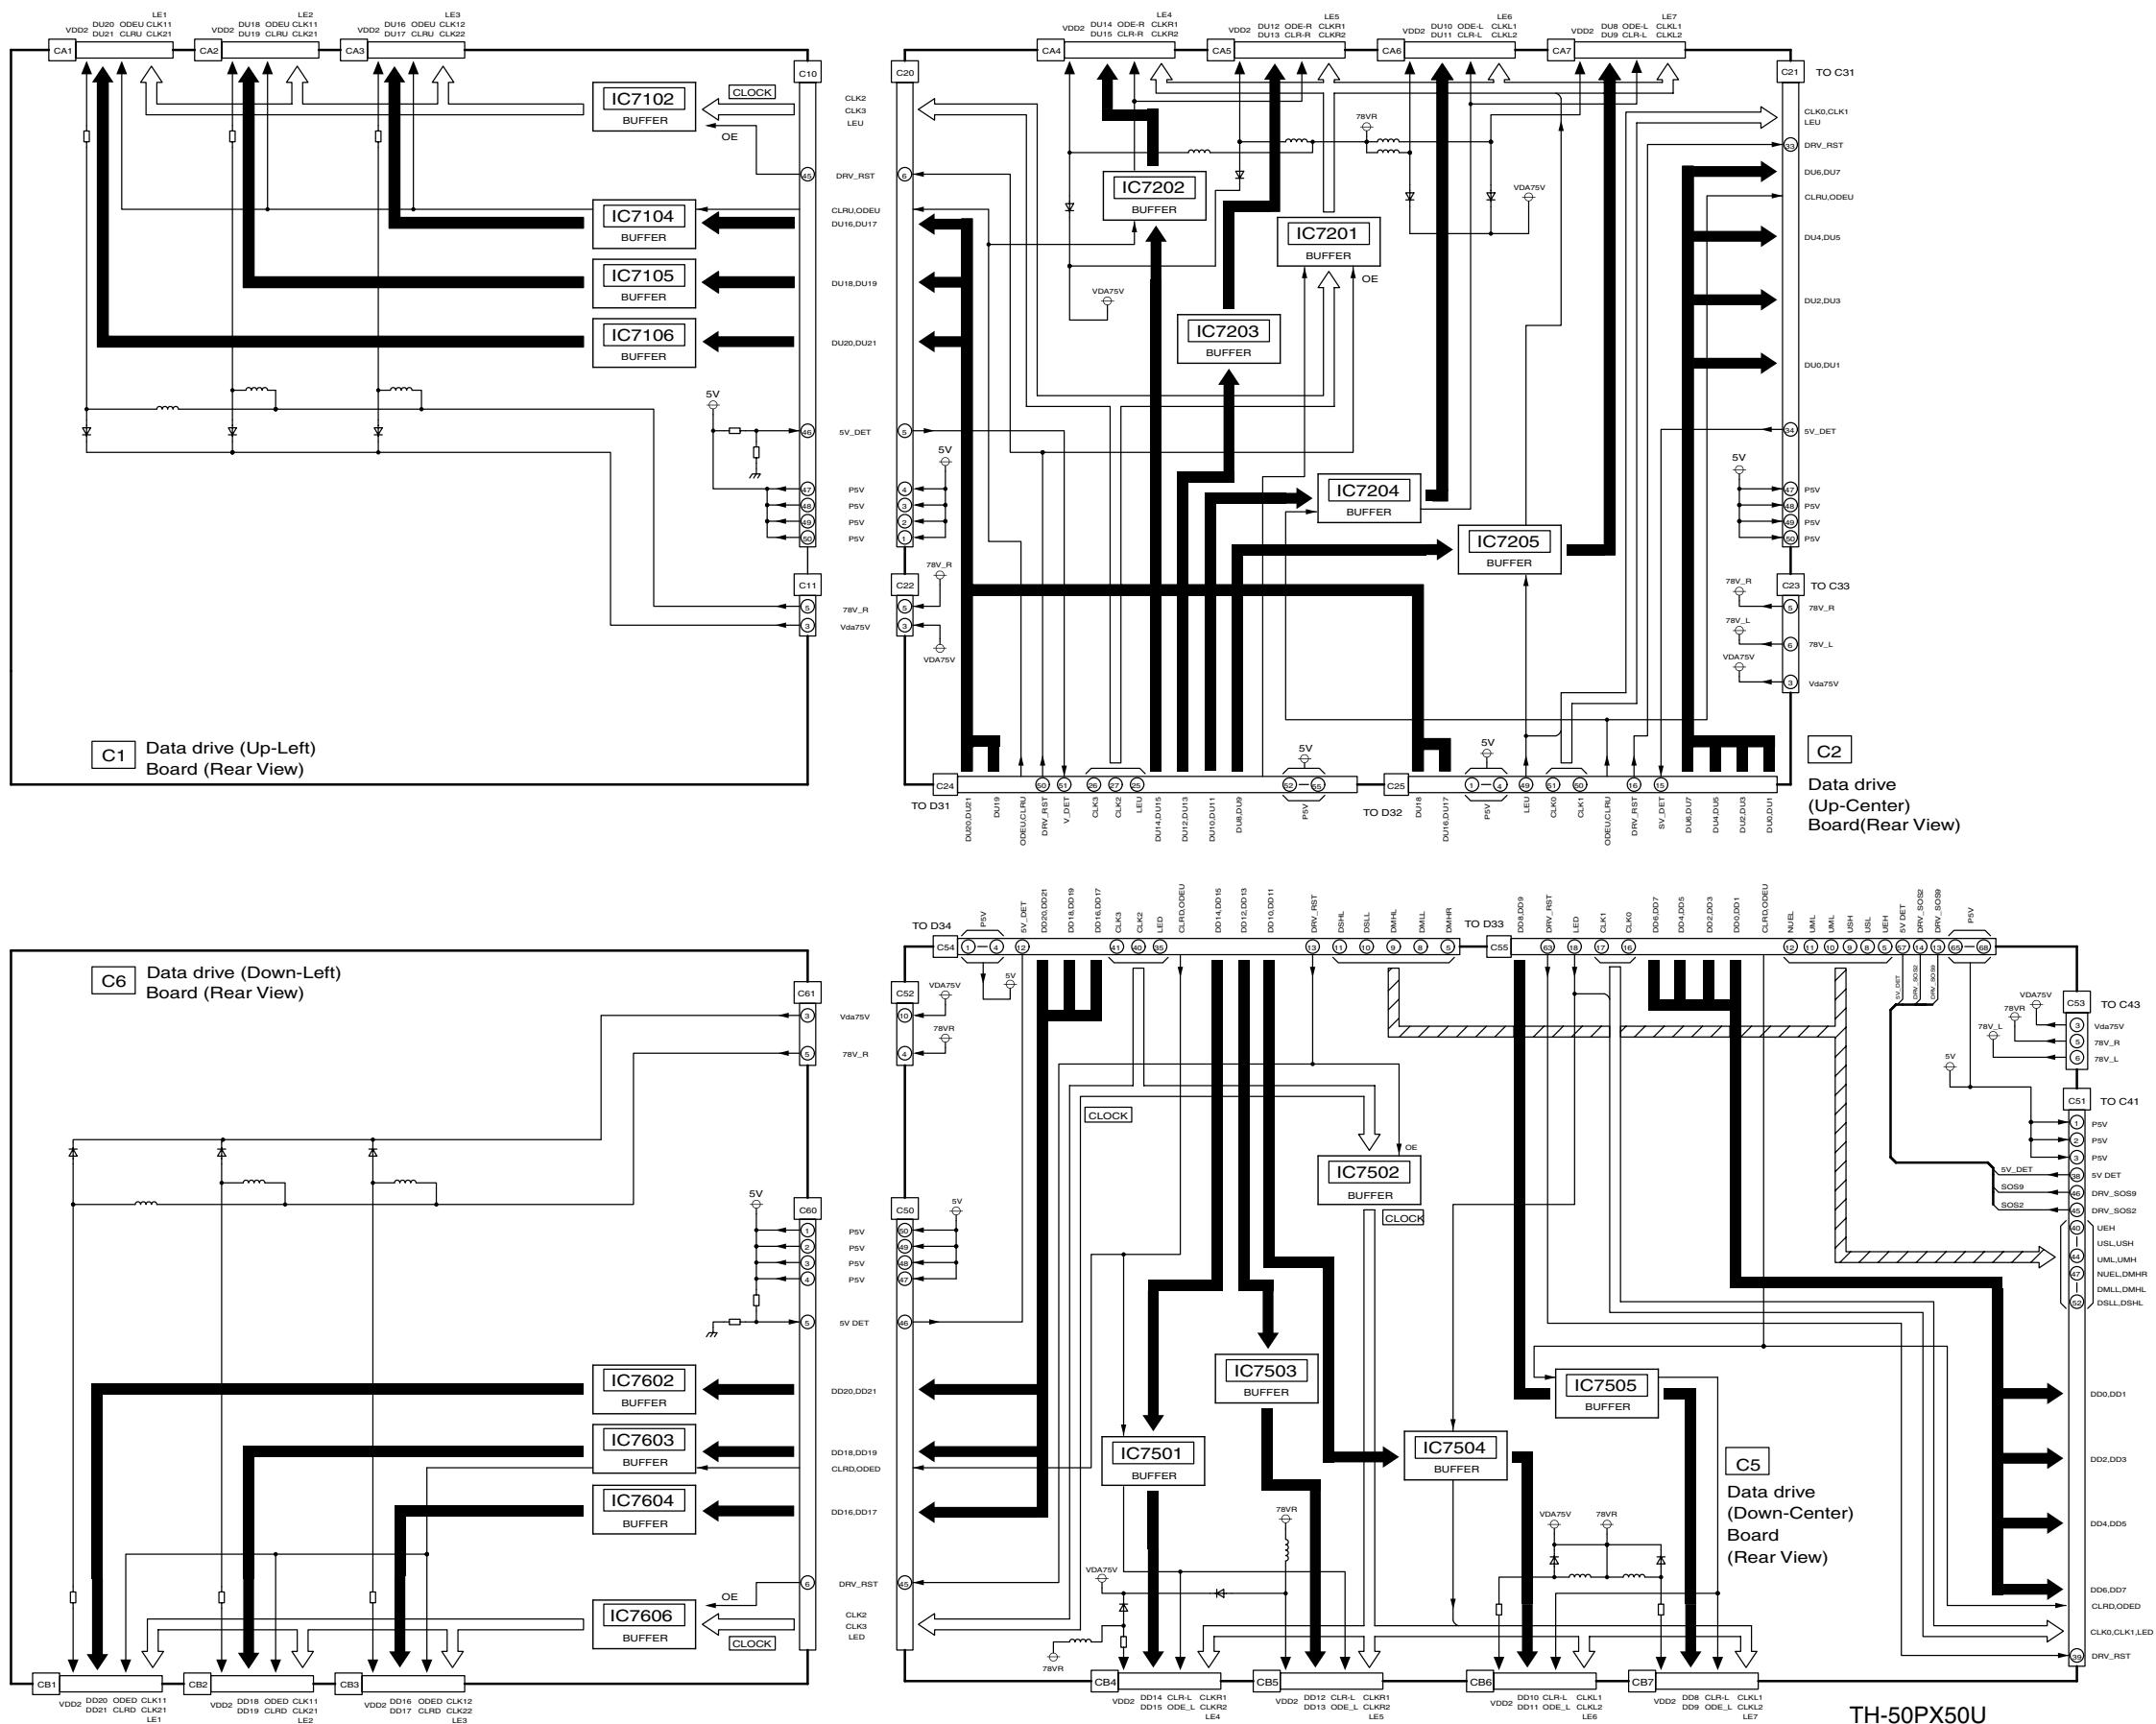

TH-50PX50U
C1, C2, C5 and C6-Board Block Diagram


TH-50PX50U
C1, C2, C5 and C6-Board Block Diagram

13.74. C3 and C4-Board Block Diagram (50inch)

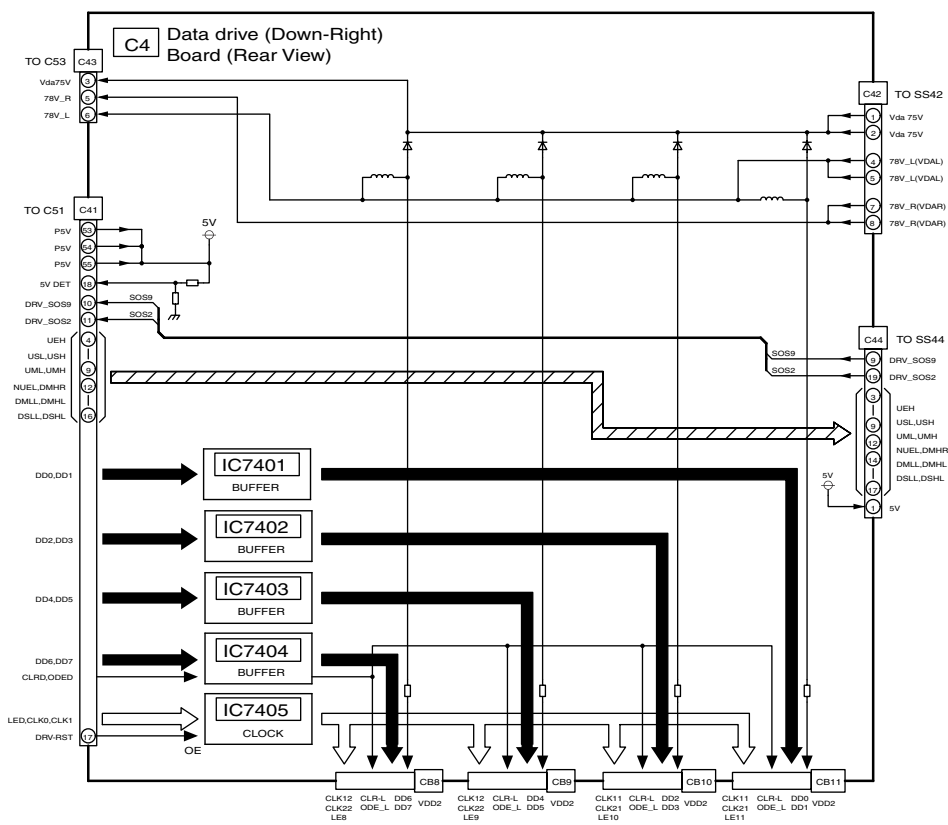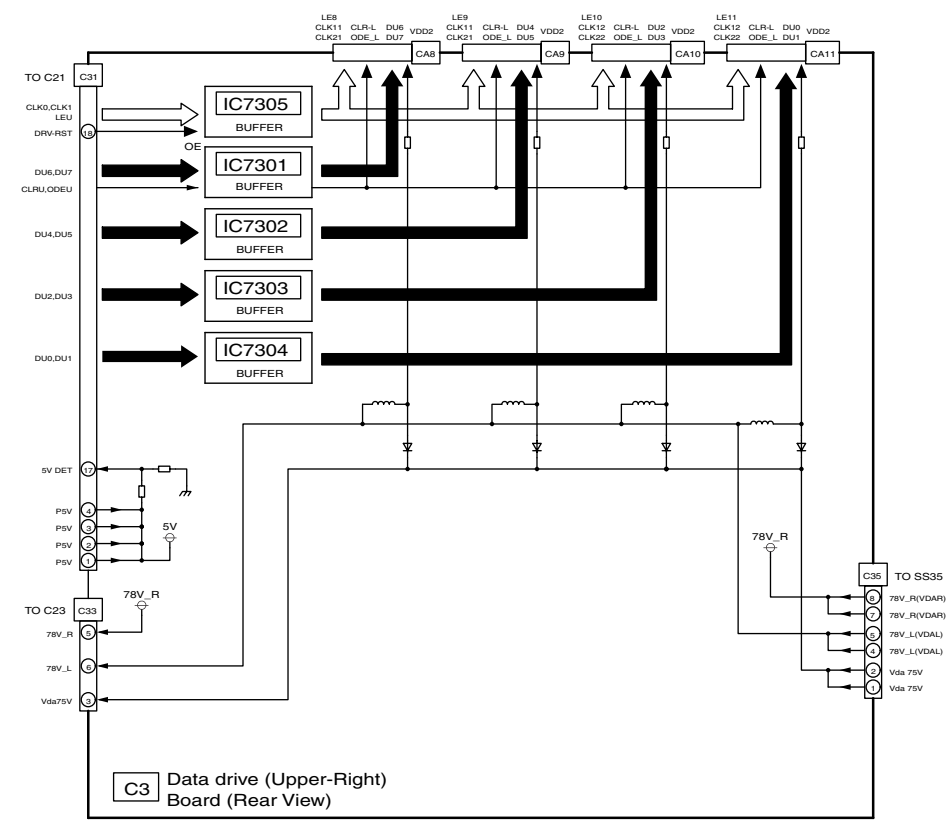

TH-50PX50U
C3 and C4-Board Block Diagram


TH-50PX50U
C3 and C4-Board Block Diagram






TH-50PX50U
C1-Board (2 of 2) Schematic Diagram

13.77. C2-Board (1 of 2) Schematic Diagram (50inch)

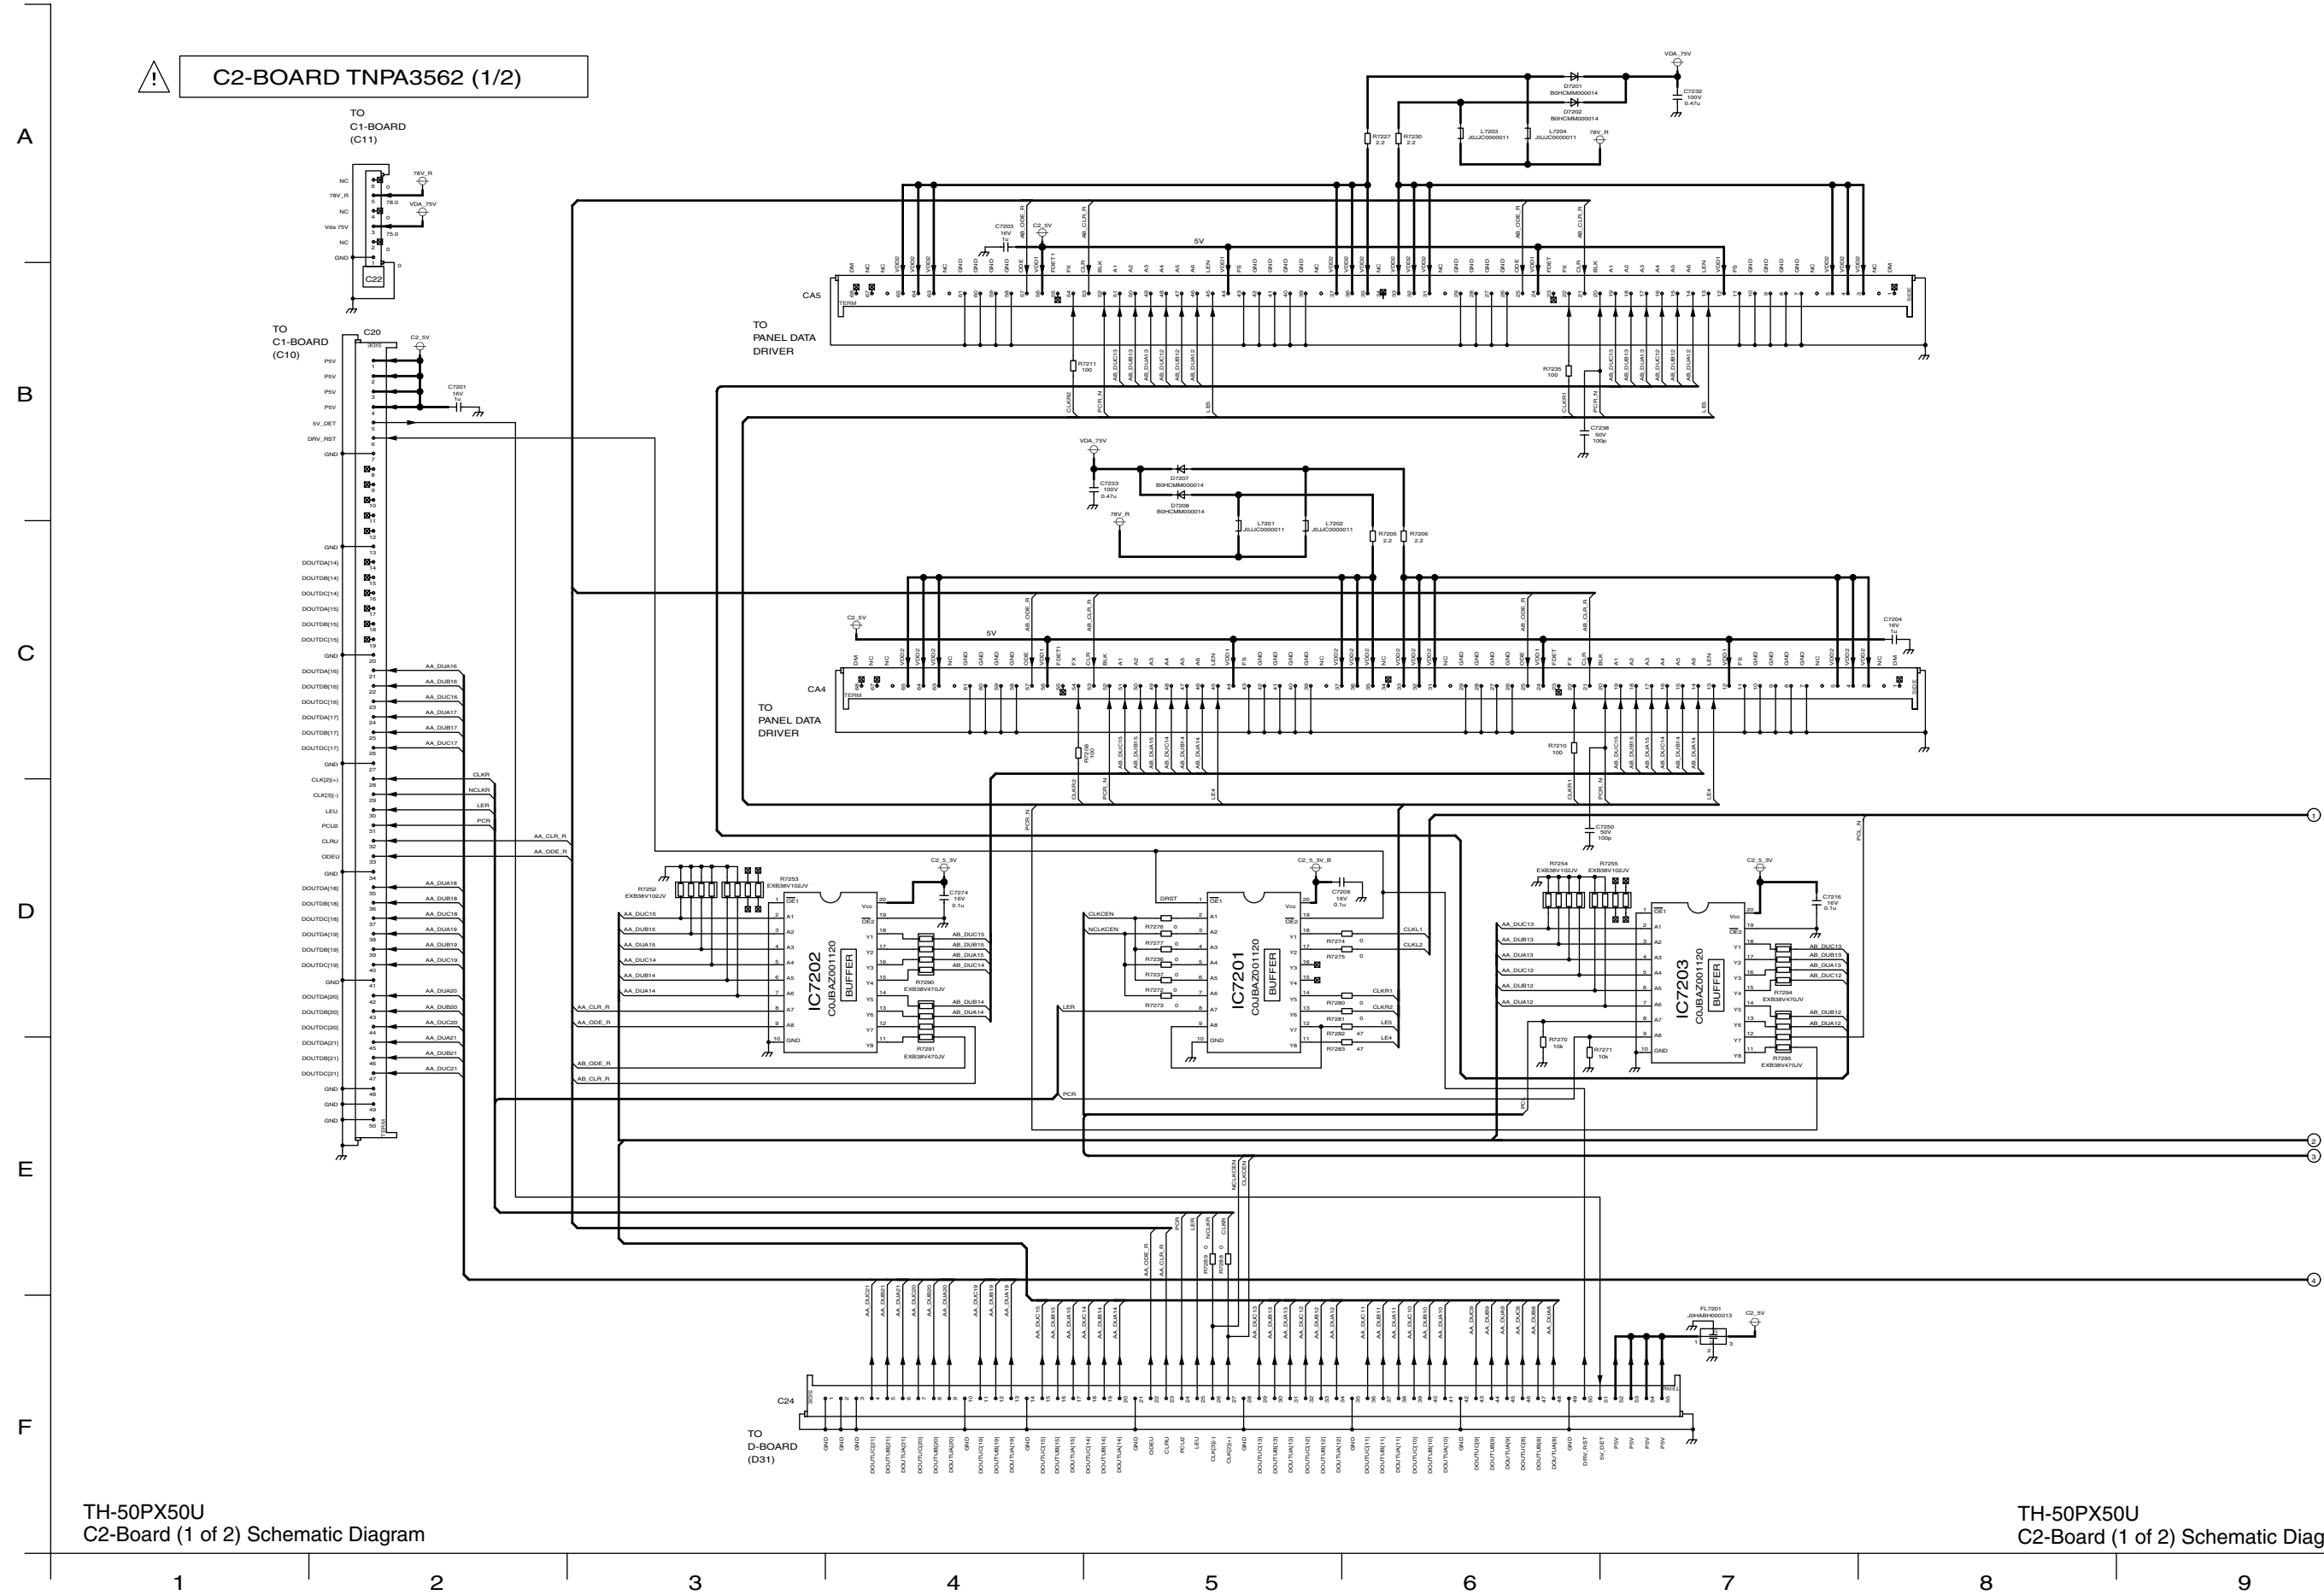


13.78. C2-Board (2 of 2) Schematic Diagram (50inch)

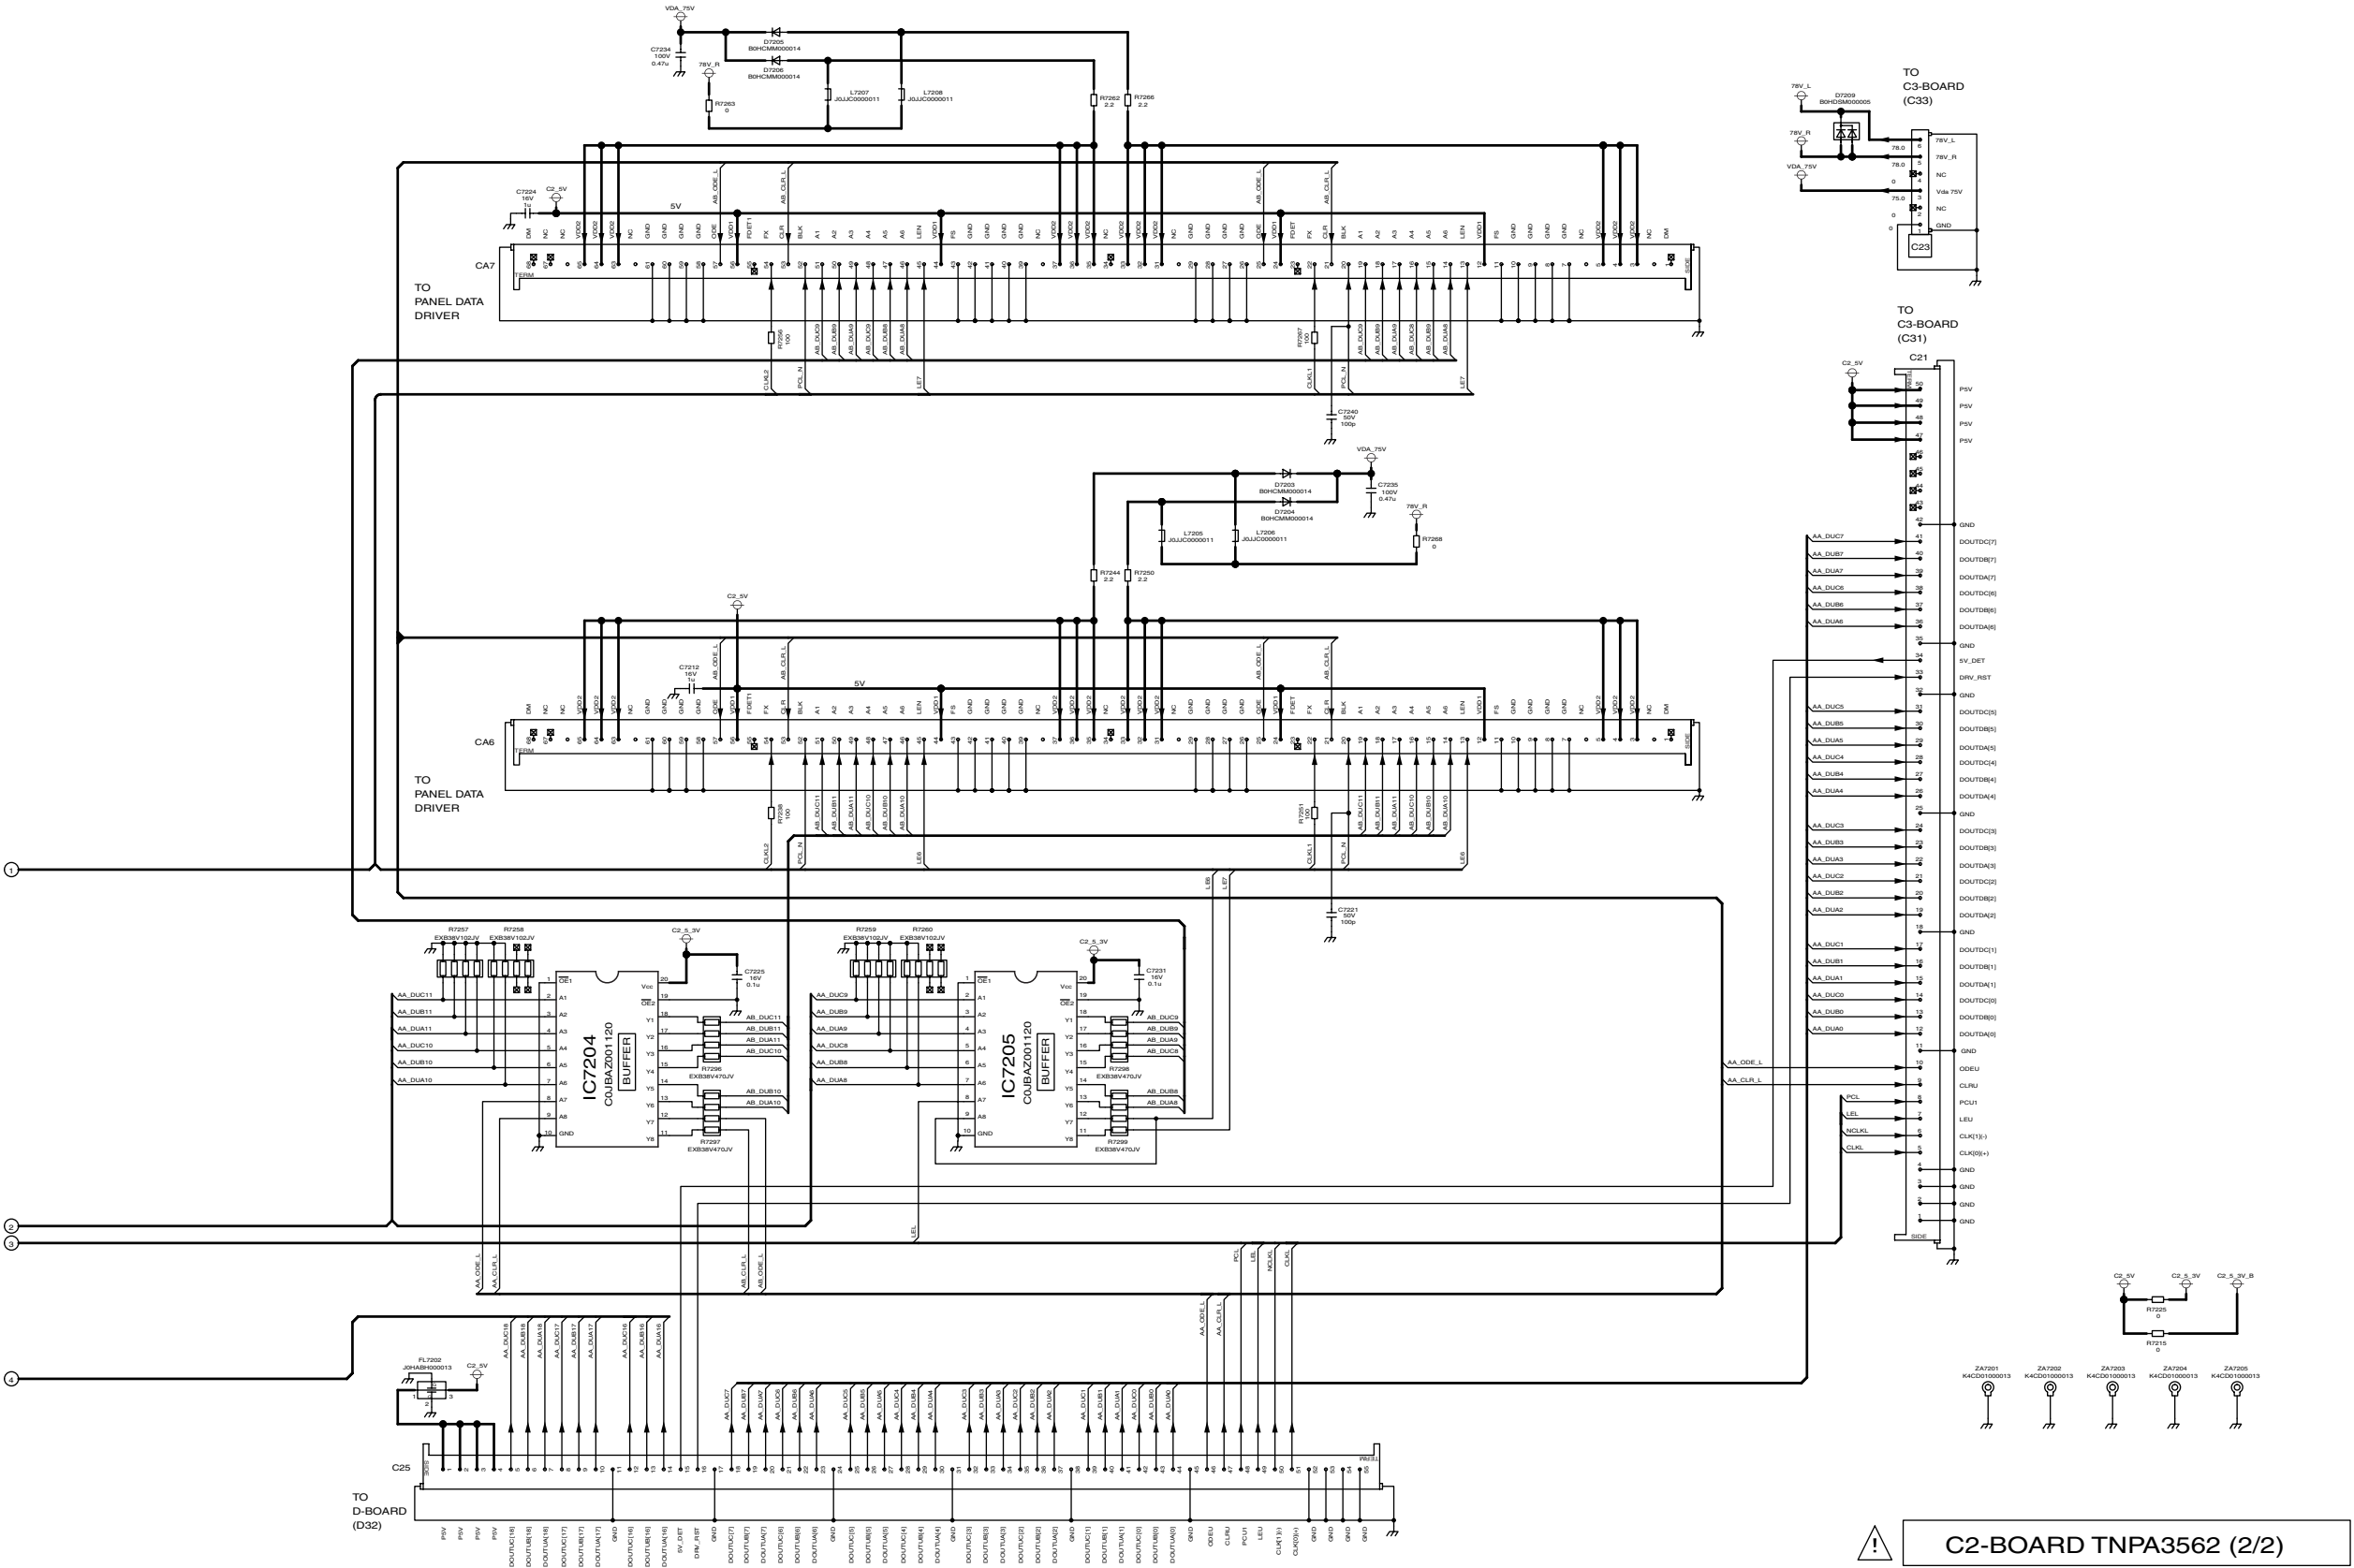

TH-50PX50U
C2-Board (2 of 2) Schematic Diagram

TH-50PX50U
C2-Board (2 of 2) Schematic Diagram

13.79. C3-Board (1 of 2) Schematic Diagram (50inch)

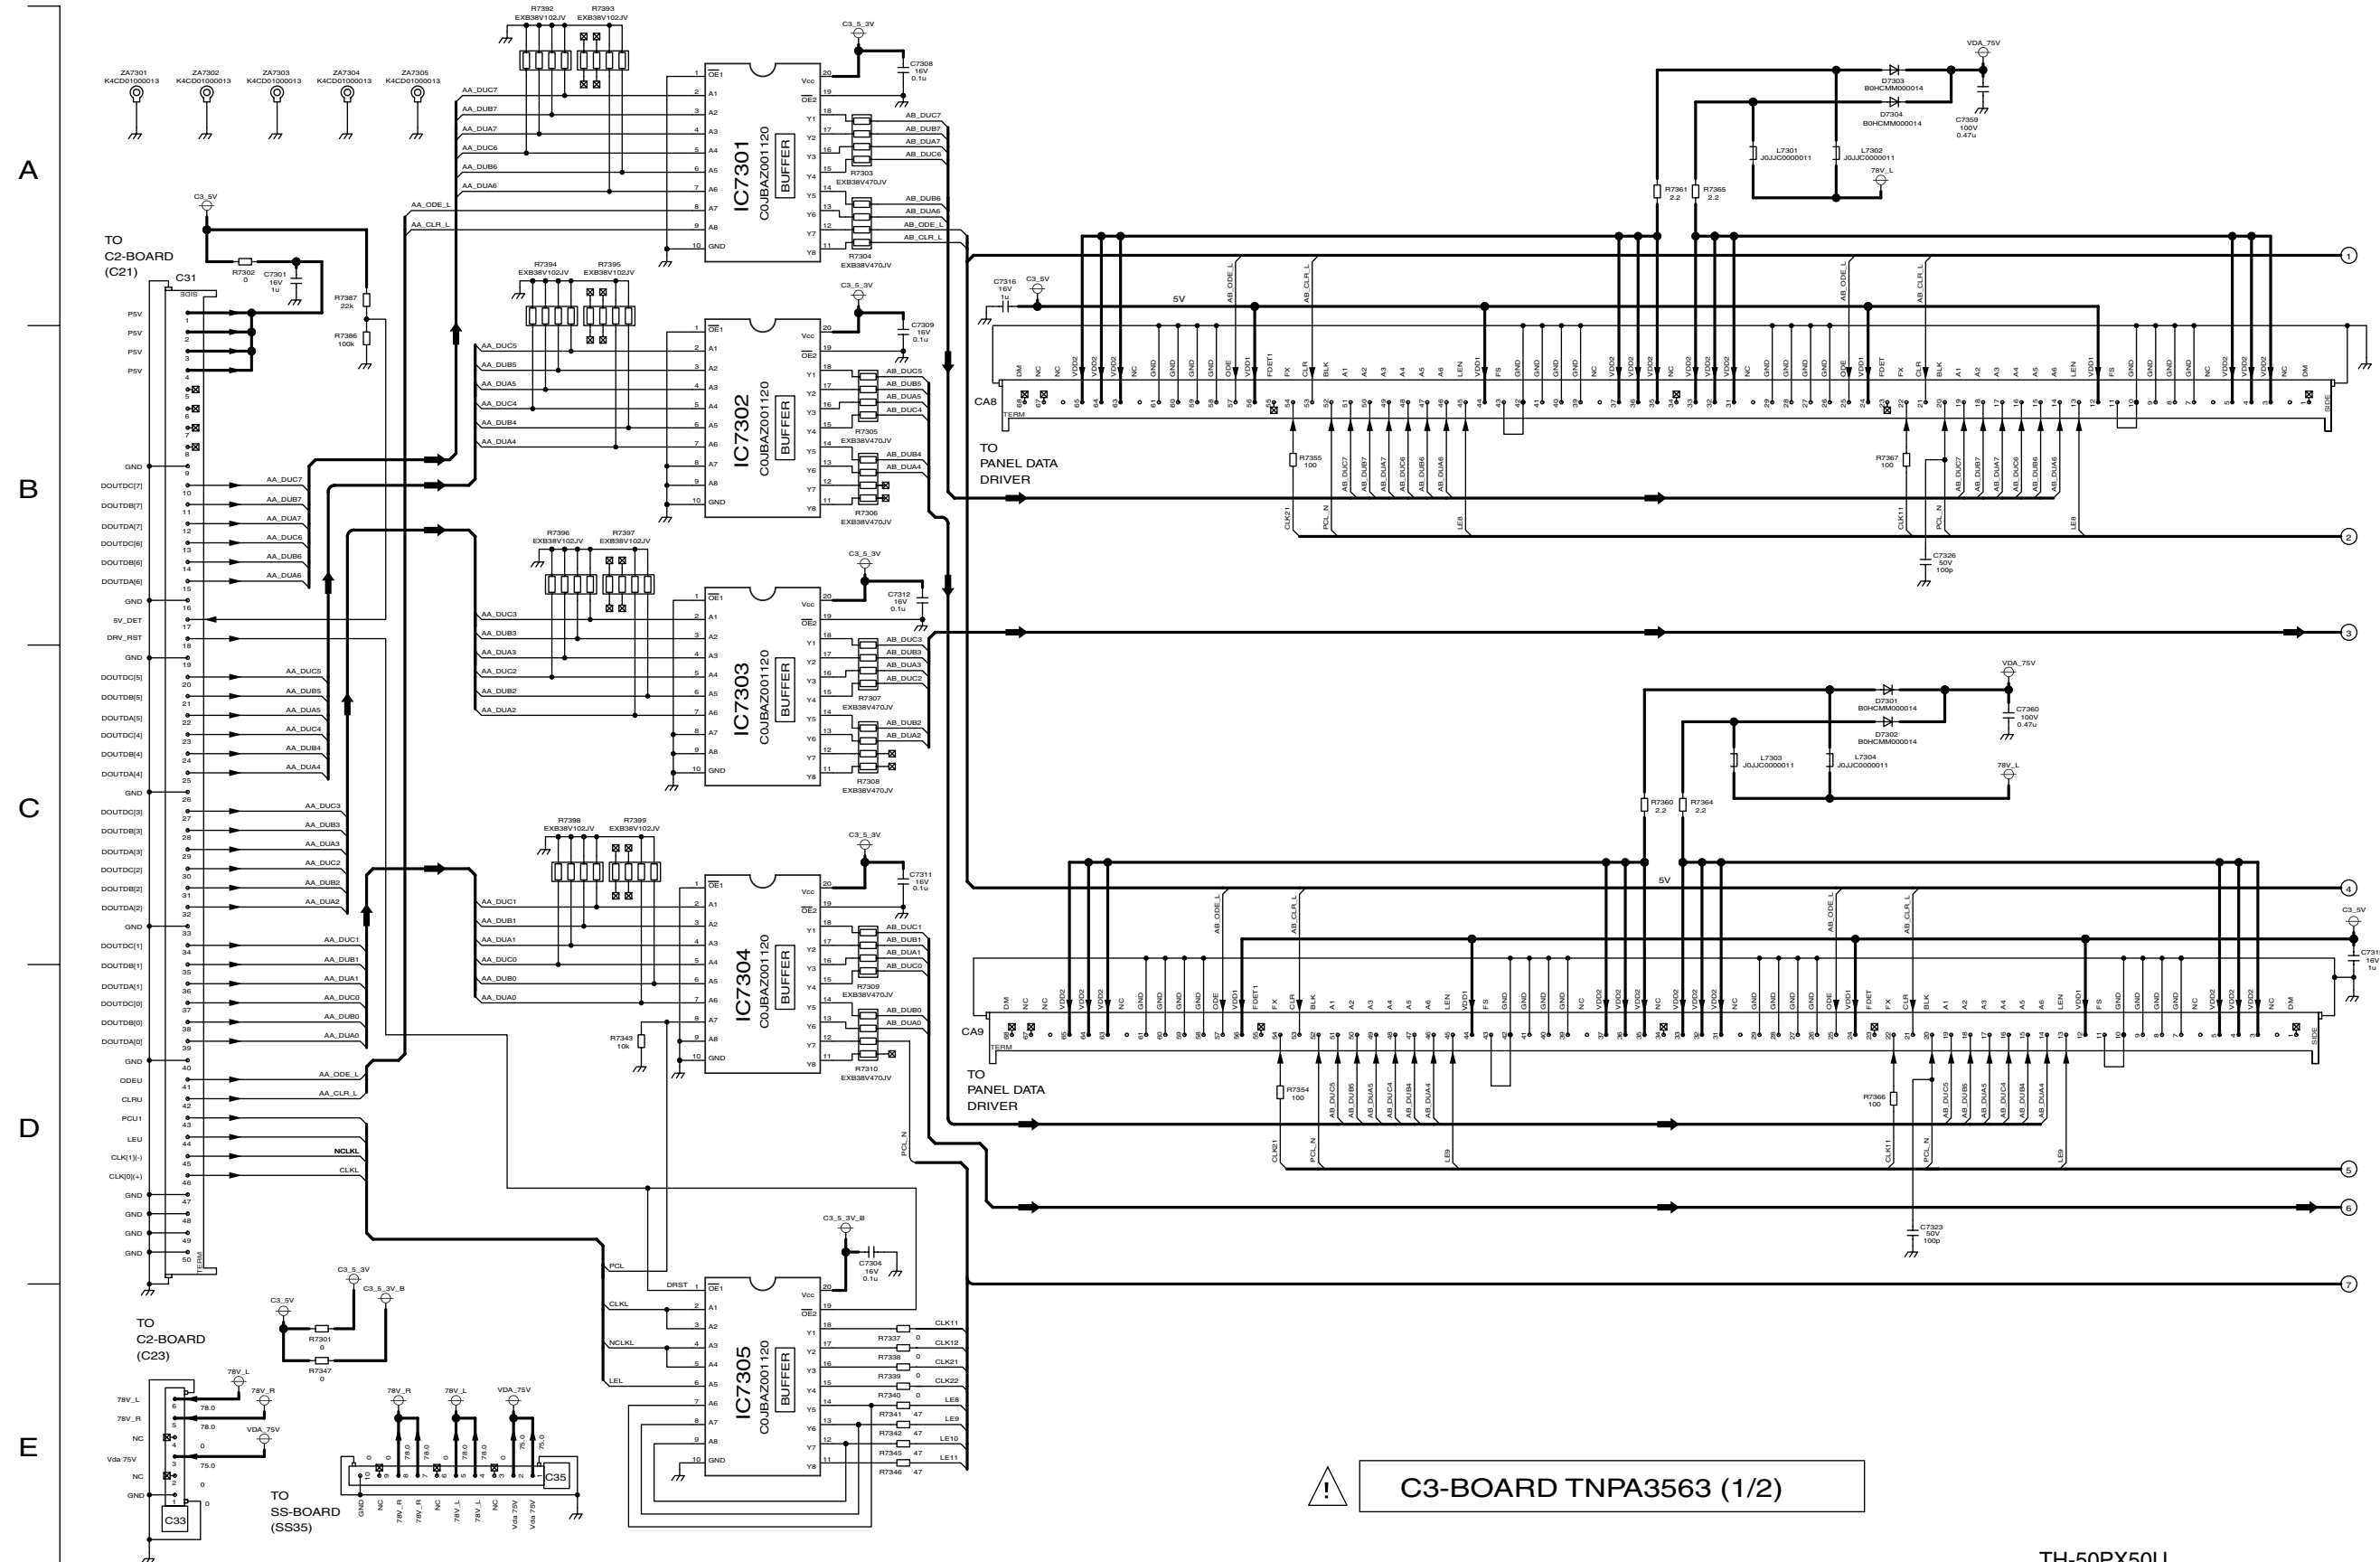


TH-50PX50U C3-Board (1 of 2) Schematic Diagram

TH-50PX50U
C3-Board (1 of 2) Schematic Diagram

13.80. C3-Board (2 of 2) Schematic Diagram (50inch)

!


C3-BOARD TNPA3563 (2/2)

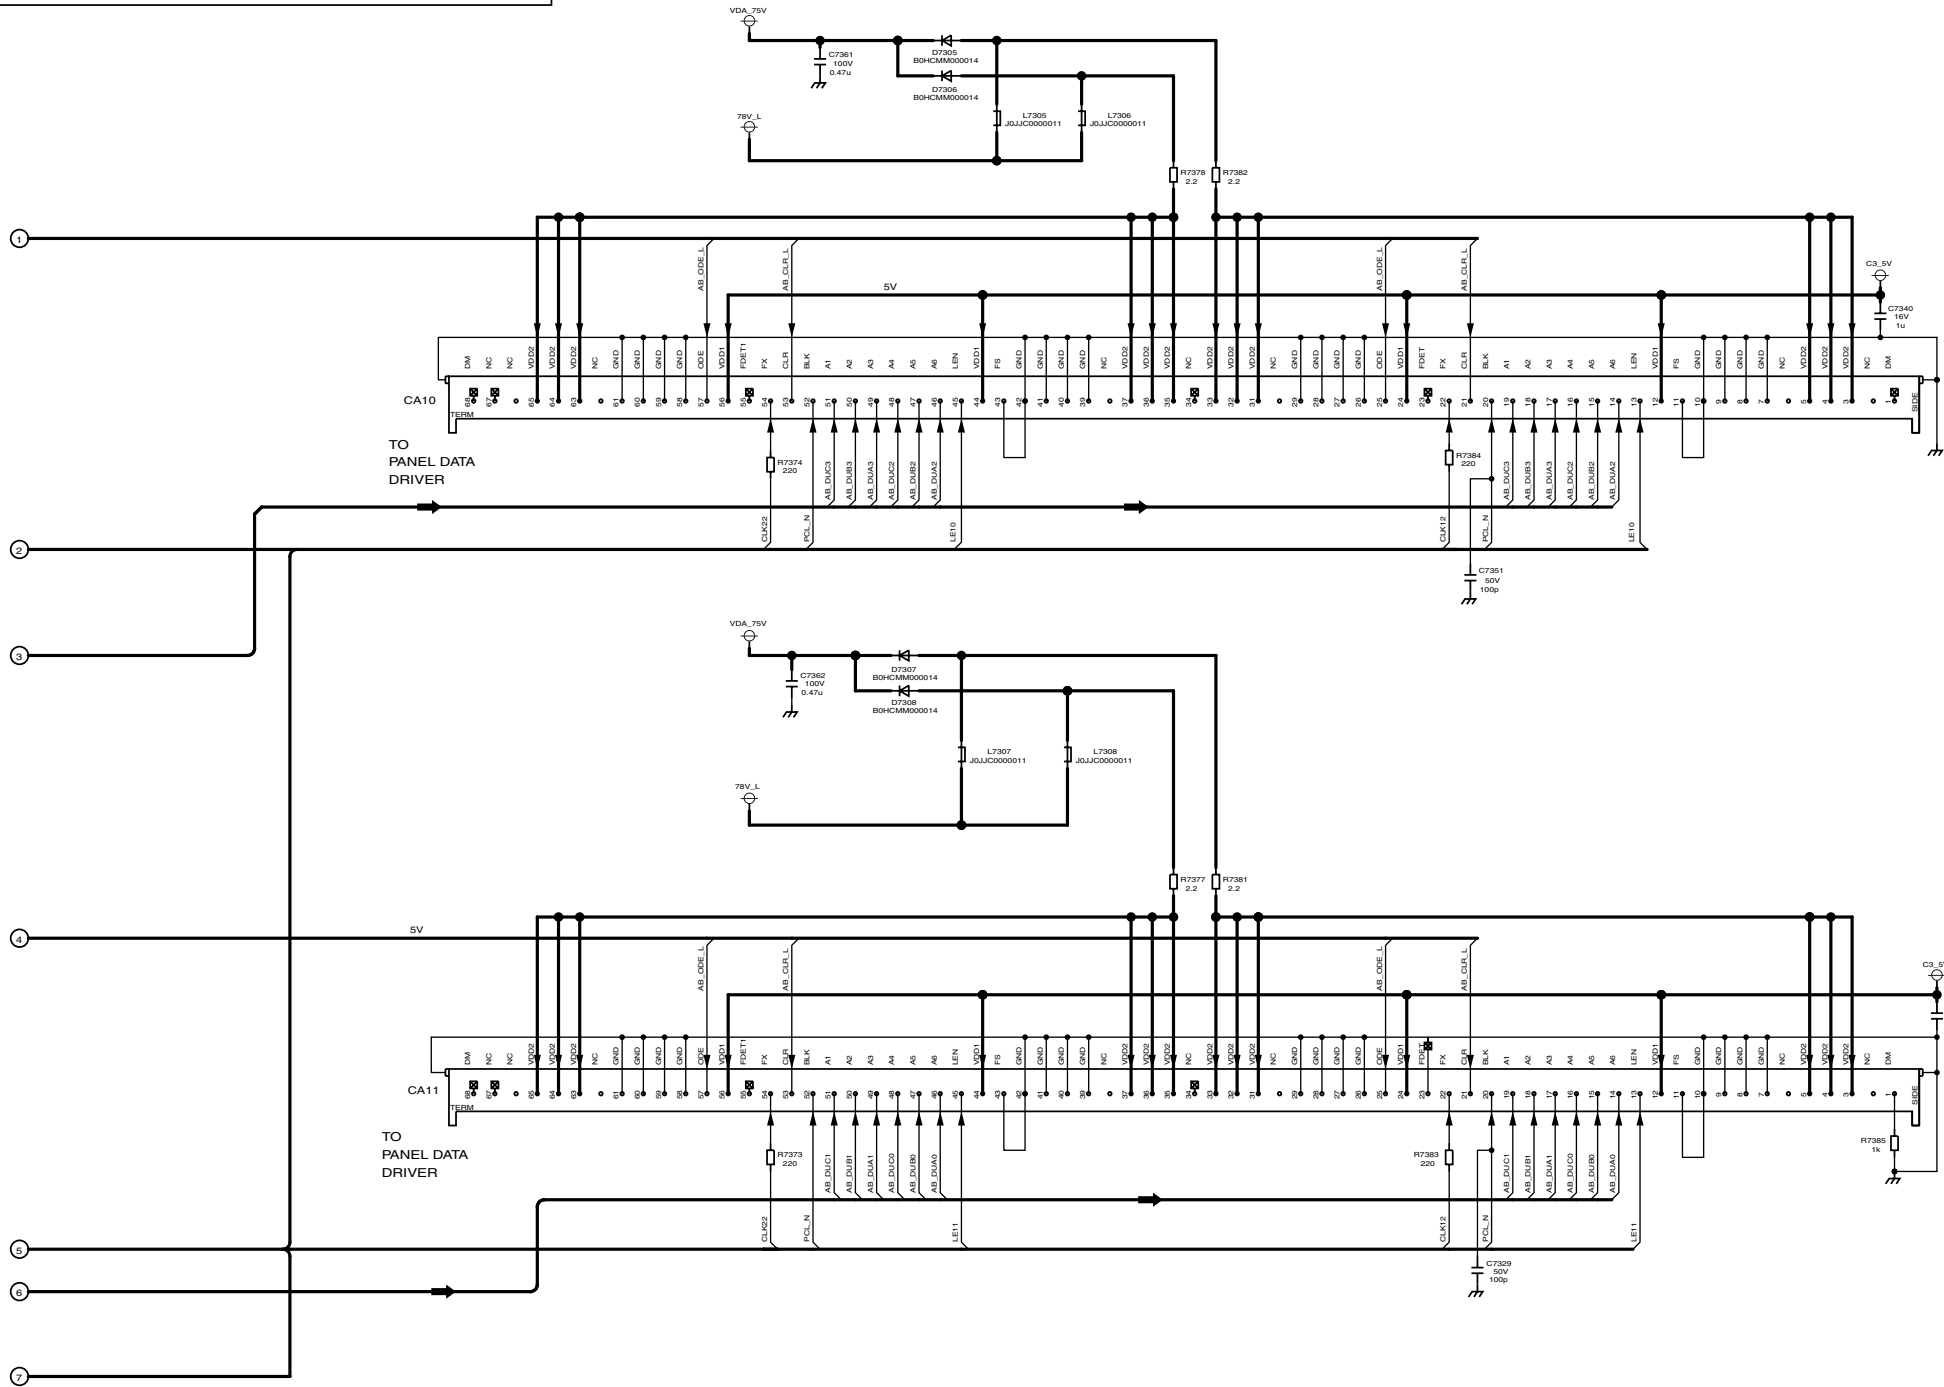

TH-50PX50U
C3-Board (2 of 2) Schematic Diagram

TH-50PX50U
C3-Board (2 of 2) Schematic Diagram


13.81. C4-Board (1 of 2) Schematic Diagram (50inch)

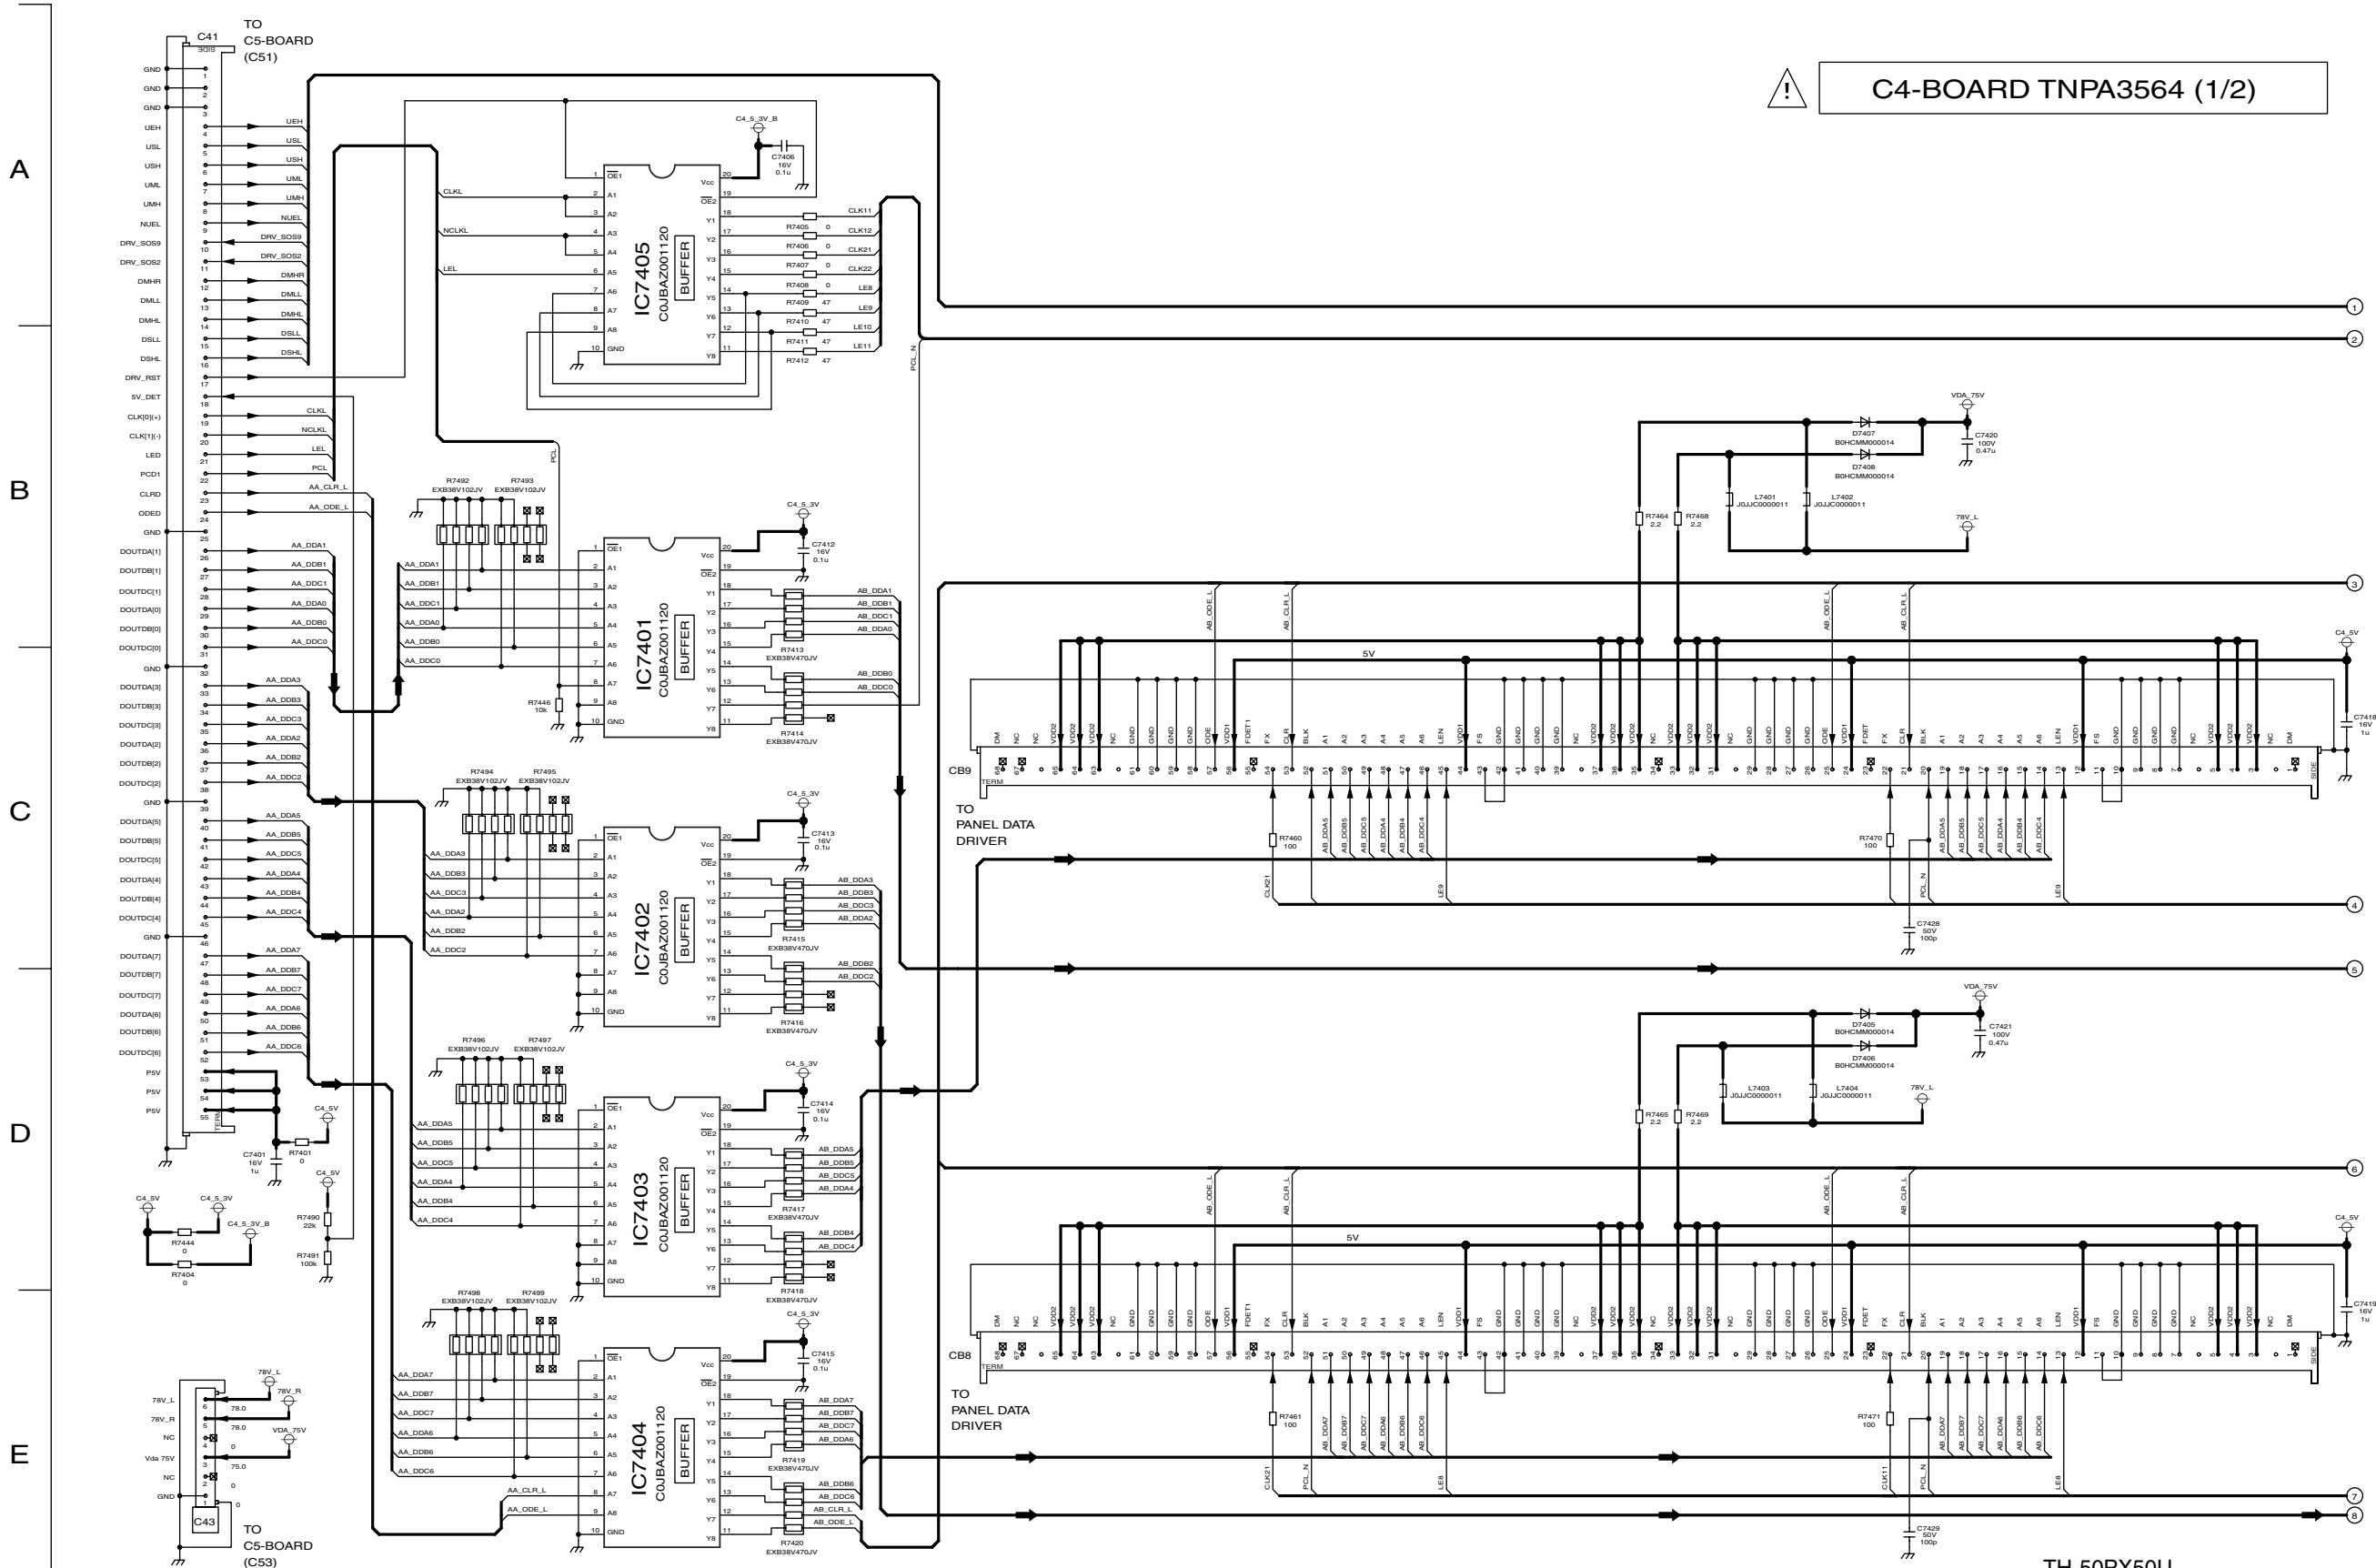


TH-50PX50U C4-Board (1 of 2) Schematic Diagram

TH-50PX50U C4-Board (1 of 2) Schematic Diagram








TH-50PX50U
C5-Board (2 of 2) Schematic Diagram




13.86. C6-Board (2 of 2) Schematic Diagram (50inch)

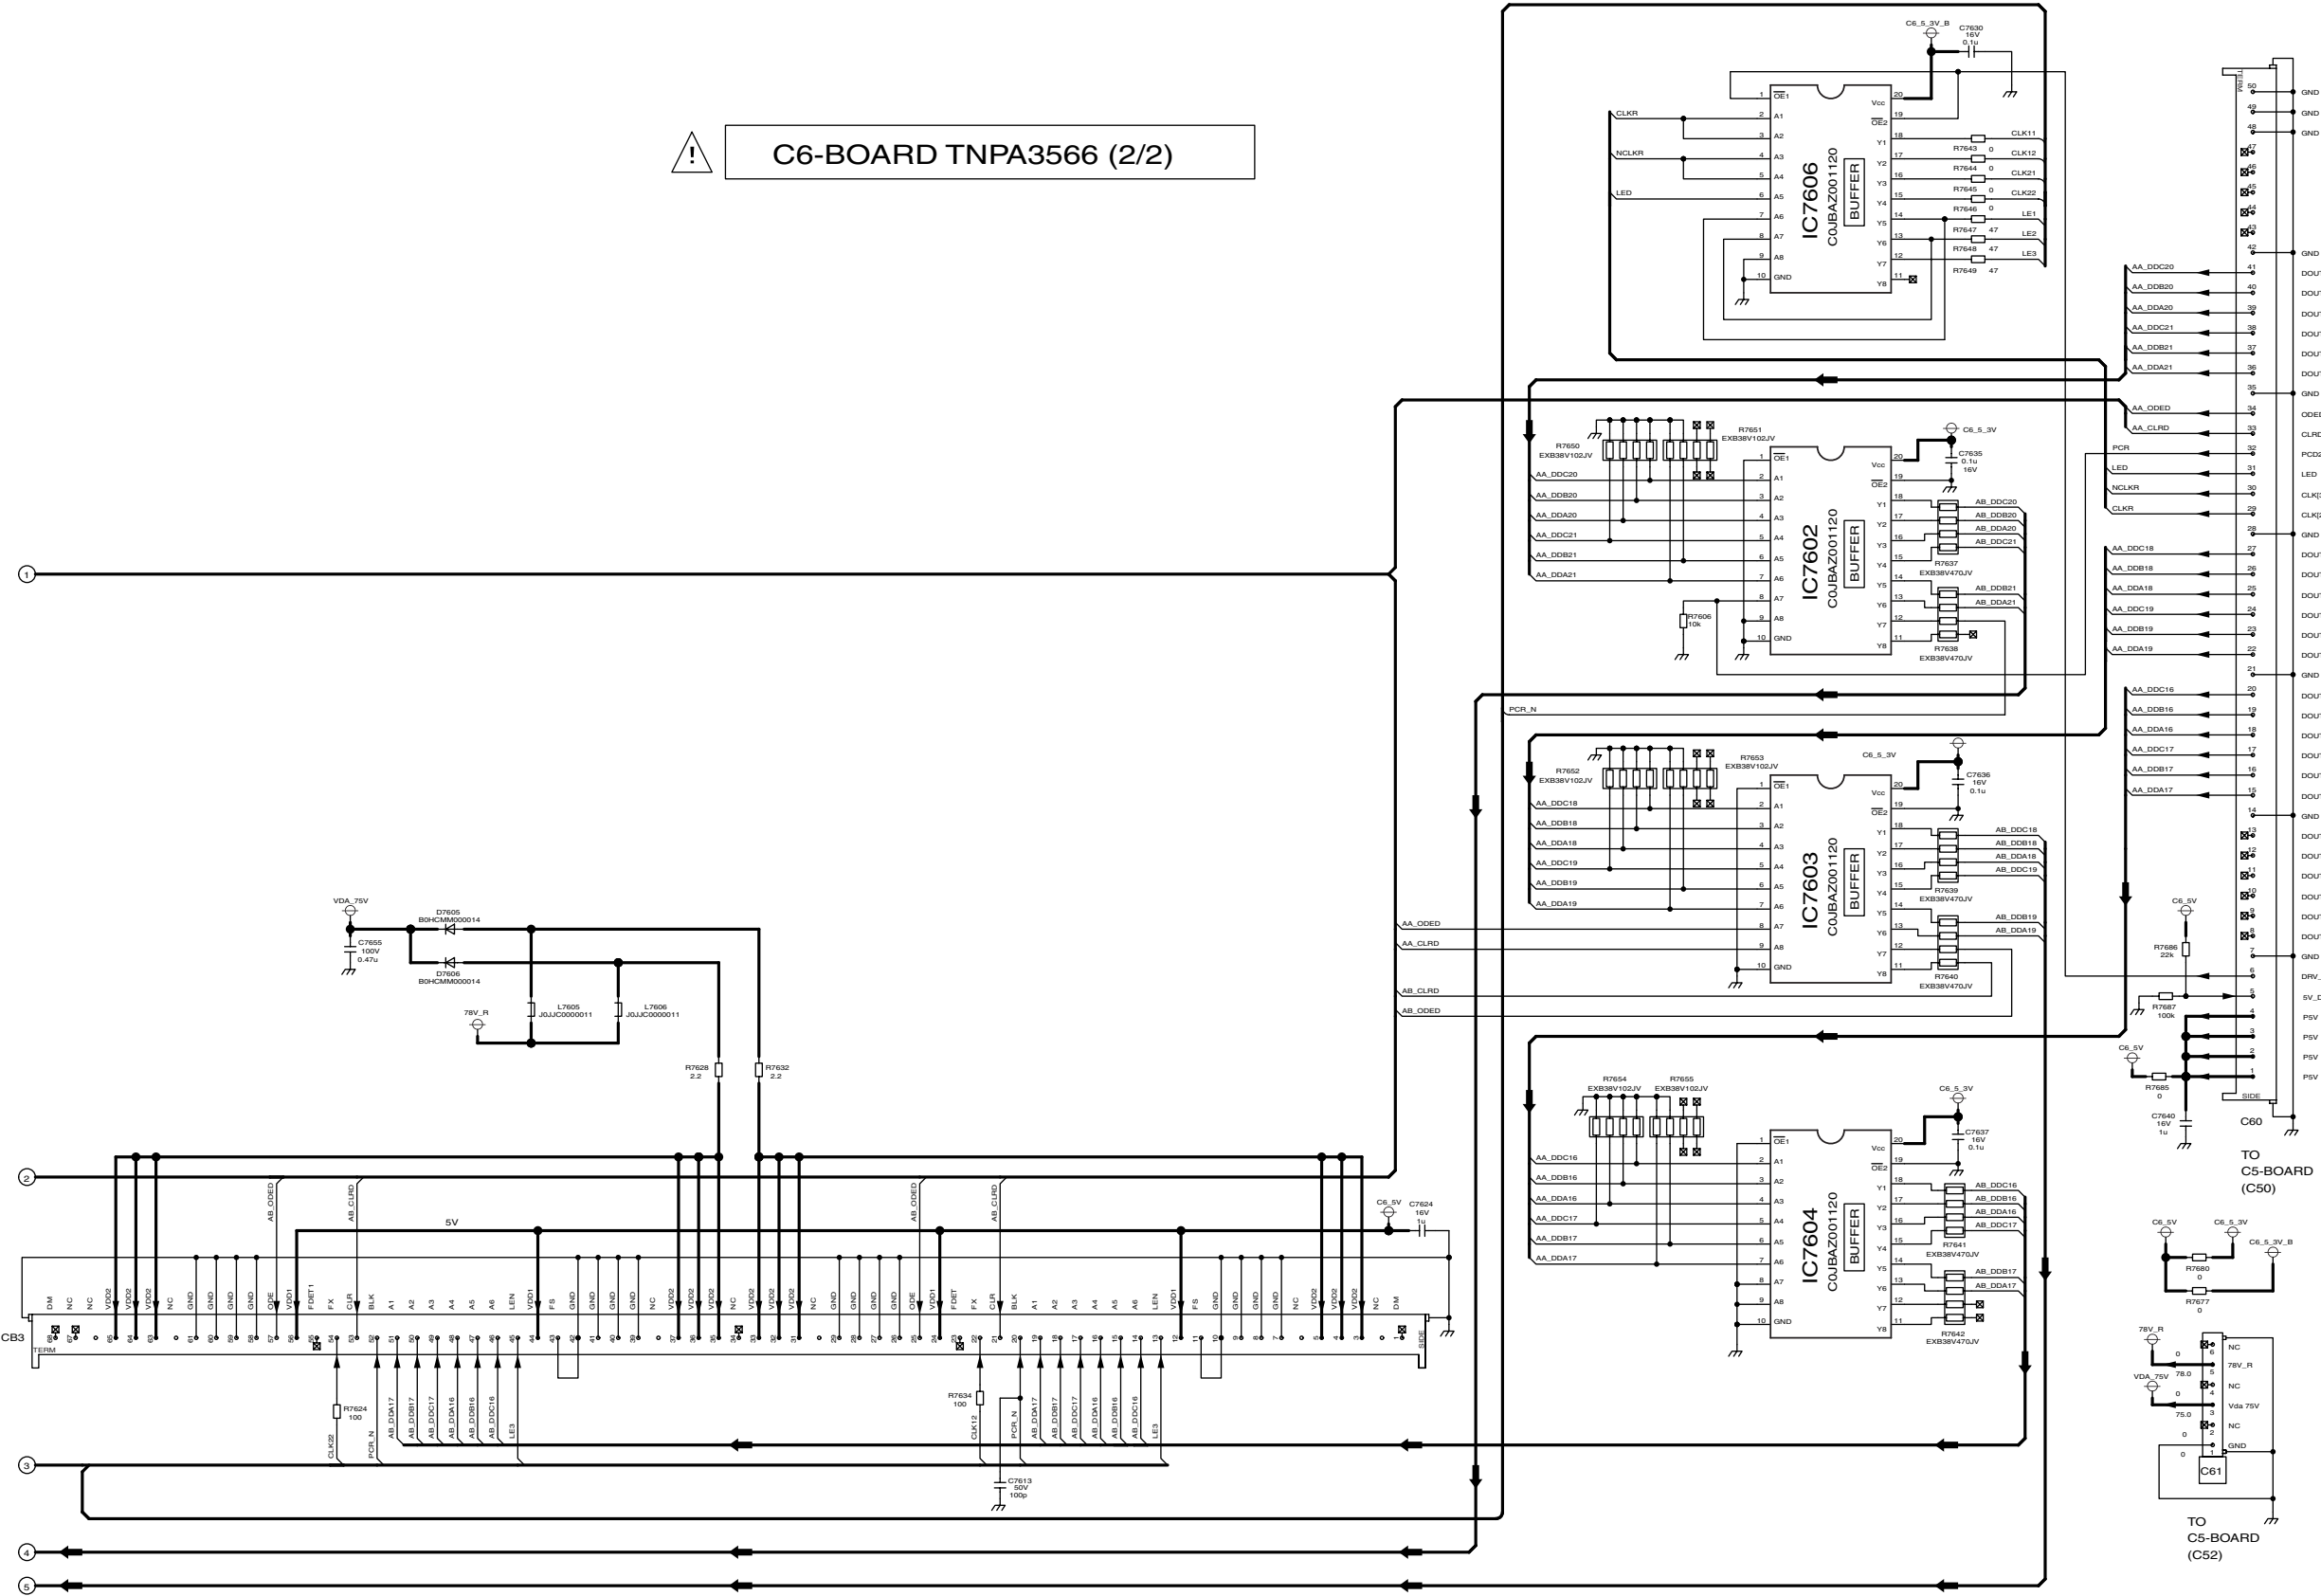

TH-50PX50U
C6-Board (2 of 2) Schematic Diagram


TH-50PX50U
C6-Board (2 of 2) Schematic Diagram

8 9 10 11 12 13 14 15



TH-37PX50U
SC-Board (1 of 2) Schematic Diagram


13.89. SC-Board (2 of 2) Schematic Diagram (37inch)

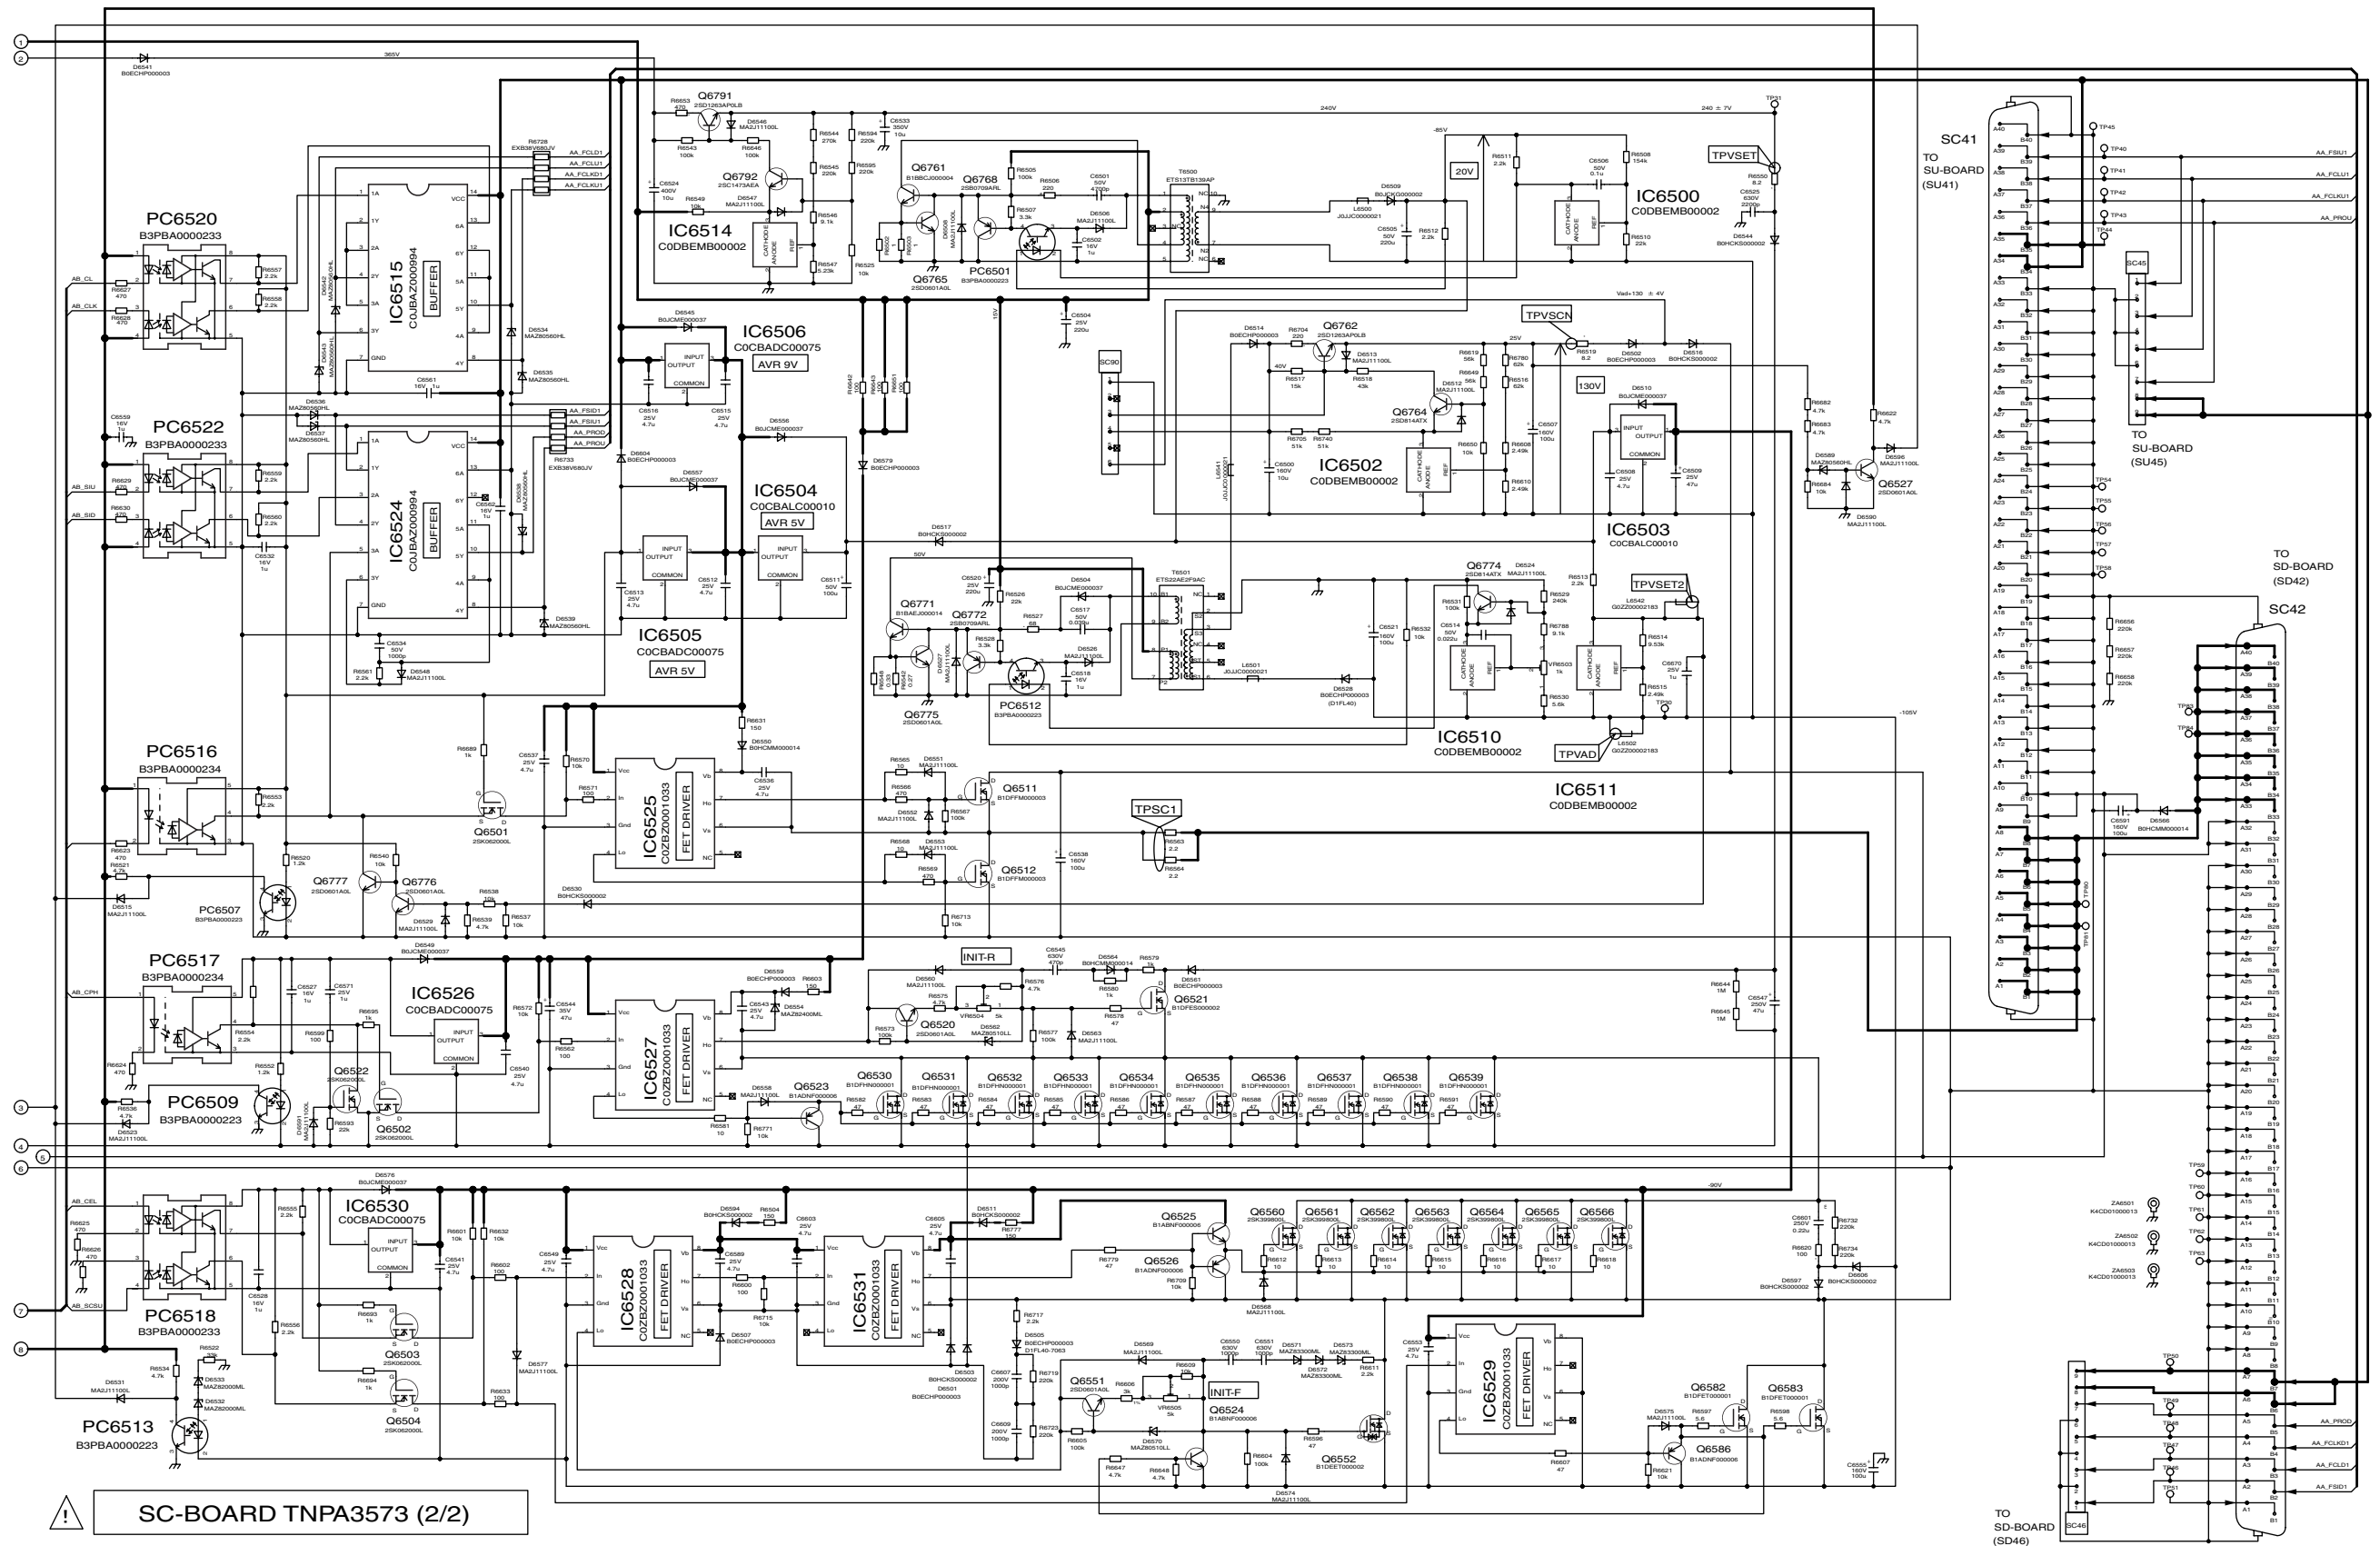TH-37PX50U
SC-Board (2 of 2) Schematic DiagramTH-37PX50U
SC-Board (2 of 2) Schematic Diagram




TH-42PX50U SC-Board Block Diagram

13.91. SC-Board (1 of 2) Schematic Diagram (42inch)

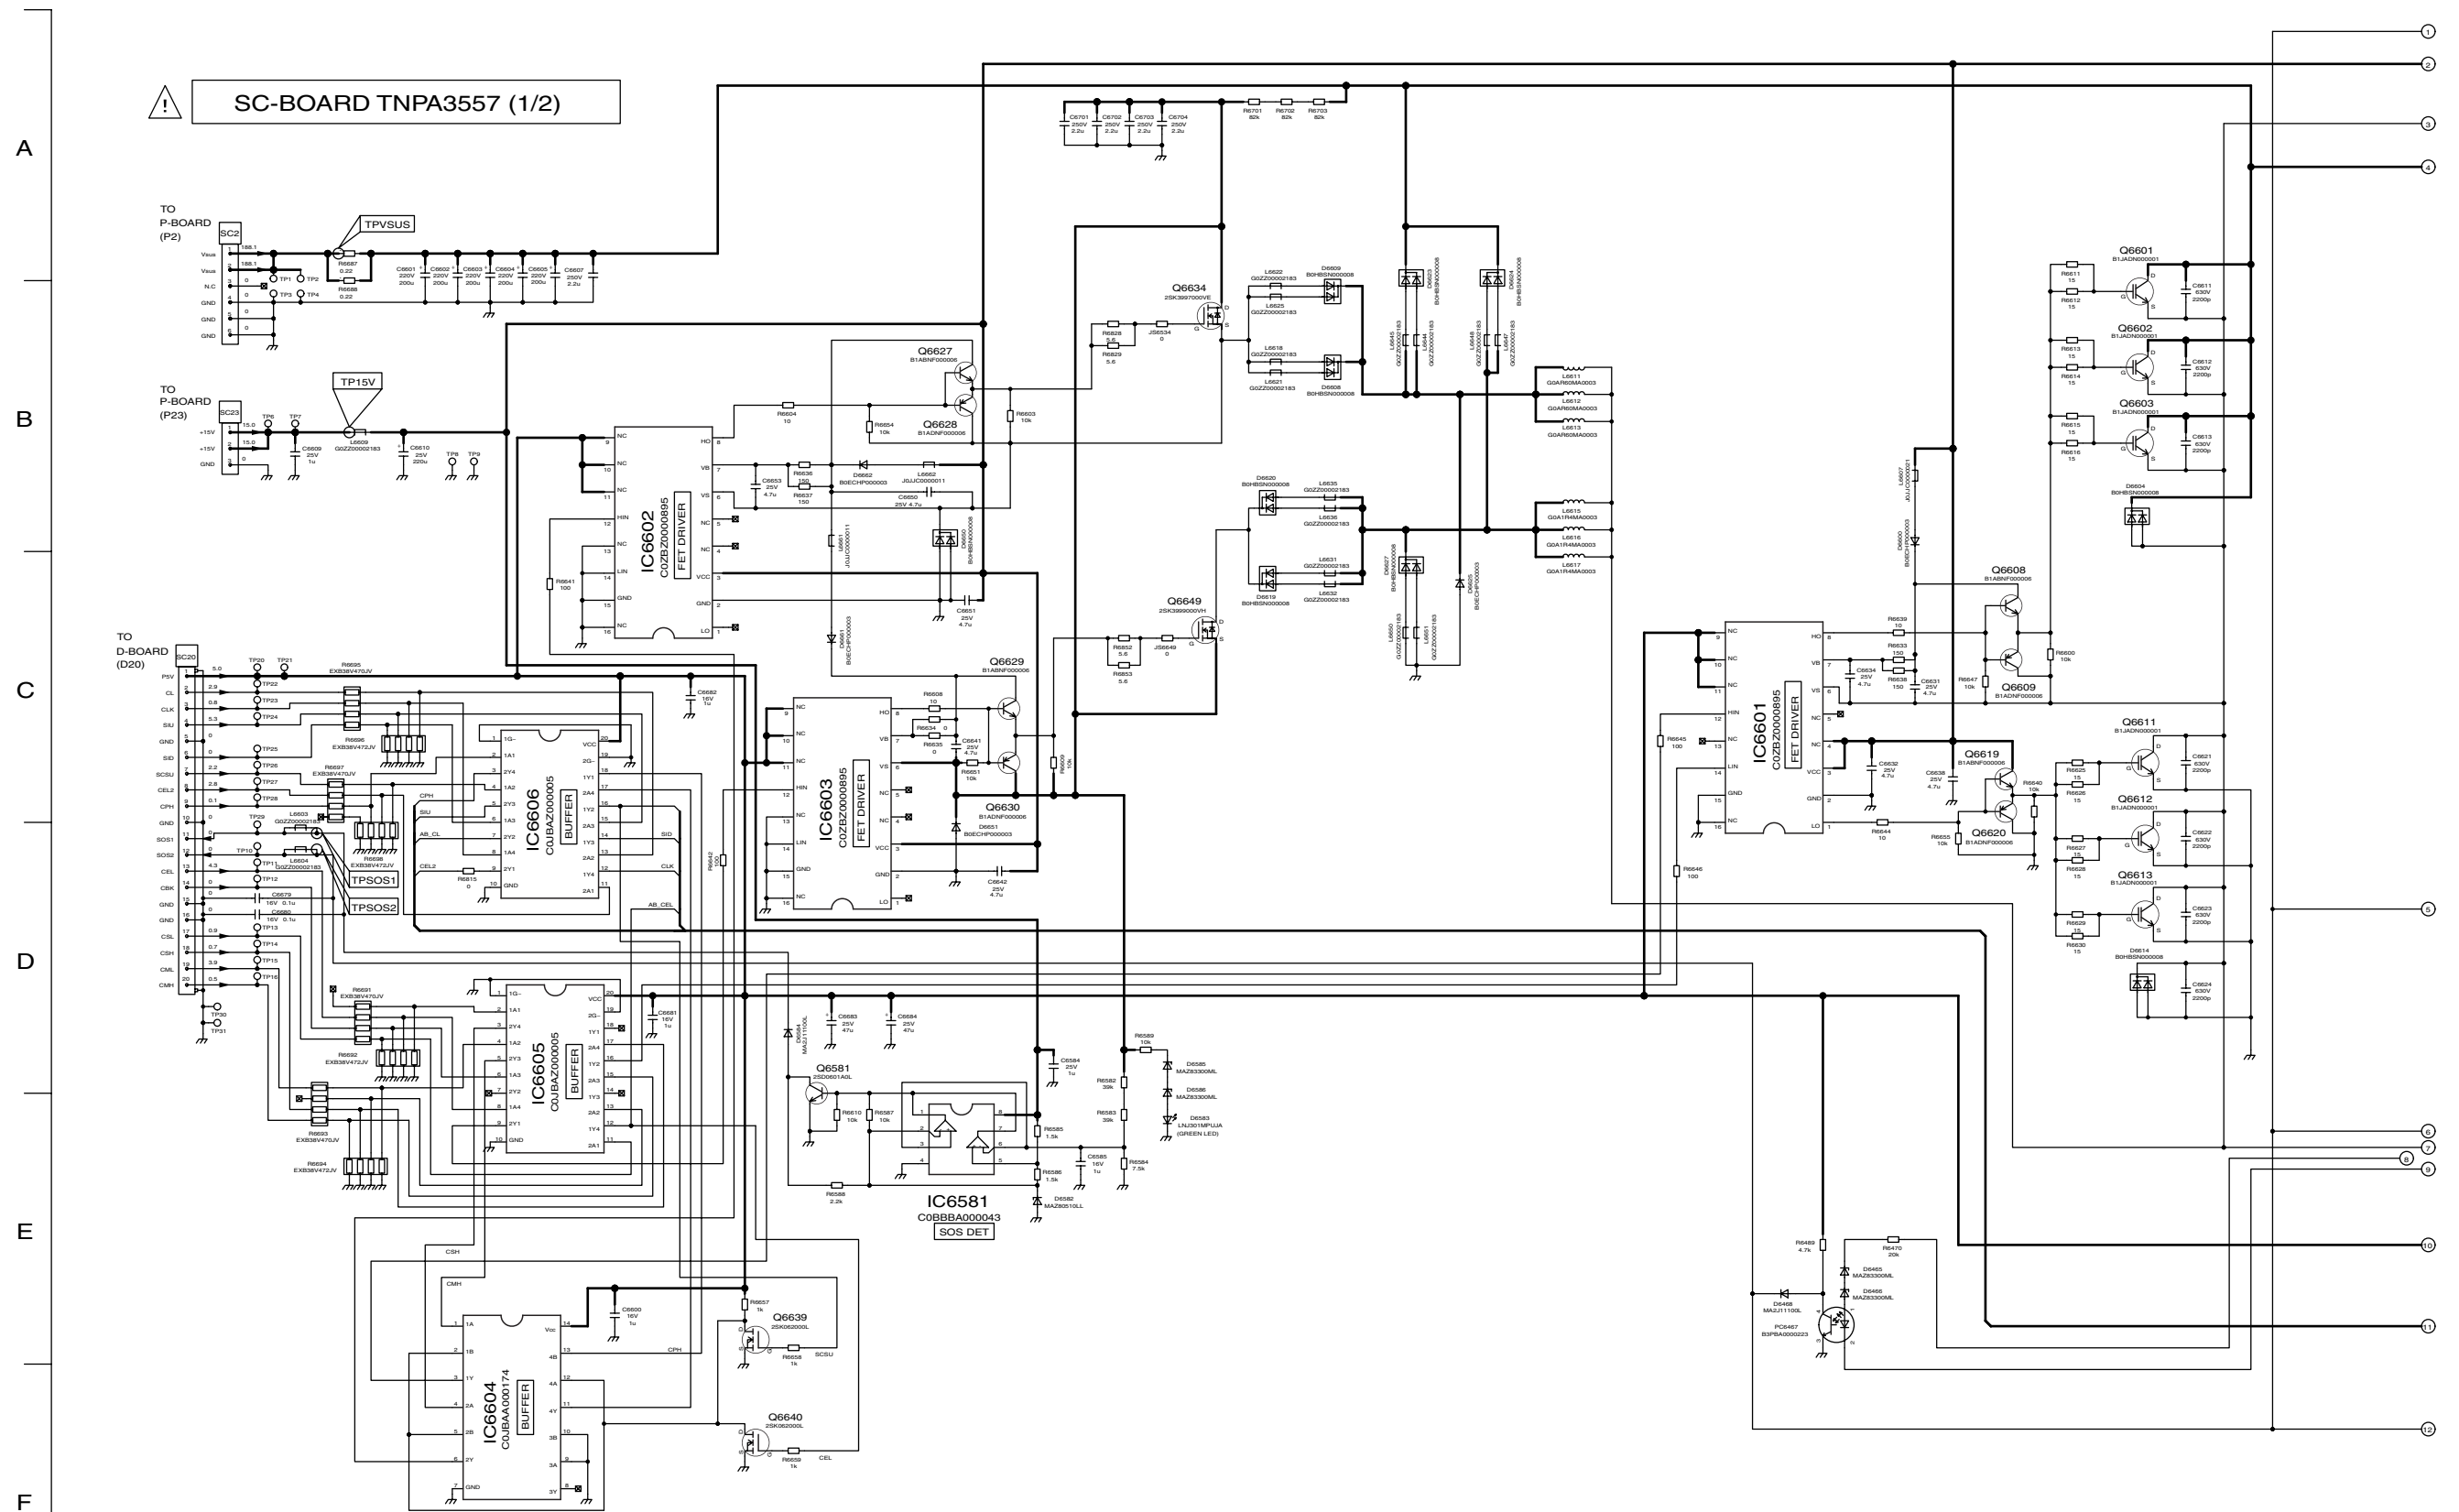

13.92. SC-Board (2 of 2) Schematic Diagram (42inch)

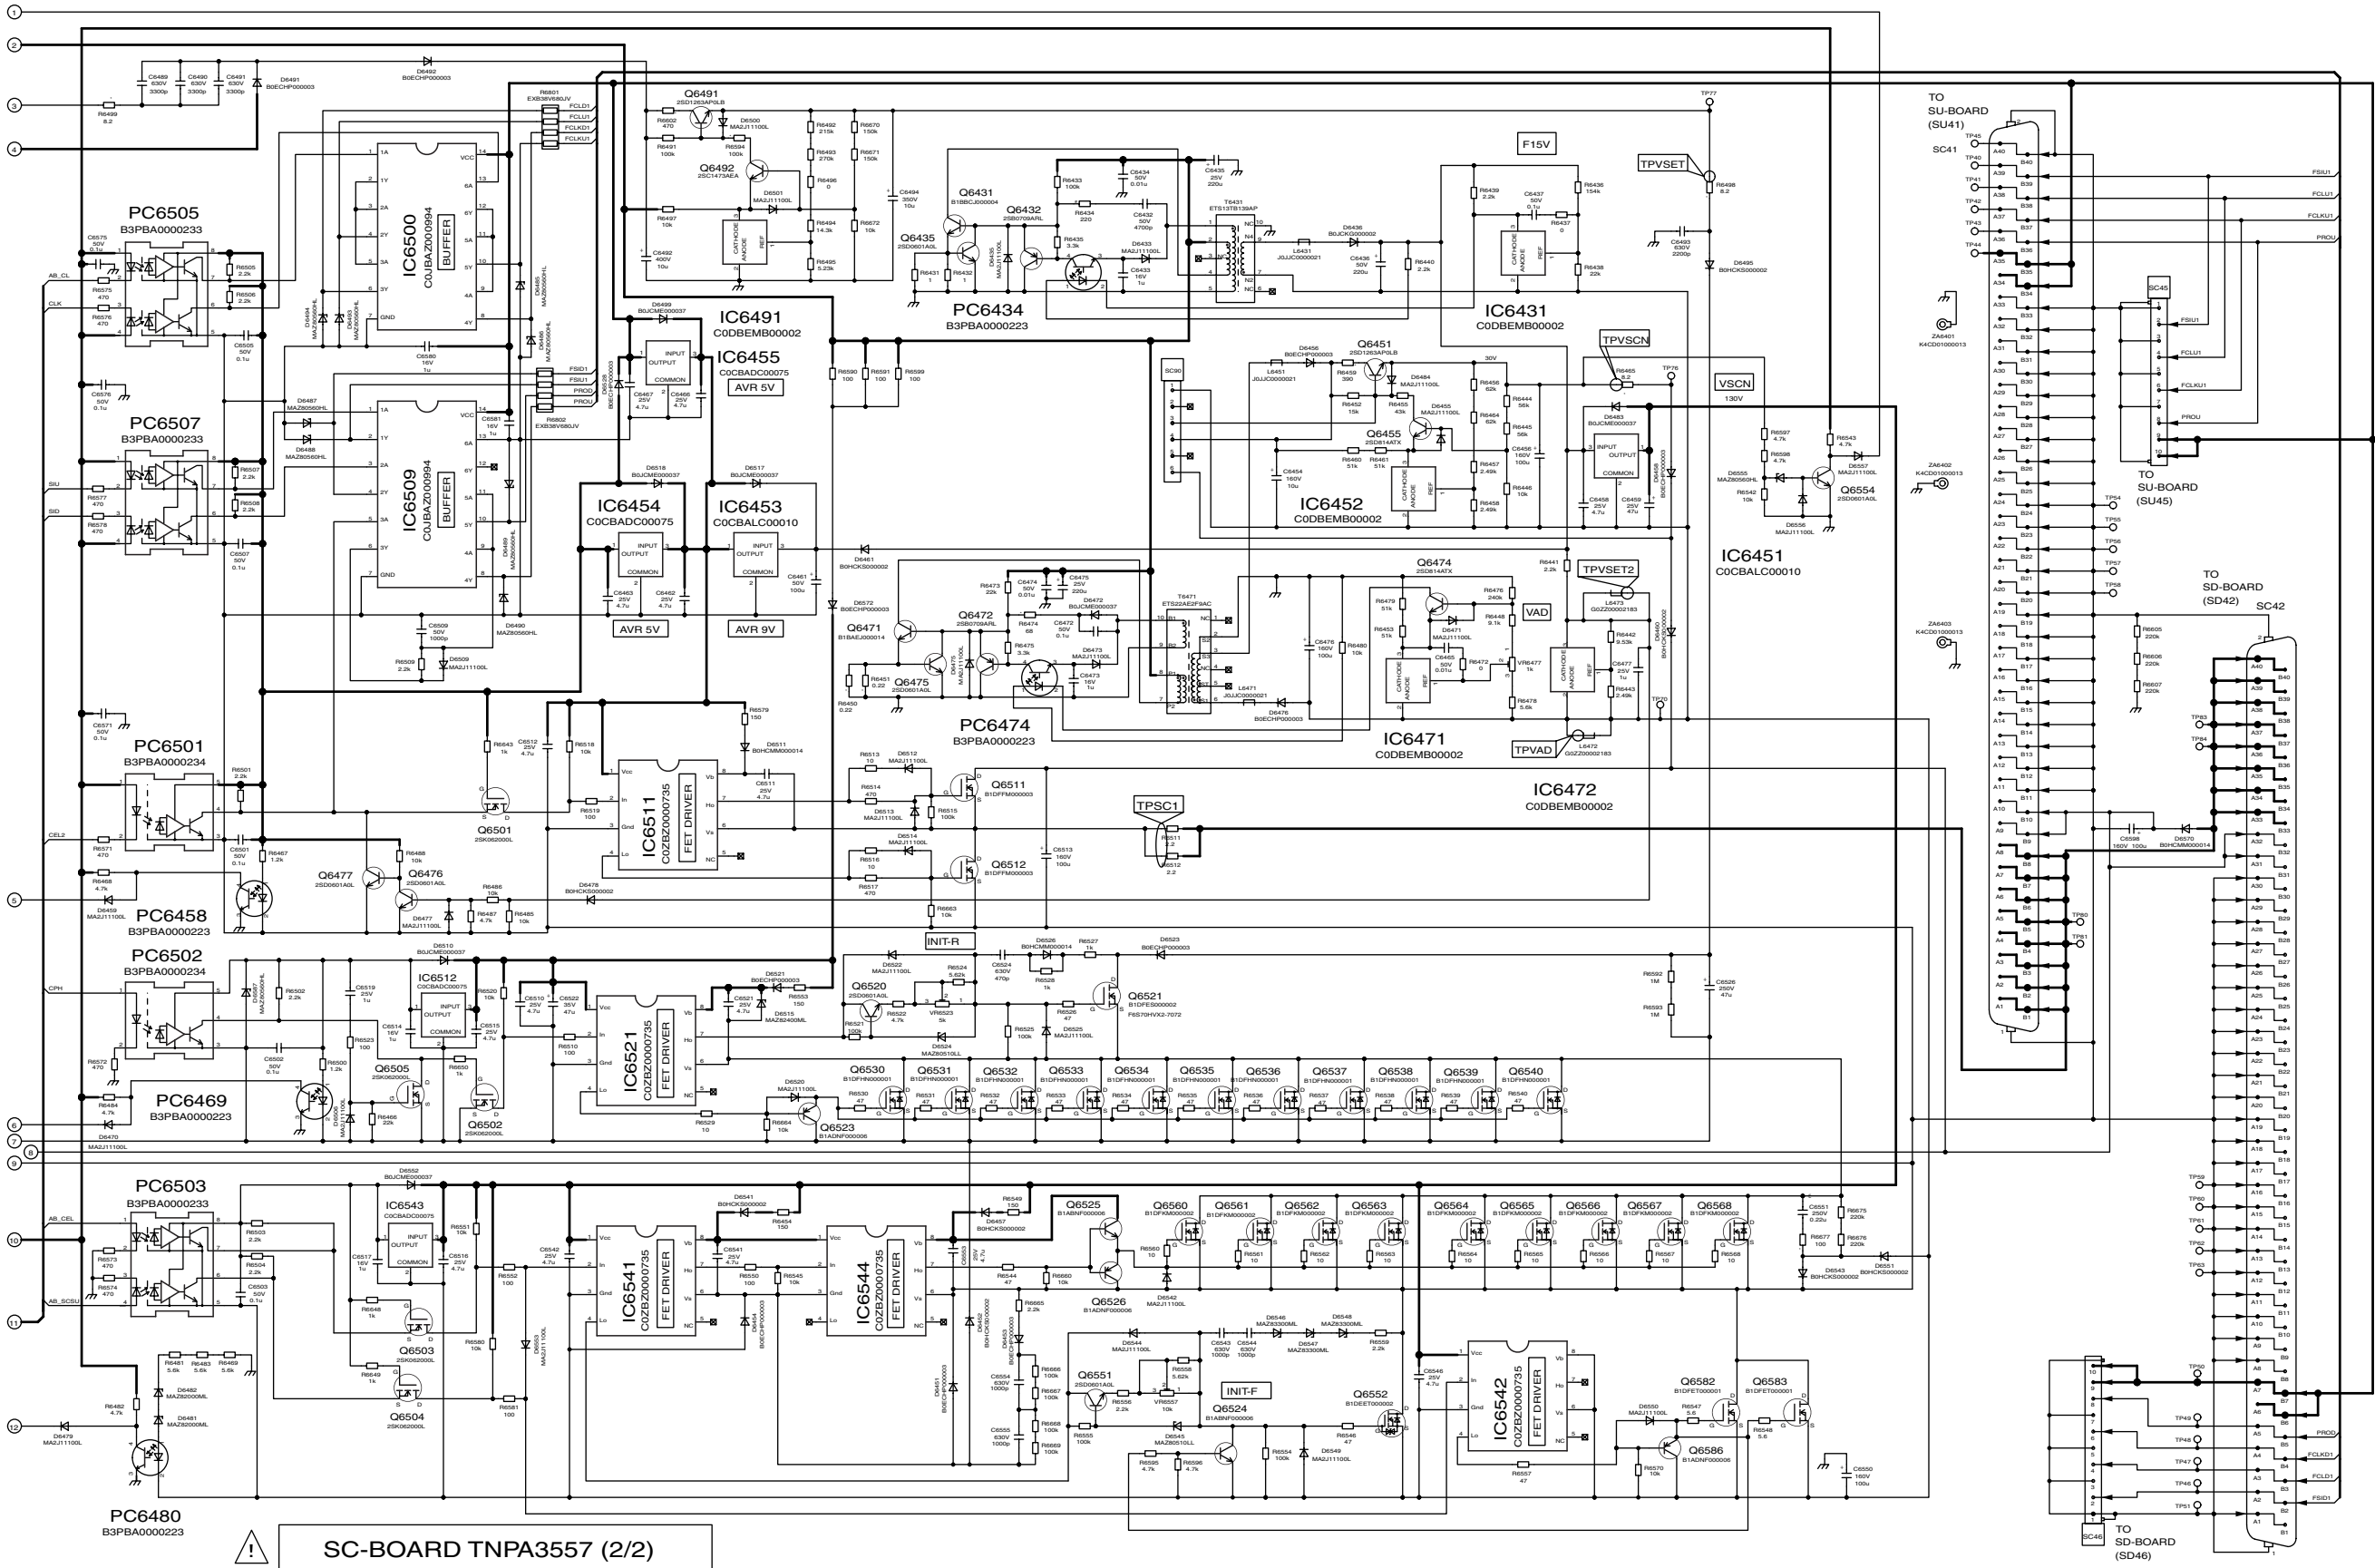


SC-BOARD TNPA3557 (2/2)

TH-42PX50U
SC-Board (2 of 2) Schematic Diagram


TH-42PX50U
SC-Board (2 of 2) Schematic Diagram






TH-50PX50U
SC-Board (1 of 2) Schematic Diagram

13.95. SC-Board (2 of 2) Schematic Diagram (50inch)

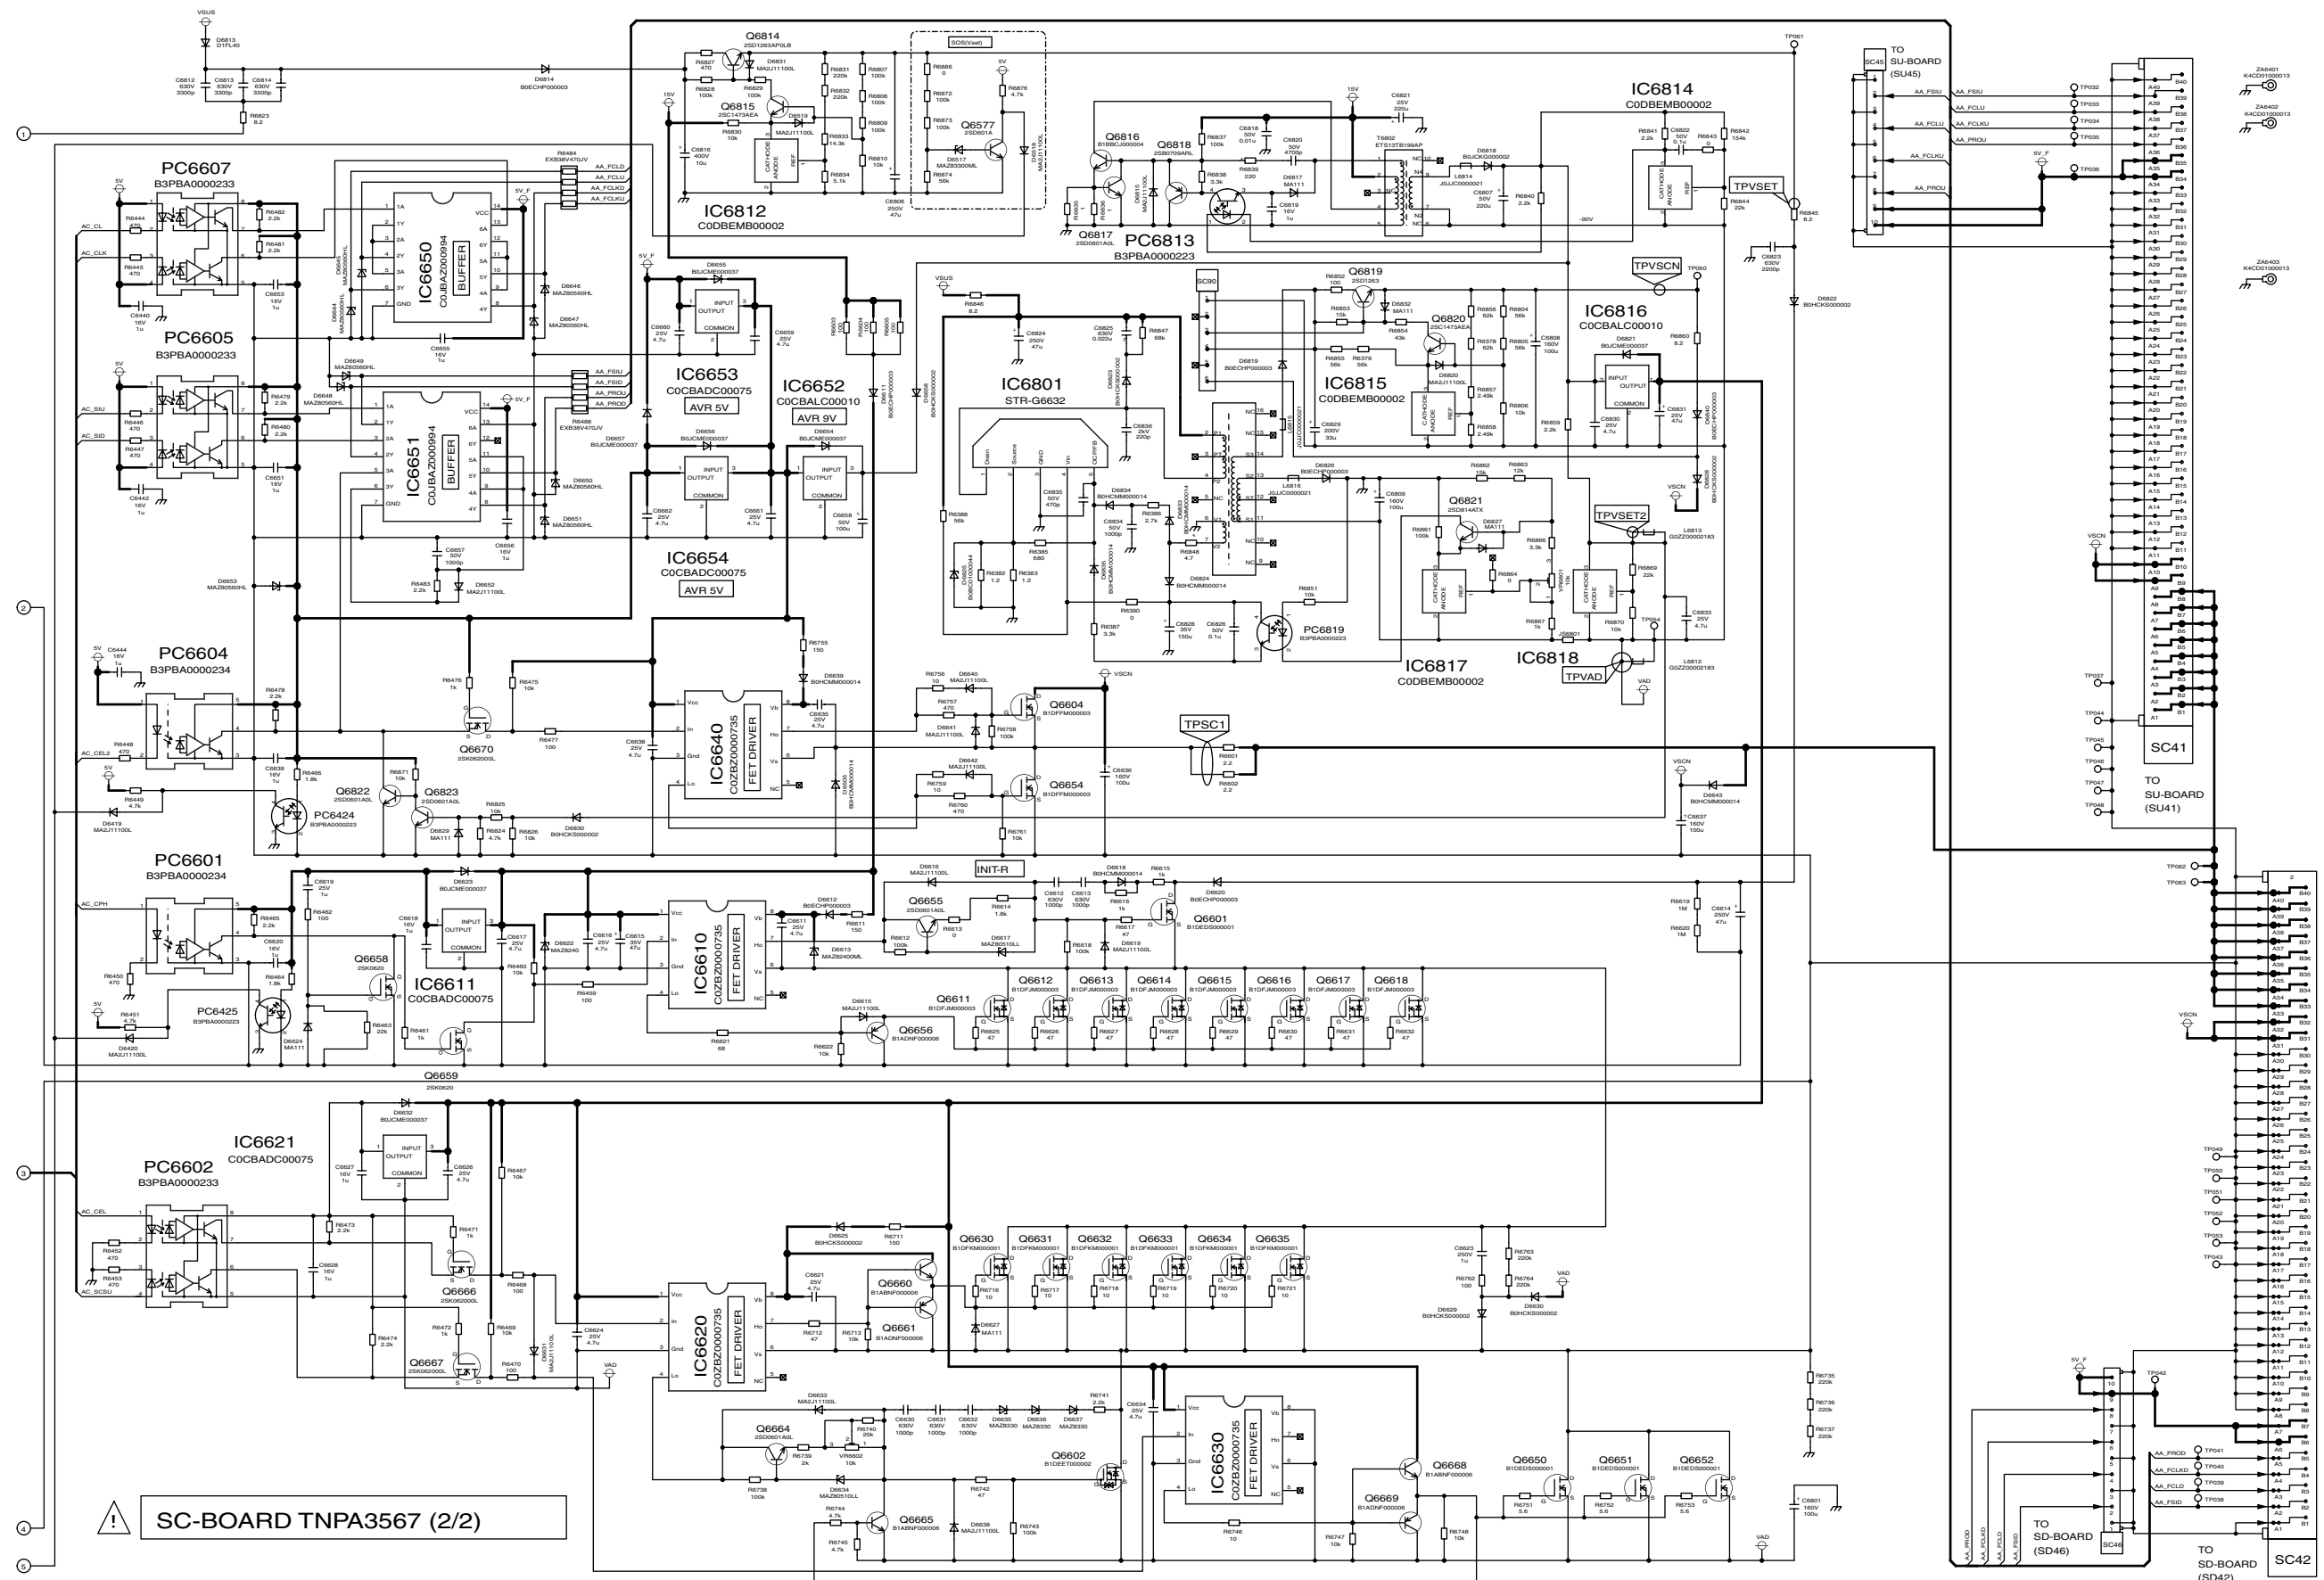

TH-50PX50U SC-Board (2 of 2) Schematic Diagram

13.96. SU-Board Block Diagram (37inch)

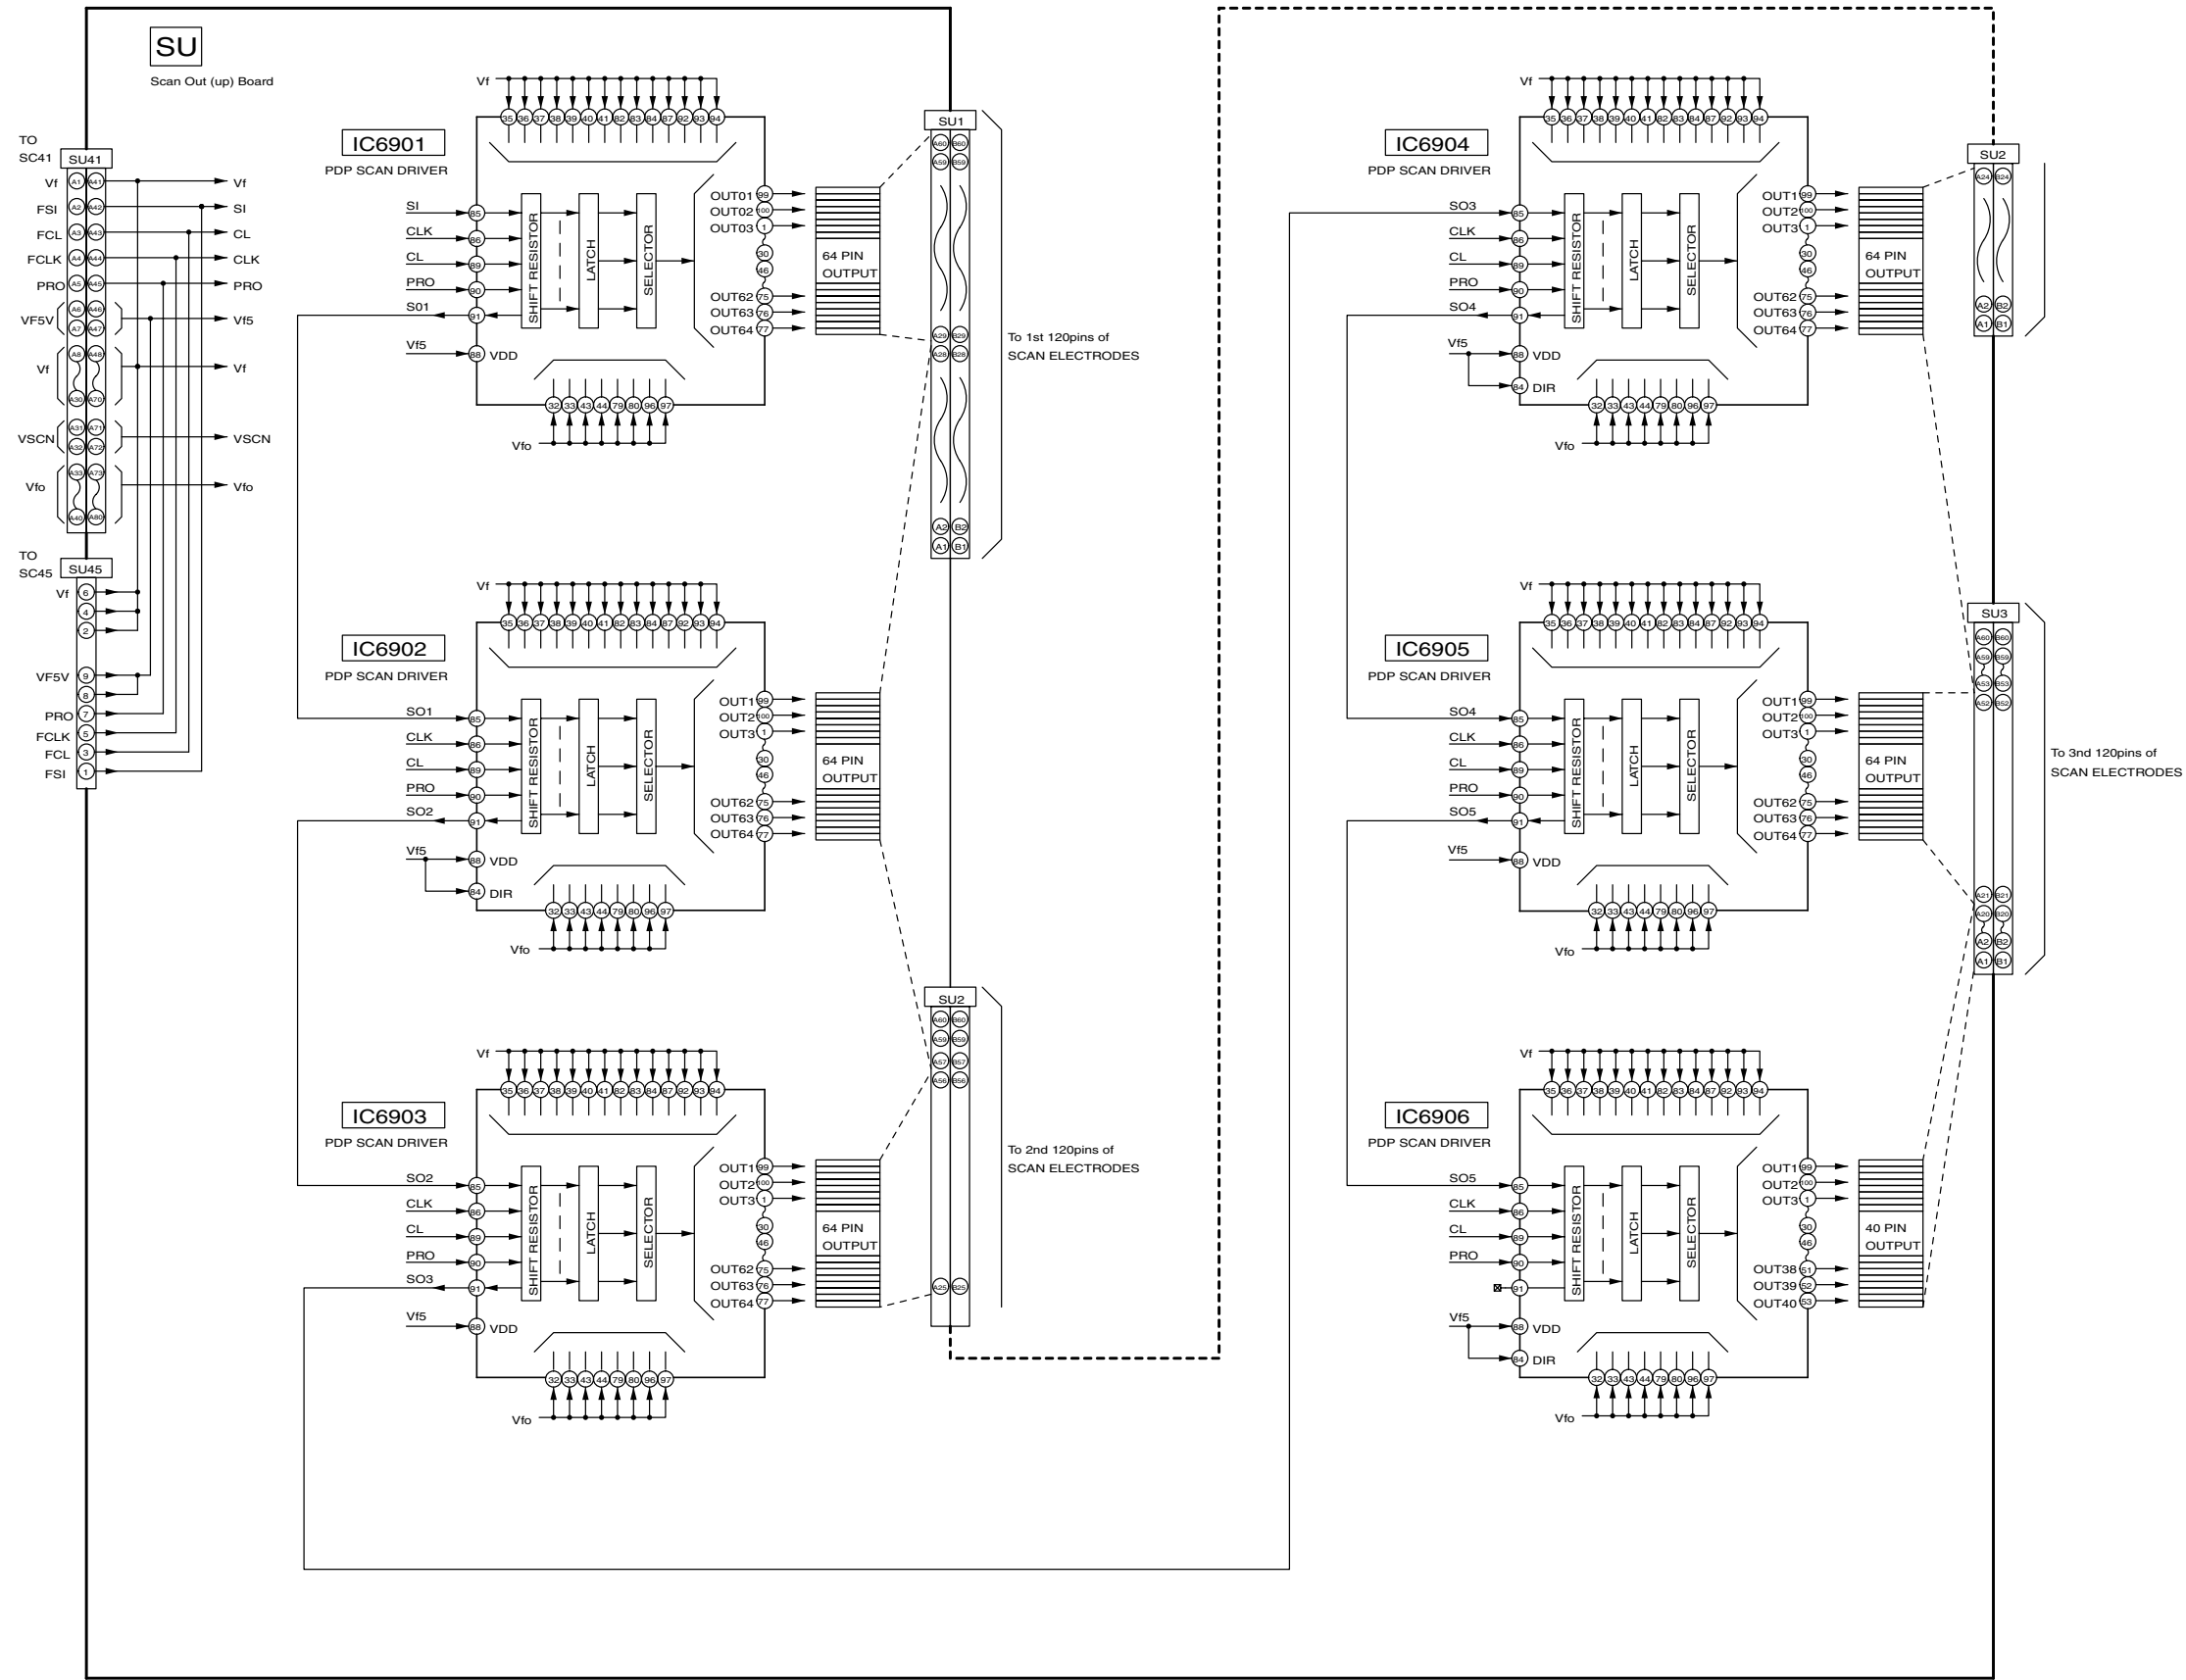

TH-37PX50U
SU-Board Block Diagram

TH-37PX50U
SU-Board Block Diagram

13.97. SU-Board (1 of 2) Schematic Diagram (37inch)

A


B


C

D


E

F

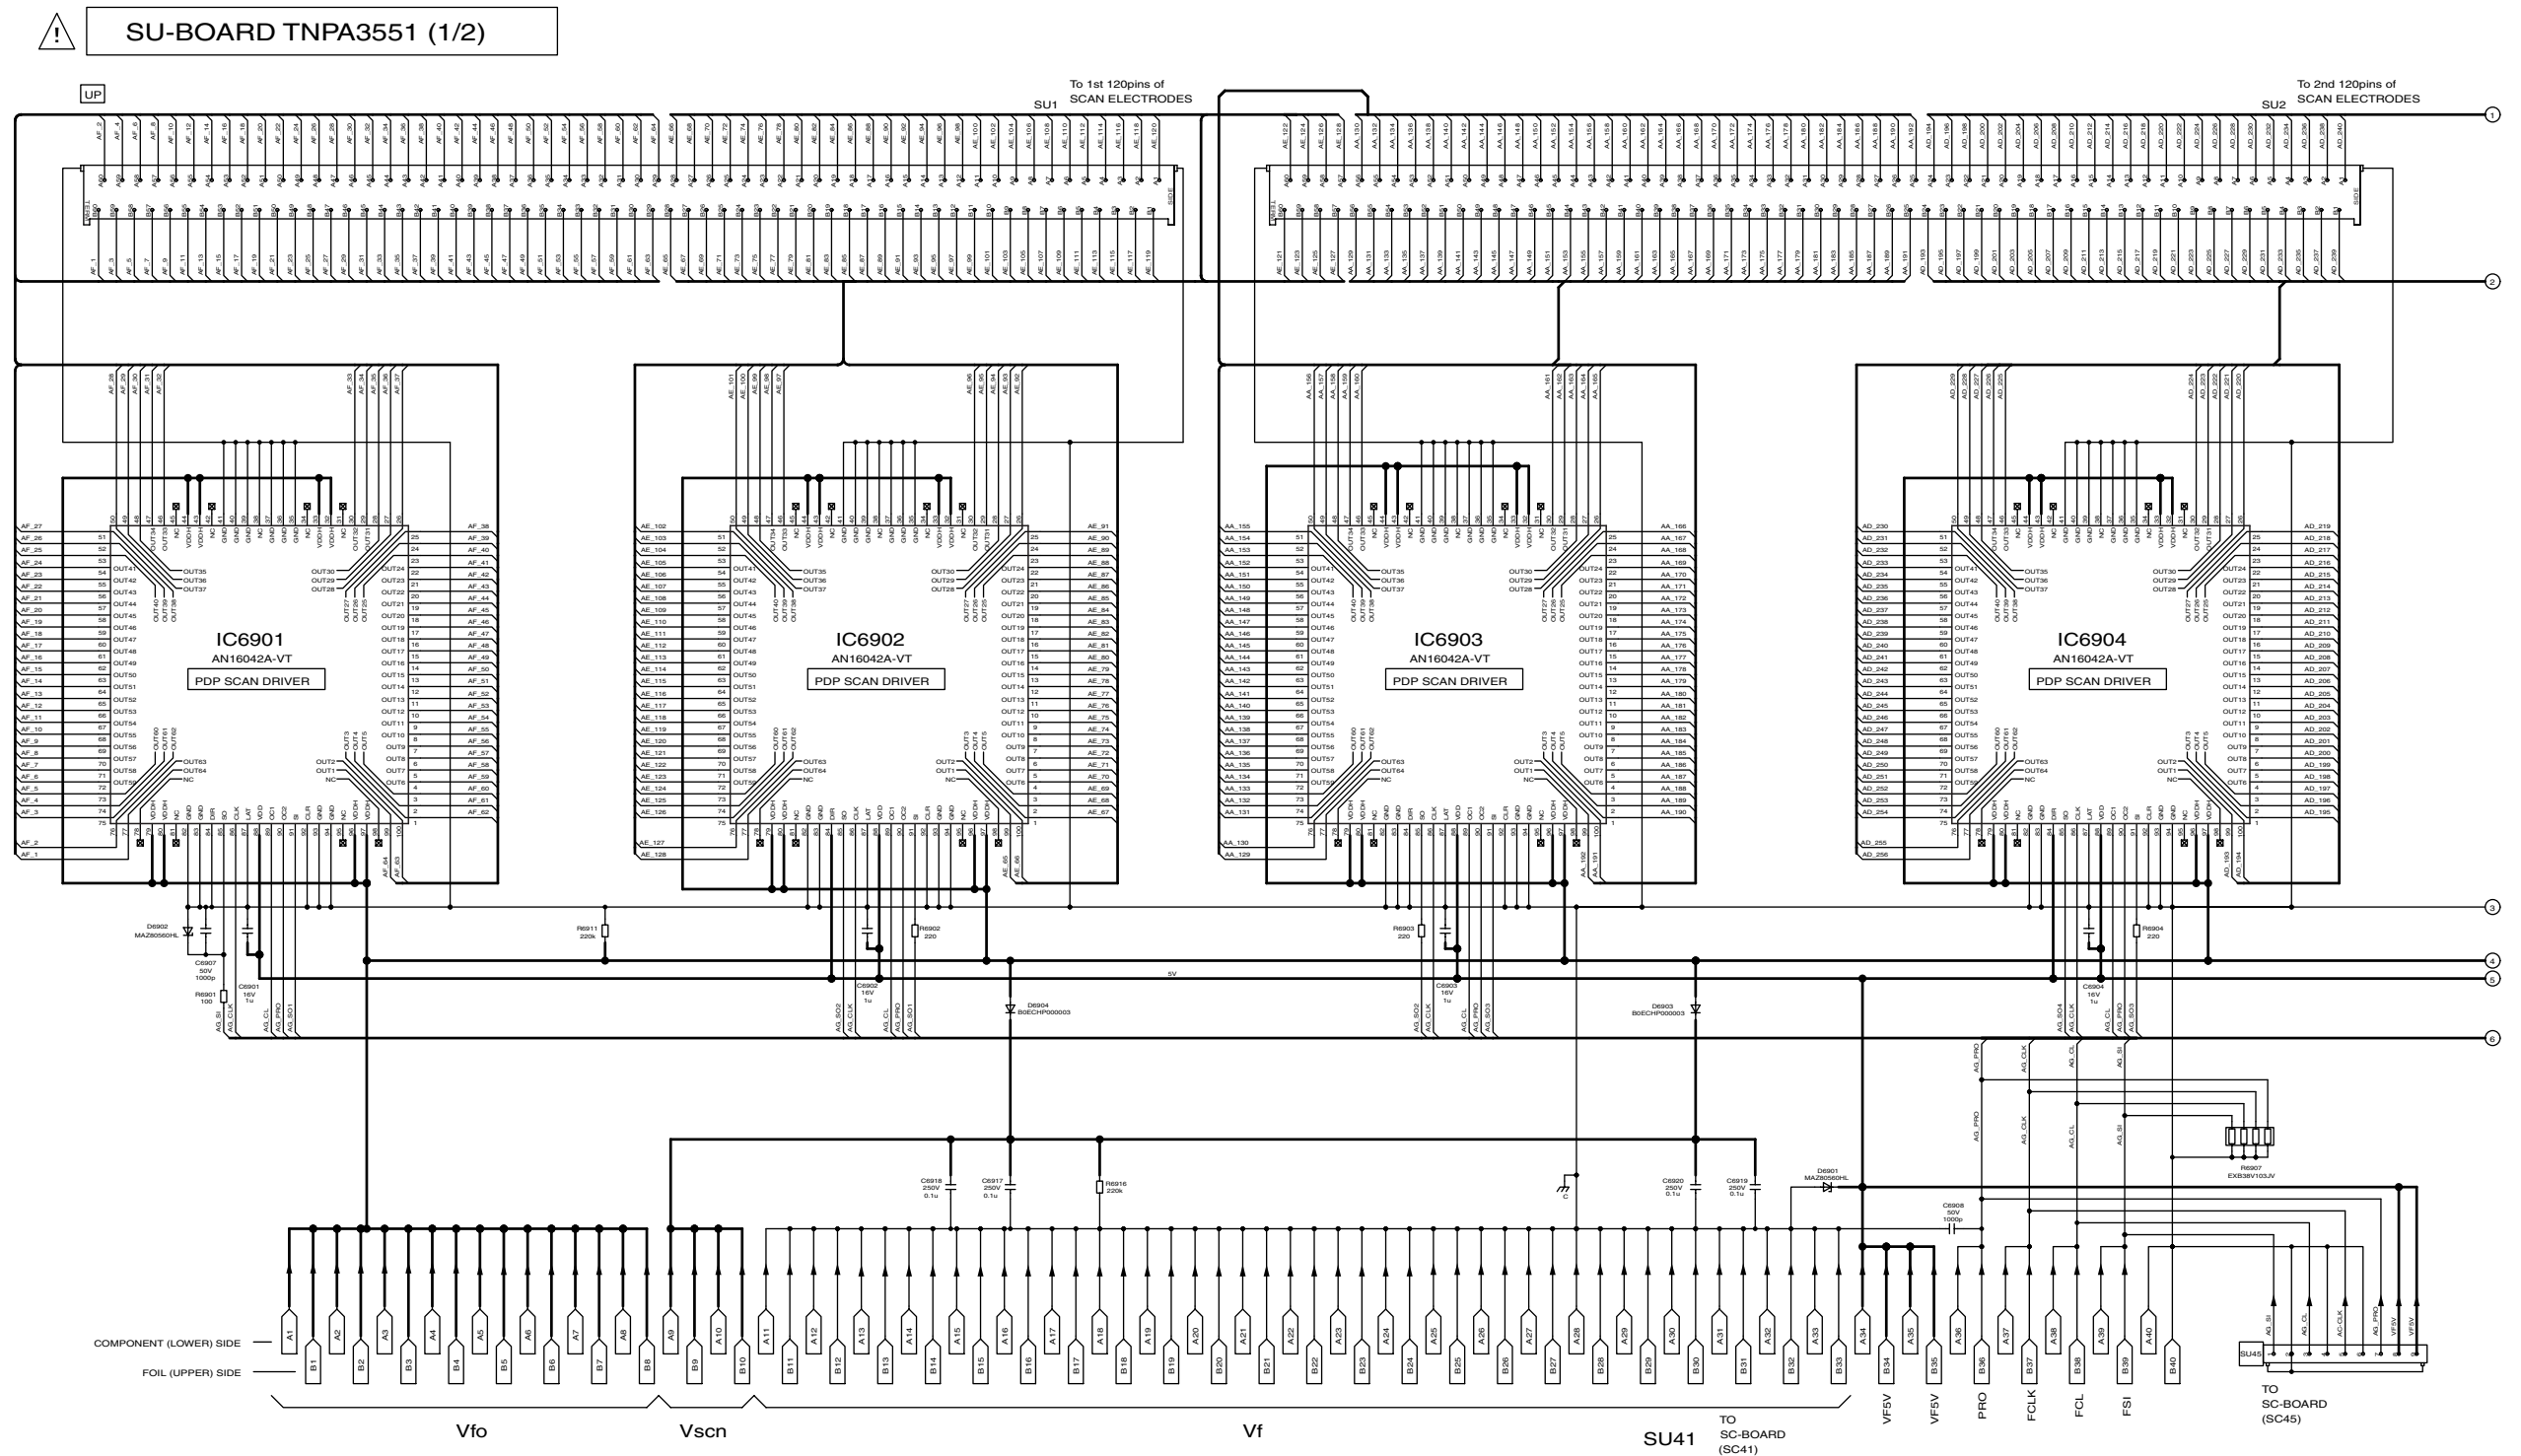




13.99. SU-Board Block Diagram (42, 50inch)

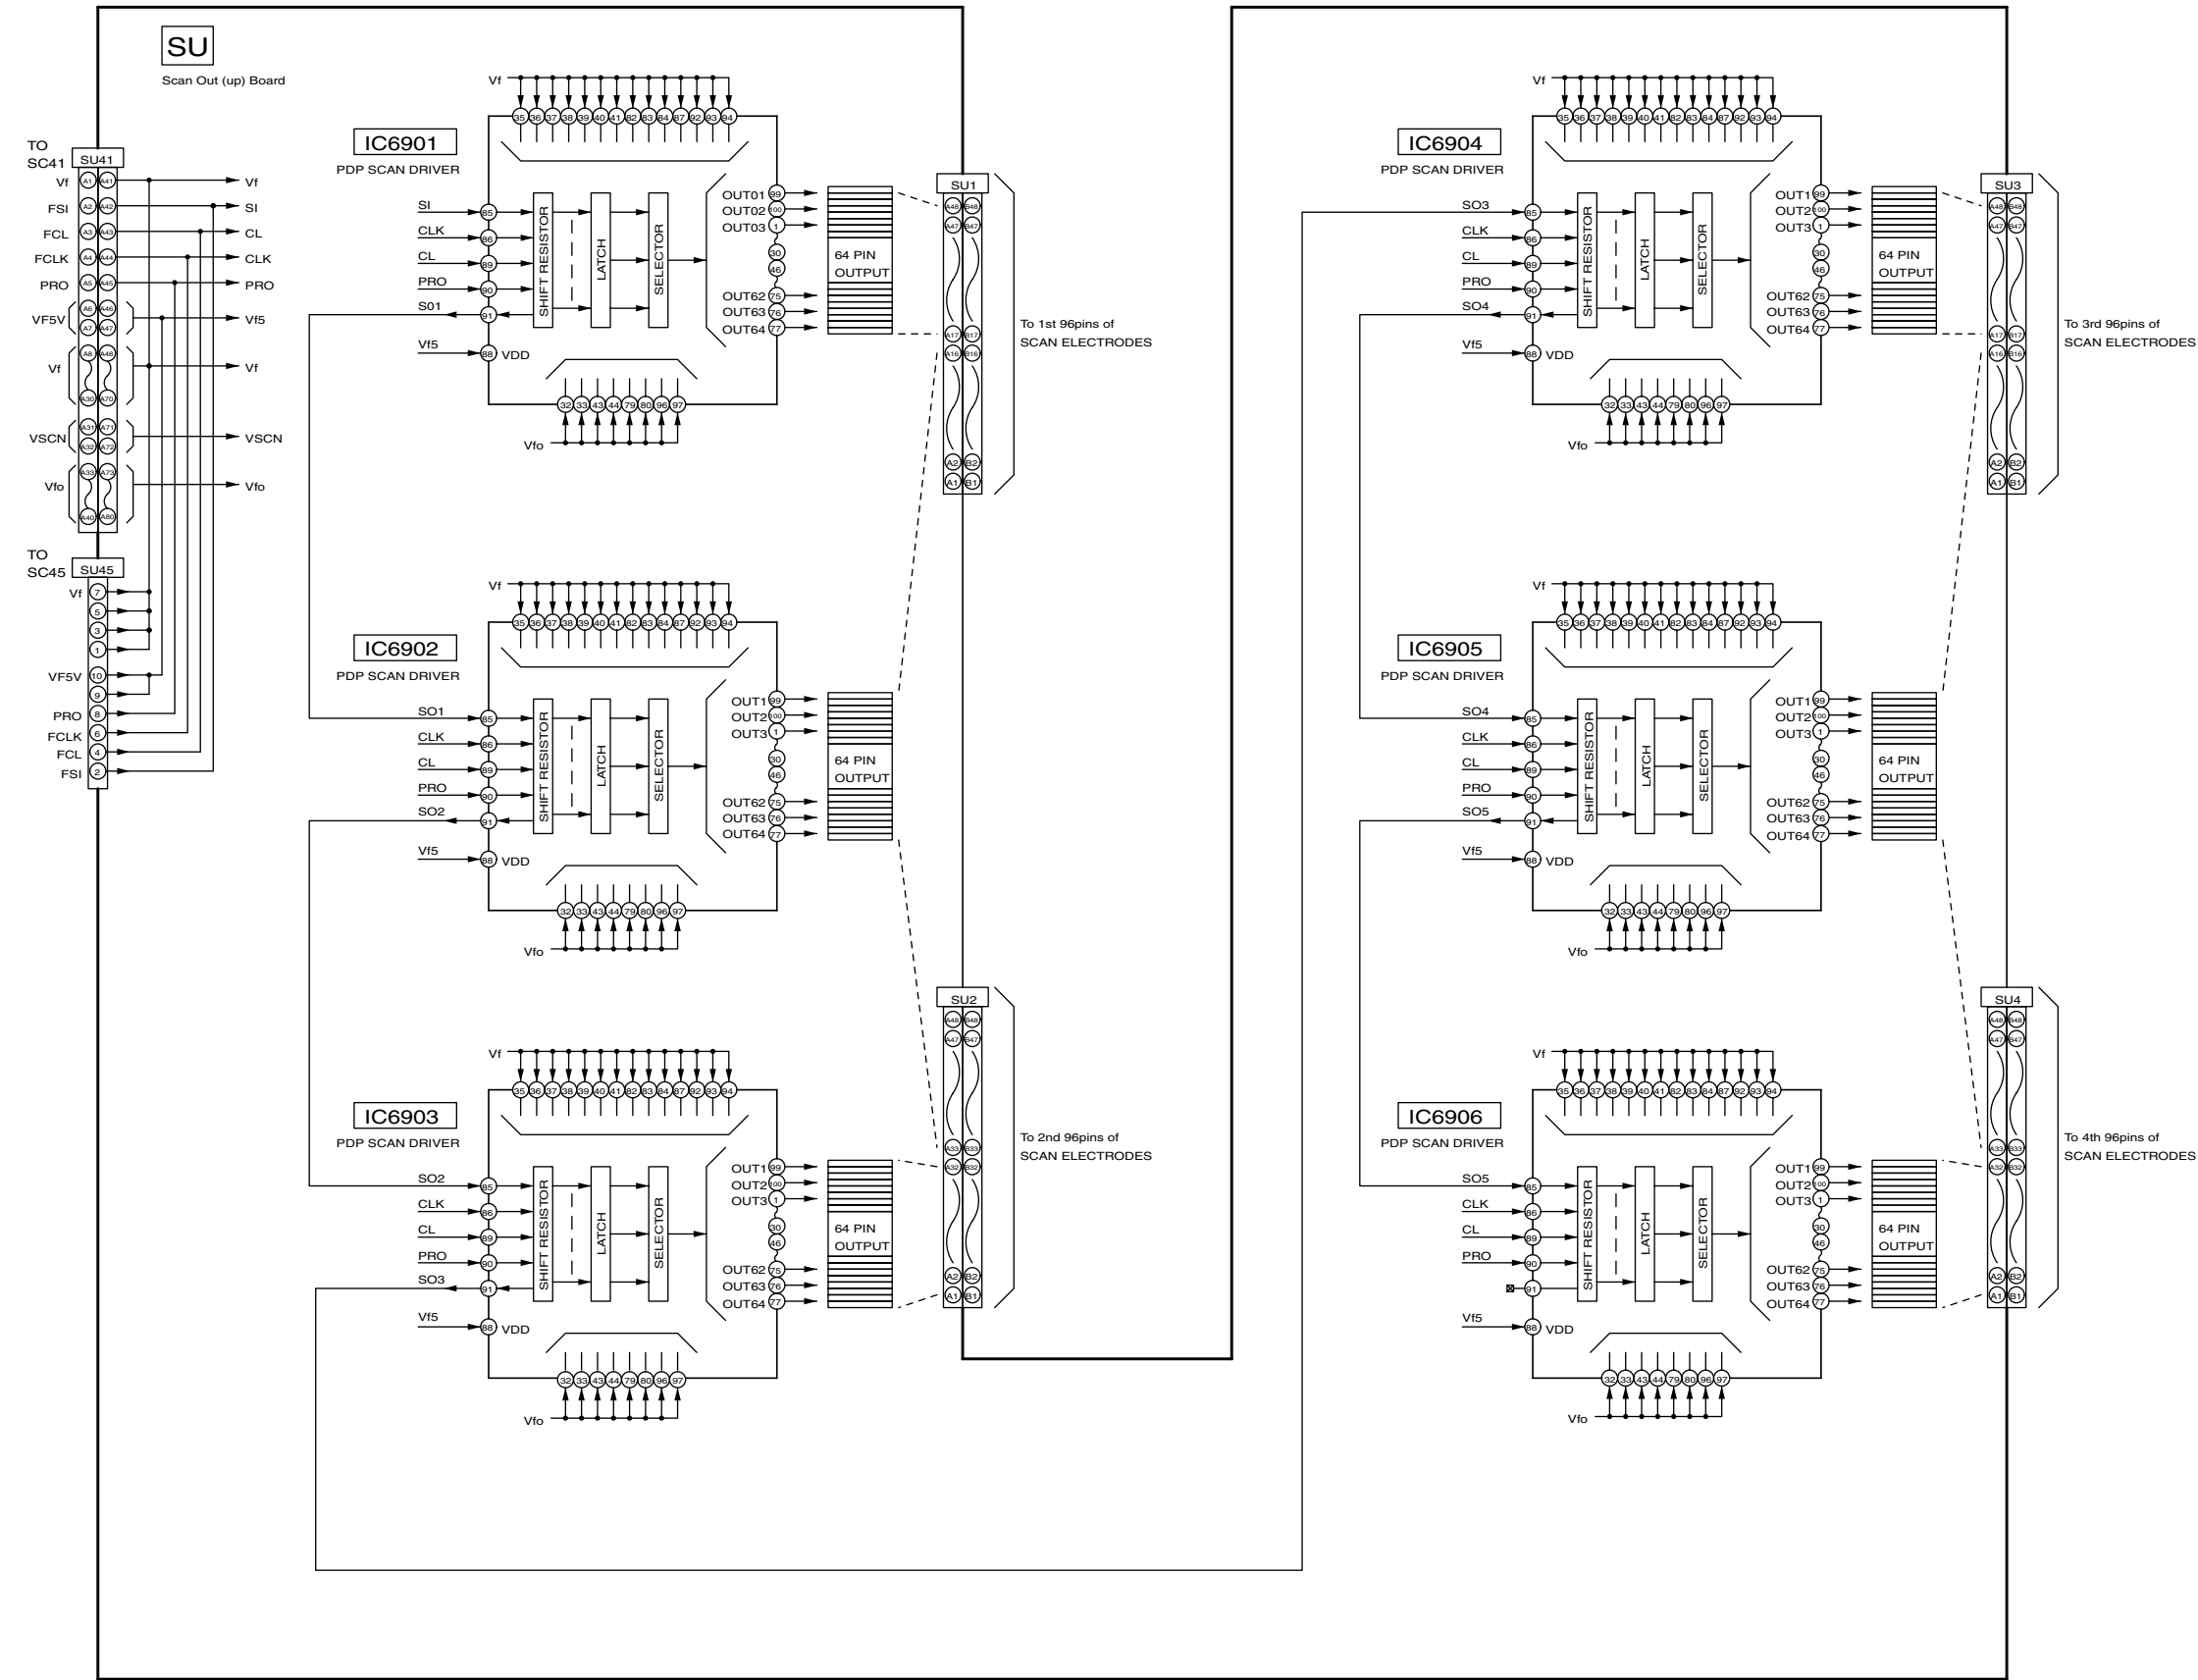


TH-42/50PX50U
SU-Board Block Diagram

TH-42/50PX50U
SU-Board Block Diagram


13.100. SU-Board (1 of 2) Schematic Diagram (42inch)

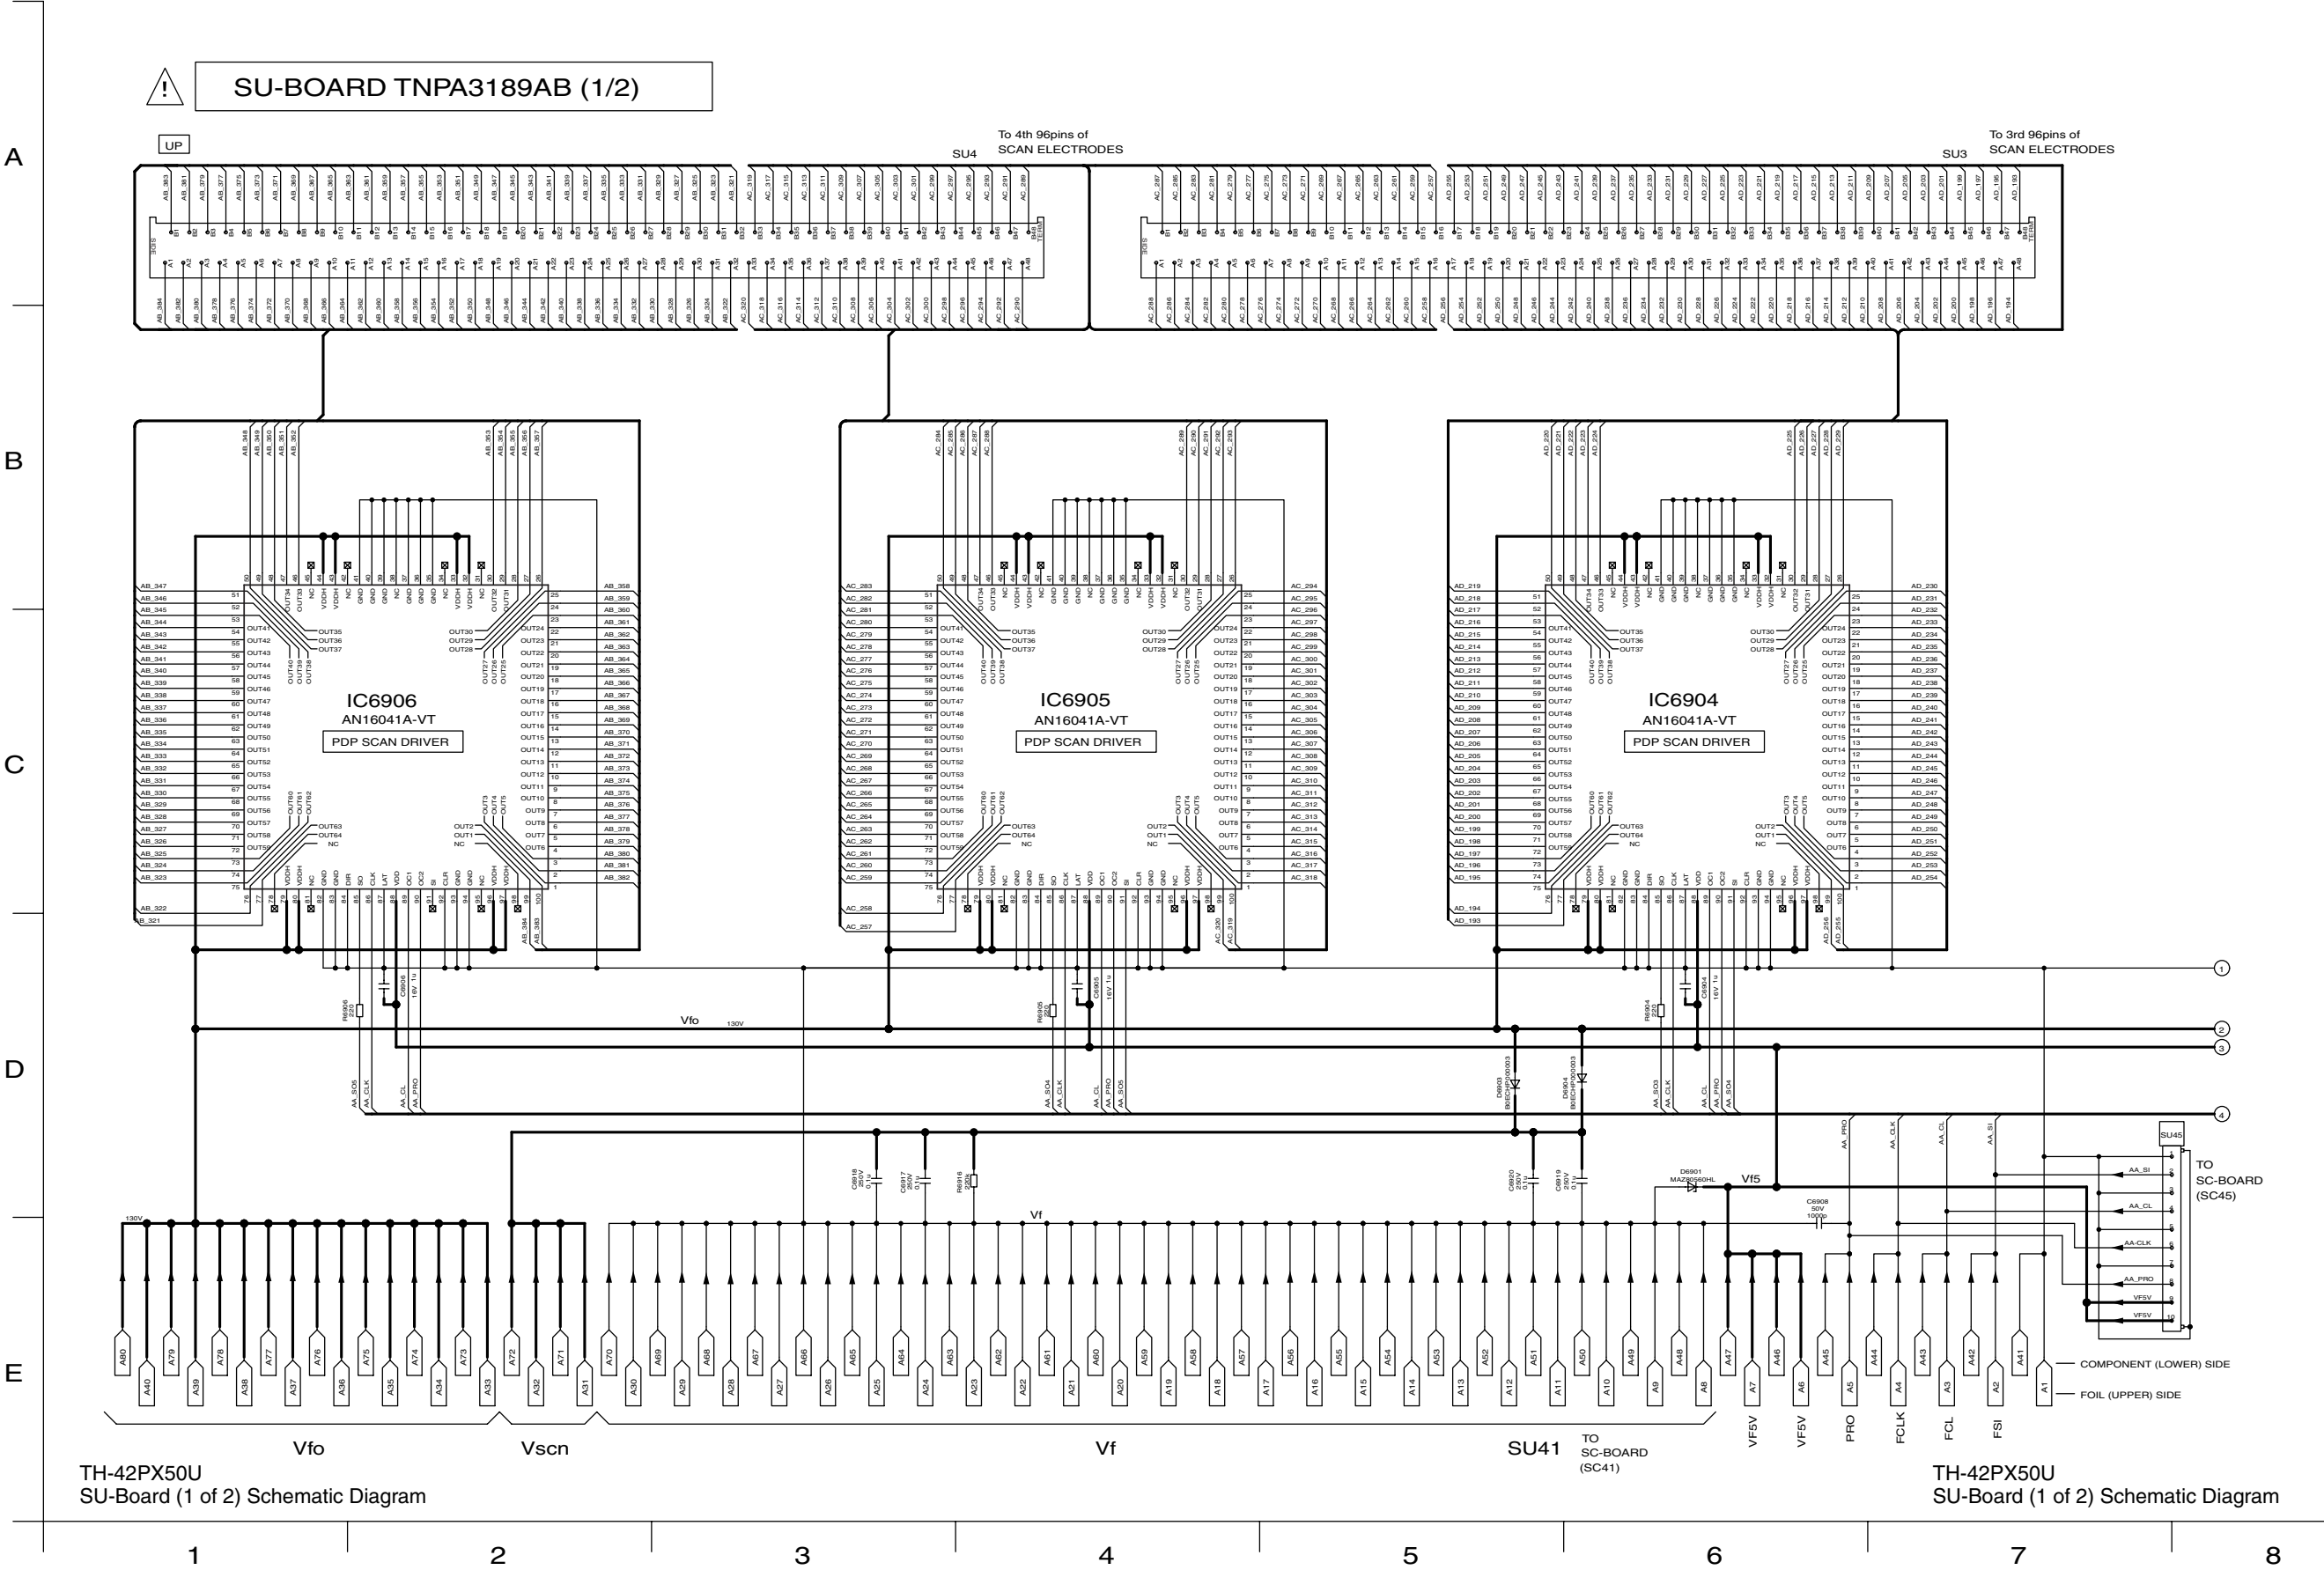


13.101. SU-Board (2 of 2) Schematic Diagram (42inch)

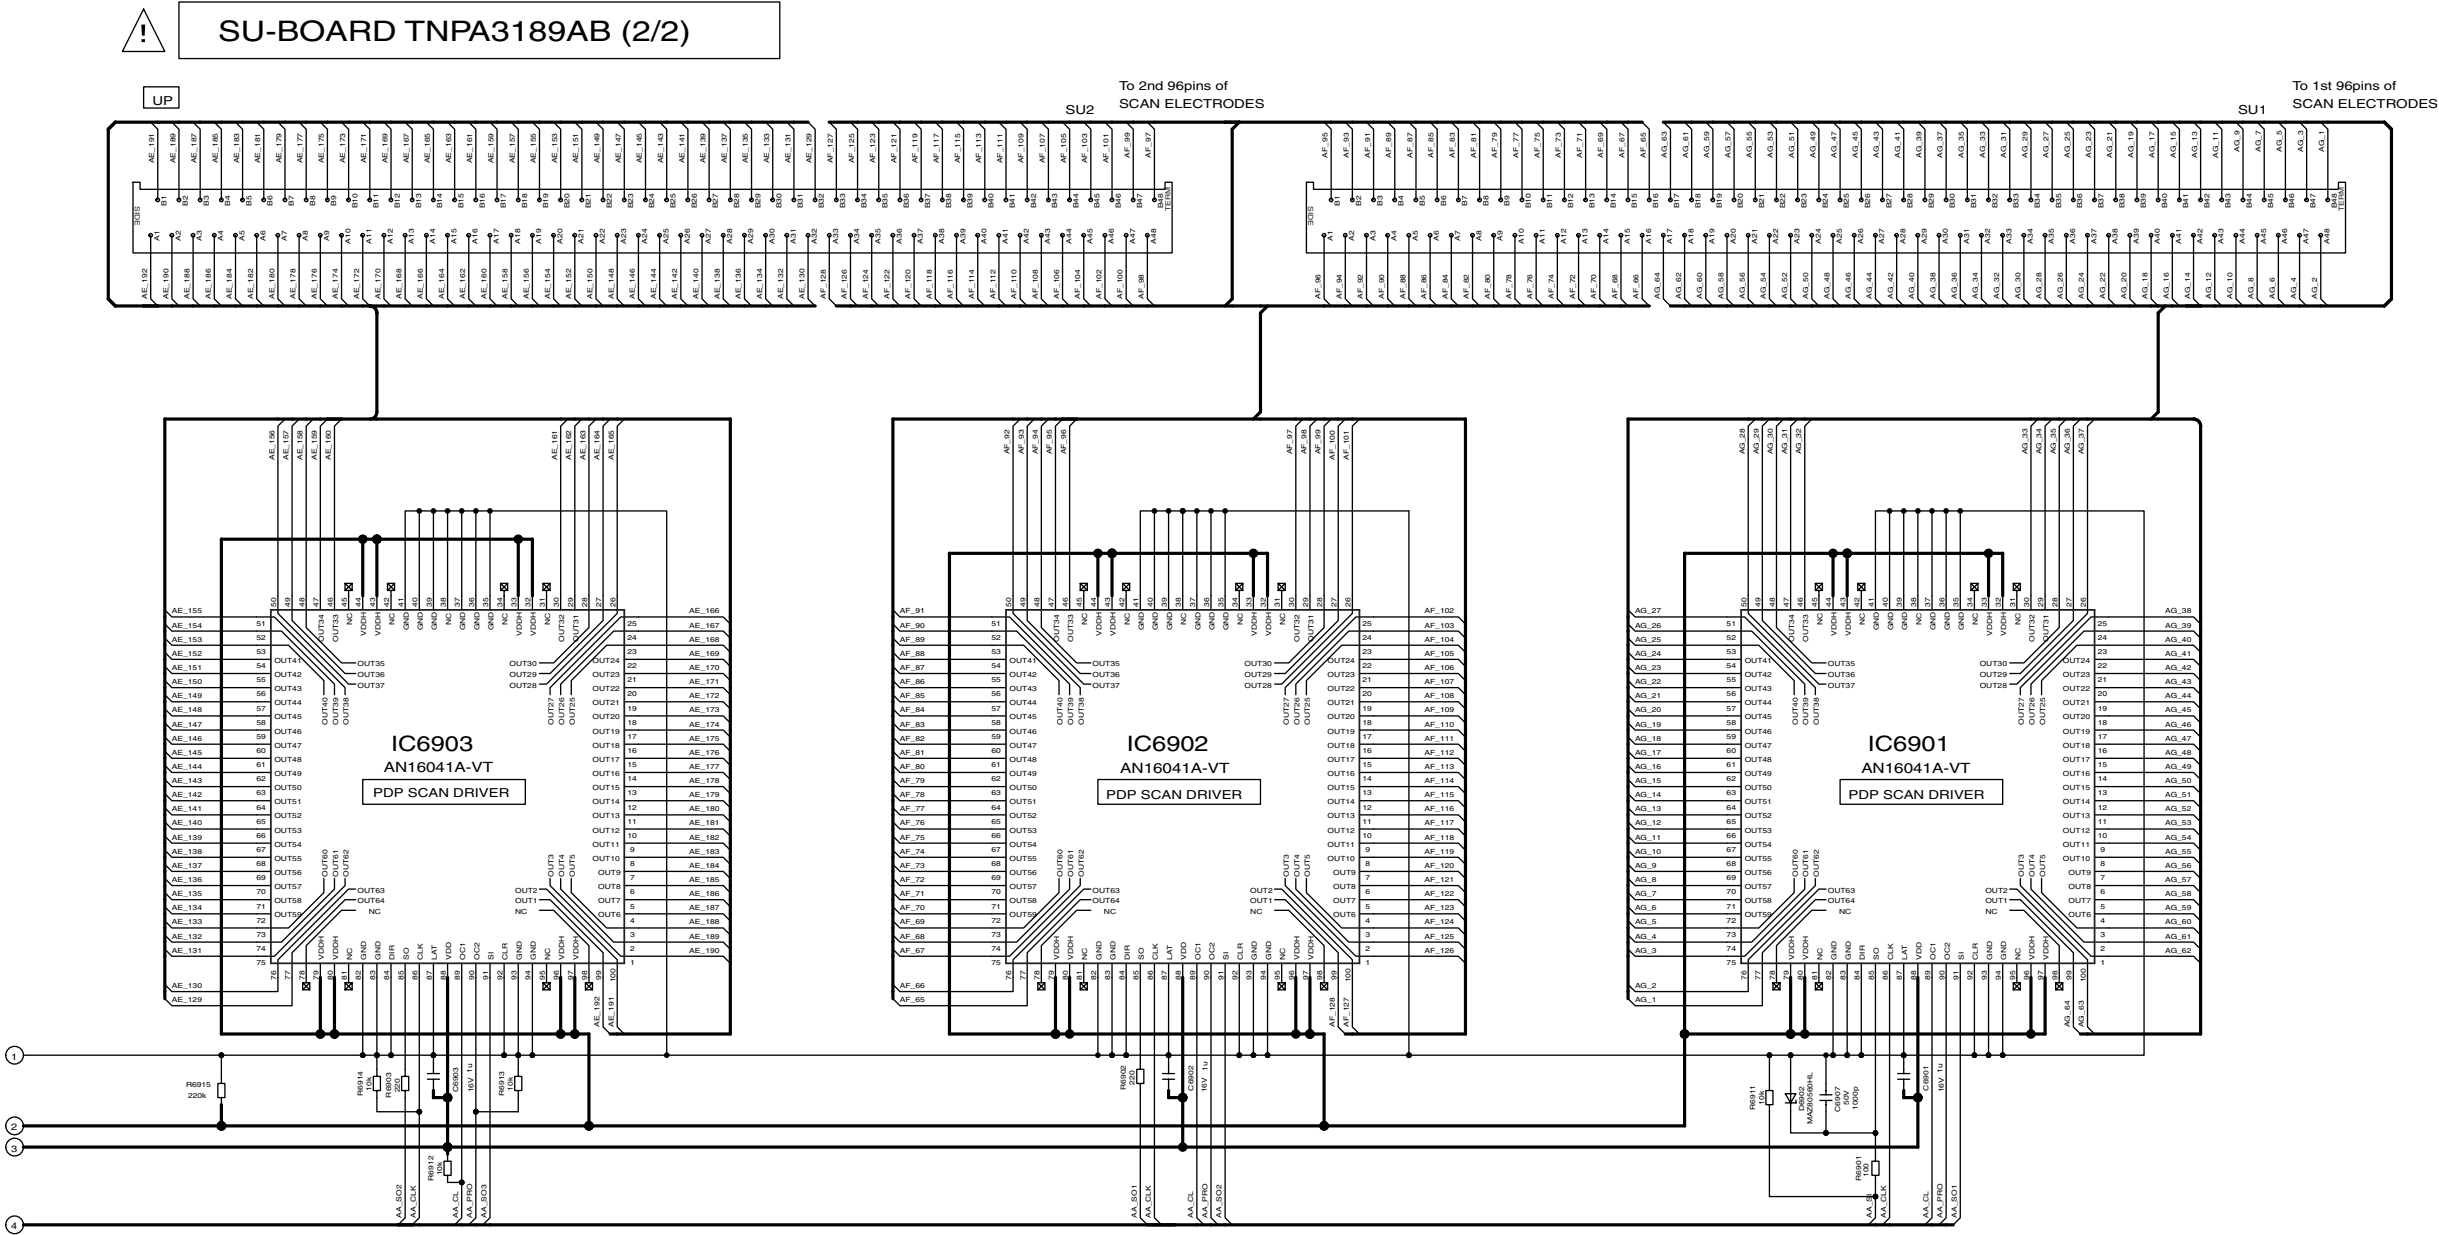

13.102. SU-Board (1 of 2) Schematic Diagram (50inch)

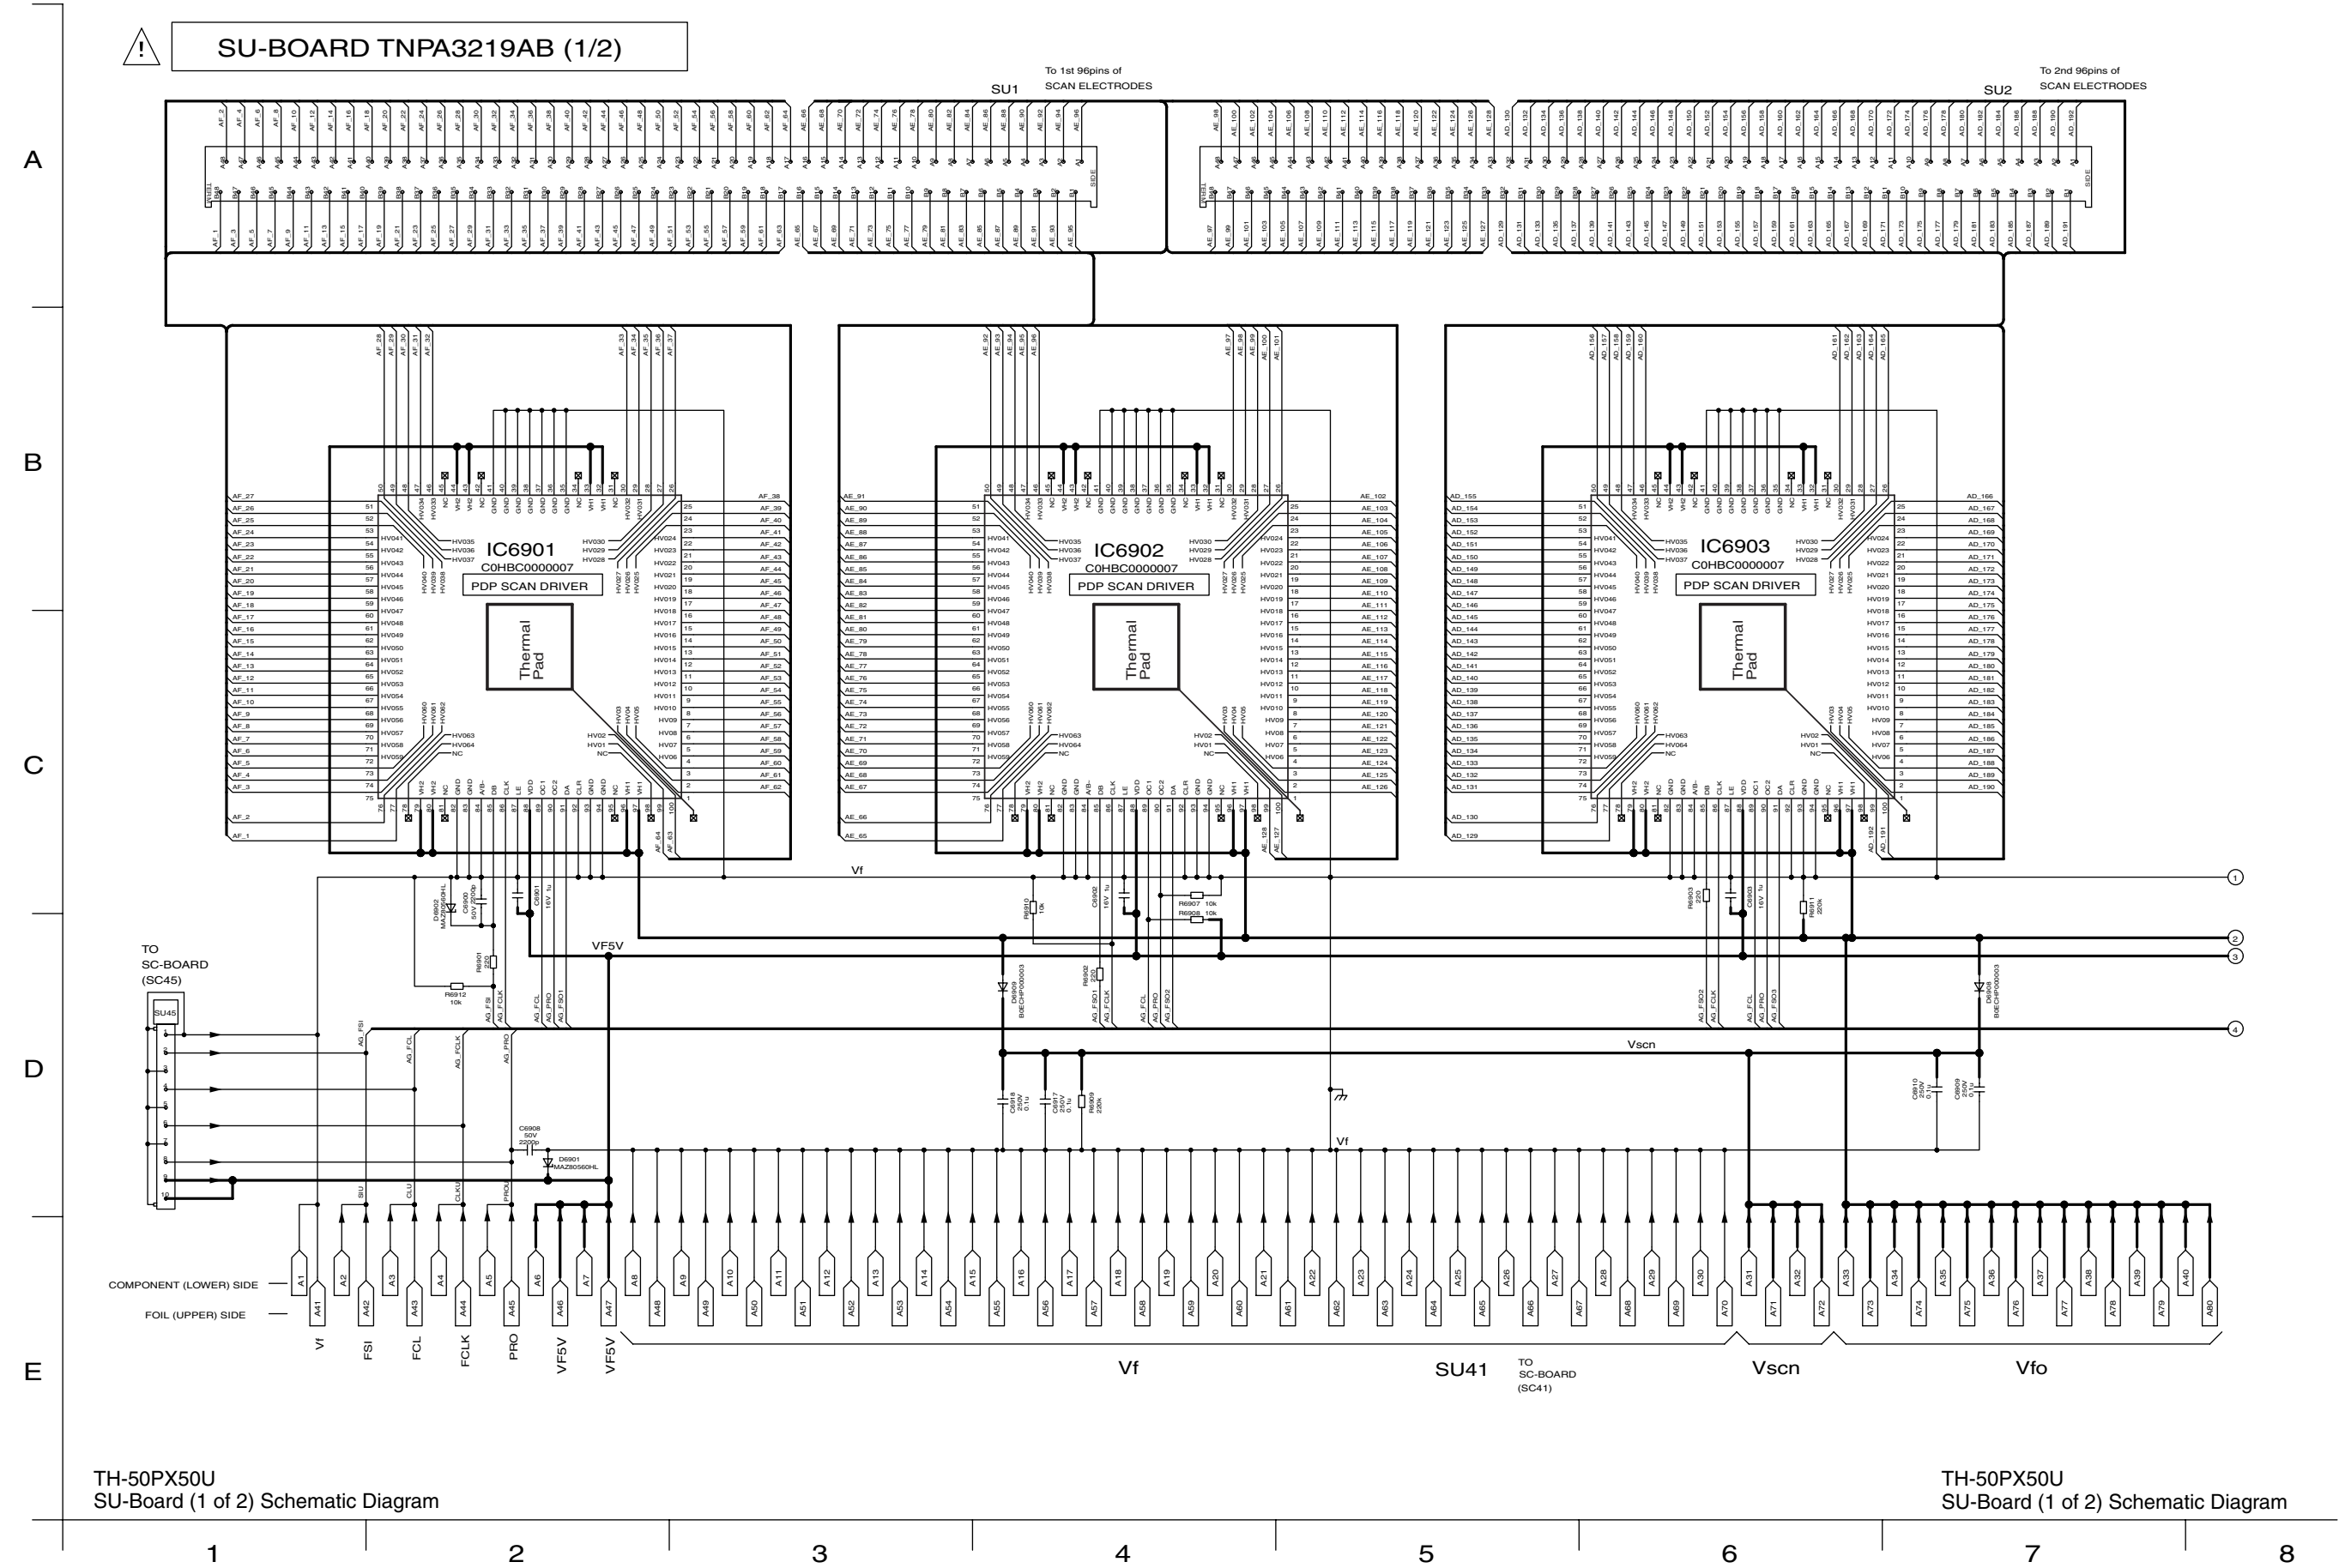


13.103. SU-Board (2 of 2) Schematic Diagram (50inch)

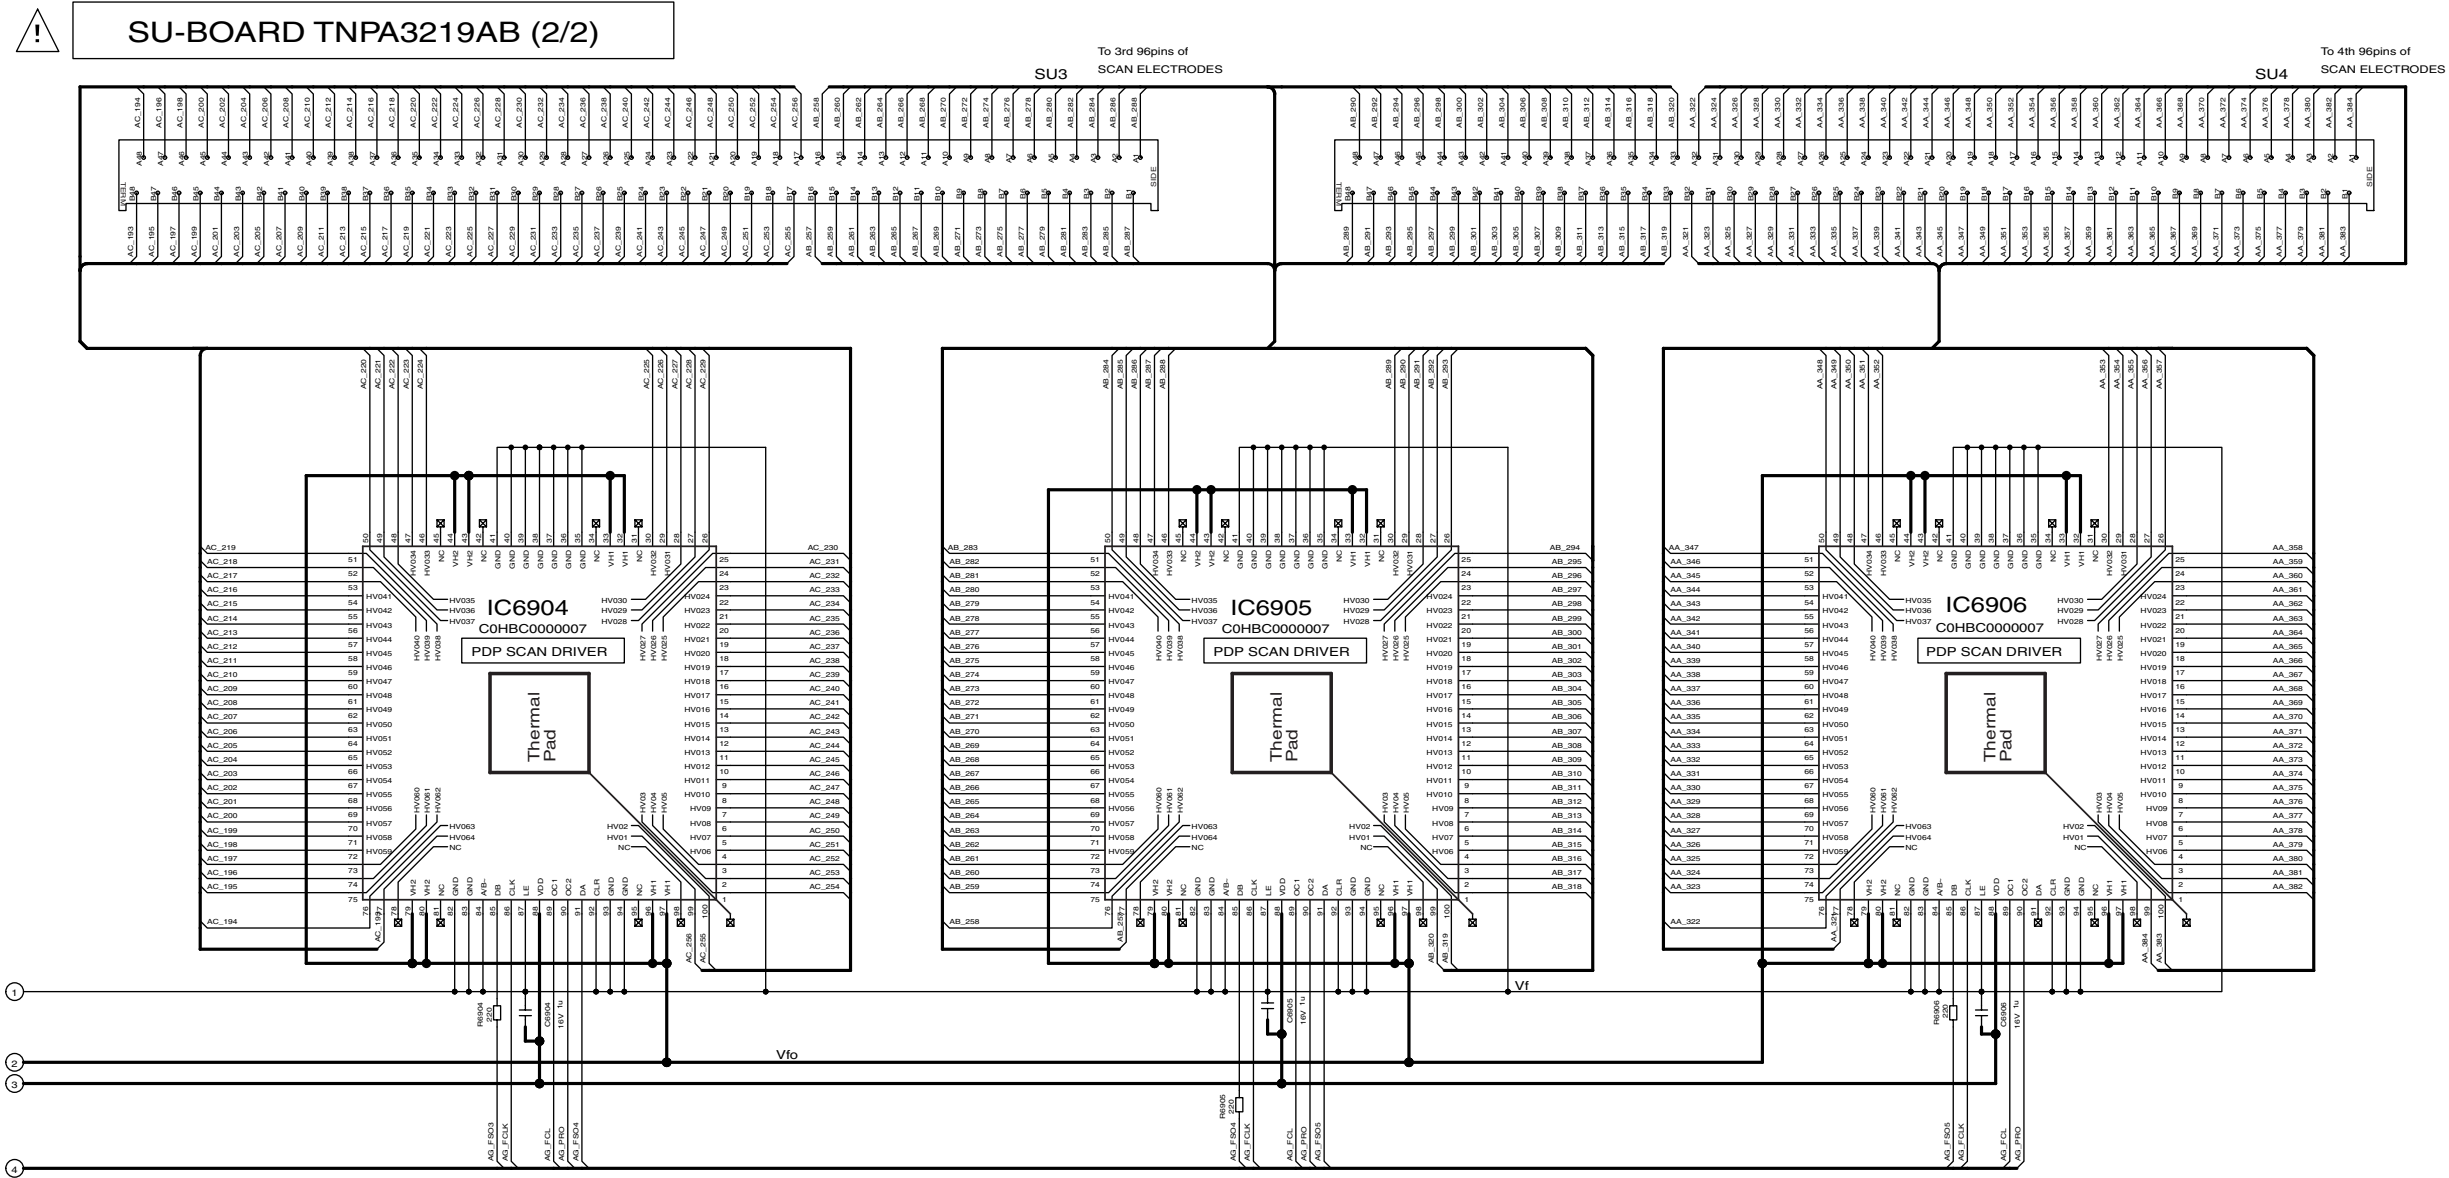

TH-50PX50U
SU-Board (2 of 2) Schematic Diagram

TH-50PX50U
SU-Board (2 of 2) Schematic Diagram


13.104. SD-Board Block Diagram (37inch)

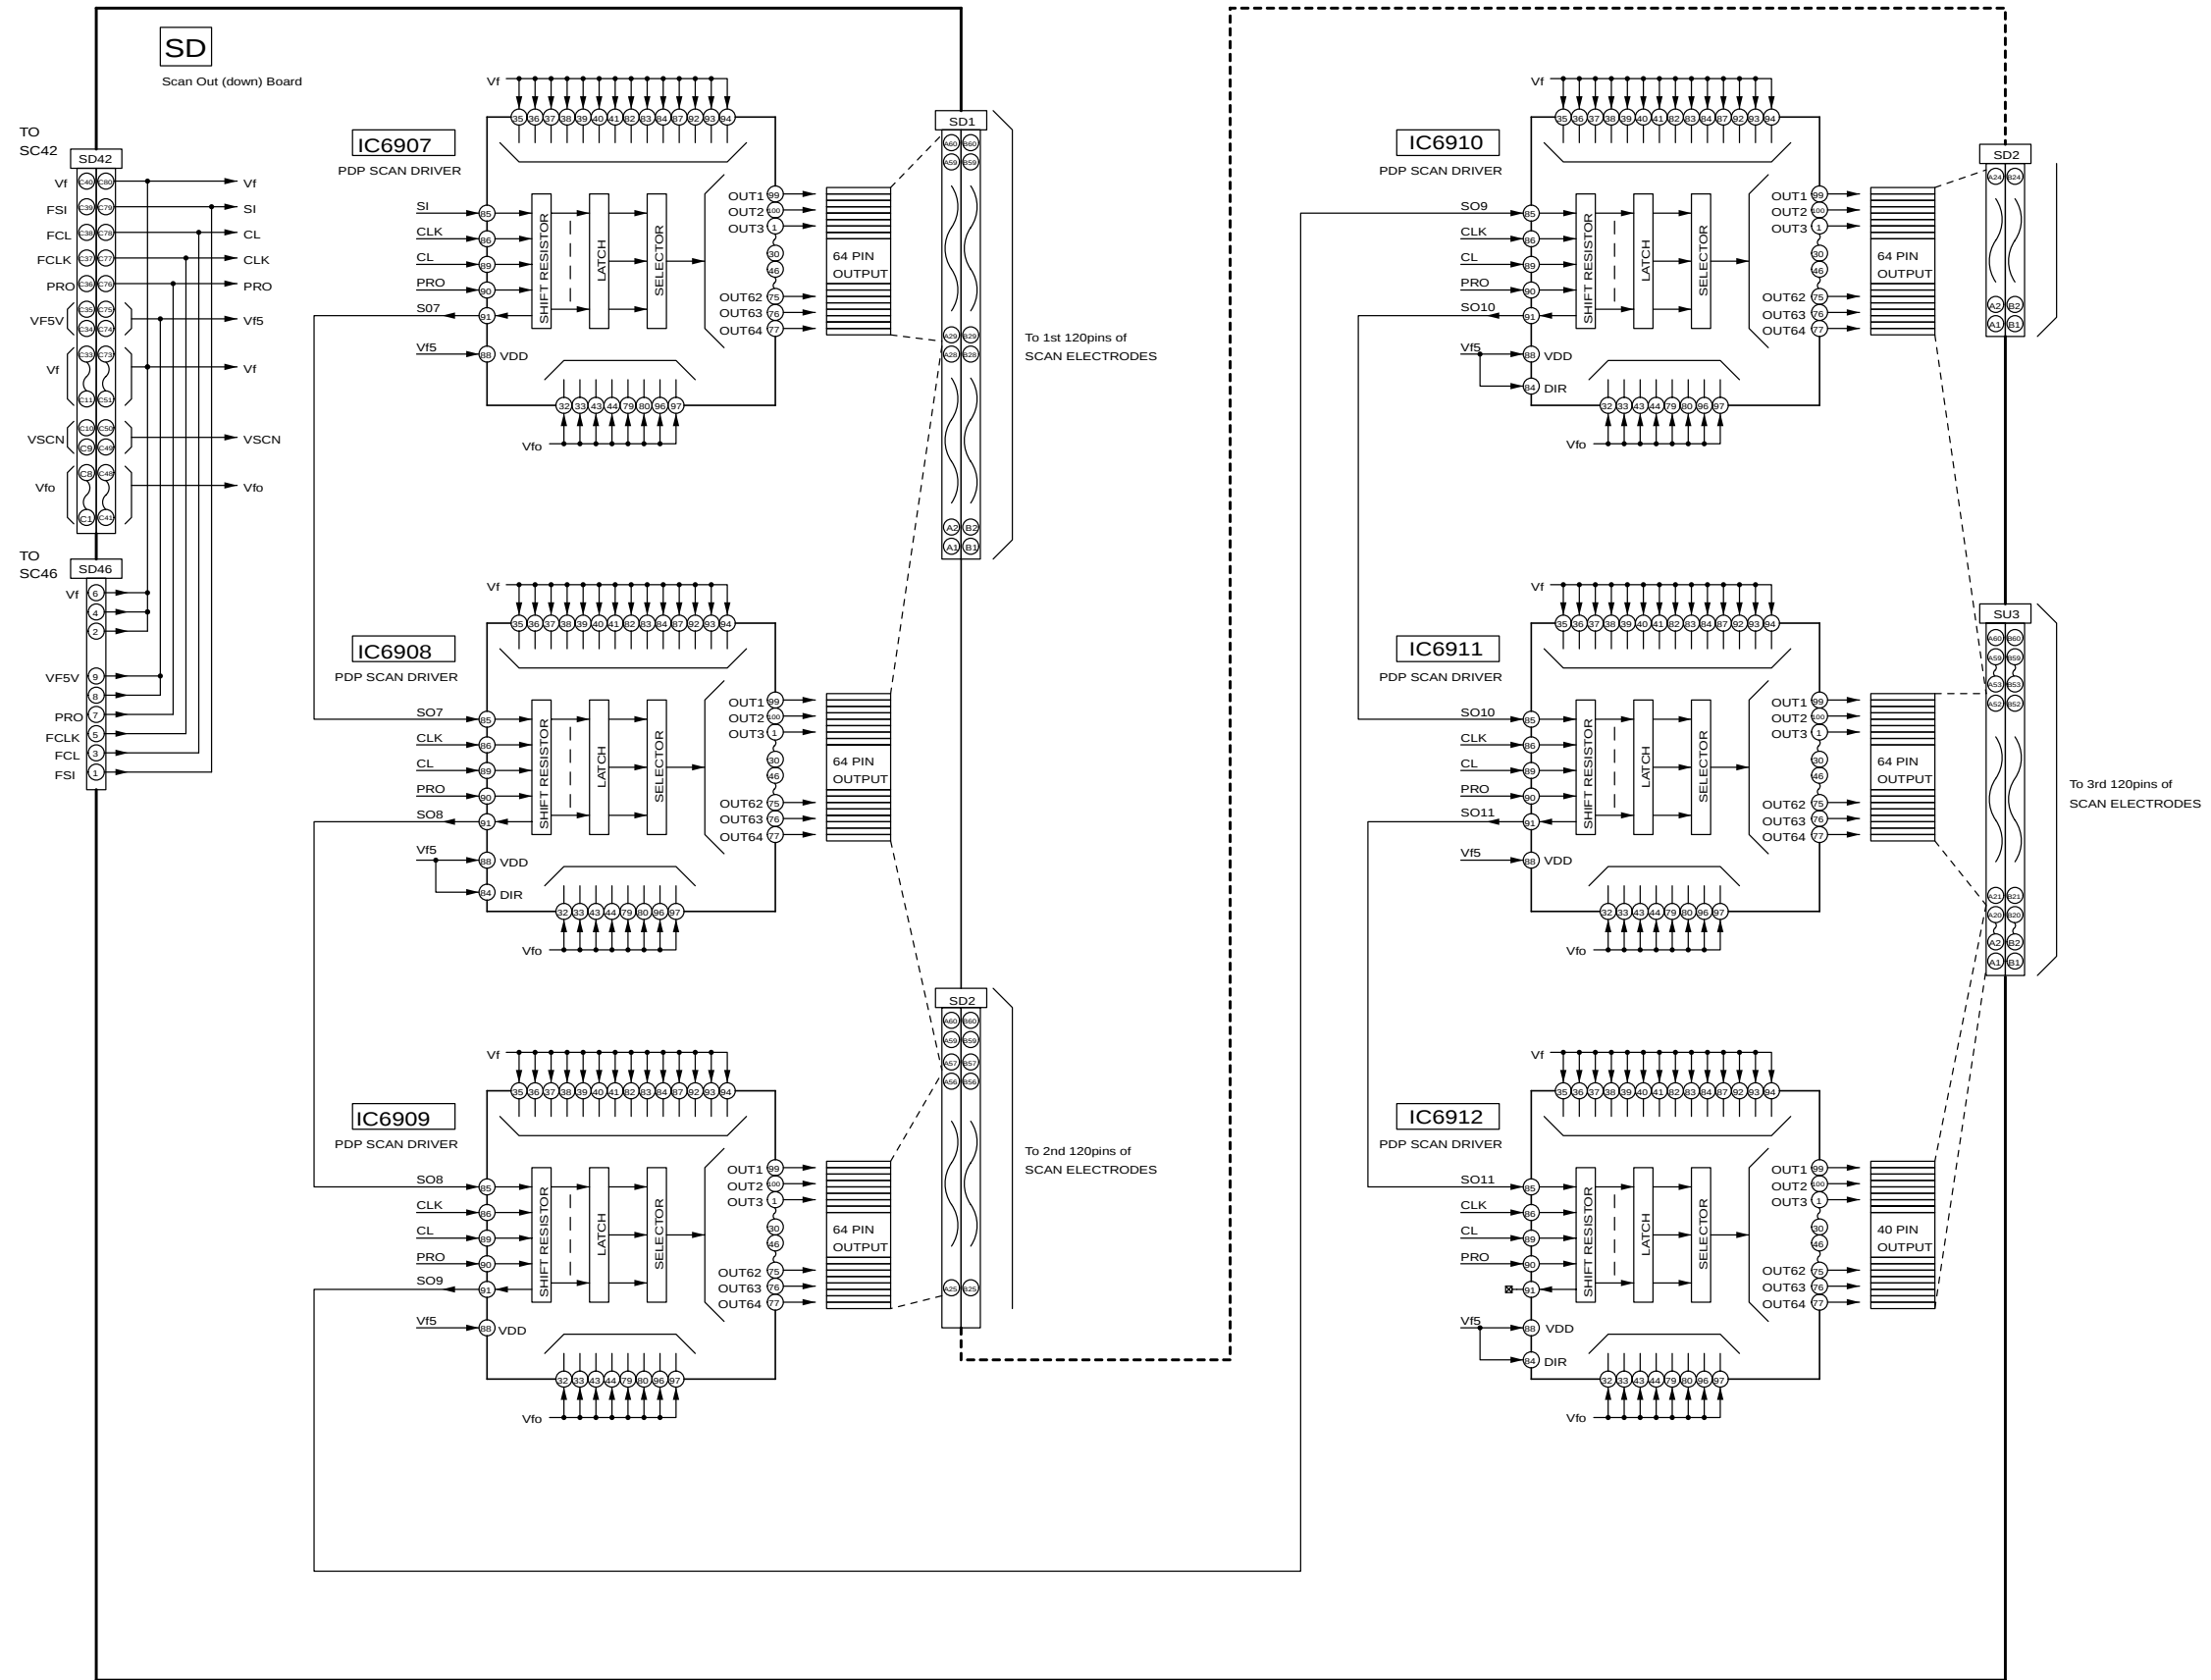


TH-37PX50U
SD-Board Block Diagram


TH-37PX50U
SD-Board Block Diagram

13.105. SD-Board (1 of 2) Schematic Diagram (37inch)

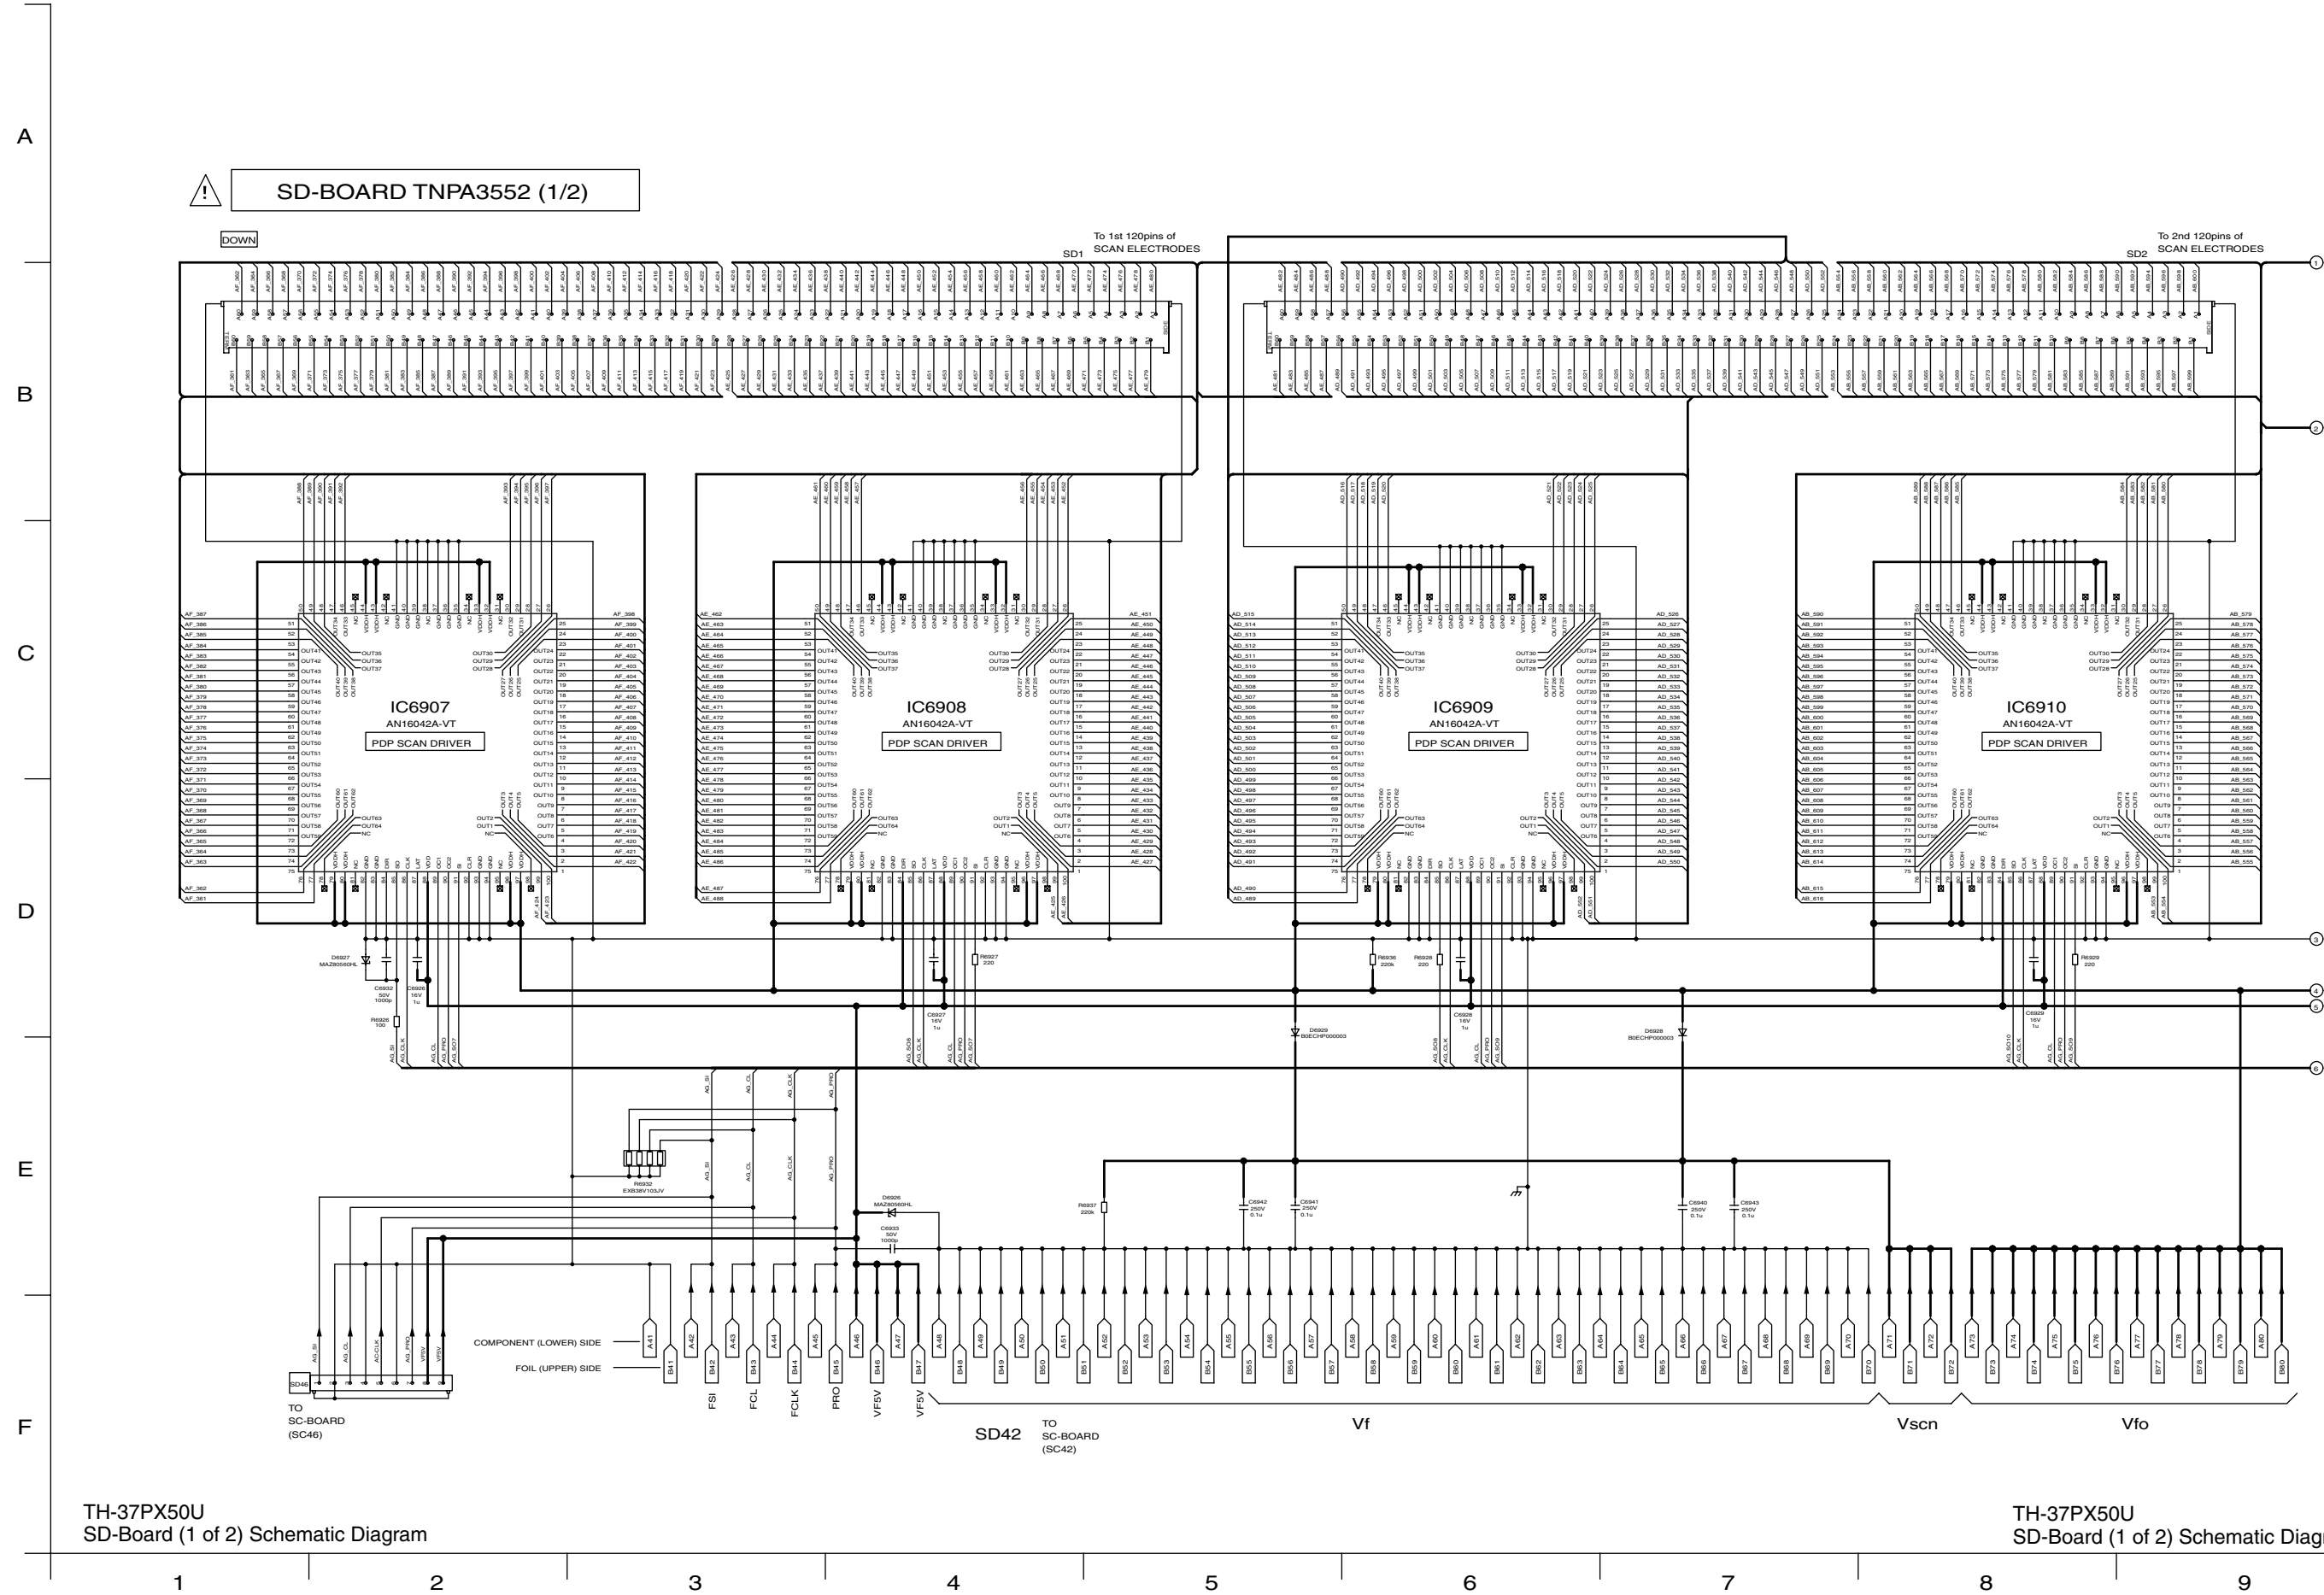




13.107. SD-Board Block Diagram (42, 50inch)

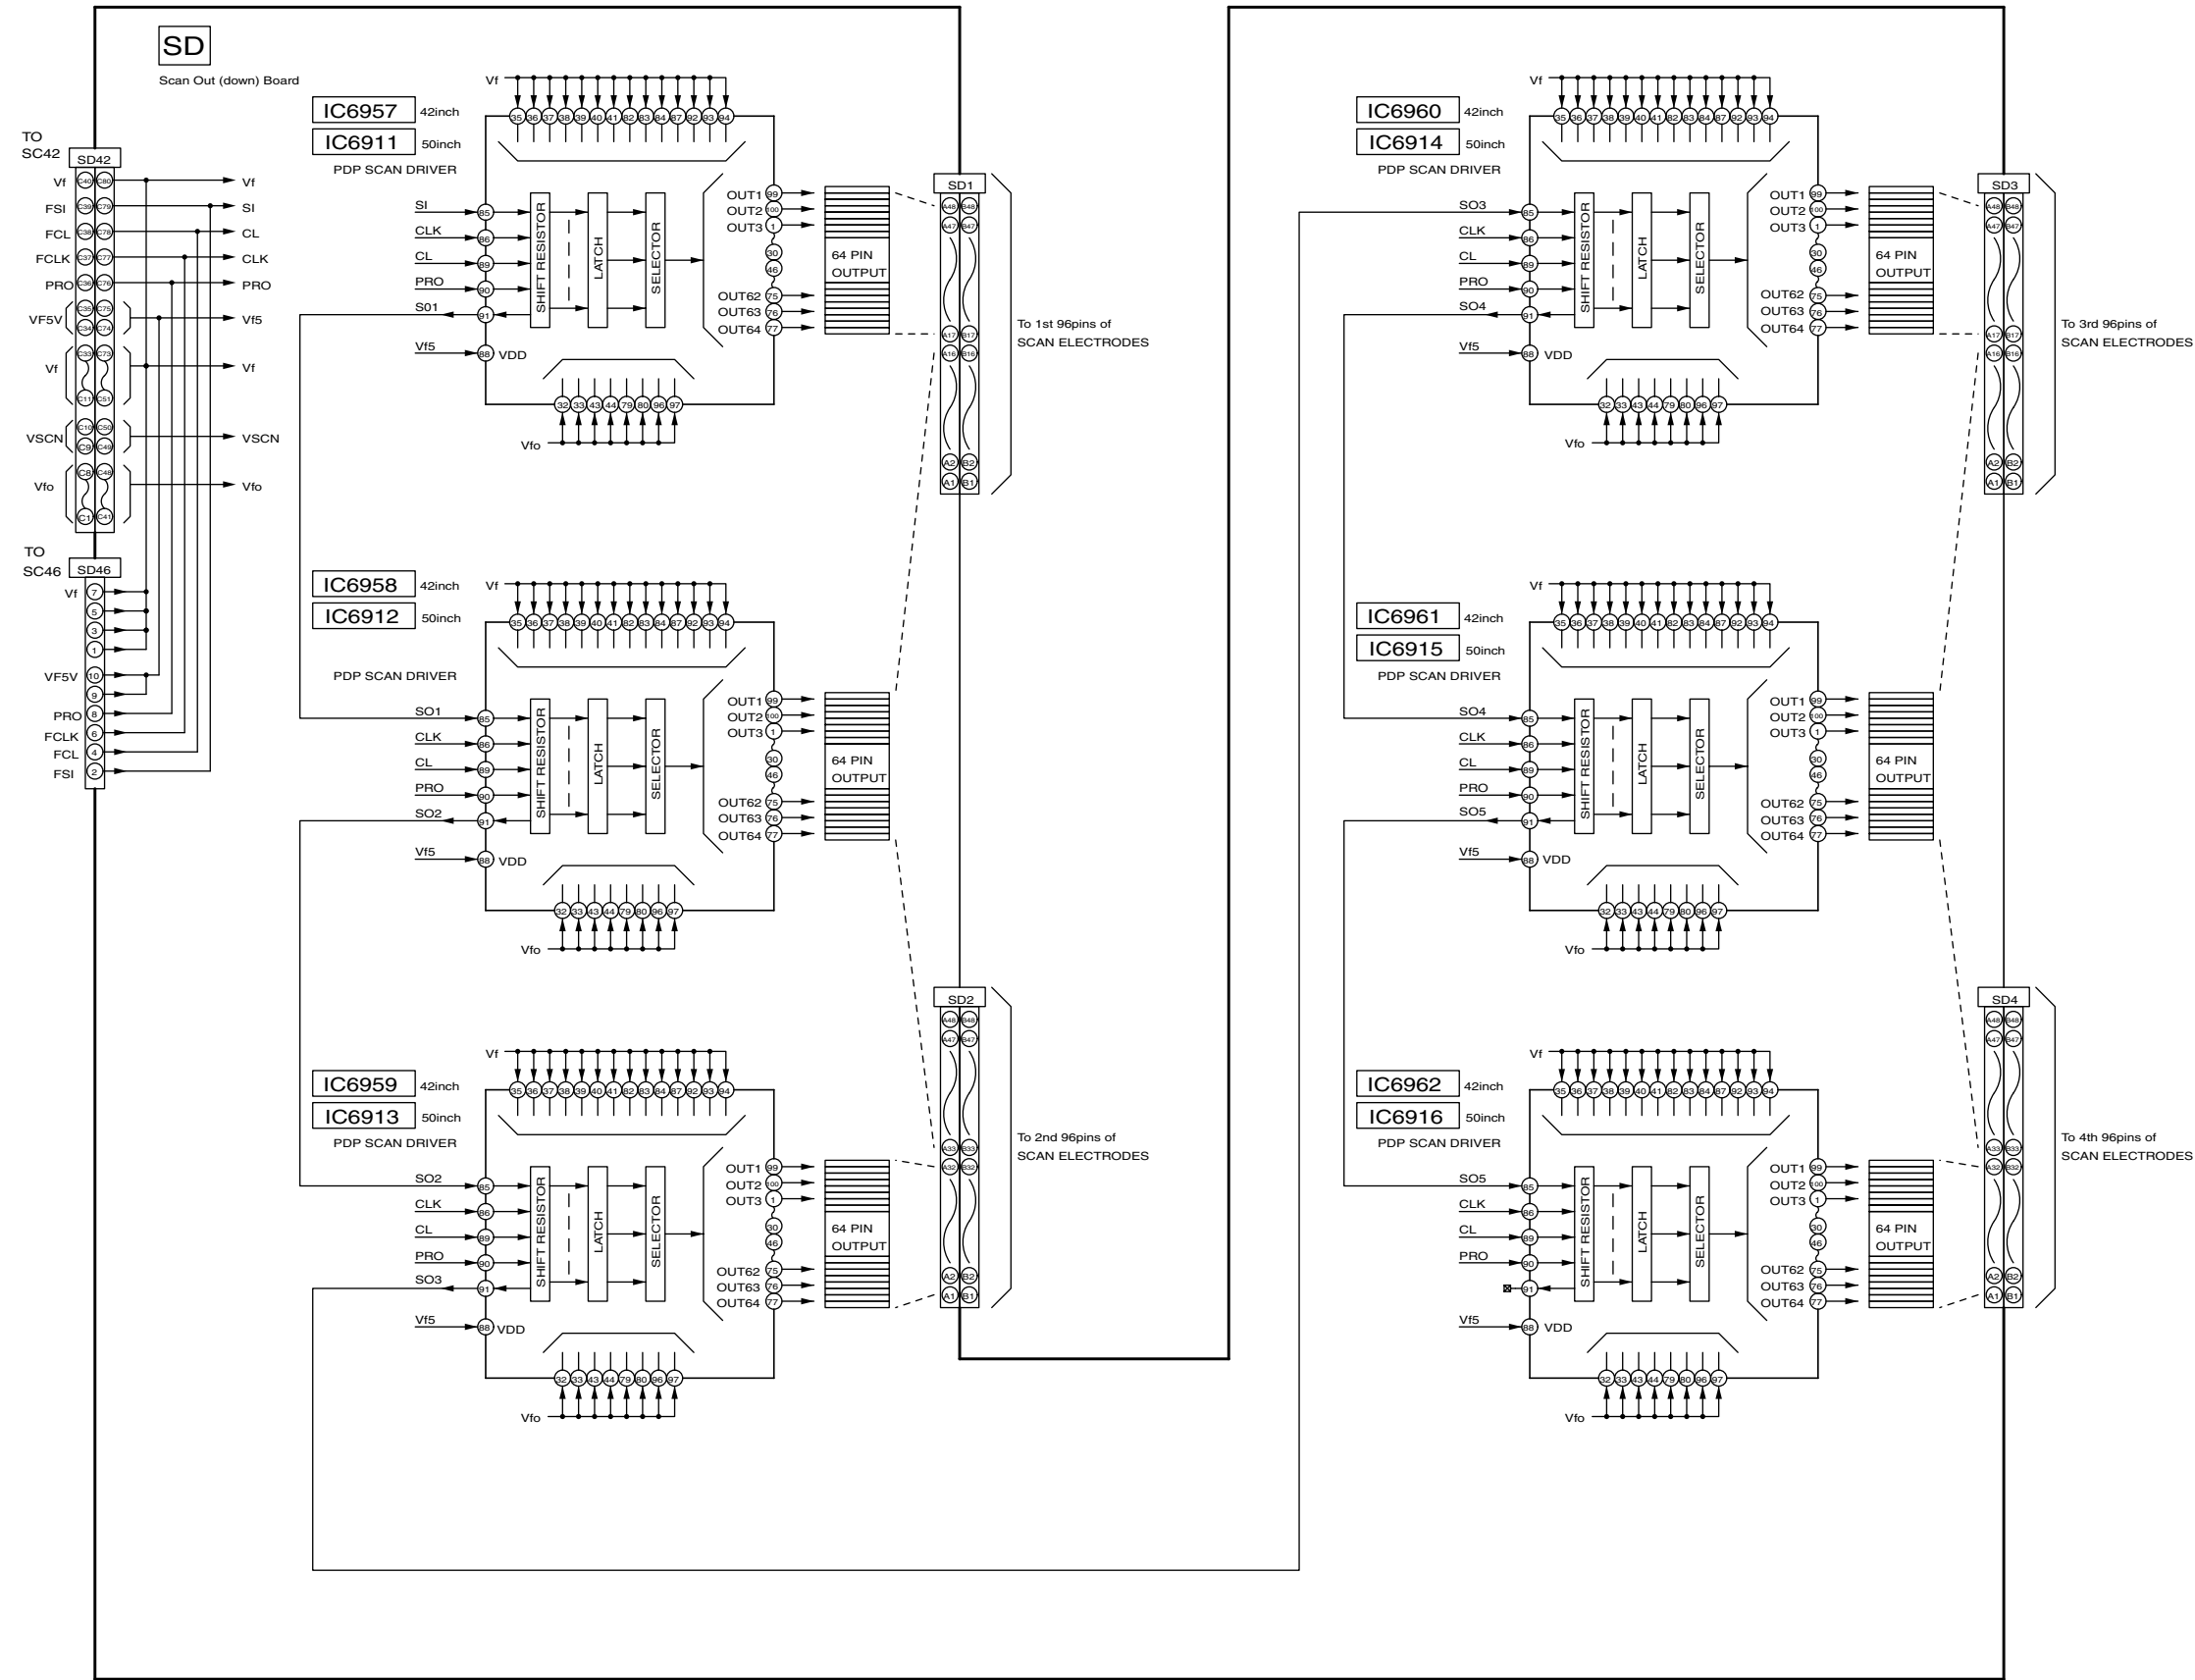


TH-42/50PX50U
SD-Board Block Diagram


TH-42/50PX50U
SD-Board Block Diagram

13.108. SD-Board (1 of 2) Schematic Diagram (42inch)

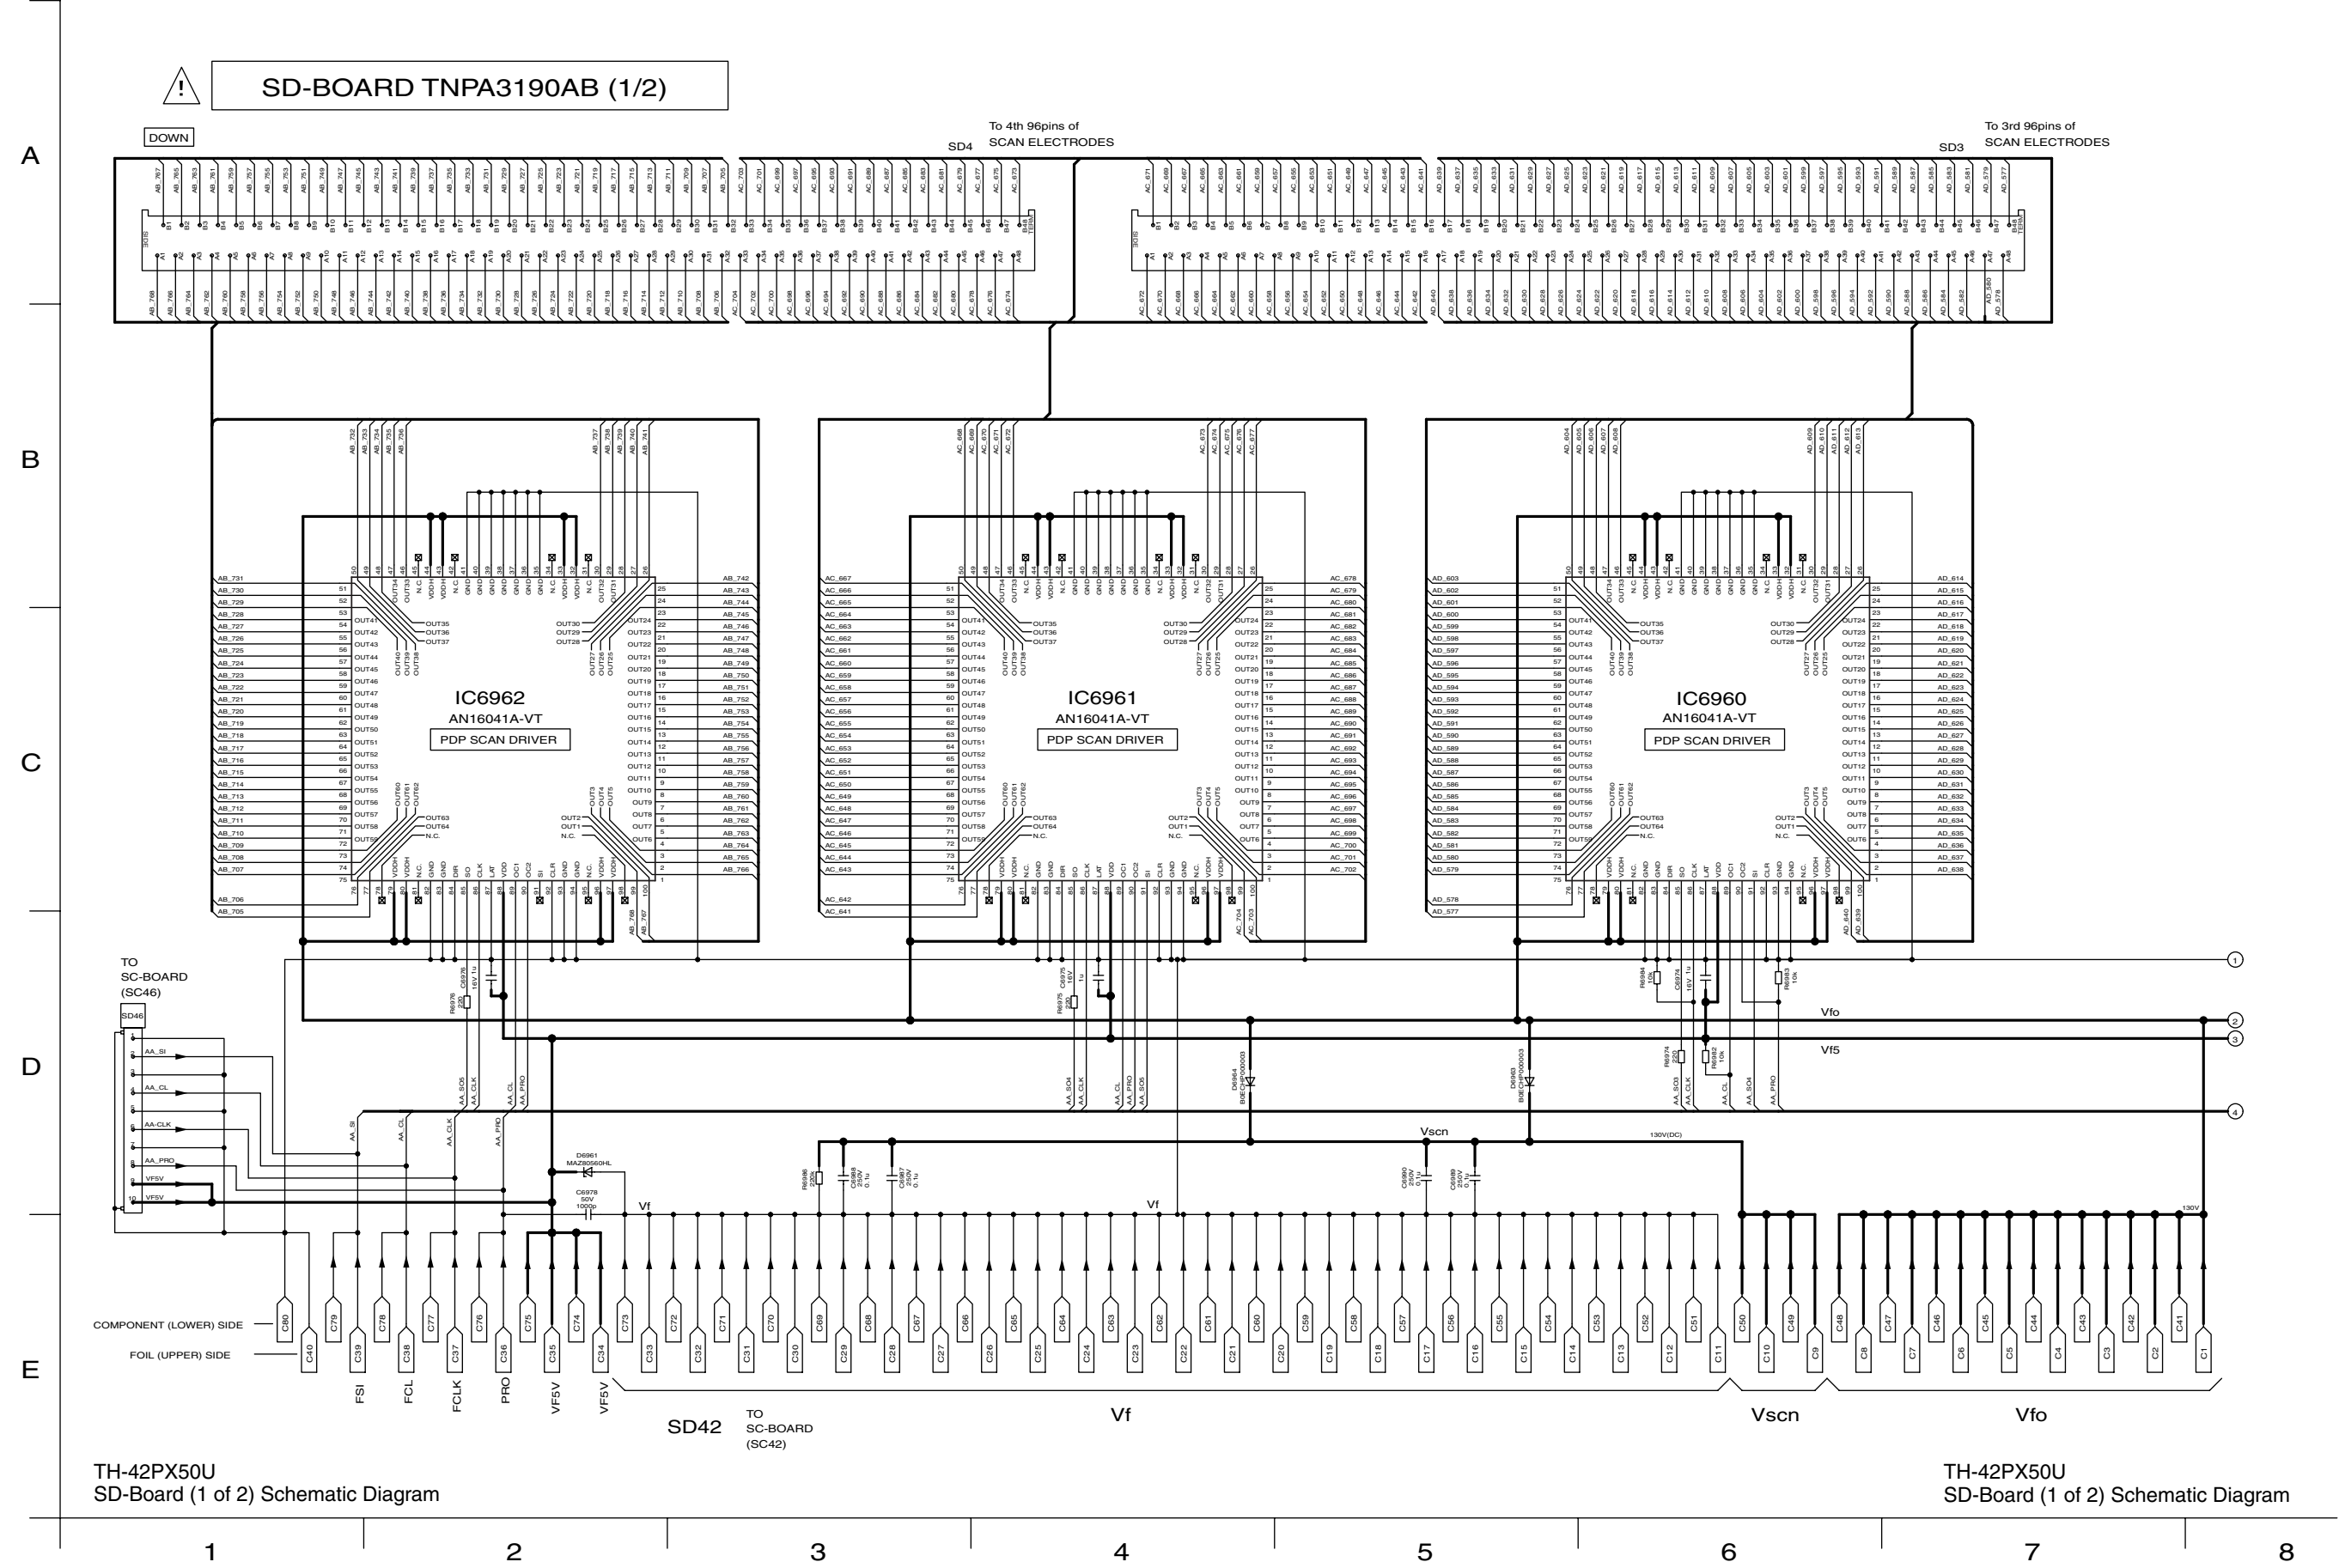









13.112. SS-Board Block Diagram (37inch)

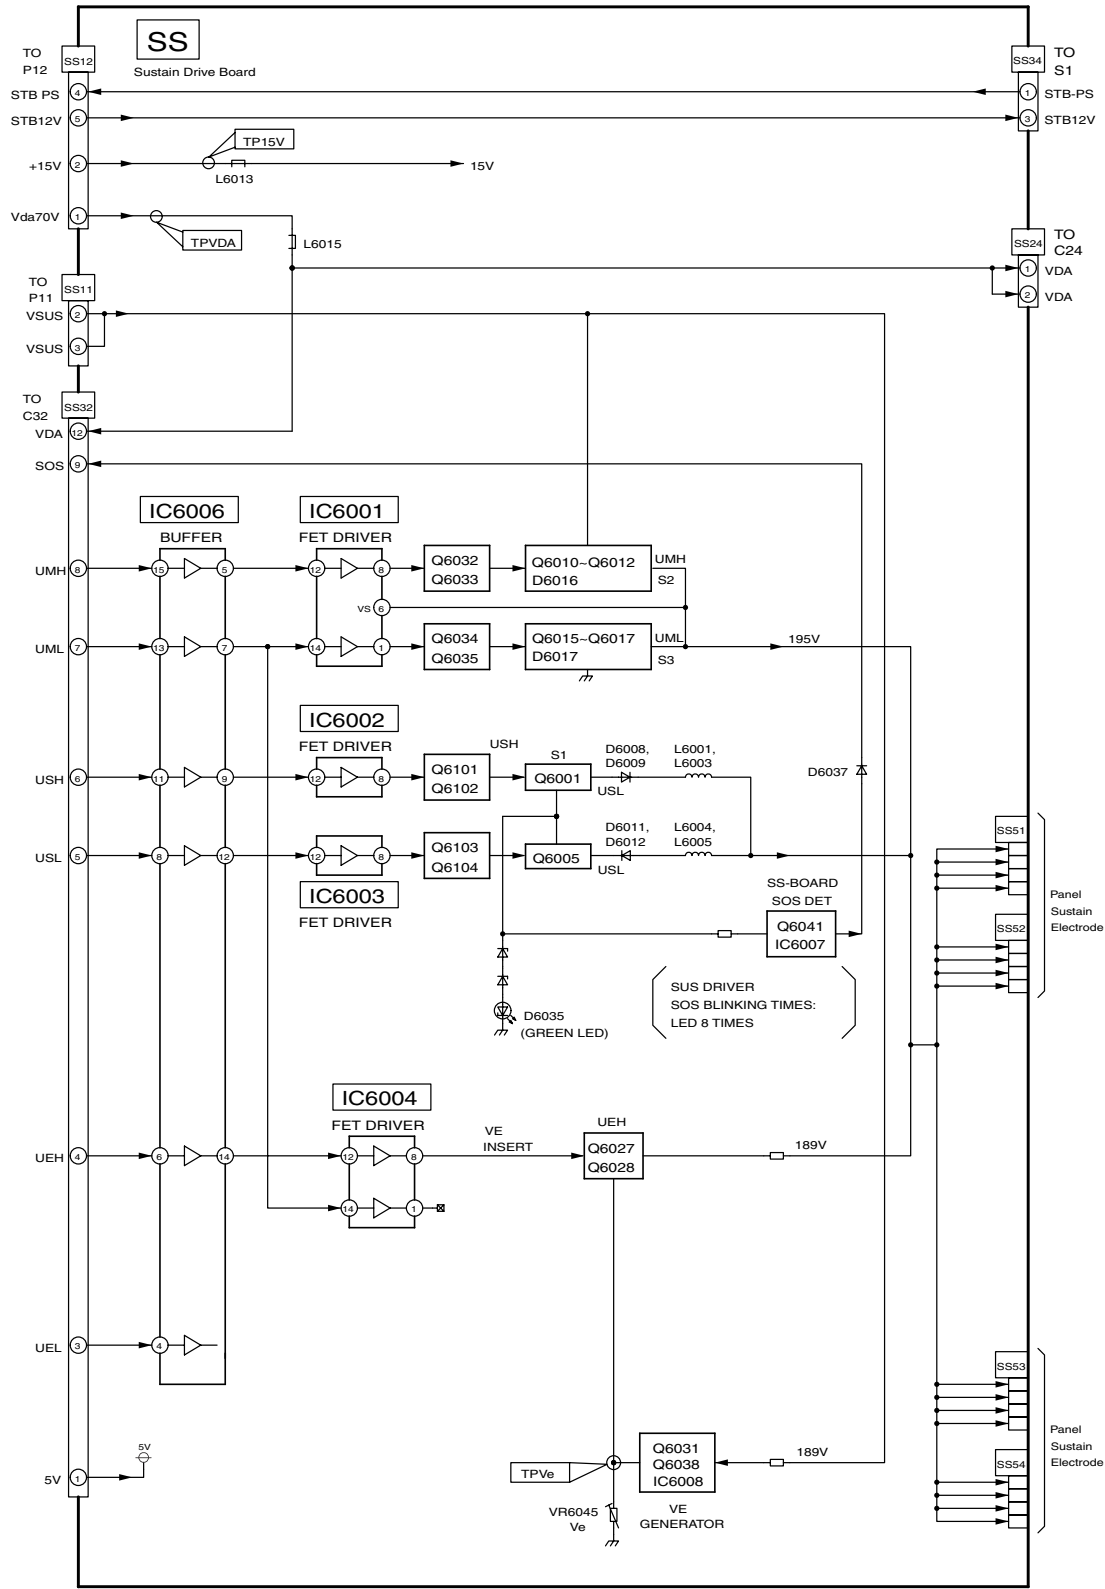


TH-37PX50U
SS-Board Block Diagram

TH-37PX50U
SS-Board Block Diagram



13.114. SS, SS2 and SS3-Board Block Diagram (42inch)

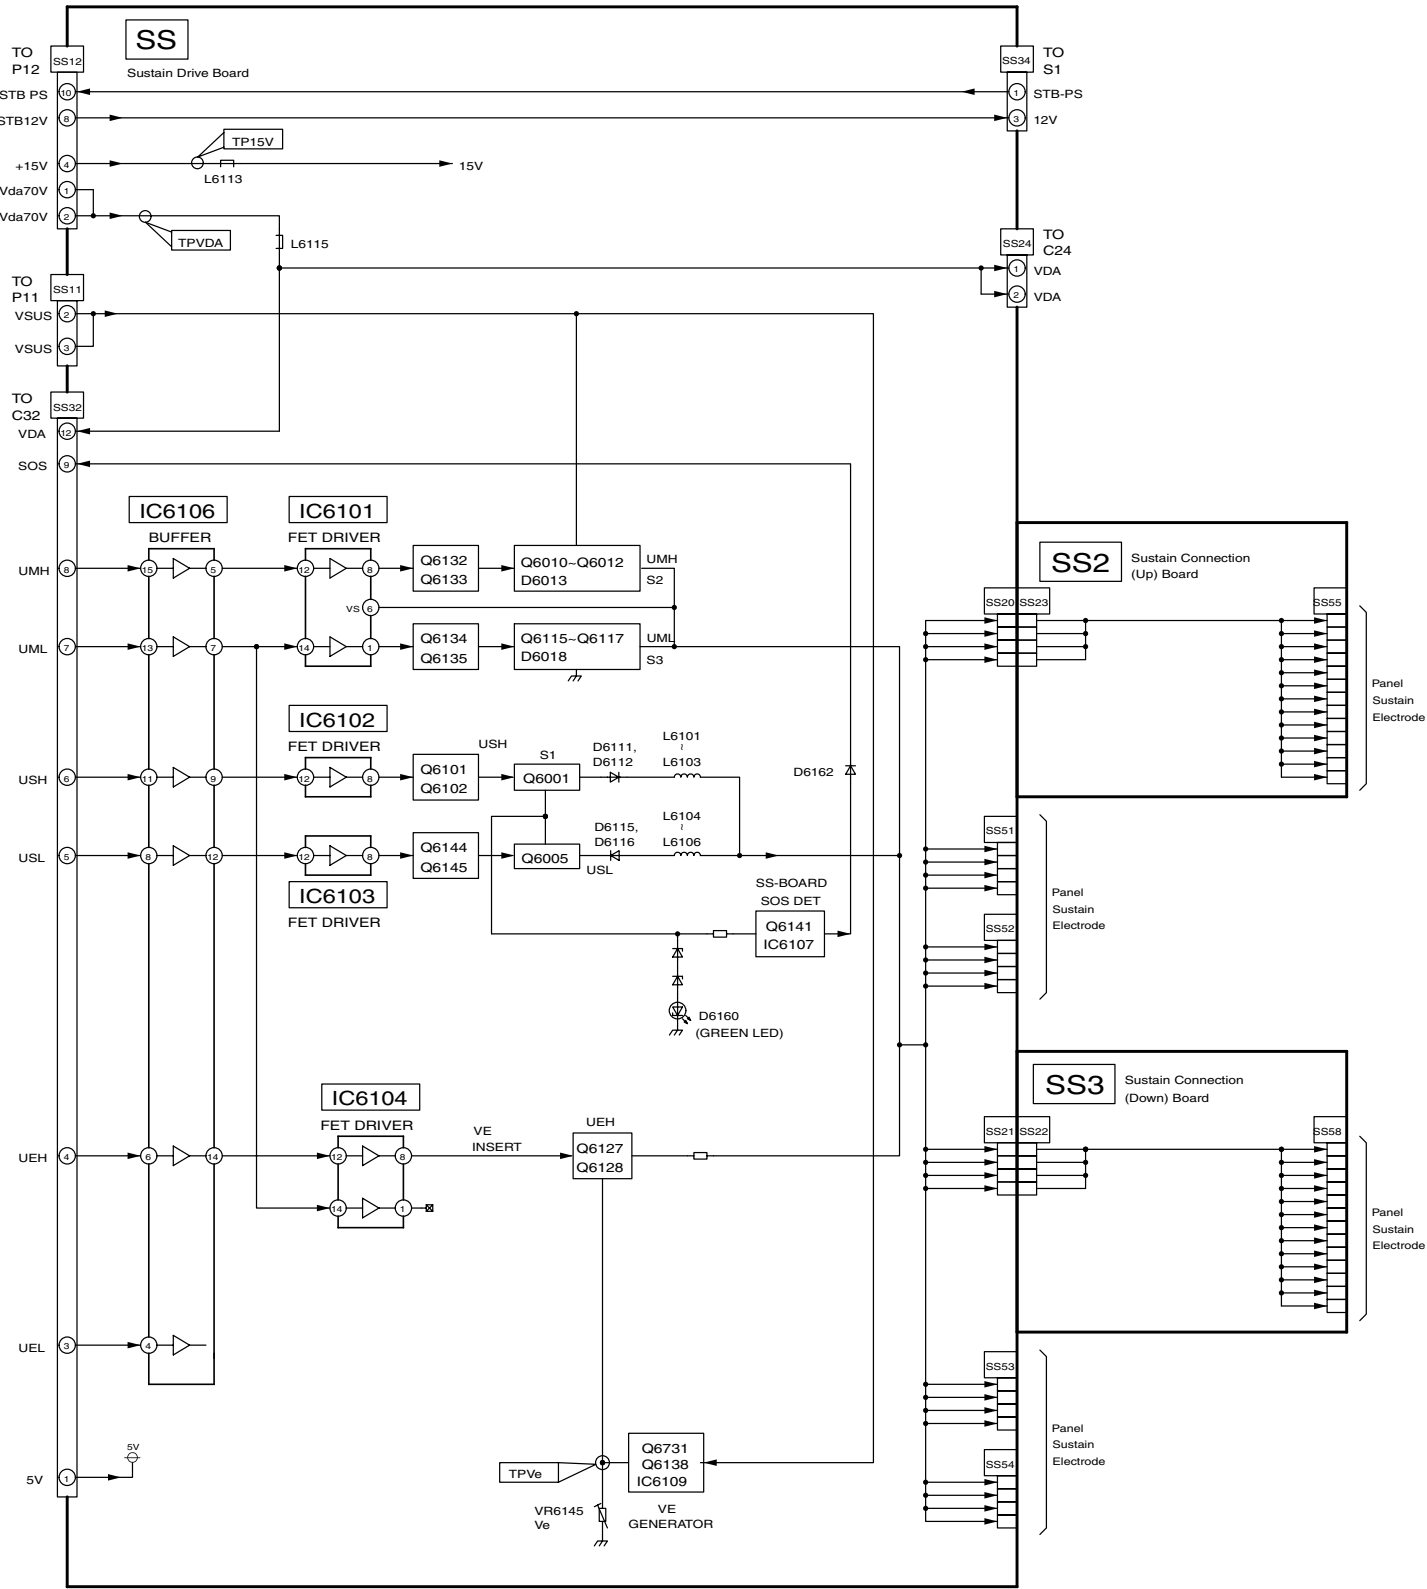


TH-42PX50U
SS, SS2 and SS3-Board Block Diagram

TH-42PX50U
SS, SS2 and SS3-Board Block Diagram




13.116. SS, SS2 and SS3-Board Block Diagram (50inch)

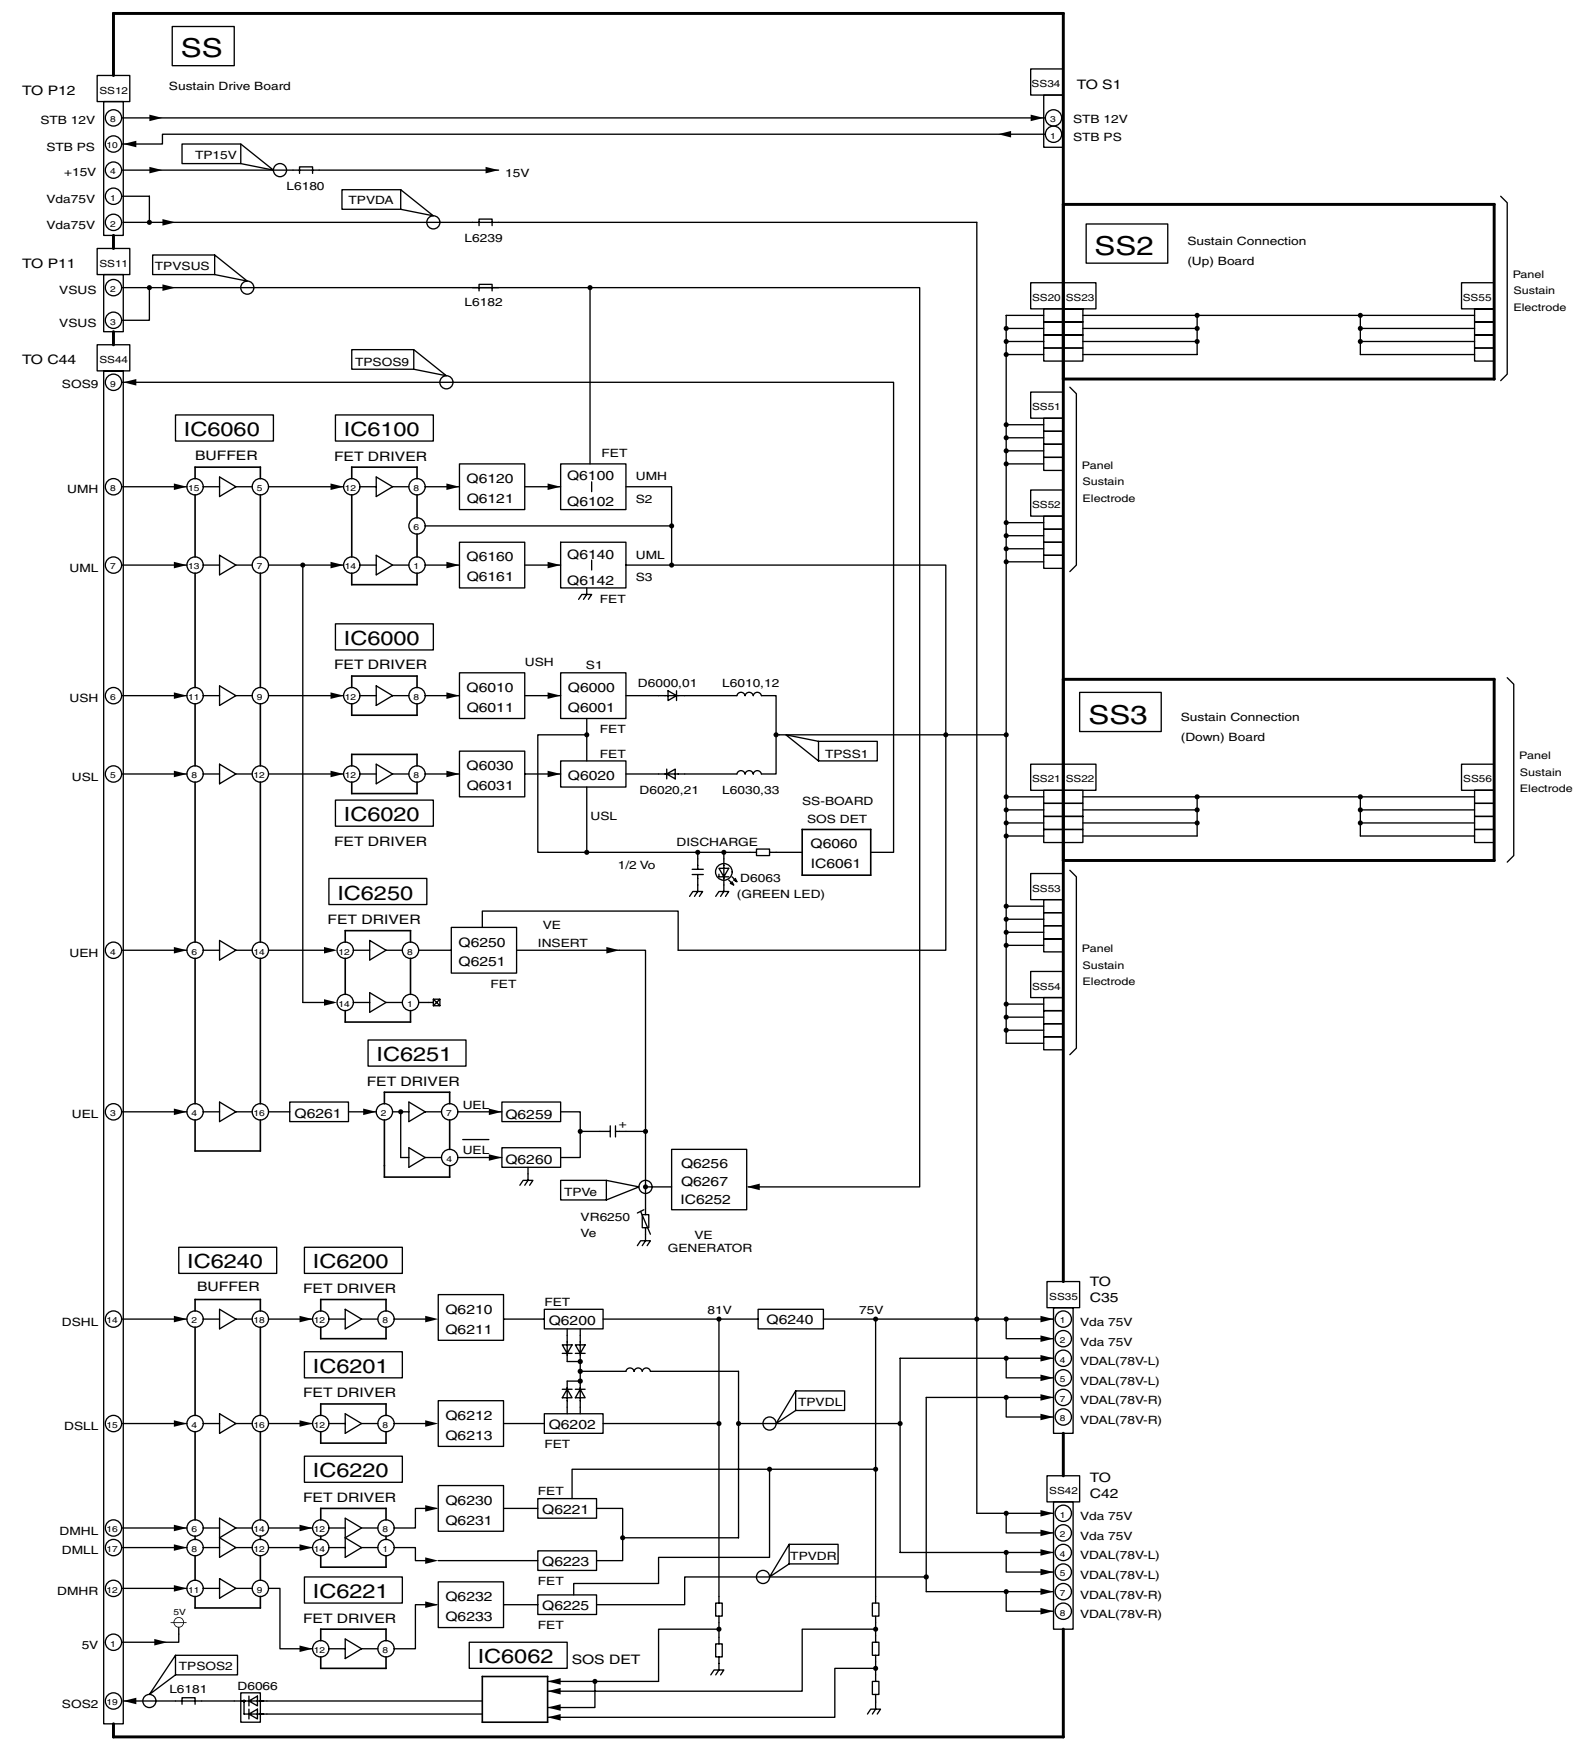

TH-50PX50U
SS, SS2 and SS3-Board Block Diagram


TH-50PX50U
SS, SS2 and SS3-Board Block Diagram

13.117. SS-Board (1 of 2), SS2 and SS3 Schematic Diagram (50inch)

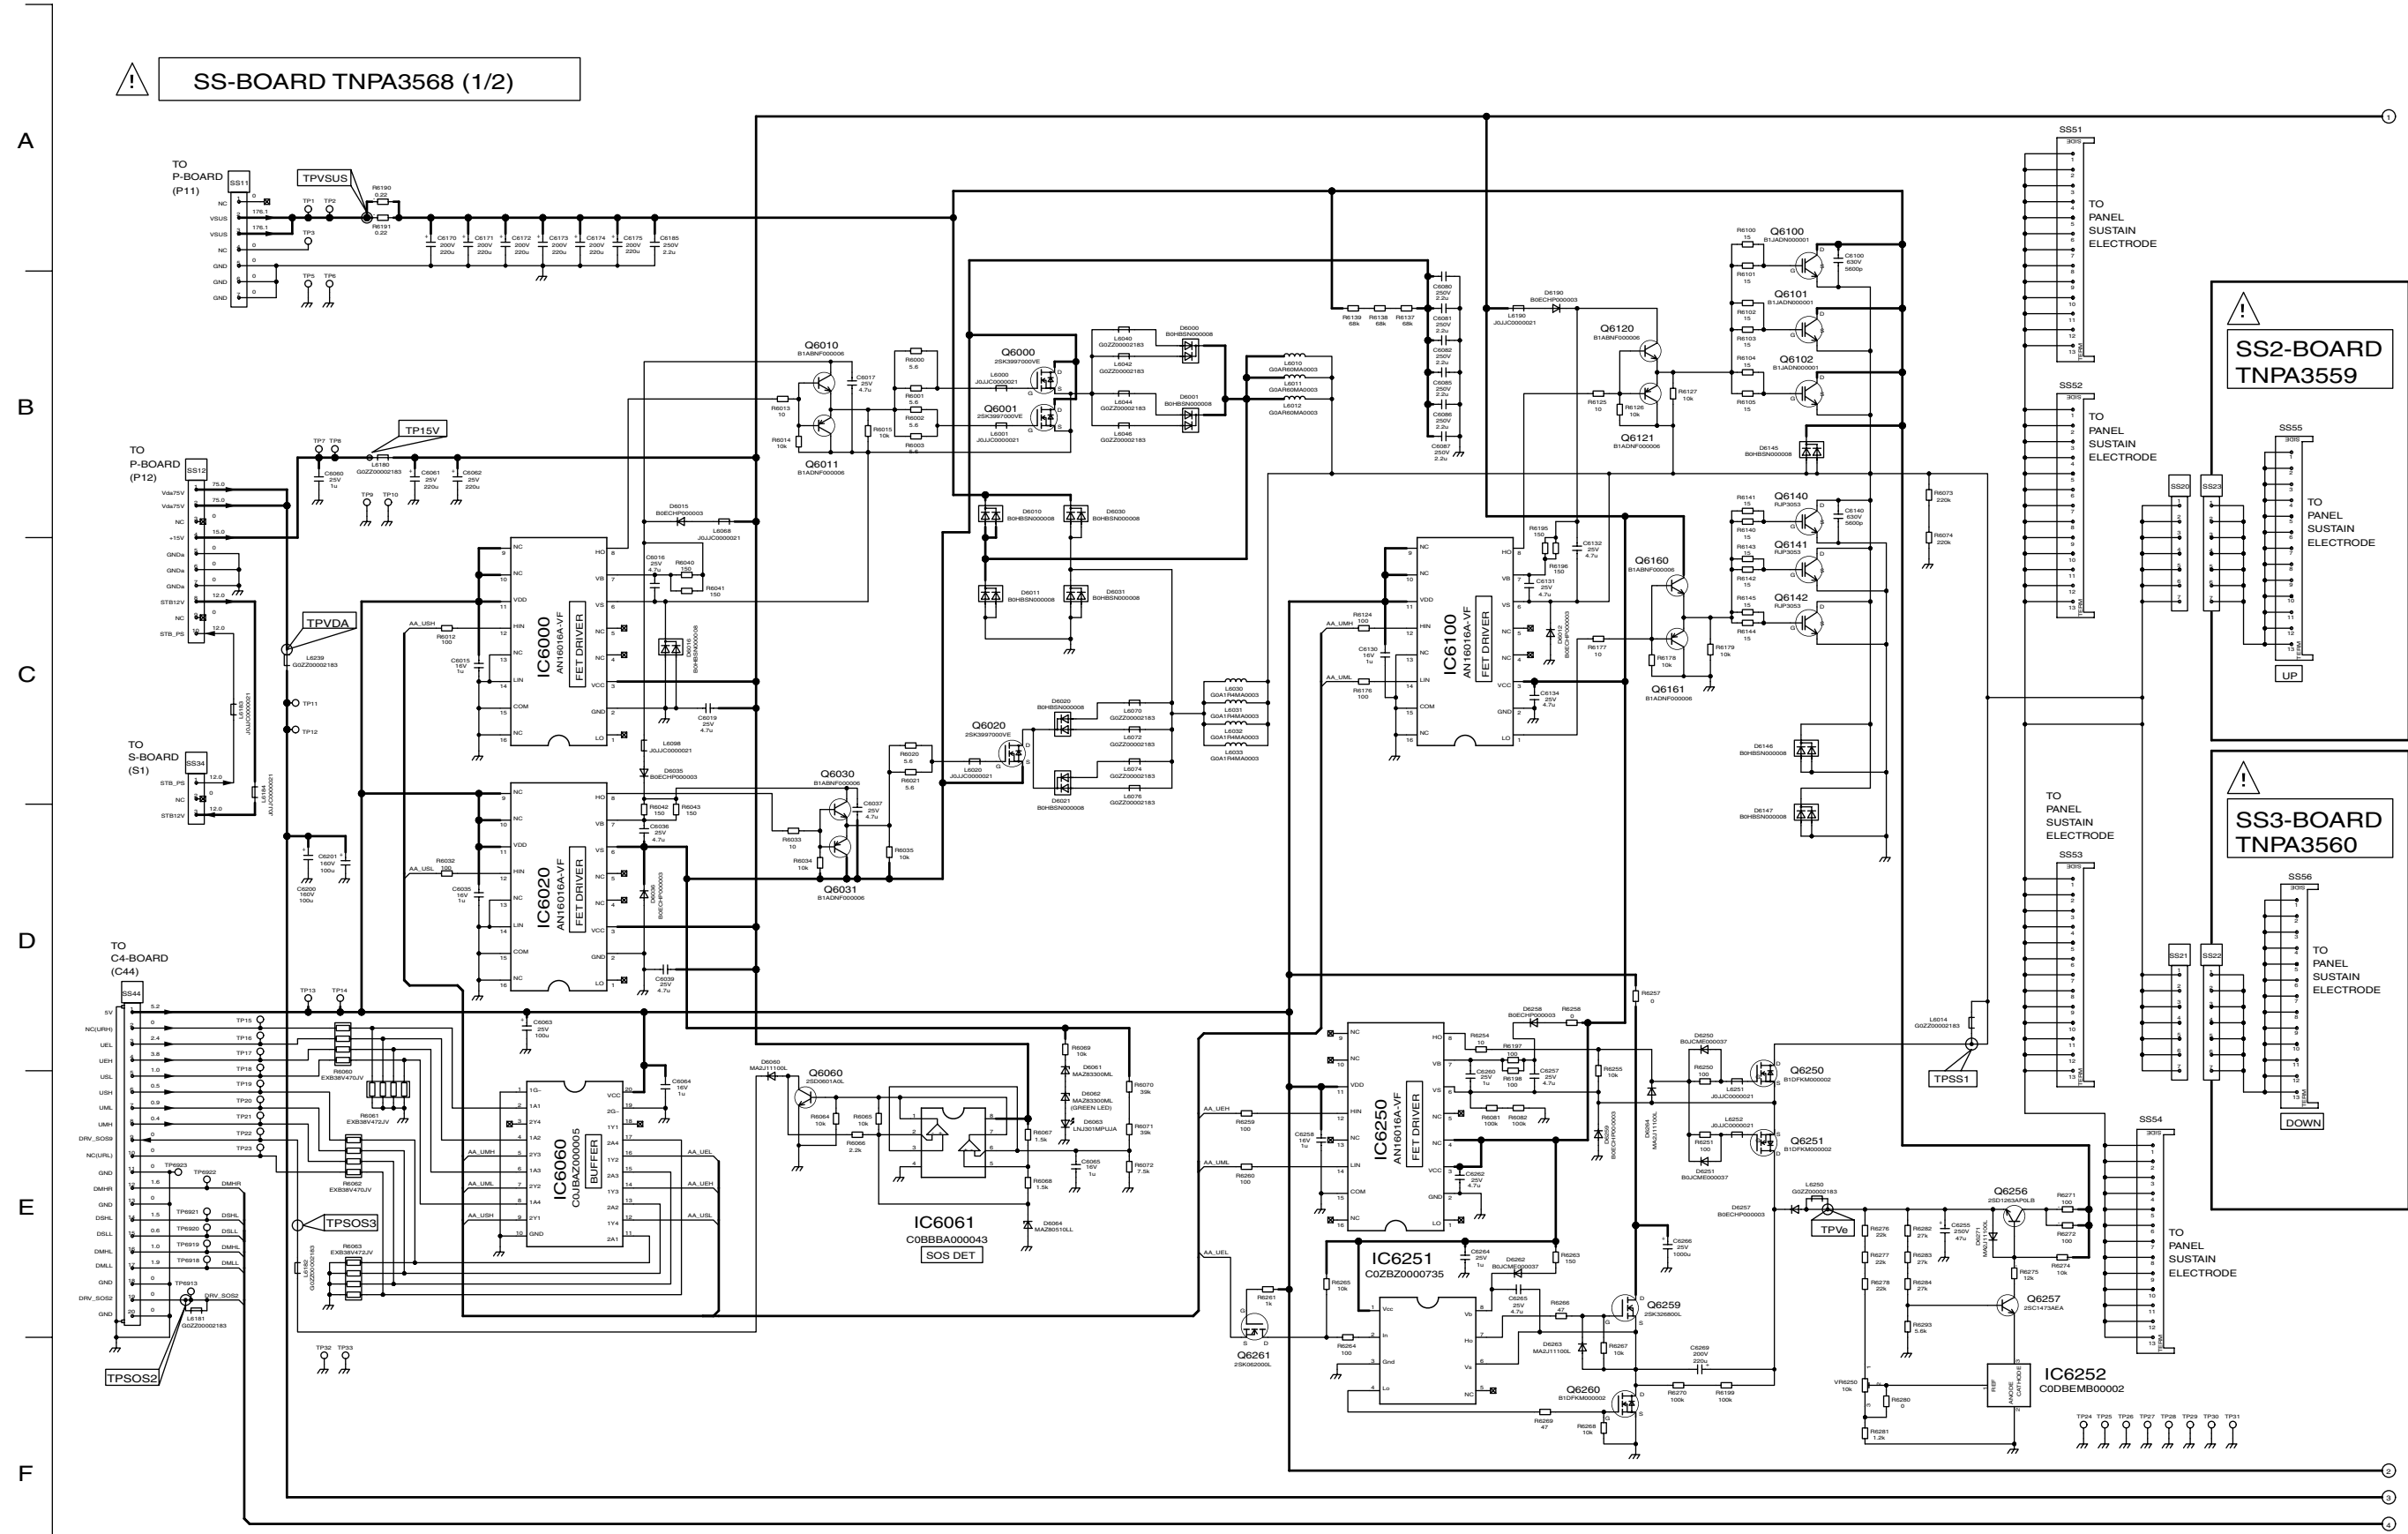

TH-50PX50U
SS-Board (1 of 2), SS2 and SS3 Schematic Diagram


TH-50PX50U
SS-Board (1 of 2), SS2 and SS3 Schematic Diagram




TH-50PX50U
SS-Board (2 of 2) Schematic Diagram

14 Parts Location & Mechanical Replacement Parts List


14.1. Parts Location

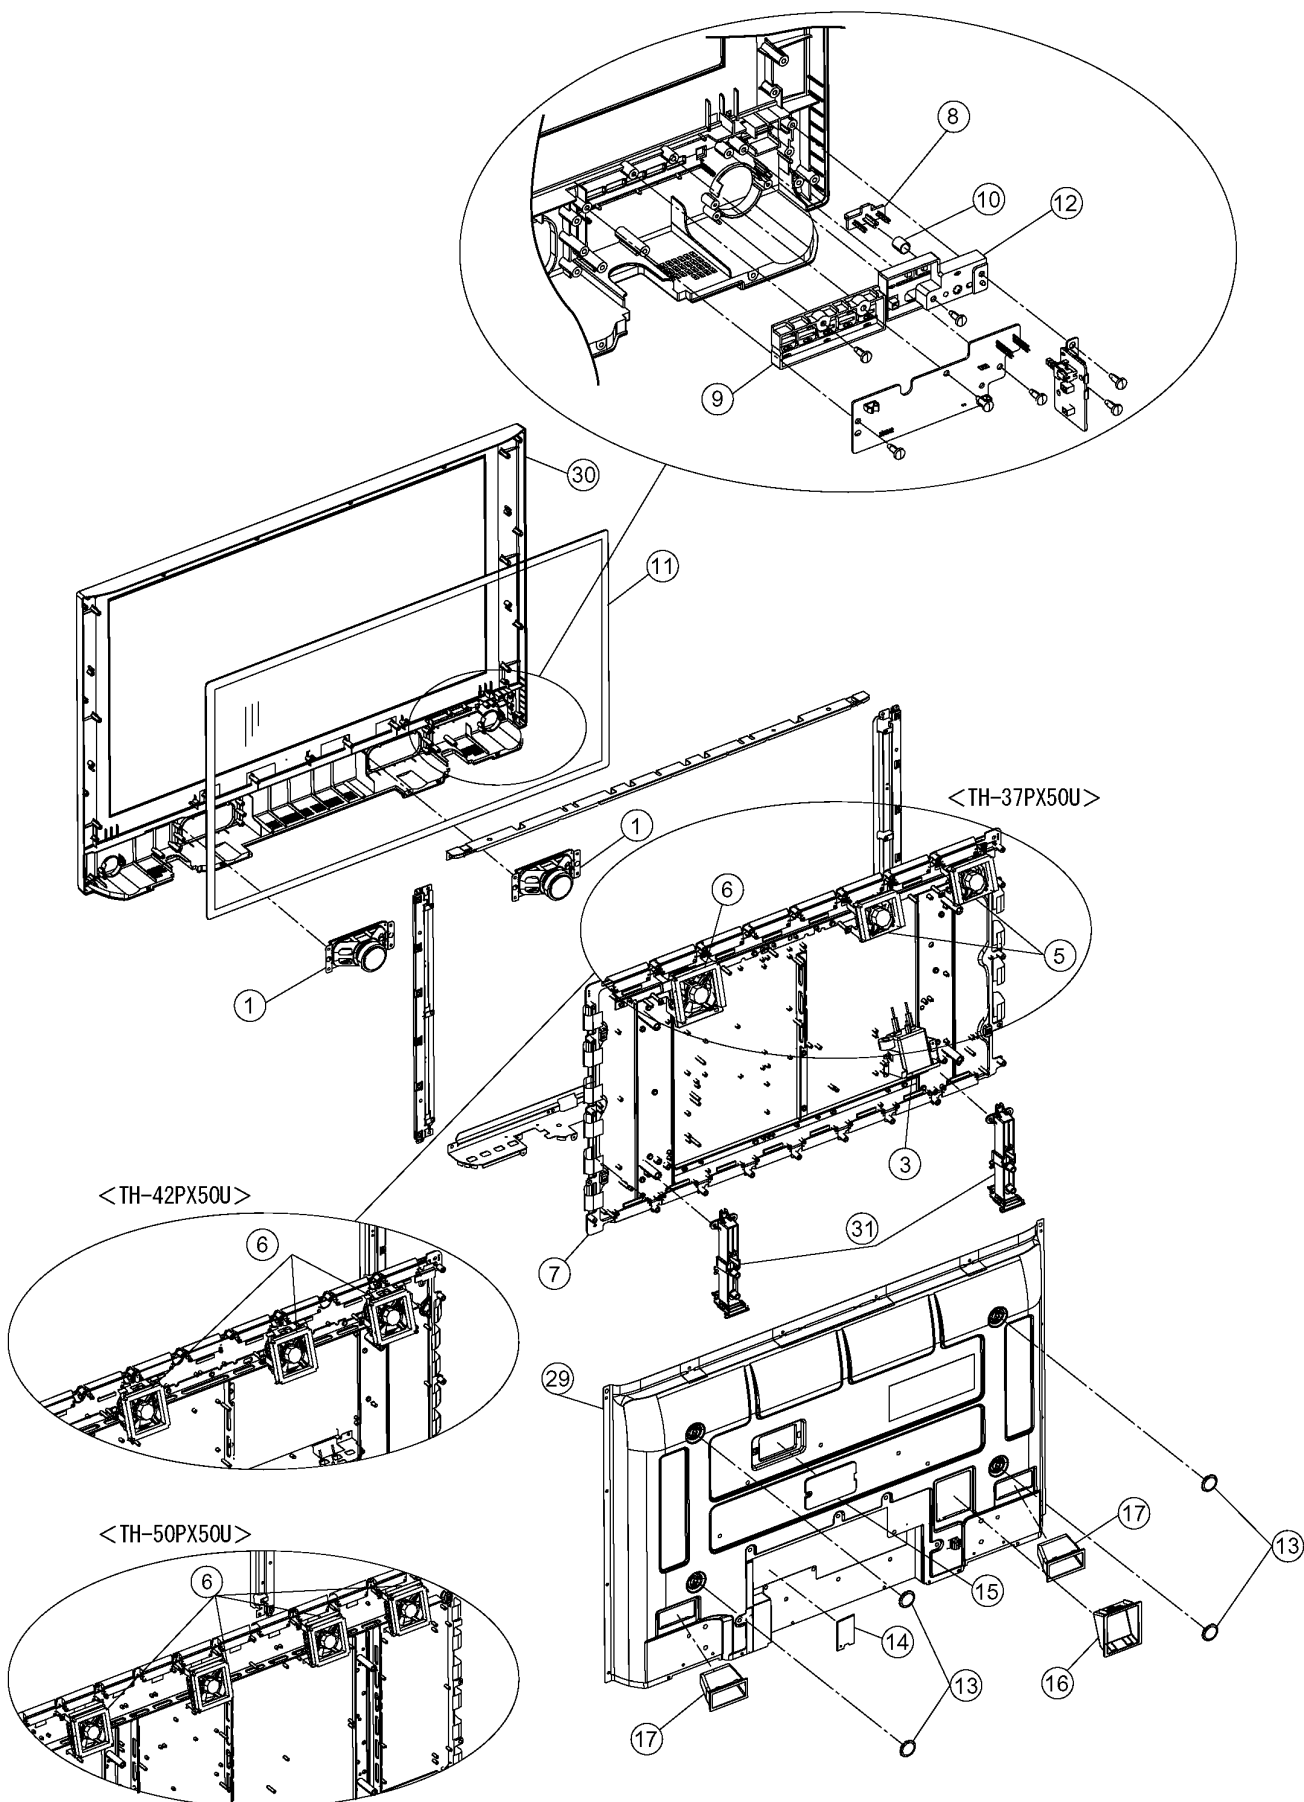


14.2. Pcaking Exploded Views (1)

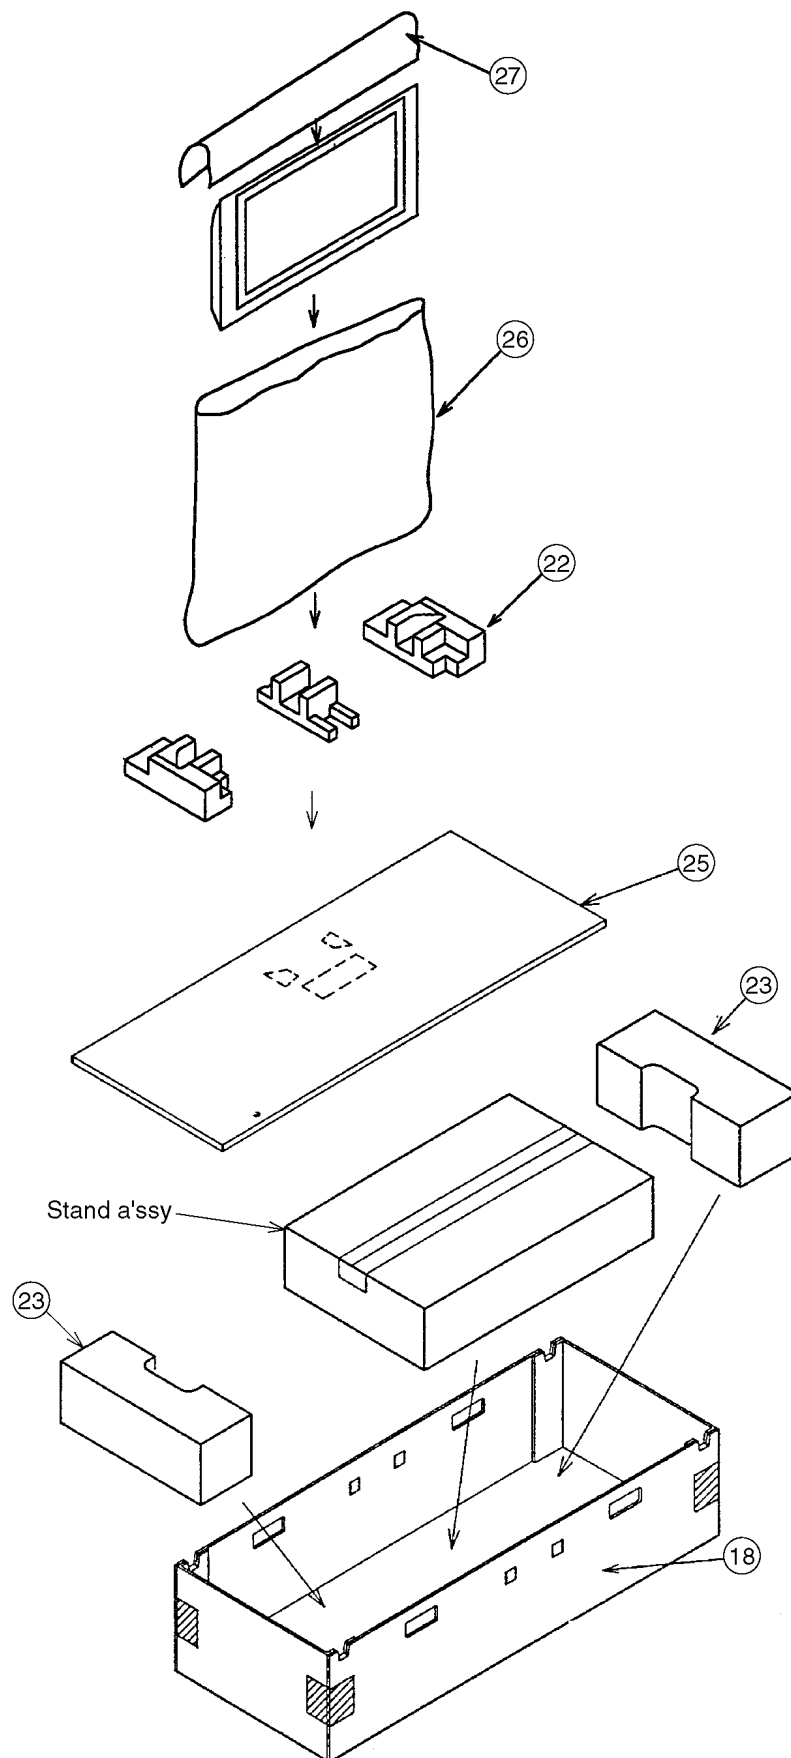

14.3. Packing Exploded Views (2)

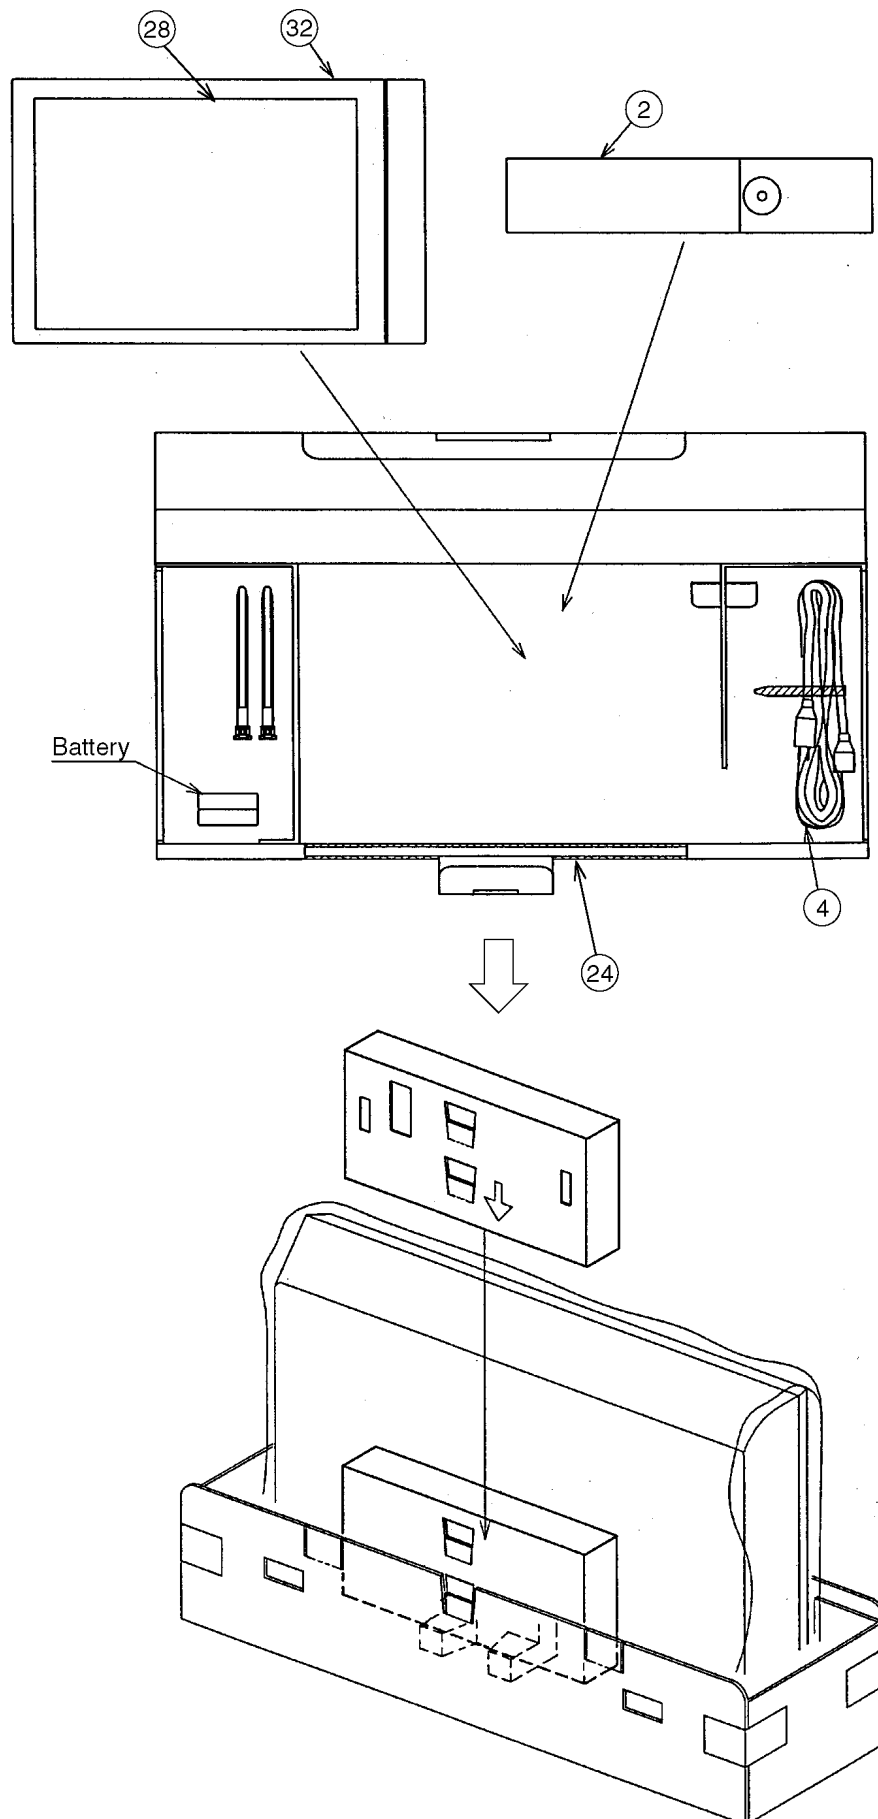

14.4. Packing Exploded Views (3)

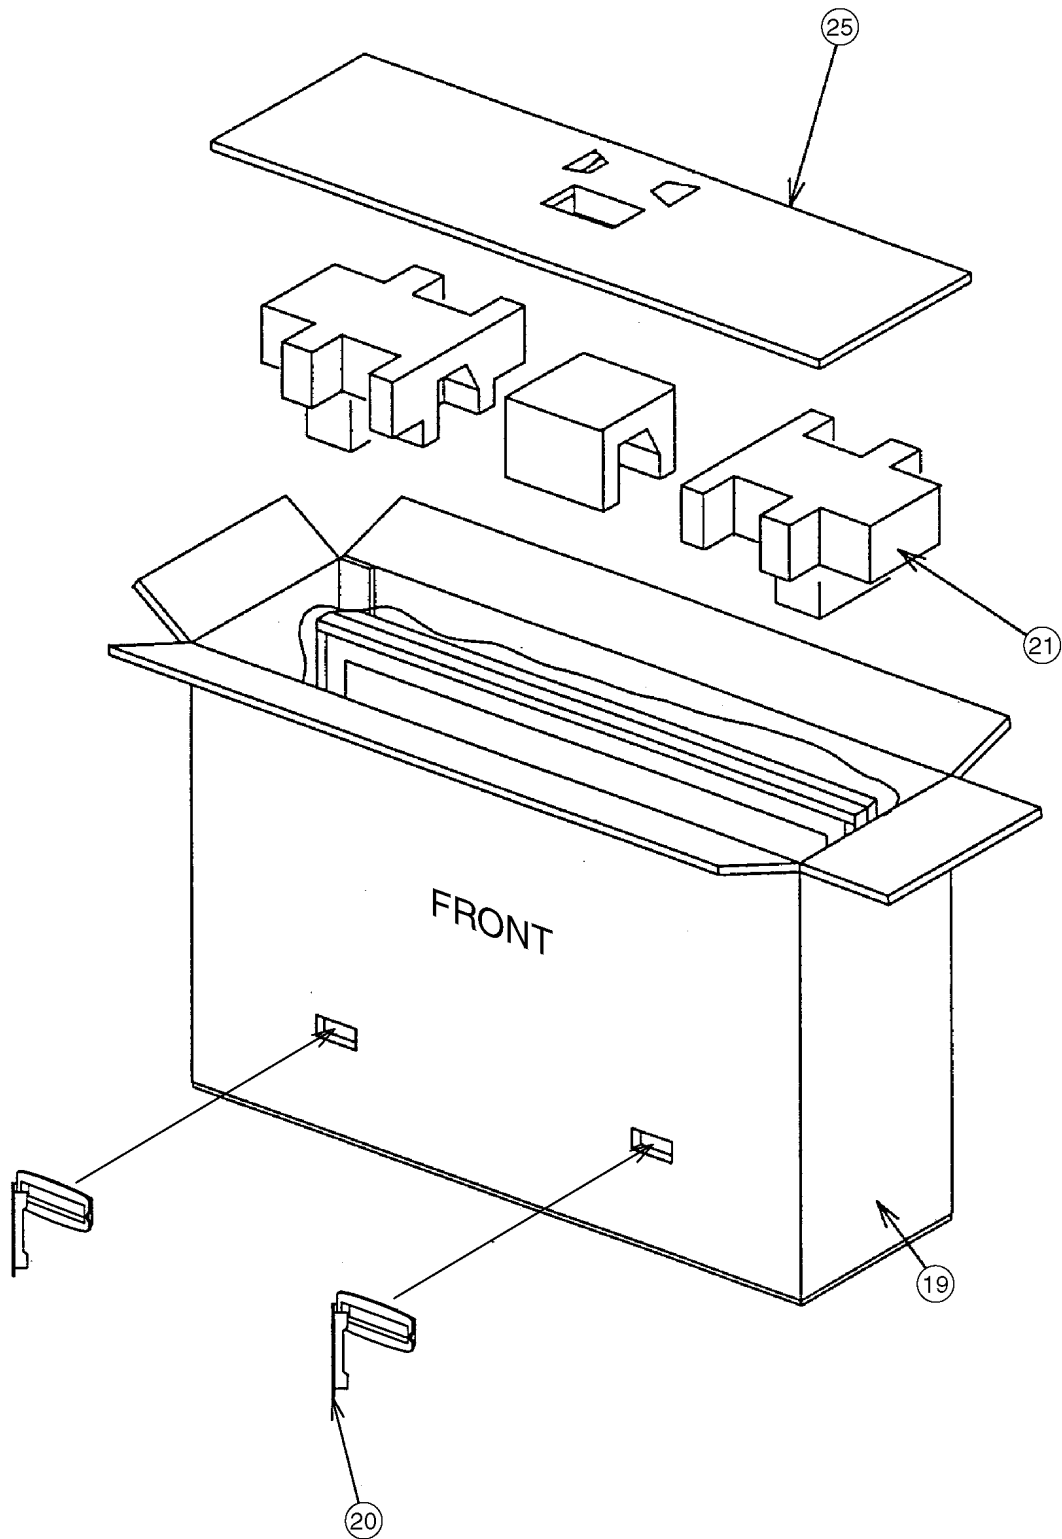

14.5. Mechanical Replacement Parts List

Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
1	EAS12S08A	SPEAKER	2	
2	EUR7627Z60	REMOTE CONTROL	1	
	J0KD00000095	FLAT CORE	4	TH-37/42PX50U
	J0KD00000095	FLAT CORE	2	TH-50PX50U
	J0KD00000096	FLAT CORE	2	TH-50PX50U
	J0KF00000018	FILTER	6	
	J0KG00000014	FILTER	4	
	K1LA12A00003	12P CONNECTOR	1	TH-37PX50U
	K1LB12A00018	12P CONNECTOR	1	TH-37PX50U
	K1YD68000002	CONNECTOR	2	TH-50PX50U
3	K2AH3H000034	AC-INLET	1	△
4	K2CG3DH00025	AC CORD	1	△
	K4DJD0000017	F TERMINAL (3C TYPE)	2	
5	L6FAKEDH0009	FAN (SMALL)	2	TH-37PX50U
6	L6FALEFH00028	FAN	1	TH-37PX50U
6	L6FALEFH00028	FAN	3	TH-42PX50U
6	L6FALEFH00028	FAN	4	TH-50PX50U
7	MD37H08A1J	PLASMA DISPLAY PANEL	1	TH-37PX50U △
7	MD42H08A1J	PLASMA DISPLAY PANEL	1	TH-42PX50U △
7	MD50H08A1J	PLASMA DISPLAY PANEL	1	TH-50PX50U △
	TBL63413-1	RUBBER	8	TH-37/42PX50U
	TBLA3339	STAND-BASE (LEFT)	1	TH-37/42PX50U
	TBLA3340	STAND-BASE (RIGHT)	1	TH-37/42PX50U
	TBLA3341	STAND POLE	2	TH-37/42PX50U
	TBLB3145	STAND-BASE COVER	1	TH-37/42PX50U
	TBMA149	PANASONIC BADGE (SILVER)	1	
8	TBXA46302	POWER BUTTON	1	
9	TBXA46402	5KEYS BUTTON	1	
10	TES4G204	SPRING	1	
	THEL027N	SCREW	4	
	THEL035N	SCREW	118	TH-37PX50U
	THEL035N	SCREW	116	TH-42PX50U
	THEL035N	SCREW	159	TH-50PX50U
	THEL0429	SCREW	23	
	THEL0439	SCREW (FLOCK)	4	
	THTA0379	SCREW	2	
	THTD010N	SCREW	10	TH-37PX50U
	THTD010N	SCREW	9	TH-42PX50U
	THTD010N	SCREW	12	TH-50PX50U
	THTD011J	SCREW	3	TH-37PX50U
	THTD011J	SCREW	4	TH-42/50PX50U
	TJSD000401	F TERMINAL (5C TYPE)	2	
11	TKGA5194	FRONT GLASS	1	TH-37PX50U
11	TKGA5195	FRONT GLASS	1	TH-42PX50U
11	TKGA5196	FRONT GLASS	1	TH-50PX50U
12	TKKC5208	PANEL LIGHT	1	
13	TKKL5231	COVER	4	
14	TKKL5306	ADJUSTMENT COVER (SMALL)	1	
15	TKKL5330	ADJUSTMENT COVER (LARGE)	1	
	TKKX5056	POWER BUTTON COVER	1	
16	TKPA94301	INLET COVER	1	
17	TKRA34802	B/COVER HANDLE	2	TH-37PX50U
17	TKRA46201	B/COVER HANDLE	2	TH-42/50PX50U
	TMKG288	SPONGE (TKG/UPPER/BOTTOM)	2	TH-42PX50U
	TMKG308	SPONGE (TKG/UPPER/BOTTOM)	2	TH-37PX50U

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TMKG289	SPONGE (TKG/LEFT/RIGHT)	2	TH-42PX50U
	TMKG309	SPONGE (TKG/LEFT/RIGHT)	2	TH-37PX50U
	TMKG468-1	SPONGE	3	
	TMKG562	SPONGE	1	TH-37PX50U
	TMKG562	SPONGE	3	TH-42PX50U
	TMKG563	SPONGE	2	TH-37PX50U
	TMM15414-2	CLAMPER	2	
	TMM17499	CLAMPER	1	
	TMM23416	SPACER	11	TH-50PX50U
	TMM25401	CLAMPER	9	TH-37PX50U
	TMM25401	CLAMPER	5	TH-42PX50U
	TMM25401	CLAMPER	7	TH-50PX50U
	TMM7464-2	CLAMPER	1	
	TMM7468-1	CLAMPER	3	
	TMME047	CLAMPER	7	TH-37PX50U
	TMME047	CLAMPER	6	TH-42PX50U
	TMME047	CLAMPER	6	TH-50PX50U
	TMME061	CLAMPER	5	TH-37/42PX50U
	TMME061	CLAMPER	4	TH-50PX50U
	TMME075	EDGE SADDLE	6	TH-37PX50U
	TMME075	EDGE SADDLE	4	TH-42PX50U
	TMME190	CLAMPER	1	TH-37/42PX50U
	TMME190	CLAMPER	2	TH-50PX50U
	TMME199	CLAMPER	5	TH-37PX50U
	TMME199	CLAMPER	8	TH-42PX50U
	TMME199	CLAMPER	2	TH-50PX50U
	TMME206	CLAMPER	2	
	TMME226	CLAMPER	1	
	TMME253	CLAMPER	1	
	TMMJ068	RUBBER	10	TH-37PX50U
	TMMJ068	RUBBER	9	TH-42PX50U
	TMMJ068	RUBBER	12	TH-50PX50U
	TMMJ078	CUSHION (RUBBER)	8	TH-37PX50U
	TMMJ082	CUSHION (RUBBER)	4	TH-37PX50U
	TMMJ082	CUSHION (RUBBER)	12	TH-42PX50U
	TMMJ082	CUSHION (RUBBER)	16	TH-50PX50U
	TMZX5050	STAND-BRACKET	1	TH-42PX50U
18	TPC2AA4601	CARTON BOTTOM	1	TH-42PX50U PAVCA
18	TPCB78301	CARTON BOTTOM	1	TH-37PX50U PAVCA
18	TPC2AA4801	CARTON BOTTOM	1	TH-50PX50U PAVCA
19	TPCB75501	CARTON TOP	1	TH-37PX50U PAVCA △
19	TPCB75302	CARTON TOP	1	TH-42PX50U PAVCA △
19	TPCB75601	CARTON TOP	1	TH-50PX50U PAVCA △
20	TPD169487	JOINT	4	
21	TPD2AA04301	CUSHION TOP	1	
22	TPD2AA04501	CUSHION BOTTOM	1	
23	TPD2AA04901	CUSHION FOR STAND	1	
24	TPD2AF00661	ACCESSORIES BOX	1	
25	TPD2AF00711	TOP/BOTTOM PAD	2	TH-42PX50U
25	TPD2AF00721	TOP/BOTTOM PAD	2	TH-37PX50U PAVCA
25	TPD2AF00731	TOP/BOTTOM PAD	2	TH-50PX50U PAVCA
32	TPE2A40055	BAG	1	PAVCA
26	TPE2AH0101	SET POLY COVER	1	PAVCA
27	TPE2AH0131	TOP PROTECT SHEET	1	PAVCA
28	TQB2AA0543	INSTRUCTION BOOK (ENGLISH)	1	PAVCA △
	TQEF035	POLY BAG	1	
	TQZH624	INSTRUCTION SHEET	1	
	TSXL438	CABLE (PA30-H30/DG20-PA2)	2	
	TSXL440	CABLE (D34-C41/D33-C31)	2	TH-37/42PX50U

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	TSXL448	CABLE(D31-C24/D32-C25)	2	TH-50PX50U
	TSXL449	CABLE(D33-C54/D34-C55)	2	TH-50PX50U
	TSXL450	CABLE(C10-C20/C21-C31/C50-60)	3	TH-50PX50U
	TSXL460	CABLE (Z50-H50)	1	
	TSXL461	CABLE (DG1-H1/DG2-H2)	2	
29	TTUA1149	REAR COVER	1	TH-42PX50U △
29	TTUA1151	REAR COVER	1	TH-37PX50U △
29	TTUA1150	REAR COVER	1	TH-50PX50U △
30	TXFKE01YCSU	ESCUTCHEON A'SSY	1	TH-50PX50U △
30	TXFKE01YDSU	ESCUTCHEON A'SSY	1	TH-42PX50U △
30	TXFKE01YESU	ESCUTCHEON A'SSY	1	TH-37PX50U △
	TXFMM010ZES	STOPPER (STAND)	1	
31	TXFMZ01YFSUA	STAND BLOCK A'SSY (LEFT OR RIGHT)	2	TH-37/42PX50U
31	TXFMZ01YCSUA	STAND BLOCK A'SSY (LEFT)	1	TH-50PX50U
31	TXFMZ02YCSUA	STAND BLOCK A'SSY (RIGHT)	1	TH-50PX50U
	TXJ/SWYFSE	SPEAKER LEAD	2	
	XTB3+10GFJ	SCREW	4	
	XTB4+12GFJ	SCREW	29	TH-37PX50U
	XTB4+12GFJ	SCREW	33	TH-42PX50U
	XTB4+12GFJ	SCREW	37	TH-50PX50U
	XTB4+12GFJK	SCREW	1	
	XTB4+15AFJK	SCREW	22	
	XTB4+8JFL	SCREW	8	TH-37/42PX50U
	XTB4+20GFJ	SCREW	10	TH-50PX50U
	XTV3+10JFJK	SCREW(HDMI)	1	
	XTW4+25DFJ	SCREW	14	TH-50PX50U PAVCA
	XTW4+35DFJ	SCREW	12	TH-37PX50U
	XTW4+35DFJ	SCREW	10	TH-42PX50U
	XYC3+JF12FJ	SCREW	3	TH-50PX50U
	XYC4+FJ35FJK	SCREW	8	TH-37/42PX50U
	XYN3+F10FJ	SCREW	2	
	XYN3+F8FJ	SCREW	38	TH-37/42PX50U
	XYN3+F8FJ	SCREW	41	TH-50PX50U
	XYN3+J12FJ	SCREW	33	TH-37/42PX50U
	XYN3+J12FJ	SCREW	36	TH-50PX50U
	XYN3+J8FJ	SCREW ROHS	5	
	XYN3+J8FJ	SCREW ROHS	1	
	XYN3+J10FJ	SCREW	1	
	XYN4+E8FJ	SCREW(EARTH)	1	
	XYN5+C15FJ	SCREW	8	
	XYN5+F20J	SCREW	4	TH-37/42PX50U
	XYN5+F30FJK	SCREW	4	TH-37/42PX50U
	XZB12X25D03	SCREW	2	
	XZB7.5X9D05	SCREW	1	
	TPCB79101	CARTON BOX (STAND)	1	TH-37/42PX50U
	TPDA1120	CUSHION TOP (STAND)	1	TH-37/42PX50U
	TPDA1121	CUSHION BOTTOM (STAND)	1	TH-37/42PX50U
	TXFBL010ZES	STAND A'SSY	1	TH-37/42PX50U
	TPDF1401	PAD BOTTOM (STAND)	1	
	TPEH270	POLY BAG (STAND)	1	
	TPCB79102	CARTON BOX (STAND)	1	TH-50PX50U
	TPDA1160	CUSHION TOP (STAND)	1	TH-50PX50U
	TPDA1161	CUSHION BOTTOM (STAND)	1	TH-50PX50U
	TXFBL010APT	STAND A'SSY	1	TH-50PX50U
	TQZH656	INSTRUCTION SHEET	1	TH-50PX50U

15 Electrical Replacement Parts List

15.1. Replacement Parts List Notes

Important Safety Notice

*Components identified by Δ mark have special characteristics important for safety.
When replacing any of these components, use only manufacturer's specified parts.*

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.

After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.

After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 $\underline{C}$ 100KOHM, $\underline{J}$ 1/4W

Type

Allowance

2. Capacitor

Example:

ECKF1H103ZF $\underline{C}$ 0.01UF, $\underline{Z}$ 50V

Type

Allowance

Type	Allowance
C : Carbon	F : $\pm 1\%$
F : Fuse	G : $\pm 2\%$
M : Metal Oxide	J : $\pm 5\%$
Metal Film	K : $\pm 10\%$
S : Solid	M : $\pm 20\%$
W : Wire Wound	

Type	Allowance
C : Ceramic	C : $\pm 0.25\text{pF}$
E : Electrolytic	D : $\pm 0.5\text{pF}$
P : Polyester	F : $\pm 1\text{pF}$
Polypropylene	G : $\pm 3\text{pF}$
T : Tantalum	J : $\pm 5\text{pF}$
	K : $\pm 10\text{pF}$
	L : $\pm 15\text{pF}$
	M : $\pm 20\text{pF}$
	P : +100%, -0%
	Z : +80%, -20%

15.2. Electrical Replacement Parts List (TH-37PX50U)

Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F401.402	K5D802BNA005	TIME LAG FUSE HIGH	2	△
C11	K1MN55BA0076	55P CONNECTOR	1	
C12	K1KA04BA0107	4P CONNECTOR	1	
C21	K1MN55BA0076	55P CONNECTOR	1	
C22	K1KA04BA0107	4P CONNECTOR	1	
C24	K1KA04AA0150	4P CONNECTOR	1	
C31	K1MN55BA0076	55P CONNECTOR	1	
C32	K1KA12AA0153	12P CONNECTOR	1	
C33	K1KA04BA0107	4P CONNECTOR	1	
C41	K1MN55BA0076	55P CONNECTOR	1	
C43	K1KA04BA0107	4P CONNECTOR	1	
C2300	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C2301	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	
C2310,11	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
C2335	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C2337	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2338	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2340	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2341	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2342	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2343	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2344	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2346	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2347	ECA1VHG470	E 47UF, 35V	1	
C2348	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2349	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2350	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2351	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2352	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2353	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2355	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2356	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2374	ECA1HHG100	E 10UF, 50V	1	
C2376-79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384-87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,29	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2433,34	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2437,38	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2441,42	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,46	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,50	ECA1EHG331	E 330UF, 25V	2	
C2453,54	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2457,58	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,62	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,66	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2469,70	ECJ2FB1E105K	C 1UF, K, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2473,74	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2477,78	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2481-84	ECJ2FB1E224K	C 22UF, K, 25V	4	
C2489,90	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2497,98	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2602	ECA1CHG101	E 100UF, 16V	1	
C2603	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2606	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2607	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2608	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2609	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2610-14	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
C2615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2616	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2617	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2620,21	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2625,26	ECJ3YB1C475K	C 0.047UF, K, 16V	2	
C2633,34	TCUY1C225ZFN	C 2.2UF, 16V	2	
C2637	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2644-50	ECJ1VF1A105Z	C 1UF, Z, 10V	7	
C2651	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2652	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2654,55	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C2656	ECA1CHG101	E 100UF, 16V	1	
C2657	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2660,61	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2662	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2663	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2664	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2665-68	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C2670	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2672	ECA1CHG470	E 47UF, 16V	1	
C2673	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2675	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2676	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2678	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2684-89	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
C2701	ECA1CHG101	E 100UF, 16V	1	
C2702	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2703	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2705	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2708	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2710	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2712	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2715	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2717	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2718	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2723	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2725	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2729,30	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2733,34	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2736-44	ECJ1VF1A105Z	C 1UF, Z, 10V	9	
C2747	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2750	ECA1HHG220	E 22UF, 50V	1	
C2775	ECA1EHG471	E 470UF, 25V	1	
C2776,77	ECJ2VF1C105Z	C 1UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2779,80	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2783	ECA1HHG220	E 22UF, 50V	1	
C4001	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4005,06	ECJ1XC1H180J	C 18PF, J, 50V	2	
C4008-11	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4012	ERJ3GEYJ680	M 68 OHM, J, 1/16W	1	
C4013-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4016	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4017,18	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4020	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4023	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4024	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4025	ECJ1XC1H220J	C 22PF, J, 50V	1	
C4030	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4032	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4033	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4034	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4035	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4038	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4042,43	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
C4051	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4053	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4054	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4055	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4057	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4059	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4063	ECJ1XC1H561J	C 560PF, J, 50V	1	
C4067	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4071	EEH0P0J470P	C 47PF, J, 6.3V	1	
C4074	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4096	EEVHB1E330	E 33UF, 25V	1	
C4098	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4099,00	ECJ1VC1H120J	C 12PF, J, 50V	2	
C4102,03	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4104	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4107	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4120	EEFCD0G560R	56UF,	1	
C4121	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4123	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4124	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4126	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4127	ECJ1VB1H153K	C 0.015UF, K, 50V	1	
C4129	EEVHB0J470R	E 47UF, 6.3V	1	
C4130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4131,32	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C4133	EEH0B1C100R	C 10PF, J, 16V	1	
C4134	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4135-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4141	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4142	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4143	EEVHB0J470R	E 47UF, 6.3V	1	
C4144	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4145-47	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4148	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C4149	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4153,54	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4155	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4160	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4161	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
C4165	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4172	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4181,82	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4184	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4186	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4191	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4203	EEVHB0J470R	E 47UF, 6.3V	1	
C4205	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4208-10	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4215	EEVHB1C470P	E 47UF, 16V	1	
C4216	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4217,18	ECJ1XC1H181J	C 180PF, J, 50V	2	
C4219,20	ECJ1XC1H330J	C 33PF, J, 50V	2	
C4221	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4222	EEVHB1C470P	E 47UF, 16V	1	
C4224	EEH0B1C100R	C 10PF, J, 16V	1	
C4225	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4227	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4229,30	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4231	EEVHB1C470P	E 47UF, 16V	1	
C4232,33	EEH0P1C100R	C 10PF, J, 16V	2	
C4234,35	ECJ1VB1H272K	C 2700PF, K, 50V	2	
C4236	EEVHB0J470R	E 47UF, 6.3V	1	
C4237-48	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4249	EEVHB0J470R	E 47UF, 6.3V	1	
C4250-54	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4257,58	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4259	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4260	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4261	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4262	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4263-65	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4267-69	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4270	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4271	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4272	EEVHB0J470R	E 47UF, 6.3V	1	
C4273-78	ECJ1XB1C104K	C 0.1UF, Z, 16V	6	
C4279	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4280	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4295	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4296	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4297	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4298	EEH0B0J330R	C 33PF, J, 6.3V	1	
C4299,00	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4301	EEH0B0J220R	C 22PF, J, 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4304	EEVHB0J470R	E 47UF, 6.3V	1	
C4305-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	11	
C4316	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4317-21	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4324,25	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4326	EEVHB0G221P	E 220UF, 4V	1	
C4327	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4328	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4329	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4330	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4331	EEVHB0J470R	E 47UF, 6.3V	1	
C4332-35	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4336	ECJ1VF1A105Z	C 1UF, Z, 10V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4338	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4339	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4456	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4457	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4459	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4461	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4463,64	FlK1A1060010	C 0.010UF, K, 6.3V	2	
C4465,66	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4468,69	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4470-73	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4474-77	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4478-81	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4482-84	ECJ1XC1H102J	C 1000PF, J, 50V	3	
C4486-90	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4492	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4493,94	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C4495-97	ECJ1XB0J105K	C 1UF, K, 16V	3	
C4498-13	ECJ1XC1H102J	C 1000PF, J, 50V	16	
C4514	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4515	EEFCD0G560R	56UF,	1	
C4516-27	ECJ1VB1H103K	C 0.001UF, K, 50V	12	
C4528	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4534-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4587	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4588	EEHBB0G221P	C 220PF, J, 4V	1	
C4589	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4590	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4591	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4780	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4781-84	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4785	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4787	EEVHB0J470R	E 47UF, 6.3V	1	
C4788	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4789	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4790	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4791	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4792-96	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
C4797	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4798	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4799	EEHBB1C100R	C 10PF, J, 16V	1	
C4800	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4802	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4803	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821SB	E 820UF, 16V	1	
C5613	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5617	EEUFC1C821SB	E 820UF, 16V	1	
C5618,19	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	
C5637	ECJ2VF1C474Z	C 0.47UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C5641-44	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,02	EEUFC1E471	E 470UF, 25V	2	
C5803	EEUFC1E470	E 47UF, 25V	1	
C5805	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C5809	ECJ3XF1E105Z	C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
C5820	ECA1CM102	E 1000UF, 16V	1	
C5821	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5823	ECA1CM222	E 2200UF, 16V	1	
C6001-05	ECQE2105RKB	P 1UF, 250V	5	
C6007	ECWF2205JS	P 2UF, 250V	1	
C6008	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6011-14	F2A2T201A001	E 200UF,	4	
C6017	FlL2J562A022	C 5600UF, K, 6.3V	1	
C6018	EEUFC1E221	E 220UF, 25V	1	
C6020	EEUFC1E221	E 220UF, 25V	1	
C6021,2	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6024,25	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6027	FlL1E4750004	C 4.7UF, 25V	1	
C6029,30	ECJ4XB1E475M	C 4.7UF, M, 25V	2	
C6032	FlL1E4750004	C 4.7UF, 25V	1	
C6036,37	TCUY1C105ZFN	C 1UF, 16V	2	
C6059	FlL2J562A022	C 5600UF, K, 6.3V	1	
C6068	EEUFC1E470	E 47UF, 25V	1	
C6069	ECA2CM101	E 100UF, 160V	1	
C6070	ECA2DHG221	E 220UF, 200V	1	
C6073	ECA2CM101	E 100UF, 160V	1	
C6074-78	ECQE2105RKB	P 1UF, 250V	5	
C6081	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6083	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6086	FlL1E4750004	C 4.7UF, 25V	1	
C6087	FlK1E1050001	C 1UF, Z, 25V	1	
C6500	ECA2CHG100	E 10UF, 160V	1	
C6501	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C6502	TCUY1C105ZFN	C 1UF, 16V	1	
C6504	EEUFC1E221	E 220UF, 25V	1	
C6505	ECA1HM221	E 220UF, 50V	1	
C6506	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C6507	ECA2CM101	E 100UF, 160V	1	
C6508	FlL1E4750004	C 4.7UF, 25V	1	
C6509	EEUFC1E470	E 47UF, 25V	1	
C6511	ECA1HM101	E 100UF, 50V	1	
C6512,13	FlL1E4750004	C 4.7UF, 25V	2	
C6514	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C6515,16	FlL1E4750004	C 4.7UF, 25V	2	
C6517	ECJ2XB1H393K	C 0.039UF, K, 50V	1	
C6518	TCUY1C105ZFN	C 1UF, 16V	1	
C6520	EEUFC1E221	E 220UF, 25V	1	
C6521	ECA2CM101	E 100UF, 160V	1	
C6522,23	FlK2J332A014	C 3300UF, K, 6.3V	2	
C6524	F2A2G100A017	E 100UF, 400V	1	
C6525	ECJ3XB2J222K	C 2200PF, K, 630V	1	
C6526	FlK2J332A014	C 3300UF, K, 6.3V	1	
C6527,28	TCUY1C105ZFN	C 1UF, 16V	2	
C6532	TCUY1C105ZFN	C 1UF, 16V	1	
C6533	ECA2VHG100	E 10UF, 350V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6534	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6536,37	F1L1E4750004	C 4.7UF, 25V	2	
C6538	ECA2CM101	E 100UF, 160V	1	
C6540,41	F1L1E4750004	C 4.7UF, 25V	2	
C6543	F1L1E4750004	C 4.7UF, 25V	1	
C6544	ECA1VM470	E 47UF, 35V	1	
C6545	F1K2J471A014	C 470UF, K,6.3V	1	
C6547	ECA2EHG470	E 47UF, 250V	1	
C6549	F1L1E4750004	C 4.7UF, 25V	1	
C6550,51	F1K2J102A014	C 1000PF,	2	
C6553	F1L1E4750004	C 4.7UF, 25V	1	
C6555	ECA2CM101	E 100UF, 160V	1	
C6559	TCUY1C105ZFN	C 1UF, 16V	1	
C6561,62	TCUY1C105ZFN	C 1UF, 16V	2	
C6563	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6564	TCUY1C105ZFN	C 1UF, 16V	1	
C6566	TCUY1C105ZFN	C 1UF, 16V	1	
C6567-70	F2A2T201A001	E 200UF,	4	
C6571	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6572	ECWF2205JS	P 2UF, 250V	1	
C6573	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6574	EEUFC1E221	E 220UF, 25V	1	
C6577	F1L2J562A022	C 5600UF, K,6.3V	1	
C6585,86	F1L1E4750004	C 4.7UF, 25V	2	
C6589	F1L1E4750004	C 4.7UF, 25V	1	
C6591	ECA2CM101	E 100UF, 160V	1	
C6596	F1L1E4750004	C 4.7UF, 25V	1	
C6598	F1L1E4750004	C 4.7UF, 25V	1	
C6601	ECQE2224KF	P 2.2UF, K,250V	1	
C6602-05	F1L1E4750004	C 4.7UF, 25V	4	
C6607	ECJ3FC2D102J	C 1000PF, J,200V	1	
C6609	ECJ3FC2D102J	C 1000PF, J,200V	1	
C6617,18	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6619,20	TCUY1C105ZFN	C 1UF, 16V	2	
C6621,22	EEUFC1E470	E 47UF, 25V	2	
C6623-27	ECQE2105RKB	P 1UF, 250V	5	
C6633	F1L2J562A022	C 5600UF, K,6.3V	1	
C6649-53	ECQE2105RKB	P 1UF, 250V	5	
C6670	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6672	F1L1E4750004	C 4.7UF, 25V	1	
C6673	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6676	F1L1E4750004	C 4.7UF, 25V	1	
C6901-06	TCUY1C105ZFN	C 1UF, 16V	6	
C6907,08	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C6917-20	F1L2E1040002	E 1000UF, 25V	4	
C6926-31	TCUY1C105ZFN	C 1UF, 16V	6	
C6932,33	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C6940-43	F1L2E1040002	E 1000UF, 25V	4	
C7103	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7106	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7107	TCUY1C105ZFN	C 1UF, 16V	1	
C7123	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7126	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7127	TCUY1C105ZFN	C 1UF, 16V	1	
C7143	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7146	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7147	TCUY1C105ZFN	C 1UF, 16V	1	
C7163	ECJ3XB2A474K	C 0.47UF, 6.3V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7166	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7167	TCUY1C105ZFN	C 1UF, 16V	1	
C7180	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7184	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7186	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7188	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7203	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7206	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7207	TCUY1C105ZFN	C 1UF, 16V	1	
C7223	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7226	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7227	TCUY1C105ZFN	C 1UF, 16V	1	
C7243	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7246	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7247	TCUY1C105ZFN	C 1UF, 16V	1	
C7263	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7266	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7267	TCUY1C105ZFN	C 1UF, 16V	1	
C7281	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7283	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7285	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7287	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7300	TCUY1C105ZFN	C 1UF, 16V	1	
C7301	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7304	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7320	TCUY1C105ZFN	C 1UF, 16V	1	
C7321	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7324	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7340	TCUY1C105ZFN	C 1UF, 16V	1	
C7341	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7344	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7360	TCUY1C105ZFN	C 1UF, 16V	1	
C7361	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7364	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7381	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7383	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7385	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7389	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7396,97	ECJ1XC1H220J	C 22PF, J, 50V	2	
C7400	TCUY1C105ZFN	C 1UF, 16V	1	
C7401	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7404	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7420	TCUY1C105ZFN	C 1UF, 16V	1	
C7421	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7424	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7440	TCUY1C105ZFN	C 1UF, 16V	1	
C7441	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7444	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7460	TCUY1C105ZFN	C 1UF, 16V	1	
C7461	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7464	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7481	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7483	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7485	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7487	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8099,00	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8101,02	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8103,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8105	EEEB0G101R	C 100PF, J, 4V	1	
C8106,07	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8108	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8109	EEEB0G101R	C 100PF, J, 4V	1	
C8110,11	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8112	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8113-18	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C8120,21	ECJ0EB1A104K	C 0.1UF, K, 10V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8128,29	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8144	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8145	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8162	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8164	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8200	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8201	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8202,03	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8204	EEHBOJ221P	C 220PF, J, 6.3V	1	
C8205	EEHBB1H220P	C 22PF, J, 50V	1	
C8206,07	EEHBOJ221P	C 220PF, J, 6.3V	2	
C8208	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8209	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8210	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8211	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8214	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8215	ECJ0EC1H200J	C 200PF, K, 50V	1	
C8216	ECJ0EB1H271K	C 270PF, D, 50V	1	
C8217	ECJ0EC1H560J	C 560PF, K, 50V	1	
C8218,19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8220	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8221	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8222	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8223	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8224,25	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8226	EEHBB1C470P	C 47PF, J, 16V	1	
C8227	ECJ0EC1H101J	C 100PF, K, 50V	1	
C8228,29	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8230	ECJ0EC1H120J	C 120PF, K, 50V	1	
C8231	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8233	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8234,35	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8237	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8238,39	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8240	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8241-43	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8244	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8245	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8246	EEHBOG470R	C 47PF, J, 4V	1	
C8247	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8248	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8249-51	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8252	ECJ0EB1H222K	C 2200UF, Z, 50V	1	
C8253-55	ECJ0EB1C103K	C0.010UF, K, 16V	3	
C8256	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8257	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8258,59	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8262	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8263	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8264,65	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8266	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8267	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8270	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8271	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8272	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8273	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8275,76	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8277	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8278,79	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8280,81	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8282	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8286-88	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8289	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8290	ECJ0EC1H101J	C 100PF, K, 50V	1	
C8291	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8292,93	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8294-97	ECJ0EB1H102K	C 1000PF, K, 50V	4	
C8298-01	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
C8302	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8303	EEHBB1C470P	C 47PF, J, 16V	1	
C8304,05	ECJ0EC1H150J	C 150PF, K, 50V	2	
C8306	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8308-10	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8311,12	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C8313-15	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8316	EEHBB1C100R	C 10PF, J, 16V	1	
C8317-19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8320	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8321-26	ECJ0EF1C104Z	C 0.10UF, Z, 16V	6	
C8327	EEHBB1C100R	C 10PF, J, 16V	1	
C8328-31	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
C8332	ECJ1XB1C153K	C 0.015UF, Z, 16V	1	
C8333-36	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
C8337	EEHBB1C100R	C 10PF, J, 16V	1	
C8338-53	ECJ0EF1C104Z	C 0.10UF, Z, 16V	16	
C8355,56	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8357,58	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8360	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8362	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8365	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8368-74	ECJ0EF1C104Z	C 0.10UF, Z, 16V	7	
C8375	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8377	ECGRLOG680R	C 68PF, J, 4V	1	
C8378	EEHBOG101R	C 100PF, J, 4V	1	
C8379	EEHBOJ101P	C 100PF, J, 6.3V	1	
C8380-84	ECJ0EF1C104Z	C 0.10UF, Z, 16V	5	
C8386	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8390,91	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8408	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8409	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8410	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8413	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8414	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8415	ECGRLOG680R	C 68PF, J, 4V	1	
C8416	EEFUD0J101R	E 100UF	1	
C8417	EEHBB1C470P	C 47PF, J, 16V	1	
C8418	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8425	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C8426	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8427	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C8428	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8437	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8440,41	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8445	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8446	ECJ1VB1C683K	C 0.068UF, K, 16V	1	
C8449	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8450-52	ECJ2FF1A475Z	C 4.7UF, Z, 10V	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8453	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8456,57	F1J0J475A035	C 4.7UF, K, 16V	2	
C8458	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8461	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8467	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8468	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8469	ECJ1VB0J334K	C 0.33UF, K, 6.3V	1	
C8474	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8475,76	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8478	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8479,80	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8482	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8484-86	EEH1B1C470P	C 47PF, J, 16V	3	
C8492	ECJ0EB1H471K	C 470PF, K, 50V	1	
C8496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8500	ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	
C8501	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8503,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8507,08	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	
C8509	EEH1B1C470P	C 47PF, J, 16V	1	
C8511	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8515	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8516	EEH1B1C470P	C 47PF, J, 16V	1	
C8518	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8520,21	ECJ0EC1H181J	C 180PF, K, 50V	2	
C8522,23	ECJ0EC1H390J	C 390PF, K, 50V	2	
C8529	ECJ0EC1H080C	C 8PF, D, 50V	1	
C8530	ECJ0EC1H221J	C 220PF, K, 50V	1	
C8531	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8532	ECJ0EB1H182K	C 1800UF, Z, 50V	1	
C8533	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8534	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8536	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8537	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8542	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8546,47	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8551	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8552	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8554	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8555	ECJ0EC1H390J	C 390PF, K, 50V	1	
C8556	ECJ0EB1H821K	C 820PF, D, 50V	1	
C8557	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8558	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8559	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8561	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8562	F1J1A106A043	C 0.010UF, K, 16V	1	
C8563	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8564	F1J1A106A043	C 0.010UF, K, 16V	1	
C8567	ECGRL0G680R	C 68PF, J, 4V	1	
C8568	ECJ2FB0J106M	C 10UF, Z, 6.3V	1	
C8572	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8573	ECJ2FB0J106M	C 10UF, Z, 6.3V	1	
C8578	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8584	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8590	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8592	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8594	ECGRL0G680R	C 68PF, J, 4V	1	
C8595,96	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8597	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8598	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8600	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8601	ECJ0EB1A104K	C 0.1UF, K, 10V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8602-04	ECJ0EB1C103K	C0.010UF, K, 16V	3	
C8605	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8606	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8607	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8608	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8609	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8610	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8611,12	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8613	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8614	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8615,16	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8617	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8620	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8621	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8622	ECGRL0G680R	C 68PF, J, 4V	1	
C8629,30	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8633,34	ECJ0EC1H820J	C 820PF, K, 50V	2	
C8638	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
C8640,41	ECJ0EC1H150J	C 150PF, K, 50V	2	
C9000	EEH1B1C470P	C 47PF, J, 16V	1	
C9001	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9004,05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	EEH1B1C470P	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009	F1J0J1060004	C 0.010UF, K, 16V	1	
C9010-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9015-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
C9023	EEH1B1C470P	C 47PF, J, 16V	1	
C9024	ECJ1XC1H271J	C 270PF, J, 50V	1	
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9026,27	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9028-31	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9035,36	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9201,02	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	F1J0J1060004	C 0.010UF, K, 16V	1	
C9206,07	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304-57	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
C9358	EEH1B0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9502	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9503-12	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9513	EEH1B1C470P	C 47PF, J, 16V	1	
C9514-17	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9518	EEH1B1C470P	C 47PF, J, 16V	1	
C9519	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9701,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9703	F1J0J1060004	C 0.010UF, K, 16V	1	
C9705,06	F1J0J1060004	C 0.010UF, K, 16V	2	
C9707	EEH1B1C470P	C 47PF, J, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9712,13	F1J0J1060004	C 0.010UF, K, 16V	2	
C9714,15	ECGRL0G680R	C 68PF, J, 4V	2	
C9716	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9718	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9719,20	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C9721,22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9723,24	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C9725	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9727	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9728,29	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9730,31	EEEBB1C470P	C 47PF, J, 16V	2	
C9732	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9734,35	EEEBB1C470P	C 47PF, J, 16V	2	
C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9739,40	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9743,44	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9800,01	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9900,01	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
CA1-A8	K1MN68BA0002	68P CONNECTOR	8	
CB1-B8	K1MN68BA0002	68P CONNECTOR	8	
D3	K1KA30AA0009	30P CONNECTOR	1	
D4	K1KA14A00248	14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	K1KA20A00310	20P CONNECTOR	1	
D8	K1KA08AA0104	8P CONNECTOR	1	
D20	K1KA20AA0008	20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D31,32	K1MN55BA0076	55P CONNECTOR	2	
D33,34	K1MN55BA0094	55P CONNECTOR	2	
D2300,01	MA111	DIODE	2	
D2303,04	MA111	DIODE	2	
D2315,16	B0JCDD000002	DIODE	2	
D2319,20	B0JCDD000002	DIODE	2	
D2332	MA111	DIODE	1	
D2512	MA8056M	ZENER DIODE	1	
D2513,14	MA152K	DIODE	2	
D2520	B3AAA0000770	DIODE	1	
D2523	MA152K	DIODE	1	
D2524	MA8056M	ZENER DIODE	1	
D2615	B0BC01100001	DIODE	1	
D2617	MA152	DIODE	1	
D2619-24	MA8140M	ZENER DIODE	6	
D2640-60	MA8140M	ZENER DIODE	21	
D4012-14	MA729	DIODE	3	
D4016	MA728	DIODE	1	
D4025-27	MA111	DIODE	3	
D4029	MA3036L	DIODE	1	
D5610	MA3X78900L	ZENER DIODE	1	
D5614	B0BC3R700006	DIODE	1	
D5615	B0BC4R700007	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D5616	B0BC6R600005	DIODE	1	
D5617	B0BC01100001	DIODE	1	
D5618	B0BC03900015	DIODE	1	
D5637,38	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3039H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645-47	MA152	DIODE	3	
D5649	MA111	DIODE	1	
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,06	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6006	BOHBSN000008	DIODE	1	
D6007	BOEHP000003	DIODE	1	
D6008,09	BOHBSN000008	DIODE	2	
D6011-13	BOHBSN000008	DIODE	3	
D6014	BOEHP000003	DIODE	1	
D6015-17	BOHBSN000008	DIODE	3	
D6022,23	BOEHP000003	DIODE	2	
D6024,25	B0JCME000037	DIODE	2	
D6026	BOEHP000003	DIODE	1	
D6028	BOEHP000003	DIODE	1	
D6033,34	MA8330M	ZENER DIODE	2	
D6035	LNJ301MPUJA	LED	1	
D6036	MA8051L	ZENER DIODE	1	
D6037	MA111	DIODE	1	
D6043	MA111	DIODE	1	
D6044,45	BOEHP000003	DIODE	2	
D6050,51	BOEHP000003	DIODE	2	
D6056	MA111	DIODE	1	
D6501,02	BOEHP000003	DIODE	2	
D6503	BOHCKS000002	DIODE	1	
D6504	B0JCME000037	DIODE	1	
D6505	BOEHP000003	DIODE	1	
D6506	MA111	DIODE	1	
D6507	BOEHP000003	DIODE	1	
D6508	MA111	DIODE	1	
D6509	B0JCKG000002	DIODE	1	
D6510	B0JCME000037	DIODE	1	
D6511	BOHCKS000002	DIODE	1	
D6512,13	MA111	DIODE	2	
D6514	BOEHP000003	DIODE	1	
D6515	MA111	DIODE	1	
D6516,17	BOHCKS000002	DIODE	2	
D6520,21	MA8330M	ZENER DIODE	2	
D6522-24	MA111	DIODE	3	
D6526,27	MA111	DIODE	2	
D6528	BOEHP000003	DIODE	1	
D6529	MA111	DIODE	1	
D6530	BOHCKS000002	DIODE	1	
D6531	MA111	DIODE	1	
D6532,33	MA8200M	ZENER DIODE	2	
D6534-39	MA8056H	ZENER DIODE	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6540,41	B0ECHP000003	DIODE	2	
D6542,43	MA8056H	ZENER DIODE	2	
D6544	B0HCKS000002	DIODE	1	
D6545	B0JCME000037	DIODE	1	
D6546-48	MA111	DIODE	3	
D6549	B0JCME000037	DIODE	1	
D6550	B0HCMM000014	DIODE	1	
D6551-53	MA111	DIODE	3	
D6554	MA8240M	ZENER DIODE	1	
D6556,57	B0JCME000037	DIODE	2	
D6558	MA111	DIODE	1	
D6559	B0ECHP000003	DIODE	1	
D6560	MA111	DIODE	1	
D6561	B0ECHP000003	DIODE	1	
D6562	MA8051L	ZENER DIODE	1	
D6563	MA111	DIODE	1	
D6564	B0HCMM000014	DIODE	1	
D6566	B0HCMM000014	DIODE	1	
D6568,69	MA111	DIODE	2	
D6570	MA8051L	ZENER DIODE	1	
D6571-73	MA8330M	ZENER DIODE	3	
D6574,75	MA111	DIODE	2	
D6576	B0JCME000037	DIODE	1	
D6577	MA111	DIODE	1	
D6579	B0ECHP000003	DIODE	1	
D6580	MA8051L	ZENER DIODE	1	
D6581	LNJ301MPUJA	LED	1	
D6582	MA111	DIODE	1	
D6583,84	MA8330M	ZENER DIODE	2	
D6585,86	B0ECHP000003	DIODE	2	
D6589	MA8056H	ZENER DIODE	1	
D6590,91	MA111	DIODE	2	
D6593	B0HBSN000008	DIODE	1	
D6594	B0HCKS000002	DIODE	1	
D6595	B0HBSN000008	DIODE	1	
D6596	MA111	DIODE	1	
D6597	B0HCKS000002	DIODE	1	
D6604	B0ECHP000003	DIODE	1	
D6605	B0HBSN000008	DIODE	1	
D6606	B0HCKS000002	DIODE	1	
D6607-10	B0HBSN000008	DIODE	4	
D6613	B0HBSN000008	DIODE	1	
D6614	B0ECHP000003	DIODE	1	
D6615	B0HBSN000008	DIODE	1	
D6618,19	B0ECHP000003	DIODE	2	
D6624,25	B0ECHP000003	DIODE	2	
D6901,02	MA8056H	ZENER DIODE	2	
D6903,04	B0ECHP000003	DIODE	2	
D6926,27	MA8056H	ZENER DIODE	2	
D6928,29	B0ECHP000003	DIODE	2	
D7101-08	B0HCMM000014	DIODE	8	
D7201-08	B0HCMM000014	DIODE	8	
D7301-08	B0HCMM000014	DIODE	8	
D7401-08	B0HCMM000014	DIODE	8	
D8200	B0DDBG000002	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D8203,04	LNJ208R8ARA	LED	2	
D8207	MA728	DIODE	1	
D8208	K7JAAAA00001	DIODE	1	
D8210	MA728	DIODE	1	
D8215	MA8039L	ZENER DIODE	1	
D8217	B0JCDD000002	DIODE	1	
D8219	B0JCDD000002	DIODE	1	
D8221	MA8024LTX	ZENER DIODE	1	
D9000-02	MA3033	ZENER DIODE	3	
D9011,12	MA728	DIODE	2	
D9015,16	MA152K	DIODE	2	
D9700,01	MA728	DIODE	2	
D9800,01	MA152K	DIODE	2	
D9900,01	MA152K	DIODE	2	
DG1,G2	K1MN40A00024	40P CONNECTOR	2	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG5	K1KA21B00008	21P CONNECTOR	1	
DG15	K1KA60A00156	60P CONNECTOR	1	
DG20	K1MN30A00068	30P CONNECTOR	1	
DG22	K1KBB0A00006	CONNECTOR	1	
DT04	K1NA68B00037	68P CONNECTOR	1	
DT07	K1KA04BA0050	4P CONNECTOR	1	
DT09	K1NA09D00004	9P CONNECTOR	1	
DT12	K1KAB0A00011	CONNECTOR	1	
FL4003-10	J0HABH000012	LC FILTER	8	
FL4012	J0HABH000012	LC FILTER	1	
FL4014-17	J0HABB000004	LC FILTER	4	
FL4018-20	J0JBD0000043	CHIP INDUCTOR	3	
FL4021-23	J0HABH000012	LC FILTER	3	
FL7101	J0HABH000013	LC FILTER	1	
FL7201	J0HABH000013	LC FILTER	1	
FL7301	J0HABH000013	LC FILTER	1	
FL7401	J0HABH000013	LC FILTER	1	
FL8202,03	J0HAAA000013	LC FILTER	2	
FL8215	J0HAAB000004	LC FILTER	1	
FL8224-40	J0HAAB000004	LC FILTER	17	
FL8258	J0HAAB000004	LC FILTER	1	
FL8260	J0HAAB000004	LC FILTER	1	
FL8262,63	J0MAB0000164	LC FILTER	2	
FL9000-04	J0HABH000013	LC FILTER	5	
FL9300-02	J0HABH000013	LC FILTER	3	
FL9701,02	J0HABH000012	LC FILTER	2	
FL9703,04	J0HABH000013	LC FILTER	2	
FL9800,01	J0HABH000013	LC FILTER	2	
FL9900,01	J0HABH000013	LC FILTER	2	
H1,H2	K1MN40B00045	40P CONNECTOR	2	
H7	K1KA12AA0178	12P CONNECTOR	1	
H21	K1KA10AA0194	10P CONNECTOR	1	
H22	K1KA11AA0194	11P CONNECTOR	1	
H30	K1MN30A00068	30P CONNECTOR	1	
H50	K1MN35A00013	35P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC2301	C1BB00000969	IC	1	
IC2305, 06	C1BB00000818	IC	2	
IC2602	C1AB000002123	IC	1	
IC2605	AN15861A-VT	IC	1	
IC2608	C1BB00001017	IC	1	
IC4001	C0ABBB000289	IC	1	
IC4002	C0FBBK000038	IC	1	
IC4004	TC74HC4066TL	IC	1	
IC4005	MN102H90MTZ1	IC	1	
IC4006	TVRN467	IC	1	
IC4008	TVRN469	IC	1	
IC4010	C0EBF0000431	IC	1	
IC4011	C0CBCAC00275	IC	1	
IC4012	C0CBCBF00009	IC	1	
IC4015	C0EBE0000336	IC	1	
IC4016	C0CBCAC00275	IC	1	
IC4018	C1AB000002298	IC	1	
IC4020	C0CBCAC00136	IC	1	
IC4022	C0DBEJG00001	IC	1	
IC4024	C1ZBZ0002790	IC	1	
IC4025	C0JBAP000020	IC	1	
IC4026	C1AB000002234	IC	1	
IC4027	C3ABQJ000040	IC	1	
IC4028	C0DBZFG00055	IC	1	
IC4030	C0EBF0000335	IC	1	
IC4031	C0CBCAC00136	IC	1	
IC5601, 02	N0BF2DE00001	DC-DC CONVERTER	2	
IC5603	C0DBAJB00004	IC	1	
IC5801	C0DBAZG00034	IC	1	
IC5803	C0DAEZH00017	IC	1	
IC6001-04	C0ZBZ0000895	IC	4	
IC6006	C0JBAA000005	IC	1	
IC6007	NJM2903M	INTEGRATED CIRCUIT	1	
IC6008	AN1431M	LINEAR IC	1	
IC6500	AN1431M	LINEAR IC	1	
IC6502	AN1431M	LINEAR IC	1	
IC6503, 04	C0CBALC00010	IC	2	
IC6505, 06	C0CBADC00075	IC	2	
IC6510, 11	AN1431M	LINEAR IC	2	
IC6514	AN1431M	LINEAR IC	1	
IC6515	C0JBAA0000994	IC	1	
IC6524	C0JBAA0000994	IC	1	
IC6525	C0ZBZ0001033	IC	1	
IC6526	C0CBADC00075	IC	1	
IC6527-29	C0ZBZ0001033	IC	3	
IC6530	C0CBADC00075	IC	1	
IC6531	C0ZBZ0001033	IC	1	
IC6532	NJM2903M	INTEGRATED CIRCUIT	1	
IC6533-35	C0ZBZ0000895	IC	3	
IC6536	C0JBAA000174	IC	1	
IC6537, 38	C0JBAA000005	IC	2	
IC6901-12	AN16042A-VT	IC	12	
IC7101-04	C0JBAA0001120	IC	4	
IC7201-04	C0JBAA0001120	IC	4	
IC7301-04	C0JBAA0001120	IC	4	
IC7401-04	C0JBAA0001120	IC	4	
IC8009, 10	C3ABRG000061	IC	2	
IC8022	C0ZBZ0001052	IC	1	
IC8200	C0FBBK000038	IC	1	
IC8201	C0ABBB000190	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC8202	C0JBAS000245	IC	1	
IC8203, 04	C0JBAS000223	IC	2	
IC8205	NJM2904V	INTEGRATED CIRCUIT	1	
IC8206, 07	C1AB000002221	IC	2	
IC8209	C1AB00001860	IC	1	
IC8211	MN884321A	IC	1	
IC8216	C1ZBZ0002437	IC	1	
IC8219	C0ZBZ0000782	IC	1	
IC8220	C0CBCAC00161	IC	1	
IC8222	C3FBRG000004	IC	1	
IC8223	C3ZBP0000019	IC	1	
IC8227	C0EBE0000336	IC	1	
IC8228	C0EBM0000027	IC	1	
IC8229	C3EBKC000014	IC	1	
IC8230	C0JBAA0002183	IC	1	
IC8232	MC14066BF	MOS IC (LOGIC)	1	
IC8235	C0DBZFF00004	IC	1	
IC8240	MN2WS0025A-A	IC	1	
IC8241, 42	C0DBAZZ00122	IC	2	
IC8244	C0FBAK000019	IC	1	
IC8245	C1AB000002221	IC	1	
IC9001	TVRN593	IC	1	
IC9003	TVRN568	IC	1	
IC9004	C0EBE0000120	IC	1	
IC9005, 06	C0JBAA0000856	IC	2	
IC9007	TVRN466	IC	1	
IC9008	C0DBEJG00001	IC	1	
IC9200	C1ZBZ0002769	IC	1	
IC9300	MN84512-A	IC	1	
IC9301	PST9128NR	IC (LOGIC)	1	
IC9302	C3ABQJ000031	IC	1	
IC9303	TVRN511	IC	1	
IC9500	C1ZBZ0002599	IC	1	
IC9502	C0JBAA0000856	IC	1	
IC9504	C0JBAA0000856	IC	1	
IC9700	C0DBEJG000001	IC	1	
IC9702	C0DBAZH00020	IC	1	
JK2601	K1U939A00001	CONNECTOR	1	
JK2605	K2HA204A0041	JACK	1	
JS2304-11	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2312	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2317-24	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2329-32	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2606, 07	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS2614-17	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2620, 21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2624	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2627, 28	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2630-37	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
JS2645	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2652-63	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2672-87	ERJ6GEY0R00	M 0 OHM, 1/10W	16	
JS2692-03	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2705-12	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2714-25	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2729	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
JS2737, 38	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS2744-49	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
JS2760-68	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
JS4003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-15	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4019-21	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4023-26	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS4033-35	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4038, 39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4041	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4044-50	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
JS4054	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4059-63	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS4067	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5609-12	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5801, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS5805-08	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5810-17	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS5819	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6503	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
K1	K1KA12BA0053	12P CONNECTOR	1	
K2	K1KA02BA0061	2P CONNECTOR	1	
L2305, 06	G0A100ZA0033	CHOKE COIL	2	
L2312, 13	G0A100ZA0033	CHOKE COIL	2	
L2316-19	J0JJC0000011	CHIP INDUCTOR	4	
L2615	J0JHC0000078	CHIP INDUCTOR	1	
L2617	J0JHC0000078	CHIP INDUCTOR	1	
L4002, 03	J0JHC0000078	CHIP INDUCTOR	2	
L4006	J0JHC0000078	CHIP INDUCTOR	1	
L4008	J0JHC0000078	CHIP INDUCTOR	1	
L4012	J0JCC0000241	CHIP INDUCTOR	1	
L4013	J0JHC0000078	CHIP INDUCTOR	1	
L4019	J0JHC0000078	CHIP INDUCTOR	1	
L4021, 22	J0JHC0000045	CHIP INDUCTOR	2	
L4024, 25	J0JHC0000078	CHIP INDUCTOR	2	
L4027	J0JHC0000078	CHIP INDUCTOR	1	
L4028	J0JCC0000241	CHIP INDUCTOR	1	
L4031	J0JHC0000078	CHIP INDUCTOR	1	
L4035	J0JHC0000078	CHIP INDUCTOR	1	
L4036	J0JCC0000241	CHIP INDUCTOR	1	
L4037-39	J0JHC0000078	CHIP INDUCTOR	3	
L4040, 41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
L4043	J0JCC0000241	CHIP INDUCTOR	1	
L4044	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L4047, 48	J0JHC0000078	CHIP INDUCTOR	2	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605	G1C1R0MA0072	CHOKE COIL	1	
L5606	G0A220GA0002	CHOKE COIL	1	
L5607	G0C101K00023	PEAKING COIL	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALL08N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A150ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613, 14	G1A150ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A150ZA0007	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA	INDUCTION COIL	1	
L5803	G0A220GA0002	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810	G0A100GA0013	CHOKE COIL	1	
L6001, 02	G0AR60MA0003	CHOKE COIL	2	
L6004, 05	G0A1R4MA0003	CHOKE COIL	2	
L6008	J0JJC0000021	CHIP INDUCTOR	1	
L6013	G0ZZ00002183	PEAKING COIL	1	
L6014	G0C101K00023	PEAKING COIL	1	
L6015-23	G0ZZ00002183	PEAKING COIL	9	
L6026-35	G0ZZ00002183	PEAKING COIL	10	
L6052, 53	G0ZZ00002183	PEAKING COIL	2	
L6058	J0JJC0000021	CHIP INDUCTOR	1	
L6061, 62	J0JJC0000011	CHIP INDUCTOR	2	
L6069, 70	G0ZZ00002183	PEAKING COIL	2	
L6091, 92	J0JJC0000021	CHIP INDUCTOR	2	
L6500, 01	J0JJC0000021	CHIP INDUCTOR	2	
L6502-04	G0ZZ00002183	PEAKING COIL	3	
L6505	J0JJC0000021	CHIP INDUCTOR	1	
L6506	G0ZZ00002183	PEAKING COIL	1	
L6508, 09	G0AR60MA0003	CHOKE COIL	2	
L6512, 13	G0A1R4MA0003	CHOKE COIL	2	
L6515-20	G0ZZ00002183	PEAKING COIL	6	
L6523-34	G0ZZ00002183	PEAKING COIL	12	
L6537, 38	J0JJC0000011	CHIP INDUCTOR	2	
L6541	J0JJC0000021	CHIP INDUCTOR	1	
L6542-44	G0ZZ00002183	PEAKING COIL	3	
L8096	J0JHC0000045	CHIP INDUCTOR	1	
L8141-43	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
L8200-03	ELJPA270KB	INDUCTION COIL	4	
L8204	ELJNA82NMB	INDUCTION COIL	1	
L8205	ELJNA47NMB	INDUCTION COIL	1	
L8206	ELJNA56NMB	INDUCTION COIL	1	
L8207	ELJNA47NMB	INDUCTION COIL	1	
L8208	ELJNAR10MF	INDUCTION COIL	1	
L8209	J0JHC0000045	CHIP INDUCTOR	1	
L8211	ELJNA1R5JF	INDUCTION COIL	1	
L8212	ELJNA1R0JF	INDUCTION COIL	1	
L8213, 14	ELJPA1R0MB	INDUCTION COIL	2	
L8217	ELJNAR56KF	INDUCTION COIL	1	
L8218	J0JHC0000045	CHIP INDUCTOR	1	
L8219, 20	ELJPA1R0MB	INDUCTION COIL	2	
L8221-25	J0JHC0000045	CHIP INDUCTOR	5	
L8231, 32	J0JHC0000035	CHIP INDUCTOR	2	
L8235	J0JHC0000045	CHIP INDUCTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L8236,37	J0JHC0000035	CHIP INDUCTOR	2	
L8239	J0JCC0000241	CHIP INDUCTOR	1	
L8240	J0JHC0000045	CHIP INDUCTOR	1	
L8242	J0JCC0000078	CHIP INDUCTOR	1	
L8243,44	J0JHC0000045	CHIP INDUCTOR	2	
L8252	ELJPA1R0MB	INDUCTION COIL	1	
L8253-56	EXC3BB221H	BEAD CHOKE	4	
L8258	J0JHC0000045	CHIP INDUCTOR	1	
L8264-68	J0JHC0000045	CHIP INDUCTOR	5	
L8269	J0JGC0000036	CHIP INDUCTOR	1	
L8270	G1C100MA0078	INDUCTION COIL	1	
L8271	G1C6R8MA0078	INDUCTION COIL	1	
L8273	G1C100MA0077	INDUCTION COIL	1	
L8274	ELJNA2R7JB	INDUCTION COIL	1	
L8276	J0JBC00000080	CHIP INDUCTOR	1	
L8277	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,01	J0JHC0000078	CHIP INDUCTOR	2	
L9700	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009	CHIP INDUCTOR	1	
PA7	K1KA08AA0192	8P CONNECTOR	1	
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,02	K5H4022A0023	FUSE	2	
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7	K1KA08AA0192	8P CONNECTOR	1	
PB30	K1KA05AA0150	5P CONNECTOR	1	
PB31-34	K1KA03AA0192	3P CONNECTOR	4	
PC6501	B3PBA0000223	IC	1	
PC6507-09	B3PBA0000223	IC	3	
PC6512,13	B3PBA0000223	IC	2	
PC6516,17	B3PBA0000234	IC	2	
PC6518	B3PBA0000233	IC	1	
PC6520	B3PBA0000233	IC	1	
PC6522	B3PBA0000233	IC	1	
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314-17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2519	2SB709A	TRANSISTOR	1	
Q2609	2SD601A	TRANSISTOR	1	
Q2611	2SD601A	TRANSISTOR	1	
Q2612	2SB709A	TRANSISTOR	1	
Q2618,19	2SD601A	TRANSISTOR	2	
Q4001	2SA207700L	TRANSISTOR	1	
Q4004	2SD601A	TRANSISTOR	1	
Q4006-09	2SD601A	TRANSISTOR	4	
Q4012	2SD601A	TRANSISTOR	1	
Q4015-17	2SD601A	TRANSISTOR	3	
Q4019-21	2SD601A	TRANSISTOR	3	
Q4022	2SC584500L	TRANSISTOR	1	
Q4024	2SC584500L	TRANSISTOR	1	
Q4026	2SC584500L	TRANSISTOR	1	
Q4039	2SD0601A	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q4043,44	2SD0601A	TRANSISTOR	2	
Q4045	2SA207700L	TRANSISTOR	1	
Q4049	2SA207700L	TRANSISTOR	1	
Q4051-54	2SD601A	TRANSISTOR	4	
Q4055	2SA207700L	TRANSISTOR	1	
Q4056-59	2SD601A	TRANSISTOR	4	
Q4062	2SD601A	TRANSISTOR	1	
Q4066,67	2SK2731T146	TRANSISTOR	2	
Q4068	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,05	2SC584500L	TRANSISTOR	2	
Q5606	B1DHDC000028	TRANSISTOR	1	
Q5607	2SC584500L	TRANSISTOR	1	
Q5610	2SC584500L	TRANSISTOR	1	
Q5613	2SC584500L	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-43	2SA207700L	TRANSISTOR	3	
Q5644	2SC584500L	TRANSISTOR	1	
Q6001	2SK3997000VE	TRANSISTOR	1	
Q6005	2SK3999000VH	FET	1	
Q6010-12	BLJADN000002	TRANSISTOR	3	
Q6015-17	BLJADN000002	TRANSISTOR	3	
Q6027,28	B1DFKM000002	TRANSISTOR	2	
Q6031	2SD1263A	TRANSISTOR	1	
Q6032	BLABNF000006	TRANSISTOR	1	
Q6033	BLADNF000006	TRANSISTOR	1	
Q6034	BLABNF000006	TRANSISTOR	1	
Q6035	BLADNF000006	TRANSISTOR	1	
Q6038	2SC1473A	TRANSISTOR	1	
Q6041	2SD601A	TRANSISTOR	1	
Q6101	BLABNF000006	TRANSISTOR	1	
Q6102	BLADNF000006	TRANSISTOR	1	
Q6103	BLABNF000006	TRANSISTOR	1	
Q6104	BLADNF000006	TRANSISTOR	1	
Q6501-04	2SK620	FET	4	
Q6511,12	B1DFFM000003	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DFES000002	TRANSISTOR	1	
Q6522	2SK620	FET	1	
Q6523	BLADNF000006	TRANSISTOR	1	
Q6524,25	BLABNF000006	TRANSISTOR	2	
Q6526	BLADNF000006	TRANSISTOR	1	
Q6527	2SD601A	TRANSISTOR	1	
Q6530-39	B1DFHN000001	TRANSISTOR	10	
Q6551	2SD601A	TRANSISTOR	1	
Q6552	B1DEET000002	TRANSISTOR	1	
Q6560-66	2SK399800L	FET	7	
Q6581	2SD601A	TRANSISTOR	1	
Q6582,83	B1DFET000001	TRANSISTOR	2	
Q6586	BLADNF000006	TRANSISTOR	1	
Q6601-03	BLJADN000002	TRANSISTOR	3	
Q6608	BLABNF000006	TRANSISTOR	1	
Q6609	BLADNF000006	TRANSISTOR	1	
Q6611-13	BLJADN000002	TRANSISTOR	3	
Q6619	BLABNF000006	TRANSISTOR	1	
Q6620	BLADNF000006	TRANSISTOR	1	
Q6627	BLABNF000006	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6628	B1ADNF000006	TRANSISTOR	1	
Q6629	B1ABNF000006	TRANSISTOR	1	
Q6630	B1ADNF000006	TRANSISTOR	1	
Q6635	2SK3997000VE	TRANSISTOR	1	
Q6639,40	2SK620	FET	2	
Q6649	2SK3999000VH	FET	1	
Q6761	B1BBCJ000004	TRANSISTOR	1	
Q6762	2SD1263A	TRANSISTOR	1	
Q6764	2SD814A	TRANSISTOR	1	
Q6765	2SD601A	TRANSISTOR	1	
Q6768	2SB0709A	TRANSISTOR	1	
Q6771	B1BAEJ000014	TRANSISTOR	1	
Q6772	2SB0709A	TRANSISTOR	1	
Q6774	2SD814A	TRANSISTOR	1	
Q6775-77	2SD601A	TRANSISTOR	3	
Q6791	2SD1263A	TRANSISTOR	1	
Q6792	2SC1473A	TRANSISTOR	1	
Q8200	B1BBAB000039	TRANSISTOR	1	
Q8201	2SD601A	TRANSISTOR	1	
Q8203	B1BBAB000039	TRANSISTOR	1	
Q8209	2SA207700L	TRANSISTOR	1	
Q8216	2SC584500L	TRANSISTOR	1	
Q8217-20	2SD601A	TRANSISTOR	4	
Q8221,22	B1MBDDA00003	TRANSISTOR	2	
Q9000,01	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,09	2SK2731T146	TRANSISTOR	2	
Q9010,11	2SD601A	TRANSISTOR	2	
Q9012,13	2SK2731T146	TRANSISTOR	2	
Q9020-23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	TRANSISTOR	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,02	B1MBCDA00002	TRANSISTOR	2	
Q9703,04	2SD601A	TRANSISTOR	2	
Q9800,01	2SD601A	TRANSISTOR	2	
Q9900,01	2SD601A	TRANSISTOR	2	
R2302	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2308,09	ERJ3GEYJ392	M 3.9KOHM, J, 1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM, J, 1/16W	1	
R2311	ERJ12YJ821	M 820 OHM, J, 1/2W	1	
R2312,13	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2316-19	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2320	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2324	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2342,43	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2349	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2350	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2351	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2352,53	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2357	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2358,59	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2360	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2363	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2364	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2365,66	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2367	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2368	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2369,70	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2388,89	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2395,96	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2397,98	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R2436	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,38	ERDS2TJ103	C 10KOHM, J, 1/4W	2	
R2444,45	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2448,49	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2451,52	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,65	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2468,69	ERJ6GEYJ331	M 330 OHM, J, 1/10W	2	
R2488,89	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2499	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2501	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2516	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2557	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R2607	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2640,41	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R2645	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R2646	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2647	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2648	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2649	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R2650	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2651	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2652	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2655	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R2659,60	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2673	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2680,81	ERJ3GEYJ184	M 180KOHM, J, 1/16W	2	
R2682	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2686	ERJ6ENF75R0	M 75 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2687	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2690	ERJ3GEYJ182	M 1.8KOHM, J, 1/16W	1	
R2693	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2695	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2696	ERJ3GEYJ105	M 1MOHM, J, 1/16W	1	
R2698	ERJ3GEYJ182	M 1.8KOHM, J, 1/16W	1	
R2699	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2700	ERJ3GEYJ274	M 270KOHM, J, 1/16W	1	
R2702	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R2708	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2723, 24	ERJ3GEYJ104	M 100KOHM, J, 1/16W	2	
R2725	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2726, 27	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2729-31	ERJ3GEYJ221	M 220 OHM, J, 1/16W	3	
R2733-36	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R2737	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2738	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2739	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2741	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2744	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R2746	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2747	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2751	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2753	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2754	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2755	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2756	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2758	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2759	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2761-64	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R2767	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2769, 70	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2772	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2775	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2777-79	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R2793-95	ERJ3GEYJ221	M 220 OHM, J, 1/16W	3	
R2797-00	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R2801, 02	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R2804	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2807, 08	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2810, 11	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2814, 15	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2817, 18	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2820	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R2821	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R2822-25	ERJ3GEYJ221	M 220 OHM, J, 1/16W	4	
R2830	ERJ3GEYJ823	M 82KOHM, J, 1/16W	1	
R2832, 33	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R2835	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2837	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R2838	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2848-51	ERJ6GEYJ393	M 39KOHM, J, 1/10W	4	
R2854, 55	ERJ6GEYJ393	M 39KOHM, J, 1/10W	2	
R2856	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2858	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2859-61	ERJ6GEYJ393	M 39KOHM, J, 1/10W	3	
R2863	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2864	ERJ6GEYJ393	M 39KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2866	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2868, 69	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R2881	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2887	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2891-94	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2899	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3751	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3753	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3755	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R3756	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R4001, 02	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4003	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4004	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4006	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4007	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4008	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4010	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4015	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4016	ERJ3GEYJ273	M 27KOHM, J, 1/16W	1	
R4017	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4018	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R4020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4021	ERJ3GEYJ273	M 27KOHM, J, 1/16W	1	
R4022	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4023	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R4024, 25	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4026	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4028, 29	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4035	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4039	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4045	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4047	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R4048	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4050	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R4052	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4053	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4055	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4056	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4059	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4063	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4064-66	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R4068, 69	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4070	ERJ3GEYJ154	M 150KOHM, J, 1/16W	1	
R4071-76	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
R4077	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4078, 79	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4082	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4083	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4086	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4088-90	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R4091	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4092	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4094	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4095	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4098, 99	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R4101	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4102	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4104	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4105	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4106	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4108	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4109	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4110,11	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4114	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4118	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4119	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4121	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4122	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4123	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4124	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4125	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4126	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4128	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4129	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4130	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4134	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4135	ERJ3EKF1801	M 1.8KOHM, 1/16W	1	
R4138	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
R4139	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4141,42	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4144	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
R4145	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4146	ERJ3GEYJ681	M 680 OHM,J,1/16W	1	
R4148,49	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4151-53	ERJ3GEYJ102	M 1KOHM,J,1/16W	3	
R4155	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4158	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4162	ERJ3GEYJ393	M 39KOHM,J,1/16W	1	
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4171-73	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4174	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4175	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4176	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4177	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4179	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4181	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4182,83	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4184	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4185	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4188	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4192	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4193	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4197	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4199,00	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4201	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4202	ERJ3EKF7151	M7.15KOHM, 1/16W	1	
R4203	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4205	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4208	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4214	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4218	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4219	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4223	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4224	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4225	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4226	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4230,31	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4237	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4238	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4252,53	ERJ3GEYJ823	M 82KOHM,J,1/16W	2	
R4254	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4255	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4256,57	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R4259	ERJ3GEYJ100	M 10 OHM,J,1/16W	1	
R4260,61	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	2	
R4262,63	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4264	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	1	
R4266	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4267,68	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4269	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R4281	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4282	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R4284	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4286	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R4289	ERJ3GEYJ241	M 240 OHM,J,1/16W	1	
R4291	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4292	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4298	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4327,28	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4329	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4339	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R4344,45	ERJ3EKF1301	M 1.3KOHM, 1/16W	2	
R4346	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4347	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4349,50	ERJ3EKF1801	M 1.8KOHM, 1/16W	2	
R4351	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R4356,57	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R4358	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R4359	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4361	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R4365	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4370	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4371	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R4375	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4379,80	ERJ3GEYJ332	M 3.3KOHM,J,1/16W	2	
R4382	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4383	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4388,89	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4391	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4392	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4408	ERJ3EKF1741	M 17.4 OHM, 1/16W	1	
R4409	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4411	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4414	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4416	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4421	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4423	EXB38V220J	RESISTOR ARRAY	1	
R4426	EXB38V220J	RESISTOR ARRAY	1	
R4427	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4428	EXB38V220J	RESISTOR ARRAY	1	
R4433,34	EXB38V220J	RESISTOR ARRAY	2	
R4435-37	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R4441,42	D1HG5608A002	NETWORK RESISTER	2	
R4443	EXB38V560J	RESISTOR ARRAY	1	
R4444	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4445-47	ERJ3GEYJ560	M 56 OHM,J,1/16W	3	
R4448,49	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4450-54	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4456,57	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4458,59	ERJ3EKF3302	M 33KOHM, 1/16W	2	
R4460	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4461,62	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4463	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4464	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4465	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4466	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4469	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4471	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4472	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4473	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4474	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4480	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4481	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4482,83	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4484	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R4485,86	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4487	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R4488,89	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4490,91	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4492,93	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R4494	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4495,96	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4497,98	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R4516	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4522	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4527	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R4528	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R4529	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R4530	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4531,32	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4533-37	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4540,41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4543,44	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4545,46	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R4547-50	EXB2HV680J	RESISTOR ARRAY	4	
R4551,52	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4557	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
R4558	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4559	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R4560,61	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4562	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4564-66	TAJAAH0680JV	M 68 OHM,J,1/16W	3	
R4569	EXB38V680J	RESISTOR ARRAY	1	
R4570	EXB2HV680J	RESISTOR ARRAY	1	
R4571	EXB38V680J	RESISTOR ARRAY	1	
R4572,73	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4575-77	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4578,79	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4581-85	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4590	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4592	ERJ3GEYJ820	M 82 OHM,J,1/16W	1	
R4593	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4594	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4596	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4597	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4600	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4602	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4603-22	ERJ3GEYJ820	M 82 OHM,J,1/16W	20	
R4623	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R4624-26	EXB38V820J	RESISTOR ARRAY	3	
R4627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4630	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4632,33	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4636	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4638	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4639,40	EXB2HV680J	RESISTOR ARRAY	2	
R4643,44	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4650	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4651	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4652	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4653-55	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4657	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4658	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4660,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4666	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R4667,68	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4674	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4676,77	ERJ3GEYJ474	M 470KOHM,J,1/16W	2	
R4678	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4682,83	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4684	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4685	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4686	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4690	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4703	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4706	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4708-47	ERJ6GEY0R00	M 0 OHM, 1/10W	40	
R4748	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
R4749	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4750	ERJ3EKF6801	M 6.8KOHM, 1/16W	1	
R4751,52	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4754	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4756	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4757	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4758	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4759,60	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4761,62	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4765	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R4767	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4771	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4775	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4780-87	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
R5601	ERJ6ENF4532	M4.53KOHM, 1/10W	1	
R5603	ERJ6ENF2550	M 255 OHM, 1/10W	1	
R5605	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5606	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5607	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R5609	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5610	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1652	M16.5KOHM, 1/10W	1	
R5615,16	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R5617,18	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R5619	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5620	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R5621	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5623,24	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R5625-27	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	3	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5635	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5637,38	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R5639	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5643	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R5644	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5645,46	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R5647	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R5649	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R5650	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5651	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5653-56	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R5657,58	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R5659	ERJ6ENF4700	M 470 OHM, 1/10W	1	
R5660	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5662	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5670	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5675	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5676	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5679	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5692	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R5693	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5694,95	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R5696	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	
R5801	ERJ6ENF9100	M 910 OHM, 1/10W	1	
R5802	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R5803	ERJ6ENF2741	M2.74KOHM, 1/10W	1	
R5804	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5805-08	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	4	
R5809	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5812	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R5815	ERJ6ENF3900	M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R5822-24	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R5826	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6005	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
R6016-21	ERJ14YJ100	M 10 OHM, J,1/4W	6	
R6022	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
R6023-25	ERJ14YJ100	M 10 OHM, J,1/4W	3	
R6029,30	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6031	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6032-34	ERJ14YJ100	M 10 OHM, J,1/4W	3	
R6036	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6037	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6038	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6039	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6040-44	ERJ6GEYJ101	M 100 OHM,J,1/10W	5	
R6047	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6050	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6052	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6053	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6054	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6058	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
R6059	ERJ6GEYJ243	M 24KOHM,J,1/10W	1	
R6060	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6062	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6064	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6067	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6068	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6069,70	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6071	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6072,73	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6074	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6075	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6076	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6077	EXB38V470J	RESISTOR ARRAY	1	
R6078	EXB38V472J	RESISTOR ARRAY	1	
R6079	EXB38V470J	RESISTOR ARRAY	1	
R6080	EXB38V472J	RESISTOR ARRAY	1	
R6081,82	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6083,84	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6087,88	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6090	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6092-94	ERX2FJSR22D	M0.22 OHM, J, 2W	3	
R6095	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6096,97	ERJ6GEYJ100	M 10 OHM,J,1/10W	2	
R6098,99	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6101-04	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R6105	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6106-08	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R6110	ERJ6GEYJ243	M 24KOHM,J,1/10W	1	
R6111-14	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R6115,16	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6117,18	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6121-23	ERJ6ENF8202	M 82KOHM, 1/10W	3	
R6130-32	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R6502,03	ERJ12YJ1R0	M 1 OHM, J,1/2W	2	
R6504	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6505	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6506	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R6507	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6508	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6510	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6511-13	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	3	
R6514	ERJ6ENF9531	M9.53KOHM, 1/10W	1	
R6515	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6516	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6517	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6518	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6519	ERX3FJSR82D	M 8.2 OHM, J, 3W	1	
R6520	ERJ6GEYJ122	M 1.2KOHM,J,1/10W	1	
R6521	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6522	ERJ14YJ333U	M 33KOHM, 1/2W	1	
R6523	ERJ14YJ203U	M 20KOHM, 1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6525	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6526	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6527	ERG1FJS680D	M 68 OHM, J, 1W	1	
R6528	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6529	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6530	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6531	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6532	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6534	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6536	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6537, 38	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6539	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6540	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6541	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6542	ERX1FJSR27D	M0.27 OHM, J, 1W	1	
R6543	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6544	ERJ6ENF2703	M 270KOHM, 1/10W	1	
R6545	ERJ6ENF2203	M 220KOHM, 1/10W	1	
R6546	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6547	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6548	ERX1FJSR33D	M0.33 OHM, J, 1W	1	
R6549	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6550, 51	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6552	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6553-61	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	9	
R6562	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6563, 64	ERX3FJS2R2D	M 2.2 OHM, J, 3W	2	
R6565	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6566	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6567	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6568	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6569	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6570	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6571	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6572	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6573	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6575	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R6576	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6577	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6578	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6579	ERJ14YJ102	M 1KOHM, J, 1/4W	1	
R6580	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6581	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6582-91	ERJ6GEYJ470	M 47 OHM, J, 1/10W	10	
R6593	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6594, 95	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6596	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6597, 98	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	2	
R6599, 00	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6601	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6602	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6603	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6604, 05	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6606	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R6607	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6608	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6609	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6610	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6611	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6612-18	ERJ6GEYJ100	M 10 OHM, J, 1/10W	7	
R6619	ERJ6GEYJ563	M 56KOHM, J, 1/10W	1	
R6620	ERG1FJS101D	M 100 OHM, J, 1W	1	
R6621	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6622	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6623-30	ERJ6GEYJ471	M 470 OHM, J, 1/10W	8	
R6631	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6632	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6633	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6634, 35	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6636	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6637, 38	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	2	
R6639	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6640	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6641	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6642, 43	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6644, 45	ERJ6GEYJ105	M 1MOHM, J, 1/10W	2	
R6646	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6647, 48	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R6649	ERJ6GEYJ563	M 56KOHM, J, 1/10W	1	
R6650	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6651	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6652	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6653	ERG1FJS471D	M 470 OHM, J, 1W	1	
R6654	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6655	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6656-58	ERJ6GEYJ224	M 220KOHM, J, 1/10W	3	
R6659	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6660, 61	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6662-67	ERJ14YJ100	M 10 OHM, J, 1/4W	6	
R6673-78	ERJ14YJ100	M 10 OHM, J, 1/4W	6	
R6682, 83	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R6684	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6685	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6686	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6687, 88	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6689	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6690	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6691, 92	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6693-95	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6698	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6700-02	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6703	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6704	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6705	ERJ6GEYJ513	M 51KOHM, J, 1/10W	1	
R6706, 07	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6708	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6709	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6710	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6713	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6714	EXB38V470J	RESISTOR ARRAY	1	
R6715	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6716	EXB38V472J	RESISTOR ARRAY	1	
R6717	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6718	EXB38V470J	RESISTOR ARRAY	1	
R6719	ERJ14YJ224	M 220KOHM, J, 1/4W	1	
R6720	EXB38V472J	RESISTOR ARRAY	1	
R6722	EXB38V470J	RESISTOR ARRAY	1	
R6723	ERJ14YJ224	M 220KOHM, J, 1/4W	1	
R6724	EXB38V472J	RESISTOR ARRAY	1	
R6726	EXB38V470J	RESISTOR ARRAY	1	
R6727	EXB38V472J	RESISTOR ARRAY	1	
R6728	EXB38V680J	RESISTOR ARRAY	1	
R6732	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6733	EXB38V680J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6734	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6738	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6740	ERJ6GEYJ513	M 51KOHM, J, 1/10W	1	
R6749	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
R6751	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
R6761	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
R6763	ERJ14YJ5R6U	M 6.2OHM, 1/4W	1	
R6771	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6777	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6779	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6780	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6781, 8 2	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
R6783, 8 4	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6785, 8 6	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
R6788	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6791- 93	ERJ6ENF8202	M 82KOHM, 1/10W	3	
R6901	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6902- 06	ERJ6GEYJ221	M 220 OHM, J, 1/10W	5	
R6907	EXB38V103J	RESISTOR ARRAY	1	
R6911	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6916	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R6926	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6927- 31	ERJ6GEYJ221	M 220 OHM, J, 1/10W	5	
R6932	EXB38V103J	RESISTOR ARRAY	1	
R6936, 3 7	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R7102	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7103	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7105- 07	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7108	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7109	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7111	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7112- 17	ERJ3GEY0R00	M 0 OHM, 1/16W	6	
R7122	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7125- 27	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7128	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7129	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7131- 37	TAJAAH0470JV	M 47 OHM, J, 1/16W	7	
R7138, 3 9	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7142	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7145- 47	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7148	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7149	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7151	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7156, 5 7	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7158	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7159	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R7160	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R7162	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7165- 67	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7168	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7169	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7171	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7183- 88	EXB38V470J	RESISTOR ARRAY	6	
R7189- 92	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7202	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7203, 0 4	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7205- 07	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7208	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7209	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7211	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7212- 17	EXB38V470J	RESISTOR ARRAY	6	
R7222	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7225- 27	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7228	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7229	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7231	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7232- 35	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7236- 39	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7242	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7245- 47	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7248	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7249	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7251	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7252, 5 3	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7254- 59	TAJAAH0470JV	M 47 OHM, J, 1/16W	6	
R7262	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7265- 67	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7268	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7269	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7271	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7274	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7277	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R7278	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R7279	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7285, 8 6	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7301, 0 2	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7303	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7305- 07	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7308	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7309	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7310	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7312	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7314- 19	EXB38V470J	RESISTOR ARRAY	6	
R7323	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7325- 27	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7328	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7329	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7332	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7334- 37	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7343	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7345- 47	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7348	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7349	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7352	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7354, 5 5	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7356- 61	TAJAAH0470JV	M 47 OHM, J, 1/16W	6	
R7363	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7365- 67	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7368	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7369	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7372	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7374	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7375- 78	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7379	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7385, 8 6	ERJ6GEY0R00	M 0 OHM, 1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7387	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7388	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7403	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7405-07	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7408	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7409	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7410,1	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7412	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7416-21	EXB38V470J	RESISTOR ARRAY	6	
R7422	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7423	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7425-27	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7428	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7429	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7430	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7431	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7432	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7434-37	ERJ8GEY0R00	M 0 OHM, 1/8W	4	
R7438-41	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7443	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7445-47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7448	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7449	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7452	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7454	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7455-60	TAJAAH0470JV	M 47 OHM,J,1/16W	6	
R7461,6	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7463	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7465-67	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7468	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7469	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7470,7	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7472	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R8137	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
R8140,4	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R8144-47	D1HG5608A002	NETWORK RESISTER	4	
R8148,4	D1HG3908A002	NETWORK RESISTER	2	
R8150-62	ERJ2GEJ390	M 39 OHM, J,0.063W	13	
R8163-66	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8200-03	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8206	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8207	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8209	ERJ2GEJ273	M 27KOHM, J,0.063W	1	
R8210	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8211	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8215	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8216	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8217	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8219	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
R8220	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8221	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R8222	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8224	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8228	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8229	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8230	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8231	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8232	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8233	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R8234	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8237	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8240	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8241	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8242	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R8243	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R8244	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8245,4	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8248	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8250	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8251	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
R8258	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8262-65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8266,6	ERJ2GEJ821	M 820 OHM, J,0.063W	2	
R8268,6	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R8270	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8272	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8273,7	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R8275	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8276	ERJ2GEJ183	M 18KOHM, J,0.063W	1	
R8277	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R8278	ERJ3EKF1201	M 1.2KOHM, 1/16W	1	
R8279,8	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R8281	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8282-84	ERJ2GEJ102	M 1KOHM, J,0.063W	3	
R8285	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8286	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8287	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8288	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8289,9	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8291	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8292	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8293	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8297	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8300	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8301	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8303	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8304,0	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8306	EXB38V472J	RESISTOR ARRAY	1	
R8307	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8313	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8314,15	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8316-18	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8322-36	ERJ2GEJ101	M 100 OHM, J,0.063W	15	
R8339	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8341	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8343	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8345	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8347	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8349	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R8351	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8354	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8355	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8356,57	ERJ2GEJ390	M 39 OHM, J,0.063W	2	
R8358	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8370	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8372	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8373-79	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
R8381,82	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8383	D1HG5608A002	NETWORK RESISTER	1	
R8384	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8385	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8386	D1HG5608A002	NETWORK RESISTER	1	
R8387	EXB38V560J	RESISTOR ARRAY	1	
R8388	D1HG5608A002	NETWORK RESISTER	1	
R8390	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8391	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8392	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8393,94	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8395	EXB38V560J	RESISTOR ARRAY	1	
R8396-98	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8399	EXB2HV223JV	NETWORK RESISTER	1	
R8407,08	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8409,10	EXB38V560J	RESISTOR ARRAY	2	
R8411,12	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8414	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8415	EXB38V560J	RESISTOR ARRAY	1	
R8416	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8419	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8420	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8421	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8422,23	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8435	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8436	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
R8460	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8464,65	EXB2HV104JV	RESISTOR ARRAY	2	
R8467	D1HG1008A002	NETWORK RESISTER	1	
R8468	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8470	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8471,72	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8474	D1HG1008A002	NETWORK RESISTER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8475	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8476	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8477	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8478	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R8479,80	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8481	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8483-87	ERJ2GEJ560	M 56 OHM, J,0.063W	5	
R8488	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8489	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8491-94	ERJ2GEJ101	M 100 OHM, J,0.063W	4	
R8495	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8497,98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8500	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8501	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8503	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
R8504,05	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8507	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
R8508,09	ERJ2GEJ203	M 20KOHM, J,0.063W	2	
R8510	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8511	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8512-18	ERJ2GEJ103	M 10KOHM, J,0.063W	7	
R8519	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8524	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8525,26	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8527	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8528-30	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
R8531	EXB38V560J	RESISTOR ARRAY	1	
R8532-35	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8536	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8537	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8538	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8539	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8540	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8541-47	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
R8548	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8551	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8552	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8554-56	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8558	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8559	EXB38V560J	RESISTOR ARRAY	1	
R8560,61	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8564	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8565	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8566,67	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8568,69	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8570-73	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8574	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R857502	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R8575	ERJ3GEYJ181	M 180 OHM, J,1/16W	1	
R8576-80	ERJ2GEJ330	M 33 OHM, J,0.063W	5	
R8582-95	ERJ2GEJ330	M 33 OHM, J,0.063W	14	
R8596,97	D1HG33080001	NETWORK RESISTER	2	
R8598-00	D1HG5608A002	NETWORK RESISTER	3	
R8601	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8602	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8605-15	ERJ2GEJ103	M 10KOHM, J,0.063W	11	
R8617	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8629	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8630,31	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8632-37	ERJ2GEJ560	M 56 OHM, J,0.063W	6	
R8640	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8641	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8643,44	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8645,46	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8647	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8648,49	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8650	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8651	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8652	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8653	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8654,55	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8656	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8657	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8658	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8659	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8661	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8665	D1HG1218A002	NETWORK RESISTER	1	
R8666	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8668	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8670	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8673	D1HG1218A002	NETWORK RESISTER	1	
R8674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8678	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8682	ERJ3EKF1303	M 130KOHM, 1/16W	1	
R8686,87	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8688,89	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8690	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8691	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8692	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8693	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8694	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8695	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8696	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8697	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8698	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8700	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8702	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8703	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8704	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8705	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8706	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8707	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8708	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8709	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8710	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8711	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8712	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8713,14	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8715	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8719,20	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8722-25	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8727	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8731	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8733	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R8734	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8736	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8737	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8738	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R8741	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8748	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8749	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8751-53	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8755-58	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8765	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8770	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8774	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8776	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8777	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8778,79	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8780,81	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8782-87	EXB38VR000	RESISTOR ARRAY	6	
R8788	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8790	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8791	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
R8792,93	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8795-98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8799-02	ERJ2GEJ103	M 10KOHM, J,0.063W	4	
R8817,18	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
R9000	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9003,04	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9006	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9007	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9015-18	ERJ3GEYJ103	M 10KOHM, J,1/16W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,21	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R9029,30	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9031,32	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9033,34	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9035,36	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9042	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9043,44	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9045	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9046	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R9047-50	TAJAAH0101JV	M 100 OHM, J, 1/16W	4	
R9052	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9054,55	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	2	
R9056,57	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9058,59	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9060-67	TAJAAH0101JV	M 100 OHM, J, 1/16W	8	
R9068-72	ERJ3GEYJ103	M 10KOHM, J, 1/16W	5	
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9077-79	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9080	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9081	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9082-89	TAJAAH0101JV	M 100 OHM, J, 1/16W	8	
R9090	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R9091,92	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9093	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9094	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9095-98	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9102-04	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9105	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9107-09	ERJ3GEYJ393	M 39KOHM, J, 1/16W	3	
R9110	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9111,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9113	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9114-16	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9117,18	EXB38VR000	RESISTOR ARRAY	2	
R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,21	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9122-24	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9125,26	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9127,28	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9130	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9131-33	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	3	
R9134-36	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9137	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9140-42	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9145-47	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9160,61	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9162,63	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9164,65	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9200-02	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
R9204	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9206,07	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9210	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300-04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9306,07	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9313-16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,19	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9324-28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9330-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9335,36	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339-42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500-03	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9505-10	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,17	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519-21	EXB38V470J	RESISTOR ARRAY	3	
R9522,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9524-26	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,29	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R9530	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9533,34	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R9537,38	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM, J, 1/16W	1	
R9543	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9702-04	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9706,07	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,17	ERJL14KJ33M	M 33 OHM, J, 1/4W	2	
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,23	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9724	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9726,27	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9728,29	ERJ6ENF2002	M 20KOHM, 1/10W	2	
R9738,39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9800	EXB38V470J	RESISTOR ARRAY	1	
R9802-04	EXB2HV470JV	RESISTOR ARRAY	3	
R9806,07	EXB38V470J	RESISTOR ARRAY	2	
R9808,09	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9810	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9811	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9812	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9813	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9814	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9815	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9816,17	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9819	EXB2HV470JV	RESISTOR ARRAY	1	
R9820,21	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9822,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9824	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9900	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9901	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9902	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9903	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9904	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9905	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9906	EXB2HV470JV	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9908,09	EXB38V470J	RESISTOR ARRAY	2	
R9910,11	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9913	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9914	EXB38V470J	RESISTOR ARRAY	1	
R9915,16	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9917-19	EXB2HV470JV	RESISTOR ARRAY	3	
R9922	EXB2HV470JV	RESISTOR ARRAY	1	
R9923	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNGA162	CIRCUIT BOARD DT	1	PAVCA △
RTL	TNPA3598AC	CIRCUIT BOARD H	1	△
RTL	TNPA3620	CIRCUIT BOARD PA	1	△
RTL	TNPA3621AB	CIRCUIT BOARD Z	1	△
RTL	TNPA3625AE	CIRCUIT BOARD DG	1	△

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
RTL	TNPA3626	CIRCUIT BOARD DV	1	△
RTL	TNPA3547	CIRCUIT BOARD C1	1	△
RTL	TNPA3548	CIRCUIT BOARD C2	1	△
RTL	TNPA3549	CIRCUIT BOARD C3	1	△
RTL	TNPA3550	CIRCUIT BOARD C4	1	△
RTL	TZTNP010YES	CIRCUIT BOARD D	1	△
RTL	TNPA3570AB	CIRCUIT BOARD P	1	△
RTL	TNPA3643AC	CIRCUIT BOARD PB	1	△
RTL	TNPA3573	CIRCUIT BOARD SC	1	△
RTL	TNPA3552	CIRCUIT BOARD SD	1	△
RTL	TNPA3574	CIRCUIT BOARD SS	1	△
RTL	TNPA3551	CIRCUIT BOARD SU	1	△
RTL	TNPA3603	CIRCUIT BOARD K	1	△
RTL	TNPA3604	CIRCUIT BOARD S	1	△
S1	K1KA03AA0193	3P CONNECTOR	1	
S2	K1KA02AA0193	2P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA09A00210	9P CONNECTOR	2	
SC90	K1KA06AA0192	6P CONNECTOR	1	
SD1-D3	K1MNC0B00001	CONNECTOR	3	
SD46	K1KB09A00045	9P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA05AA0192	5P CONNECTOR	1	
SS24	K1KA04AA0193	4P CONNECTOR	1	
SS32	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS51-54	K1MN13B00020	13P CONNECTOR	4	
SU1-U3	K1MNC0B00001	CONNECTOR	3	
SU45	K1KB09A00045	9P CONNECTOR	1	
SW2500	K0F122A00172	SWITCREMOTE CONTROLH	1	
SW3751-55	EVQ11G05R	SWITCH	5	
T6500	ETS13TB139AP	SWITCHING TRANS	1	
T6501	ETS22AE2F9AC	SWITCHING TRANS	1	
TU8200	ENG6302DF	TUNER	1	△
VR6045	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6503	EVMEASA00B13	CONTROL 1KOHMB 0.3W	1	
VR6504,05	EVMEASA00B53	CONTROL 5KOHMB 0.3W	2	
X4001	TSSA101	CRYSTAL	1	
X4002	H0J400400017	CRYSTAL	1	
X4004	H0J270500087	CRYSTAL	1	
X8005	H0J270500061	CRYSTAL	1	
X8200	H0J250500050	CRYSTAL	1	
X9000	H2D2705A0004	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
XF8200	J0C4405B0004	LC FILTER	1	
XF8201	J0C4405B0006	LC FILTER	1	
XF8202	J0C4405B0005	LC FILTER	1	
Z2	K1KA05AA0192	5P CONNECTOR	1	
Z50	K1MN35A00013	35P CONNECTOR	1	
ZA5601-04	K9ZZ00000424	CONNECTOR	4	
ZA5801-04	K9ZZ00000424	CONNECTOR	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
ZA6001-04	K4CD01000013	TERMINAL	4	
ZA6501-03	K4CD01000013	TERMINAL	3	
ZA7101-03	K4CD01000013	TERMINAL	3	
ZA7201, 02	K4CD01000013	TERMINAL	2	
ZA7204	K4CD01000013	TERMINAL	1	
ZA7301-04	K4CD01000013	TERMINAL	4	
ZA7401-03	K4CD01000013	TERMINAL	3	
ZA9001	K4CD01000013	TERMINAL	1	
ZA9002-06	K4ZZ01000179	TERMINAL	5	
ZMM1	TMM25401	CLAMPER	1	
C402	ECJ2XC1H101J	C 100PF, J, 50V	1	
C403	ECKCNA222MEB	C 2200PF, M	1	△
C404	F0CAF105A021	C 1UF, 250V	1	△
C405	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C407	ECA2WHG220	E 22UF, 450V	1	
C409	F0CAF105A021	C 1UF, 250V	1	△
C410	ECJ3YB1E105K	C 1UF, K, 25V	1	
C411-14	ECJ2XB1H103K	C 0.01UF, K, 50V	4	
C415,16	F1A3A102A040	C 1000PF, J, 1KV	2	
C417	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C418	F1J1C1050011	C 1UF, Z, 50V	1	
C419	F1A3A102A040	C 1000PF, J, 1KV	1	
C421,22	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C423	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C424	F1A3A102A040	C 1000PF, J, 1KV	1	
C425	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C426	ECJ2XC1H471J	C 470PF, J, 50V	1	
C427	F1J1C1050011	C 1UF, Z, 50V	1	
C428	ECJ2XC1H221J	C 220PF, J, 50V	1	
C429,30	F1K2J1530002	C 0.15PF, J, 630V	2	
C431	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C432-34	F1J1C1050011	C 1UF, Z, 50V	3	
C436	F1J1C1050011	C 1UF, Z, 50V	1	
C440	ECA1HM100	E 10UF, 50V	1	
C443,44	F1A3A102A040	C 1000PF, J, 1KV	2	
C445	F1J1C1050011	C 1UF, Z, 50V	1	
C446	F2B2W3910005	C 390UF, 450V	1	
C451	F1A3A101A040	C 100PF, J, 1KV	1	
C457	ECWH12333RHV	P 0.013UF, J, 1.2KV	1	
C459	F1K2J1530002	C 0.15PF, J, 630V	1	
C460,61	F1A3A331A039	E 330UF, 1KV	2	
C462	ECJ3YB1E105K	C 1UF, K, 25V	1	
C463	ECJ2XC1H220J	C 22UF, J, 50V	1	
C465	ECKCNA221KB7	C 220PF, M	1	△
C467	ECKCNA221KB7	C 220PF, M	1	△
C468	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C470	F0CAF105A021	C 1UF, 250V	1	△
C471	F1J1C1050011	C 1UF, Z, 50V	1	
C473	ECKCNA221KB7	C 220PF, M	1	△
C476	ECKCNA221KB7	C 220PF, M	1	△
C482	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C490	ECJ2XC1H331J	C 330PF, J, 50V	1	
C491	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C492	ECJ2XC1H271J	C 270PF, J, 50V	1	
C493	ECA1EM101	E 100UF, 25V	1	
C494,95	ECJ2XC1H101J	C 100PF, J, 50V	2	
C496	F1J1C1050011	C 1UF, Z, 50V	1	
C497	ECA1EM221	E 220UF, 25V	1	
C498	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C501-03	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C504	F1J1C1050011	C 1UF, Z, 50V	1	
C505	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C506-08	ECJ2XB1H103K	C 0.01UF, K, 50V	3	
C509	ECA1EM101	E 100UF, 25V	1	
C510	ECJ2XB1H104K	C 0.1UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C511	ECA1EM331	E 330UF, 25V	1	
C512-14	ECJ2XC1H471J	C 470PF, J, 50V	3	
C515	ECA1CM222	E 2200UF, 16V	1	
C516	ECJ2XB1C474K	C 0.47UF, K, 16V	1	
C517	F2D1E1010001	E 10UF, 25V	1	
C518,19	F1J1C1050011	C 1UF, Z, 50V	2	
C523	ECJ3YB1E105K	C 1UF, K, 25V	1	
C525	F2A1E8210012	E 820UF, 25V	1	
C526	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C527	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C528,29	F1J1C1050011	C 1UF, Z, 50V	2	
C530	ECJ2VB1H333K	C 0.033UF, K, 50V	1	
C533	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C534	ECJ2XC1H471J	C 470PF, J, 50V	1	
C546,47	ECJ2VB1H333K	C 0.033UF, K, 50V	2	
C548	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C551-53	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C554	F1J1C1050011	C 1UF, Z, 50V	1	
C555	ECA2AM101	E 100UF, 100V	1	
C556	F2A1C1520009	E 1500UF, 16V	1	
C557	F2A1E1520089	E 1500UF, 25V	1	
C562	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C572	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C574	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C577	ECA2AM330	E 33UF, 100V	1	
C581	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C583	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C584	ECJ2XB1H223K	C 0.022UF, K, 50V	1	
C587	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C591,92	F1K2J1530002	C 0.15PF, J, 630V	2	
C601	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C603	ECA1HM470	E 47UF, 50V	1	
C604,05	F2A2C1510004	E 150UF, 160V	2	
C606,07	F1J1C1050011	C 1UF, Z, 50V	2	
C608,09	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C610	F1J1C1050011	C 1UF, Z, 50V	1	
C611	F2B2T1420001	E 142UF, 220V	1	
C612	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C615	F2B2T1420001	E 142UF, 220V	1	
C616	F1A3A102A040	C 1000PF, J, 1KV	1	
C619	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C620	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C623	ECA1HM100	E 10UF, 50V	1	
C624	ECJ3YB1E105K	C 1UF, K, 25V	1	
C626	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C629	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C631	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C633	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C634	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C635	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C636	F1J1C1050011	C 1UF, Z, 50V	1	
C637	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C638,39	ECJ2XB1H103K	C 0.01UF, K, 50V	2	
C640	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C641	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C643	ECA1HM470	E 47UF, 50V	1	
C646,47	ECJ2XC1H331J	C 330PF, J, 50V	2	
D401	B0FBAT000006	DIODE	1	
D402	MA4240MTA	ZENER DIODE	1	
D403	MA4051NM	ZENER DIODE	1	
D404	B0EBKT000007	DIODE	1	
D406	MA4200M	ZENER DIODE	1	
D407	MA188	DIODE	1	
D410	MA111	DIODE	1	
D411	B0BB17000010	DIODE	1	
D412-14	MA111	DIODE	3	
D415	B0JAME000081	DIODE	1	
D417	RU30A	DIODE	1	
D418	MA4082M	ZENER DIODE	1	
D419,20	RU30A	DIODE	2	
D423	MA188	DIODE	1	
D425	MA188	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D427-29	ERA15-10	DIODE	3	
D431	B0JCDD000002	DIODE	1	
D433	MA4150M	ZENER DIODE	1	
D434	MA4082M	ZENER DIODE	1	
D435	ERA15-10	DIODE	1	
D436	MA188	DIODE	1	
D437	MA4082M	ZENER DIODE	1	
D438	MA4150M	ZENER DIODE	1	
D439	MA4130HTA	ZENER DIODE	1	
D440	MA4300M	ZENER DIODE	1	
D441	B0HAMM000122	DIODE	1	
D442	MA4075M	ZENER DIODE	1	
D443	MA4240MTA	ZENER DIODE	1	
D444	B0HAMM000122	DIODE	1	
D445	MA165	DIODE	1	
D459	MA188	DIODE	1	
D461	MA4082M	ZENER DIODE	1	
D462	MA142WKT	ZENER DIODE	1	
D463-67	ERA15-10	DIODE	5	
D501	B0HANR000016	DIODE	1	
D503,04	MA165	DIODE	2	
D505	B0JAME000081	DIODE	1	
D506	MA4051NM	ZENER DIODE	1	
D507,08	MA4150M	ZENER DIODE	2	
D509,10	B0HANM000028	DIODE	2	
D511	B0HBSM000043	DIODE	1	
D514	MA4062M	ZENER DIODE	1	
D521	B0HAMP000067	DIODE	1	
D528,29	MA153	DIODE	2	
D530	MA4100M	ZENER DIODE	1	
D531,32	B0HAPR000012	DIODE	2	
D534	B0JBSG000026	DIODE	1	
D535	MA188	DIODE	1	
D536	B0JBSL000013	DIODE	1	
D538	MA3051M	ZENER DIODE	1	
D539	B0HERP000007	DIODE	1	
D542	MA4180HTA	ZENER DIODE	1	
D543	MA4150M	ZENER DIODE	1	
D544,45	MA4180HTA	ZENER DIODE	2	
D549	MA4075M	ZENER DIODE	1	
D551	MA4130M	ZENER DIODE	1	
D552	MA4082M	ZENER DIODE	1	
D555	MA4075M	ZENER DIODE	1	
D559	MA4075M	ZENER DIODE	1	
D563	MA4062M	ZENER DIODE	1	
D564	MAZ72000AF	ZENER DIODE	1	
D565	MA4160M	ZENER DIODE	1	
D566	B0HAMM000122	DIODE	1	
D568	MA3J142D0L	DIODE	1	
D569-71	MA4300M	ZENER DIODE	3	
D572	MA188	DIODE	1	
D574	MA111	DIODE	1	
D575	MA188	DIODE	1	
D579	MA111	DIODE	1	
D582	MAZ705600F	ZENER DIODE	1	
D584	MA4075M	ZENER DIODE	1	
D586	B0HAMP000067	DIODE	1	
D587	MA188	DIODE	1	
IC401	CNC1S171R	IC	1	△
IC402	C0BBAA000038	IC	1	
IC403,04	CNC1S171R	IC	2	△
IC406	C0DAZZZ00021	IC	1	
IC407	C0DBAZZ00111	IC	1	
IC408,09	CNC1S171R	IC	2	△
IC411	C0BBAA000038	IC	1	
IC412	CNC1S171R	IC	1	△
IC501	C2ABDD000064	IC	1	
IC502	C0EBH0000190	IC	1	
IC503,04	C0DAEMB00004	IC	2	
IC505	CNC1S171R	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC506	C0ZBZ0000878	IC	1	
IC507	C0CBABE00023	IC	1	
IC509	C0DABZZ00010	IC	1	
IC512	C0DAEMB00004	IC	1	
IC520	C9ZB00000496	IC	1	
L402	EXCELSA24	BEAD CHOKE	1	
L403	EXCELSA35	BEAD CHOKE	1	
L404,05	G0B123K00003	INDUCTION COIL	2	△
L501	EXCELSA35	BEAD CHOKE	1	
L502	TALL08N102JA	INDUCTION COIL	1	
L506	EXCELD25C	BEAD CHOKE	1	
L509	J0JBC0000032	CHIP INDUCTOR	1	
L510	EXCELD25C	BEAD CHOKE	1	
P2	K1KA06AA0479	6P CONNECTOR	1	
P5	K1KA11AA0183	11P CONNECTOR	1	
P9	K1KA03A00537	3P CONNECTOR	1	
P10	K1KA06AA0182	6P CONNECTOR	1	
P11	K1KA07AA0192	7P CONNECTOR	1	
P12	K1KA05AA0192	5P CONNECTOR	1	
P23	K1KA03AA0182	3P CONNECTOR	1	
P25	K1KA20AA0178	20P CONNECTOR	1	
P30	K1KA05AA0182	5P CONNECTOR	1	
PR401	K5Y502BA0001	FUSE	1	
PR402	K5G202B00015	FUSE	1	
PR501	K5H502Z00003	FUSE	1	
PR503	K5H502Z00003	FUSE	1	
PR509	K5H501Z00005	FUSE	1	
PR601	K5G312B00012	FUSE	1	
Q401	B1CHND000004	TRANSISTOR	1	
Q403	B1CBGD000001	TRANSISTOR	1	
Q404	B1BCCF000022	TRANSISTOR	1	
Q406	B1DEHQ000007	TRANSISTOR	1	
Q407	XN4601	TRANSISTOR	1	
Q408,09	B1CHND000004	TRANSISTOR	2	
Q412,13	B1DAGQ000013	TRANSISTOR	2	
Q414	B1ABCF000134	TRANSISTOR	1	
Q415	2SB1218ARL	TRANSISTOR	1	
Q417	B1CHND000004	TRANSISTOR	1	
Q418	2SD1819A	TRANSISTOR	1	
Q420-22	2SD1819A	TRANSISTOR	3	
Q423,24	B1CBGD000001	TRANSISTOR	2	
Q430	B1CEJQ000002	TRANSISTOR	1	
Q431	B1DEGS000001	TRANSISTOR	1	
Q432	B1CEJQ000002	TRANSISTOR	1	
Q433	B1CBGD000001	TRANSISTOR	1	
Q434	B1CEJQ000002	TRANSISTOR	1	
Q435	B1CBGD000001	TRANSISTOR	1	
Q436	B1CEJQ000002	TRANSISTOR	1	
Q438	B1CBGD000001	TRANSISTOR	1	
Q439	B1CHND000004	TRANSISTOR	1	
Q440,41	2SD1819A	TRANSISTOR	2	
Q501,02	2SD1820A	TRANSISTOR	2	
Q503	XN0440100L	TRANSISTOR	1	
Q505	B1CEJQ000002	TRANSISTOR	1	
Q506	B1CHND000004	TRANSISTOR	1	
Q507	B1DAGQ000013	TRANSISTOR	1	
Q508	XN0450100L	TRANSISTOR	1	
Q509	XN0440100L	TRANSISTOR	1	
Q510	B1DHBD000004	TRANSISTOR	1	
Q511	B1CFND000005	TRANSISTOR	1	
Q512	B1CBGD000001	TRANSISTOR	1	
Q516	B1DHBD000004	TRANSISTOR	1	
Q517	B1HFCFA00021	TRANSISTOR	1	
Q518	B1DEHL000018	TRANSISTOR	1	
Q519	B1DEHF000002	TRANSISTOR	1	
Q520	B1HFCFA00021	TRANSISTOR	1	
Q525	B1CBGD000001	TRANSISTOR	1	
Q527	B1DEHL000018	TRANSISTOR	1	
Q530	B1CBGD000001	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q535	2SD1819A	TRANSISTOR	1	
Q536-38	B1CFQD000001	TRANSISTOR	3	
Q541	B1CBGD000001	TRANSISTOR	1	
Q544	XN0440100L	TRANSISTOR	1	
Q550	B1CHGD000006	TRANSISTOR	1	
Q551,52	B1CBGD000001	TRANSISTOR	2	
Q553	2SD1819A	TRANSISTOR	1	
Q554	B1DHBD000004	TRANSISTOR	1	
Q557	2SD1819A	TRANSISTOR	1	
Q558	B1CHHG000002	TRANSISTOR	1	
Q559	2SD1819A	TRANSISTOR	1	
Q560	B1CHHG000002	TRANSISTOR	1	
Q561,62	2SD1819A	TRANSISTOR	2	
Q564,65	2SD1819A	TRANSISTOR	2	
Q567	B1CBGD000001	TRANSISTOR	1	
R401	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R402	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R403	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R404	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R405	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R407	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R408	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R410,11	D1F5100E0002	F 3.3 OHM, 5W	2	△
R412	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R413	D1F5100E0002	F 3.3 OHM, 5W	1	△
R414	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R415	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R416	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R417	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R418	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R419	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R420	ERJ6GEYJ474	M 470KOHM,J,1/10W	1	
R421	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R422	ERJ8GEYJ181	M 180 OHM, J,1/8W	1	
R423	ERJ6GEYJ154	M 150KOHM,J,1/10W	1	
R424	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R425	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R426	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R427	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R428	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R429	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R430	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R431	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R432	ERJ8GEYJ103	M 10KOHM, J,1/8W	1	
R433	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R435	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R436	ERJ8GEYJ153	M 15KOHM, J,1/8W	1	
R437	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R438	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R439	ERG12SJ120	M 12 OHM, J,1/2W	1	
R440	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
R441,42	ERJ6EKF6803	M 680KOHM, 1/10W	2	
R443	EVMAASA00B23	CONTROL 2KOHMB	1	
R444	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R445	ERJ6ENF1003	M 100KOHM, 1/10W	1	
R446	ERX2SJR39H	M0.39 OHM, J, 2W	1	
R447	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R448,49	D0XGR10JA007	RESISTOR ARRAY	2	
R450	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R451	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R452	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R453	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R454	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R455	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R456,57	ERJ6GEYJ333	M 33KOHM,J,1/10W	2	
R458	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R461	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R462	ERJ6ENF4303	M 430KOHM, 1/10W	1	
R463	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R464	ERJ6ENF3302	M 33KOHM, 1/10W	1	
R465	ERJ6ENF5603	M 560KOHM, 1/10W	1	
R466,67	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R468	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R469	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R470	ERX2SJR39H	M0.39 OHM, J, 2W	1	
R471	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R472,73	ERJ6ENF5603	M 560KOHM, 1/10W	2	
R474	ERG1SJ104P	M 100KOHM, J, 1W	1	
R475	ERJ6EKF6803	M 680KOHM, 1/10W	1	
R476,77	ERJ14YJ181U	M 181 OHM, J,1/4W	2	
R478	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R479	ERG1SJ104P	M 100KOHM, J, 1W	1	
R480	ERJ6ENF9102	M91.0KOHM, 1/10W	1	
R481	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R482	ERJ8GEYJ220	M 22 OHM, J,1/8W	1	
R483	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R485	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R486,87	ERJ6GEYJ682	M 6.8KOHM,J,1/10W	2	
R488	ERJ6GEYJ106	M 10MOHM,J,1/10W	1	
R489	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R490,91	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R492	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R493	ERG12SJ120	M 12 OHM, J,1/2W	1	
R494-96	ERJ6ENF5603	M 560KOHM, 1/10W	3	
R497	ERJ6ENF2402	M 24KOHM, 1/10W	1	
R501	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R502,03	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R504	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R505	ERJ8GEYJ330	M 33 OHM, J,1/8W	1	
R506	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R507	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R508	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R509-11	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R512	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R513,14	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R515,16	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R517	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R518	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R519,20	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R521,22	ERJ8GEYJ100	M 10 OHM, J,1/8W	2	
R523	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R524	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R525	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R526,27	ERJ8GEYJ224	M 220KOHM, J,1/8W	2	
R528	ERJ6GEYJ47R	M 4.7 OHM,J,1/10W	1	
R530	ERJ6RBD3302	M 33KOHM,F,1/10W	1	
R531	ERJ8GEYJ472	M 4.7KOHM, J,1/8W	1	
R532	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R533	ERJ8GEYJ223	M 22KOHM, J,1/8W	1	
R534	ERJ8GEYJ224	M 220KOHM, J,1/8W	1	
R535,36	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R537	ERJ6ENF3602	M 36KOHM, 1/10W	1	
R538	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R539	ERJ6RBD1002	M 1.0KOHM, 1/10W	1	
R540	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R541	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R542	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R543	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R544	ERJ6GEYJ331	M 330 OHM,J,1/10W	1	
R545	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R546,47	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R548	ERJ8GEYJ102	M 1KOHM, J,1/8W	1	
R549	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R550	ERJ6GEYJ105	M 1MOHM,J,1/10W	1	
R551	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R552	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R553	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R554	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R555,56	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R557	ERJ8GEYJ471	M 470 OHM, J,1/8W	1	
R558	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R559	ERJ6RBD4702	M 47KOHM, 1/10W	1	
R560	ERJ6ENF1302	M 13KOHM, 1/10W	1	
R561	ERJ6ENF4301	M 4.3KOHM, 1/10W	1	
R562	ERJ6ENF1802	M 18KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R563	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R564	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R565	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R566	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R567	ERJ8GEYJ472	M 4.7KOHM, J, 1/8W	1	
R568, 69	ERG2SJ181	M 180 OHM, J, 2W	2	
R570	ERJ8GEYJ102	M 1KOHM, J, 1/8W	1	
R571	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R572, 73	ERJ8ENF3900	M 390 OHM, 1/8W	2	
R574	ERJ6GEYJ331	M 330 OHM, J, 1/10W	1	
R575	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R576	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R577, 78	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R579	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R580, 81	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R582	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R583	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R584	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R585	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R586, 87	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R588	ERJ8ENF3900	M 390 OHM, 1/8W	1	
R589, 90	ERJ8GEYJ123	M 12KOHM, J, 1/8W	2	
R591	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R592	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R593	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R594	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R595	ERJ8GEYJ222	M 2.2KOHM, J, 1/8W	1	
R596	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R597, 98	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R599, 00	ERJ8GEYJ391	M 390 OHM, J, 1/8W	2	
R601	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R602	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R603	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R604	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R606	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R607	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
R608	ERJ8GEYJ332	M 3.3KOHM, J, 1/8W	1	
R609	ERJ6GEYJ822	M 8.2KOHM, J, 1/10W	1	
R610, 11	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R612	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R613	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R614	ERJ6ENF3301	M 3.3KOHM, 1/10W	1	
R615-17	ERJ6GEYJ103	M 10KOHM, J, 1/10W	3	
R618	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R619	ERJ8RQFR68	M 0.68OHM, J, 1/8W	1	
R620	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R621	ERJ8GEYJ123	M 12KOHM, J, 1/8W	1	
R622	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R623	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R624	ERX2SJR22	M0.22 OHM, J, 2W	1	
R625	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R626	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R628	EVMAASA00B33	CONTROL 3KOHMB	1	
R629	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R630	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R631	ERJ8GEYJ333	M 33KOHM, J, 1/8W	1	
R632	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R633	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R634	ERJ8RQFR68	M 0.68OHM, J, 1/8W	1	
R636	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R637	ERJ8RQFR68	M 0.68OHM, J, 1/8W	1	
R640	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R641	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R642-44	ERJ8RQFR68	M 0.68OHM, J, 1/8W	3	
R645	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R646, 47	ERJ6GEYJ223	M 22KOHM, J, 1/10W	2	
R648	ERJ8ENF1503	M 15KOHM, 1/8W	1	
R649	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R650	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R651	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R652	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R653	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R654	ERJ8GEYJ101	M 100 OHM, J, 1/8W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R655	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R656	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R657	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R658	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
R659	ERJ6ENF3002	M 30KOHM, 1/10W	1	
R660	ERJ6ENF1202	M 12KOHM, 1/10W	1	
R661	EVMAASA00B53	CONTROL 5KOHMB	1	
R662	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R663	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	1	
R664	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R665	EVMAASA00B23	CONTROL 2KOHMB	1	
R666	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R667, 68	ERJ8GEYJ0R00	M 0 OHM, 1/8W	2	
R669	ERJ6ENF1303	M 130KOHM, 1/10W	1	
R670	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R671	EVMAASA00B14	CONTROL 10KOHMB	1	
R674	ERJ8GEYJ333	M 33KOHM, J, 1/8W	1	
R675	ERJ3GEYJ2R2	M 2.2 OHM, J, 1/16W	1	
R676	ERJ8GEYJ333	M 33KOHM, J, 1/8W	1	
R677	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R678	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R679, 80	ERJ8RQJR39	M0.39 OHM, 1/8W	2	
R681	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R682	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R683	ERJ6ENF1500	M 150 OHM, 1/10W	1	
R684	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R685	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R686	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R687	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R688	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R689	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R690	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R691	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R692, 93	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R694	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R695	ERJ6ENF1602	M 16KOHM, 1/10W	1	
R696	ERJ8GEYJ100	M 10 OHM, J, 1/8W	1	
R697	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R698	ERJ8RQJR39	M0.39 OHM, 1/8W	1	
R702	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R703, 04	ERG2SJ101	M 100 OHM, J, 2W	2	
R706	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R707	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R708	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R712	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R713	ERJ8GEYJ472	M 4.7KOHM, J, 1/8W	1	
R901	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R903-06	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R907	ERJ6ENF2702	M 27KOHM, 1/10W	1	
R908	ERJ6GEYJ335	M 3.3MOHM, J, 1/10W	1	
R909-11	ERJ6GEYJ106	M 10MOHM, J, 1/10W	3	
R912	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R913, 14	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R915	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R916	ERJ6GEYJ0R00	M 0 OHM, 1/10W	1	
R917	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R918	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R920	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R921	ERJ6RBD3092	M30.9KOHM, F, 1/10W	1	
R922	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R925	ERJ6GEYJ335	M 3.3MOHM, J, 1/10W	1	
R926, 27	ERG2DJW224E	M 220KOHM, J, 2W	2	
R928-31	ERJ8ENF1203	M 12KOHM, 1/8W	4	
R932	ERJ6GEYJ105	M 1MOHM, J, 1/10W	1	
RL402	TSEH8011	RELAY	1	△
RL403	TSE10801	RELAY	1	△
S401, 02	JOLT00000009	SWITCH	2	△
T401	G4D4A0000107	SWITCHING TRANSFORMER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
T402	G4D1A0000098	SWITCHING TRANSFORMER	1	△
T404	G4D4A0000109	SWITCHING TRANSFORMER	1	△
T407	ETQ11K5AZ	CHOKE TRANS	1	△
T410	G4D2A0000229	SWITCHING TRANSFORMER	1	△
T601	G4D2A0000227	SWITCHING TRANSFORMER	1	
W2	ERDS2TJ391	C 390 OHM, J,1/4W	1	
X501	H2B400400021	CRYSTAL	1	
Z1, Z2	K4ZZ01000206	TERMINAL	2	
Z400	TNPA3570	CIRCUIT BOARD P	1	
Z410	TMM7464-2	CLAMPER	1	
Z411	TMME190	CLAMPER	1	
Z412	TMM7443-3	CLAMPER	1	
Z413	TMM7464-2	CLAMPER	1	
Z414	TMME190	CLAMPER	1	
Z420	TMM23417	CLAMPER	1	
Z450-53	EYF52BCY	FUSE HOLDER	4	
ZN401, 02	D4EAD6210001	VARISTOR	2	△
ZN403	D4EA8511A001	VARISTOR	1	△
ZN404	D4EAB681A011	VARISTOR	1	△

15.3. Electrical Replacement Parts List (TH-42PX50U)

Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F603	K5D102BNA007	TIME LAG FUSE HIGH(F603)	1	△
F601.602	K5D103BMA001	TIME LAG FUSE HIGH(F601)	2	△
C11	K1MN55BA0076	55P CONNECTOR	1	
C12	K1KA04BA0107	4P CONNECTOR	1	
C21	K1MN55BA0076	55P CONNECTOR	1	
C22	K1KA04BA0107	4P CONNECTOR	1	
C24	K1KA04AA0150	4P CONNECTOR	1	
C31	K1MN55BA0076	55P CONNECTOR	1	
C32	K1KA12AA0153	12P CONNECTOR	1	
C33	K1KA04BA0107	4P CONNECTOR	1	
C41	K1MN55BA0076	55P CONNECTOR	1	
C43	K1KA04BA0107	4P CONNECTOR	1	
C2300	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C2301	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	
C2310,11	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
C2335	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C2337	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2338	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2340	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2341	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2342	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2343	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2344	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2346	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2347	ECA1VHG470	E 47UF, 35V	1	
C2348	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2349	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2350	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2351	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2352	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2353	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2355	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2356	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2374	ECA1HHG100	E 10UF, 50V	1	
C2376-79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384-87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,29	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2433,34	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2437,38	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2441,42	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,46	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,50	ECA1EHG331	E 330UF, 25V	2	
C2453,54	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2457,58	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,62	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,66	ECJ2FB1E105K	C 1UF, K, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2469,70	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2473,74	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2477,78	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2481-84	ECJ2FB1E224K	C 22UF, K, 25V	4	
C2489,90	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2497,98	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2602	ECA1CHG101	E 100UF, 16V	1	
C2603	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2606	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2607	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2608	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2609	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2610-14	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
C2615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2616	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2617	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2620,21	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2625,26	ECJ3YB1C475K	C 0.047UF, K, 16V	2	
C2633,34	TCUY1C225ZFN	C 2.2UF, 16V	2	
C2637	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2644-50	ECJ1VF1A105Z	C 1UF, Z, 10V	7	
C2651	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2652	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2654,55	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C2656	ECA1CHG101	E 100UF, 16V	1	
C2657	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2660,61	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2662	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2663	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2664	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2665-68	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C2670	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2672	ECA1CHG470	E 47UF, 16V	1	
C2673	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2675	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2676	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2678	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2684-89	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
C2701	ECA1CHG101	E 100UF, 16V	1	
C2702	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2703	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2705	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2708	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2710	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2712	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2715	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2717	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2718	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2723	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2725	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2729,30	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2733,34	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2736-44	ECJ1VF1A105Z	C 1UF, Z, 10V	9	
C2747	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2750	ECA1HHG220	E 22UF, 50V	1	
C2775	ECA1EHG471	E 470UF, 25V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2776,77	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C2779,80	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2783	ECA1HHG220	E 22UF, 50V	1	
C4001	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4005,06	ECJ1XC1H180J	C 18PF, J, 50V	2	
C4008-11	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4012	ERJ3GEYJ680	M 68 OHM, J, 1/16W	1	
C4013-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4016	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4017,18	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4020	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4023	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4024	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4025	ECJ1XC1H220J	C 22PF, J, 50V	1	
C4030	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4032	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4033	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4034	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4035	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4038	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4042,43	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
C4051	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4053	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4054	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4055	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4057	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4059	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4063	ECJ1XC1H561J	C 560PF, J, 50V	1	
C4067	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4071	EEHHP0J470P	C 47PF, J, 6.3V	1	
C4074	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4096	EEVHB1E330	E 33UF, 25V	1	
C4098	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4099,00	ECJ1VC1H120J	C 12PF, J, 50V	2	
C4102,03	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4104	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4107	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4120	EEFCD0G560R	56UF,	1	
C4121	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4123	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4124	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4126	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4127	ECJ1VB1H153K	C 0.015UF, K, 50V	1	
C4129	EEVHB0J470R	E 47UF, 6.3V	1	
C4130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4131,32	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C4133	EEHBB1C100R	C 10PF, J, 16V	1	
C4134	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4135-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4141	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4142	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4143	EEVHB0J470R	E 47UF, 6.3V	1	
C4144	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4145-47	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4148	ECJ1VB1H102K	C 1000PF, K, 50V	1	
C4149	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4153,54	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4155	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4160	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4161	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4165	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4172	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4181,82	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4184	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4186	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4191	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4203	EEVHB0J470R	E 47UF, 6.3V	1	
C4205	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4208-10	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4215	EEVHB1C470P	E 47UF, 16V	1	
C4216	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4217,18	ECJ1XC1H181J	C 180PF, J, 50V	2	
C4219,20	ECJ1XC1H330J	C 33PF, J, 50V	2	
C4221	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4222	EEVHB1C470P	E 47UF, 16V	1	
C4224	EEHBB1C100R	C 10PF, J, 16V	1	
C4225	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4227	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4229,30	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4231	EEVHB1C470P	E 47UF, 16V	1	
C4232,33	EEHBP1C100R	C 10PF, J, 16V	2	
C4234,35	ECJ1VB1H272K	C 2700PF, K, 50V	2	
C4236	EEVHB0J470R	E 47UF, 6.3V	1	
C4237-48	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4249	EEVHB0J470R	E 47UF, 6.3V	1	
C4250-54	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4257,58	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4259	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4260	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4261	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4262	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4263-65	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4267-69	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4270	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4271	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4272	EEVHB0J470R	E 47UF, 6.3V	1	
C4273-78	ECJ1XB1C104K	C 0.1UF, Z, 16V	6	
C4279	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4280	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4295	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4296	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4297	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4298	EEHBB0J330R	C 33PF, J, 6.3V	1	
C4299,00	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4301	EEHBB0J220R	C 22PF, J, 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4304	EEVHB0J470R	E 47UF, 6.3V	1	
C4305-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	11	
C4316	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4317-21	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4324,25	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4326	EEVHB0G221P	E 220UF, 4V	1	
C4327	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4328	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4329	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4330	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4331	EEVHB0J470R	E 47UF, 6.3V	1	
C4332-35	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4336	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4338	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4339	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4456	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4457	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4459	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4461	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4463,64	F1K1A1060010	C 0.010UF, K, 6.3V	2	
C4465,66	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4468,69	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4470-73	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4474-77	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4478-81	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4482-84	ECJ1XC1H102J	C 1000PF, J, 50V	3	
C4486-90	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4492	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4493,94	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C4495-97	ECJ1XB0J105K	C 1UF, K, 16V	3	
C4498-13	ECJ1XC1H102J	C 1000PF, J, 50V	16	
C4514	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4515	EEFCD0G560R	56UF,	1	
C4516-27	ECJ1VB1H103K	C 0.001UF, K, 50V	12	
C4528	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4534-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4587	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4588	EEHBOG221P	C 220PF, J, 4V	1	
C4589	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4590	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4591	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4780	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4781-84	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4785	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4787	EEVHB0J470R	E 47UF, 6.3V	1	
C4788	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4789	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4790	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4791	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4792-96	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
C4797	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4798	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4799	EEHBC1C100R	C 10PF, J, 16V	1	
C4800	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4802	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4803	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821SB	E 820UF, 16V	1	
C5613	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5617	EEUFC1C821SB	E 820UF, 16V	1	
C5618,19	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C5637	ECJ2VF1C474Z	C 0.47UF, Z, 16V	1	
C5641-44	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,02	EEUFC1E471	E 470UF, 25V	2	
C5803	EEUFC1E470	E 47UF, 25V	1	
C5805	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C5809	ECJ3XF1E105Z	C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
C5820	ECA1CM102	E 1000UF, 16V	1	
C5821	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5823	ECA1CM222	E 2200UF, 16V	1	
C6012	F1L2J562A022	C 5600UF, K, 6.3V	1	
C6060	ECA2CM101	E 100UF, 160V	1	
C6101-04	ECQE2255JF	P 2.5UF, K, 250V	4	
C6106	ECQE2255JF	P 2.5UF, K, 250V	1	
C6110-14	F2A2T201A001	E 200UF,	5	
C6115	F1L2J562A022	C 5600UF, K, 6.3V	1	
C6118	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6119,20	EEUFC1E221	E 220UF, 25V	2	
C6121	EEUFC1E470	E 47UF, 25V	1	
C6122	ECA2CM101	E 100UF, 160V	1	
C6124	F2A2D221A022	E 220UF, 200V	1	
C6144	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6146-48	F1L1E4750004	C 4.7UF, 25V	3	
C6150,51	F1L1E4750004	C 4.7UF, 25V	2	
C6153	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6156,57	F1L1E4750004	C 4.7UF, 25V	2	
C6158	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6159	F1L1E4750004	C 4.7UF, 25V	1	
C6163,64	TCUY1C105ZFN	C 1UF, 16V	2	
C6168	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6432	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C6433	TCUY1C105ZFN	C 1UF, 16V	1	
C6434	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6435	EEUFC1E221	E 220UF, 25V	1	
C6436	ECA1HM221	E 220UF, 50V	1	
C6437	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6454	ECA2CHG100	E 10UF, 160V	1	
C6456	ECA2CM101	E 100UF, 160V	1	
C6458	F1L1E4750004	C 4.7UF, 25V	1	
C6459	EEUFC1E470	E 47UF, 25V	1	
C6461	ECA1HM101	E 100UF, 50V	1	
C6462,63	F1L1E4750004	C 4.7UF, 25V	2	
C6465	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6466,67	F1L1E4750004	C 4.7UF, 25V	2	
C6472	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6473	TCUY1C105ZFN	C 1UF, 16V	1	
C6474	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6475	EEUFC1E221	E 220UF, 25V	1	
C6476	ECA2CM101	E 100UF, 160V	1	
C6477	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6489-91	F1K2J332A014	C 3300UF, K, 6.3V	3	
C6492	F2A2G100A017	E 100UF, 400V	1	
C6493	ECJ3XB2J222K	C 2200PF, K, 630V	1	
C6494	ECA2VHG100	E 10UF, 350V	1	
C6501-03	ECJ2XB1H104K	C 0.1UF, K, 50V	3	
C6505	ECJ2XB1H104K	C 0.1UF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6507	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6509	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6510-12	F1L1E4750004	C 4.7UF, 25V	3	
C6513	ECA2CM101	E 100UF, 160V	1	
C6514	TCUY1C105ZFN	C 1UF, 16V	1	
C6515,16	F1L1E4750004	C 4.7UF, 25V	2	
C6517	TCUY1C105ZFN	C 1UF, 16V	1	
C6519	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6521	F1L1E4750004	C 4.7UF, 25V	1	
C6522	ECA1VM470	E 47UF, 35V	1	
C6524	F1K2J471A014	C 470UF, K, 6.3V	1	
C6526	ECA2EHG470	E 47UF, 250V	1	
C6541,42	F1L1E4750004	C 4.7UF, 25V	2	
C6543,44	F1K2J102A014	C 1000PF,	2	
C6546	F1L1E4750004	C 4.7UF, 25V	1	
C6550	ECA2CM101	E 100UF, 160V	1	
C6551	ECQE2224KF	P 2.2UF, K, 250V	1	
C6553	F1L1E4750004	C 4.7UF, 25V	1	
C6554,55	F1K2J102A014	C 1000PF,	2	
C6571	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6575,76	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C6580,81	TCUY1C105ZFN	C 1UF, 16V	2	
C6584	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6585	TCUY1C105ZFN	C 1UF, 16V	1	
C6598	ECA2CM101	E 100UF, 160V	1	
C6600	TCUY1C105ZFN	C 1UF, 16V	1	
C6601-05	F2A2T201A001	E 200UF,	5	
C6607	ECQE2255JF	P 2.5UF, K, 250V	1	
C6609	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6610	EEUFC1E221	E 220UF, 25V	1	
C6611-13	F1L2J222A022	C 2200UF, K, 6.3V	3	
C6621-24	F1L2J222A022	C 2200UF, K, 6.3V	4	
C6631,32	F1L1E4750004	C 4.7UF, 25V	2	
C6634	F1L1E4750004	C 4.7UF, 25V	1	
C6638	F1L1E4750004	C 4.7UF, 25V	1	
C6641,42	F1L1E4750004	C 4.7UF, 25V	2	
C6650,51	F1L1E4750004	C 4.7UF, 25V	2	
C6653	F1L1E4750004	C 4.7UF, 25V	1	
C6679,80	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C6681,82	TCUY1C105ZFN	C 1UF, 16V	2	
C6683,84	EEUFC1E470	E 47UF, 25V	2	
C6701-04	ECQE2255JF	P 2.5UF, K, 250V	4	
C6901-06	TCUY1C105ZFN	C 1UF, 16V	6	
C6907,08	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C6917-20	F1L2E1040002	E 1000UF, 25V	4	
C6971-76	TCUY1C105ZFN	C 1UF, 16V	6	
C6977,78	ECJ2XB1H102K	C 1000PF, K, 50V	2	
C6987-90	F1L2E1040002	E 1000UF, 25V	4	
C7103	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7106	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7107	TCUY1C105ZFN	C 1UF, 16V	1	
C7123	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7126	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7127	TCUY1C105ZFN	C 1UF, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7143	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7146	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7147	TCUY1C105ZFN	C 1UF, 16V	1	
C7163	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7166	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7167	TCUY1C105ZFN	C 1UF, 16V	1	
C7181	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7185	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7187	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7189	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7203	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7206	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7207	TCUY1C105ZFN	C 1UF, 16V	1	
C7223	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7226	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7227	TCUY1C105ZFN	C 1UF, 16V	1	
C7232-34	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C7243	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7246	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7247	TCUY1C105ZFN	C 1UF, 16V	1	
C7263	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7266	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7267	TCUY1C105ZFN	C 1UF, 16V	1	
C7281	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7300	TCUY1C105ZFN	C 1UF, 16V	1	
C7301	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7304	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7320	TCUY1C105ZFN	C 1UF, 16V	1	
C7321	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7324	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7340	TCUY1C105ZFN	C 1UF, 16V	1	
C7341	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7344	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7360	TCUY1C105ZFN	C 1UF, 16V	1	
C7361	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7364	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7381	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7383	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7385	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7389	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7396,97	ECJ1XC1H220J	C 22PF, J, 50V	2	
C7400	TCUY1C105ZFN	C 1UF, 16V	1	
C7401	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7404	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7420	TCUY1C105ZFN	C 1UF, 16V	1	
C7421	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7424	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7440	TCUY1C105ZFN	C 1UF, 16V	1	
C7441	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7444	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7460	TCUY1C105ZFN	C 1UF, 16V	1	
C7461	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7464	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7481	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7483	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7485	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7487	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8099,00	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8101,02	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8103,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8105	EEH0B0G101R	C 100PF, J, 4V	1	
C8106,07	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8108	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8109	EEH0B0G101R	C 100PF, J, 4V	1	
C8110,11	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8112	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8113-18	ECJ0EB1A104K	C 0.1UF, K, 10V	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8120,21	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8128,29	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8144	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8145	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8162	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8164	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8200	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8201	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8202,03	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8204	EEH0B0J221P	C 220PF, J, 6.3V	1	
C8205	EEH0B1H220P	C 22PF, J, 50V	1	
C8206,07	EEH0B0J221P	C 220PF, J, 6.3V	2	
C8208	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8209	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8210	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8211	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8214	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8215	ECJ0EC1H200J	C 200PF, K, 50V	1	
C8216	ECJ0EB1H271K	C 270PF, D, 50V	1	
C8217	ECJ0EC1H560J	C 560PF, K, 50V	1	
C8218,19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8220	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8221	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8222	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8223	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8224,25	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8226	EEH0B1C470P	C 47PF, J, 16V	1	
C8227	ECJ0EC1H101J	C 100PF, K, 50V	1	
C8228,29	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8230	ECJ0EC1H120J	C 120PF, K, 50V	1	
C8231	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8233	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8234,35	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8237	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8238,39	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8240	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8241-43	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8244	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8245	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8246	EEH0B0G470R	C 47PF, J, 4V	1	
C8247	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8248	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8249-51	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8252	ECJ0EB1H222K	C 220UF, Z, 50V	1	
C8253-55	ECJ0EB1C103K	C0.010UF, K, 16V	3	
C8256	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8257	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8258,59	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8262	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8263	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8264,65	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8266	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8267	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8270	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8271	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8272	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8273	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8275,76	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8277	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8278,79	ECJ0EB1C103K	C0.010UF, K, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8280,81	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8282	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8286-88	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8289	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8290	ECJ0EC1H101J	C 100PF, K, 50V	1	
C8291	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8292,93	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8294-97	ECJ0EB1H102K	C 1000PF, K, 50V	4	
C8298-01	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
C8302	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8303	EEH0B1C470P	C 47PF, J, 16V	1	
C8304,05	ECJ0EC1H150J	C 150PF, K, 50V	2	
C8306	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8308-10	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8311,12	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C8313-15	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8316	EEH0B1C100R	C 10PF, J, 16V	1	
C8317-19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8320	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8321-26	ECJ0EF1C104Z	C 0.10UF, Z, 16V	6	
C8327	EEH0B1C100R	C 10PF, J, 16V	1	
C8328-31	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
C8332	ECJ1XB1C153K	C 0.015UF, Z, 16V	1	
C8333-36	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
C8337	EEH0B1C100R	C 10PF, J, 16V	1	
C8338-53	ECJ0EF1C104Z	C 0.10UF, Z, 16V	16	
C8355,56	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8357,58	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8360	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8362	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8365	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8368-74	ECJ0EF1C104Z	C 0.10UF, Z, 16V	7	
C8375	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8377	ECGRLOG680R	C 68PF, J, 4V	1	
C8378	EEH0B0G101R	C 100PF, J, 4V	1	
C8379	EEH0B0J101P	C 100PF, J, 6.3V	1	
C8380-84	ECJ0EF1C104Z	C 0.10UF, Z, 16V	5	
C8386	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8390,91	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8408	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8409	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8410	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8413	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8414	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8415	ECGRLOG680R	C 68PF, J, 4V	1	
C8416	EEFUD0J101R	E 100UF	1	
C8417	EEH0B1C470P	C 47PF, J, 16V	1	
C8418	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8425	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C8426	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8427	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C8428	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8437	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8440,41	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8445	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8446	ECJ1VB1C683K	C 0.068UF, K, 16V	1	
C8449	ECJ0EB1H102K	C 1000PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8450-52	ECJ2FF1A475Z	C 4.7UF, Z, 10V	3	
C8453	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8456,57	FLJ0J475A035	C 4.7UF, K, 16V	2	
C8458	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8461	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8467	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8468	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8469	ECJ1VB0J334K	C 0.33UF, K, 6.3V	1	
C8474	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8475,76	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8478	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8479,80	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8482	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8484-86	EEH1B1C470P	C 47PF, J, 16V	3	
C8492	ECJ0EB1H471K	C 470PF, K, 50V	1	
C8496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8500	ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	
C8501	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8503,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8507,08	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	
C8509	EEH1B1C470P	C 47PF, J, 16V	1	
C8511	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8515	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8516	EEH1B1C470P	C 47PF, J, 16V	1	
C8518	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8520,21	ECJ0EC1H181J	C 180PF, K, 50V	2	
C8522,23	ECJ0EC1H390J	C 390PF, K, 50V	2	
C8529	ECJ0EC1H080C	C 8PF, D, 50V	1	
C8530	ECJ0EC1H221J	C 220PF, K, 50V	1	
C8531	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8532	ECJ0EB1H182K	C 1800UF, Z, 50V	1	
C8533	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8534	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8536	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8537	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8542	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8546,47	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8551	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8552	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8554	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8555	ECJ0EC1H390J	C 390PF, K, 50V	1	
C8556	ECJ0EB1H821K	C 820PF, D, 50V	1	
C8557	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8558	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8559	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8561	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8562	FLJ1A106A043	C 0.010UF, K, 16V	1	
C8563	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8564	FLJ1A106A043	C 0.010UF, K, 16V	1	
C8567	ECGR10G680R	C 68PF, J, 4V	1	
C8568	ECJ2FB0J106M	C 10UF, Z, 6.3V	1	
C8572	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8573	ECJ2FB0J106M	C 10UF, Z, 6.3V	1	
C8578	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8584	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8590	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8592	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8594	ECGR10G680R	C 68PF, J, 4V	1	
C8595,96	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8597	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8598	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8600	ECJ0EB1C103K	C0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8601	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8602-04	ECJ0EB1C103K	C0.010UF, K, 16V	3	
C8605	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8606	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8607	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8608	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8609	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8610	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8611,12	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8613	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8614	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8615,16	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8617	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8620	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8621	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8622	ECGR10G680R	C 68PF, J, 4V	1	
C8629,30	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8633,34	ECJ0EC1H820J	C 820PF, K, 50V	2	
C8638	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
C8640,41	ECJ0EC1H150J	C 150PF, K, 50V	2	
C9000	EEH1B1C470P	C 47PF, J, 16V	1	
C9001	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9004,05	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9006	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9007	EEH1B1C470P	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9010-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9015-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
C9023	EEH1B1C470P	C 47PF, J, 16V	1	
C9024	ECJ1XC1H271J	C 270PF, J, 50V	1	
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9026,27	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9028-31	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9035,36	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9201,02	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9206,07	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304-57	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
C9358	EEH1B0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9502	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C9503-12	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9513	EEH1B1C470P	C 47PF, J, 16V	1	
C9514-17	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9518	EEH1B1C470P	C 47PF, J, 16V	1	
C9519	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9701,02	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9703	FLJ0J1060004	C 0.010UF, K, 16V	1	
C9705,06	FLJ0J1060004	C 0.010UF, K, 16V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9707	EEHBC1C470P	C 47PF, J, 16V	1	
C9712,13	F1J0J1060004	C 0.010UF, K, 16V	2	
C9714,15	ECGRL0G680R	C 68PF, J, 4V	2	
C9716	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9718	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9719,20	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C9721,22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9723,24	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C9725	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9727	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9728,29	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9730,31	EEHBC1C470P	C 47PF, J, 16V	2	
C9732	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9734,35	EEHBC1C470P	C 47PF, J, 16V	2	
C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9739,40	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9743,44	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9800,01	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9900,01	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
CA1-A8	K1MN68BA0002	68P CONNECTOR	8	
CB1-B8	K1MN68BA0002	68P CONNECTOR	8	
D3	K1KA30AA0009	30P CONNECTOR	1	
D4	K1KA14A00248	14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	K1KA20A00310	20P CONNECTOR	1	
D8	K1KA08AA0104	8P CONNECTOR	1	
D20	K1KA20AA0008	20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D31,32	K1MN55BA0076	55P CONNECTOR	2	
D33,34	K1MN55BA0094	55P CONNECTOR	2	
D2300,01	MA111	DIODE	2	
D2303,04	MA111	DIODE	2	
D2315,16	B0JCDD000002	DIODE	2	
D2319,20	B0JCDD000002	DIODE	2	
D2332	MA111	DIODE	1	
D2512	MA8056M	ZENER DIODE	1	
D2513,14	MA152K	DIODE	2	
D2520	B3AAA0000770	DIODE	1	
D2523	MA152K	DIODE	1	
D2524	MA8056M	ZENER DIODE	1	
D2615	B0BC01100001	DIODE	1	
D2617	MA152	DIODE	1	
D2619-24	MA8140M	ZENER DIODE	6	
D2640-60	MA8140M	ZENER DIODE	21	
D4012-14	MA729	DIODE	3	
D4016	MA728	DIODE	1	
D4025-27	MA111	DIODE	3	
D4029	MA3036L	DIODE	1	
D5610	MA3X78900L	ZENER DIODE	1	
D5614	B0BC3R700006	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D5615	B0BC4R700007	DIODE	1	
D5616	B0BC6R600005	DIODE	1	
D5617	B0BC01100001	DIODE	1	
D5618	B0BC03900015	DIODE	1	
D5637,38	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	
D5640	MA3039H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645-47	MA152	DIODE	3	
D5649	MA111	DIODE	1	MA2J111
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,06	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6013	BOHBSN000008	DIODE	1	
D6018	BOHBSN000008	DIODE	1	
D6101	BOHBSN000008	DIODE	1	
D6110	BOEHP000003	DIODE	1	
D6111,12	BOHBSN000008	DIODE	2	
D6115,16	BOHBSN000008	DIODE	2	
D6119	BOEHP000003	DIODE	1	
D6121	BOHBSN000008	DIODE	1	
D6122	BOEHP000003	DIODE	1	
D6128,29	BOHBSN000008	DIODE	2	
D6140,41	BOEHP000003	DIODE	2	
D6149,50	B0JCME000037	DIODE	2	
D6151	BOEHP000003	DIODE	1	
D6153	BOEHP000003	DIODE	1	
D6158,59	MA8330M	ZENER DIODE	2	
D6160	LNJ301MPUJA	LED	1	
D6161	MA8051L	ZENER DIODE	1	
D6162	MA111	DIODE	1	
D6166	MA111	DIODE	1	
D6172	MA111	DIODE	1	
D6173	BOEHP000003	DIODE	1	
D6195	BOEHP000003	DIODE	1	
D6433	MA111	DIODE	1	
D6435	MA111	DIODE	1	
D6436	B0JCKG000002	DIODE	1	
D6451	BOEHP000003	DIODE	1	
D6452	BOHCKS000002	DIODE	1	
D6453,54	BOEHP000003	DIODE	2	
D6455	MA111	DIODE	1	
D6456	BOEHP000003	DIODE	1	
D6457	BOHCKS000002	DIODE	1	
D6458	BOEHP000003	DIODE	1	
D6459	MA111	DIODE	1	
D6460,61	BOHCKS000002	DIODE	2	
D6465,66	MA8330M	ZENER DIODE	2	
D6468	MA111	DIODE	1	
D6470,71	MA111	DIODE	2	
D6472	B0JCME000037	DIODE	1	
D6473	MA111	DIODE	1	
D6475	MA111	DIODE	1	
D6476	BOEHP000003	DIODE	1	
D6477	MA111	DIODE	1	
D6478	BOHCKS000002	DIODE	1	
D6479	MA111	DIODE	1	
D6481,82	MA8200M	ZENER DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6483	B0JCME000037	DIODE	1	
D6484	MA111	DIODE	1	
D6485-90	MA8056H	ZENER DIODE	6	
D6491,92	B0ECHP000003	DIODE	2	
D6493,94	MA8056H	ZENER DIODE	2	
D6495	B0HCKS000002	DIODE	1	
D6499	B0JCME000037	DIODE	1	
D6500,01	MA111	DIODE	2	
D6506	MA111	DIODE	1	
D6509	MA111	DIODE	1	
D6510	B0JCME000037	DIODE	1	
D6511	B0HCMM000014	DIODE	1	
D6512-14	MA111	DIODE	3	
D6515	MA8240M	ZENER DIODE	1	
D6517,18	B0JCME000037	DIODE	2	
D6520	MA111	DIODE	1	
D6521	B0ECHP000003	DIODE	1	
D6522	MA111	DIODE	1	
D6523	B0ECHP000003	DIODE	1	
D6524	MA8051L	ZENER DIODE	1	
D6525	MA111	DIODE	1	
D6526	B0HCMM000014	DIODE	1	
D6528	B0ECHP000003	DIODE	1	
D6541	B0HCKS000002	DIODE	1	
D6542	MA111	DIODE	1	
D6543	B0HCKS000002	DIODE	1	
D6544	MA111	DIODE	1	
D6545	MA8051L	ZENER DIODE	1	
D6546-48	MA8330M	ZENER DIODE	3	
D6549,50	MA111	DIODE	2	
D6551	B0HCKS000002	DIODE	1	
D6552	B0JCME000037	DIODE	1	
D6553	MA111	DIODE	1	
D6555	MA8056H	ZENER DIODE	1	
D6556,57	MA111	DIODE	2	
D6570	B0HCMM000014	DIODE	1	
D6572	B0ECHP000003	DIODE	1	
D6582	MA8051L	ZENER DIODE	1	
D6583	LNJ301MPUJA	LED	1	
D6584	MA111	DIODE	1	
D6585,86	MA8330M	ZENER DIODE	2	
D6587	MA8056H	ZENER DIODE	1	
D6600	B0ECHP000003	DIODE	1	
D6602	B0ECHP000003	DIODE	1	
D6604	B0HBSN000008	DIODE	1	
D6608,09	B0HBSN000008	DIODE	2	
D6614	B0HBSN000008	DIODE	1	
D6619,20	B0HBSN000008	DIODE	2	
D6623,24	B0HBSN000008	DIODE	2	
D6625	B0ECHP000003	DIODE	1	
D6627	B0HBSN000008	DIODE	1	
D6650	B0HBSN000008	DIODE	1	
D6651	B0ECHP000003	DIODE	1	
D6661,62	B0ECHP000003	DIODE	2	
D6901,02	MA8056H	ZENER DIODE	2	
D6903,04	B0ECHP000003	DIODE	2	
D6961,62	MA8056H	ZENER DIODE	2	
D6963,64	B0ECHP000003	DIODE	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D7101-08	B0HCMM000014	DIODE	8	
D7201-08	B0HCMM000014	DIODE	8	
D7301-08	B0HCMM000014	DIODE	8	
D7401-08	B0HCMM000014	DIODE	8	
D8200	B0DDBG000002	DIODE	1	
D8203,04	LNJ208R8ARA	LED	2	
D8207	MA728	DIODE	1	
D8208	K7JAAAA00001	DIODE	1	
D8210	MA728	DIODE	1	
D8215	MA8039L	ZENER DIODE	1	
D8217	B0JCDD000002	DIODE	1	
D8219	B0JCDD000002	DIODE	1	
D8221	MA8024LTX	ZENER DIODE	1	
D9000-02	MA3033	ZENER DIODE	3	
D9011,12	MA728	DIODE	2	
D9015,16	MA152K	DIODE	2	
D9700,01	MA728	DIODE	2	
D9800,01	MA152K	DIODE	2	
D9900,01	MA152K	DIODE	2	
DG1,G2	K1MN40A00024	40P CONNECTOR	2	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG5	K1KA21B00008	21P CONNECTOR	1	
DG15	K1KA60A00156	60P CONNECTOR	1	
DG20	K1MN30A00068	30P CONNECTOR	1	
DG22	K1KBB0A00006	CONNECTOR	1	
DT04	K1NA68B00037	68P CONNECTOR	1	
DT07	K1KA04BA0050	4P CONNECTOR	1	
DT09	K1NA09D00004	9P CONNECTOR	1	
DT12	K1KAB0A00011	CONNECTOR	1	
FL4003-10	J0HABH000012	LC FILTER	8	
FL4012	J0HABH000012	LC FILTER	1	
FL4014-17	J0HABB000004	LC FILTER	4	
FL4018-20	EXB38VR000	RESISTOR ARRAY	3	
FL4021-23	J0HABH000012	LC FILTER	3	
FL7101	J0HABH000013	LC FILTER	1	
FL7201	J0HABH000013	LC FILTER	1	
FL7301	J0HABH000013	LC FILTER	1	
FL7401	J0HABH000013	LC FILTER	1	
FL8202,03	J0HAAA000013	LC FILTER	2	
FL8215	J0HAAB000004	LC FILTER	1	
FL8224-40	J0HAAB000004	LC FILTER	17	
FL8258	J0HAAB000004	LC FILTER	1	
FL8260	J0HAAB000004	LC FILTER	1	
FL8262,63	J0MAB0000164	LC FILTER	2	
FL9000-04	J0HABH000013	LC FILTER	5	
FL9300-02	J0HABH000013	LC FILTER	3	
FL9701,02	J0HABH000012	LC FILTER	2	
FL9703,04	J0HABH000013	LC FILTER	2	
FL9800,01	J0HABH000013	LC FILTER	2	
FL9900,01	J0HABH000013	LC FILTER	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
H1,H2	K1MN40B00045	40P CONNECTOR	2	
H7	K1KA12AA0178	12P CONNECTOR	1	
H21	K1KA10AA0194	10P CONNECTOR	1	
H22	K1KA11AA0194	11P CONNECTOR	1	
H30	K1MN30A00068	30P CONNECTOR	1	
H50	K1MN35A00013	35P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	
IC2301	C1BB00000969	IC	1	
IC2305, 06	C1BB00000818	IC	2	
IC2602	C1AB00002123	IC	1	
IC2605	AN15861A-VT	IC	1	
IC2608	C1BB00001017	IC	1	
IC4001	C0ABBB000289	IC	1	
IC4002	C0FBBK000038	IC	1	
IC4004	TC74HC4066TL	IC	1	
IC4005	MN102H90MTZ1	IC	1	
IC4006	TVRN467	IC	1	
IC4008	TVRN470	IC	1	
IC4010	C0EBF0000431	IC	1	
IC4011	C0CBCAC00275	IC	1	
IC4012	C0CBCBF00009	IC	1	
IC4015	C0EBE0000336	IC	1	
IC4016	C0CBCAC00275	IC	1	
IC4018	C1AB00002298	IC	1	
IC4020	C0CBCAC00136	IC	1	
IC4022	C0DBEJG00001	IC	1	
IC4024	C1ZBZ0002790	IC	1	
IC4025	C0JBAP000020	IC	1	
IC4026	C1AB00002234	IC	1	
IC4027	C3ABQJ000040	IC	1	
IC4028	C0DBZFG00055	IC	1	
IC4030	C0EBF0000335	IC	1	
IC4031	C0CBCAC00136	IC	1	
IC5601, 02	N0BF2DE00001	DC-DC CONVERTER	2	
IC5603	C0DBAJB00004	IC	1	
IC5801	C0DBAZG00034	IC	1	
IC5803	C0DAEZH00017	IC	1	
IC6101-04	C0ZBZ0000895	IC	4	
IC6106	C0JBAB000005	IC	1	
IC6107	NJM2903M	INTEGRATED CIRCUIT	1	
IC6109	AN1431M	LINEAR IC	1	
IC6431	AN1431M	LINEAR IC	1	
IC6451	C0CBALC00010	IC	1	
IC6452	AN1431M	LINEAR IC	1	
IC6453	C0CBALC00010	IC	1	
IC6454, 55	C0CBADC00075	IC	2	
IC6471, 72	AN1431M	LINEAR IC	2	
IC6491	AN1431M	LINEAR IC	1	
IC6500	C0JBAB000994	IC	1	
IC6509	C0JBAB000994	IC	1	
IC6511	C0ZBZ0001033	IC	1	
IC6512	C0CBADC00075	IC	1	
IC6521	C0ZBZ0001033	IC	1	
IC6541, 42	C0ZBZ0001033	IC	2	
IC6543	C0CBADC00075	IC	1	
IC6544	C0ZBZ0001033	IC	1	
IC6581	NJM2903M	INTEGRATED CIRCUIT	1	
IC6601-03	C0ZBZ0000895	IC	3	
IC6604	C0JBAA000174	IC	1	
IC6605, 06	C0JBAB000005	IC	2	
IC6901-06	AN16042A-VT	IC	6	
IC6957-62	AN16042A-VT	IC	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC7101-04	C0JBAB001120	IC	4	
IC7201-04	C0JBAB001120	IC	4	
IC7301-04	C0JBAB001120	IC	4	
IC7401-04	C0JBAB001120	IC	4	
IC8009, 10	C3ABRG000061	IC	2	
IC8022	C0ZBZ0001052	IC	1	
IC8200	C0FBBK000038	IC	1	
IC8201	C0ABBB000190	IC	1	
IC8202	C0JBAS000245	IC	1	
IC8203, 04	C0JBAS000223	IC	2	
IC8205	NJM2904V	INTEGRATED CIRCUIT	1	
IC8206, 07	C1AB00002221	IC	2	
IC8209	C1AB00001860	IC	1	
IC8211	MN84321A	IC	1	
IC8216	C1ZBZ0002437	IC	1	
IC8219	C0ZBZ0000782	IC	1	
IC8220	C0CBCAC00161	IC	1	
IC8222	C3FBRG000004	IC	1	
IC8223	C3ZBP0000019	IC	1	
IC8227	C0EBE0000336	IC	1	
IC8228	C0EBM0000027	IC	1	
IC8229	C3EBKC000014	IC	1	
IC8230	C0JBAB002183	IC	1	
IC8232	MC14066BF	MOS IC (LOGIC)	1	
IC8235	C0DBZFF00004	IC	1	
IC8240	MN2WS0025A-A	IC	1	
IC8241, 42	C0DBAZZ00122	IC	2	
IC8244	C0FBAK000019	IC	1	
IC8245	C1AB00002221	IC	1	
IC9001	TVRN570	IC	1	
IC9003	TVRN568	IC	1	
IC9004	C0EBE0000120	IC	1	
IC9005, 06	C0JBAB000856	IC	2	
IC9007	TVRN466	IC	1	
IC9008	C0DBEJG00001	IC	1	
IC9200	C1ZBZ0002769	IC	1	
IC9300	MN84512-A	IC	1	
IC9301	PST9128NR	IC (LOGIC)	1	
IC9302	C3ABQJ000031	IC	1	
IC9303	TVRN512	IC	1	
IC9500	C1ZBZ0002599	IC	1	
IC9502	C0JBAB000856	IC	1	
IC9504	C0JBAB000856	IC	1	
IC9700	C0DBEJG00001	IC	1	
IC9702	C0DBAZH00020	IC	1	
JK2601	K1U939A00001	CONNECTOR	1	
JK2605	K2HA204A0041	JACK	1	
JS2304-11	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2312	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2317-24	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2329-32	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2606, 07	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS2614-17	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2620, 21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2624	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2627, 28	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2630-37	ERJ3GEY0R00	M 0 OHM, 1/16W	8	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
JS2645	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2652-63	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2672-87	ERJ6GEY0R00	M 0 OHM, 1/10W	16	
JS2692-03	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2705-12	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2714-25	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2729	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2737, 38	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS2744-49	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
JS2760-68	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
JS4003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-15	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4019-21	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4023-26	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS4033-35	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4038, 39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4041	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4044-50	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
JS4052	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4059-63	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS4067	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5609-12	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5801, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS5805-08	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5810-17	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS5819	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6001, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS6100	ERD25V0T	M OHM, 1/10W	1	
JS6534	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6649	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
K1	K1KA12BA0053	12P CONNECTOR	1	
K2	K1KA02BA0061	2P CONNECTOR	1	
L2305, 06	G0A100ZA0033	CHOKE COIL	2	
L2312, 13	G0A100ZA0033	CHOKE COIL	2	
L2316-19	J0JJC0000011	CHIP INDUCTOR	4	
L2615	J0JHC0000078	CHIP INDUCTOR	1	
L2617	J0JHC0000078	CHIP INDUCTOR	1	
L4002, 03	J0JHC0000078	CHIP INDUCTOR	2	
L4006	J0JHC0000078	CHIP INDUCTOR	1	
L4008	J0JHC0000078	CHIP INDUCTOR	1	
L4012	J0JCC0000241	CHIP INDUCTOR	1	
L4013	J0JHC0000078	CHIP INDUCTOR	1	
L4019	J0JHC0000078	CHIP INDUCTOR	1	
L4021, 22	J0JHC0000045	CHIP INDUCTOR	2	
L4024, 25	J0JHC0000078	CHIP INDUCTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L4027	J0JHC0000078	CHIP INDUCTOR	1	
L4028	J0JCC0000241	CHIP INDUCTOR	1	
L4031	J0JHC0000078	CHIP INDUCTOR	1	
L4035	J0JHC0000078	CHIP INDUCTOR	1	
L4036	J0JCC0000241	CHIP INDUCTOR	1	
L4037-39	J0JHC0000078	CHIP INDUCTOR	3	
L4040, 41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
L4043	J0JCC0000241	CHIP INDUCTOR	1	
L4044	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L4047, 48	J0JHC0000078	CHIP INDUCTOR	2	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605	G1C1R0MA0072	CHOKE COIL	1	
L5606	G0A220GA0002	CHOKE COIL	1	
L5607	G0C101K00023	PEAKING COIL	1	
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALL08N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A150ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613, 14	G1A150ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A150ZA0007	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA	INDUCTION COIL	1	
L5803	G0A220GA0002	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810	G0A100GA0013	CHOKE COIL	1	
L6101-03	G0AR60MA0003	CHOKE COIL	3	
L6104-06	G0A1R4MA0003	CHOKE COIL	3	
L6107, 08	J0JJC0000021	CHIP INDUCTOR	2	
L6113	G0ZZ00002183	PEAKING COIL	1	
L6114	G0C101K00023	PEAKING COIL	1	
L6115-17	G0ZZ00002183	PEAKING COIL	3	
L6119, 20	G0ZZ00002183	PEAKING COIL	2	
L6122	G0ZZ00002183	PEAKING COIL	1	
L6124	G0ZZ00002183	PEAKING COIL	1	
L6130	G0ZZ00002183	PEAKING COIL	1	
L6132	G0ZZ00002183	PEAKING COIL	1	
L6134	G0ZZ00002183	PEAKING COIL	1	
L6136	G0ZZ00002183	PEAKING COIL	1	
L6152-57	G0ZZ00002183	PEAKING COIL	6	
L6158, 59	J0JJC0000021	CHIP INDUCTOR	2	
L6161, 62	J0JJC0000011	CHIP INDUCTOR	2	
L6431	J0JJC0000021	CHIP INDUCTOR	1	
L6451	J0JJC0000021	CHIP INDUCTOR	1	
L6471	J0JJC0000021	CHIP INDUCTOR	1	
L6472, 73	G0ZZ00002183	PEAKING COIL	2	
L6603, 04	G0ZZ00002183	PEAKING COIL	2	
L6607	J0JJC0000021	CHIP INDUCTOR	1	
L6609	G0ZZ00002183	PEAKING COIL	1	
L6611-13	G0AR60MA0003	CHOKE COIL	3	
L6615-17	G0A1R4MA0003	CHOKE COIL	3	
L6618	G0ZZ00002183	PEAKING COIL	1	
L6621, 22	G0ZZ00002183	PEAKING COIL	2	
L6625	G0ZZ00002183	PEAKING COIL	1	
L6631, 32	G0ZZ00002183	PEAKING COIL	2	
L6635, 36	G0ZZ00002183	PEAKING COIL	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6644,45	G0ZZ00002183	PEAKING COIL	2	
L6647,48	G0ZZ00002183	PEAKING COIL	2	
L6650,51	G0ZZ00002183	PEAKING COIL	2	
L6661,62	J0JJC0000011	CHIP INDUCTOR	2	
L8096	J0JHC0000045	CHIP INDUCTOR	1	
L8141-43	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
L8200-03	ELJPA270KB	INDUCTION COIL	4	
L8204	ELJNA82NMB	INDUCTION COIL	1	
L8205	ELJNA47NMB	INDUCTION COIL	1	
L8206	ELJNA56NMB	INDUCTION COIL	1	
L8207	ELJNA47NMB	INDUCTION COIL	1	
L8208	ELJNAR10MF	INDUCTION COIL	1	
L8209	J0JHC0000045	CHIP INDUCTOR	1	
L8211	ELJNA1R5JF	INDUCTION COIL	1	
L8212	ELJNA1R0JF	INDUCTION COIL	1	
L8213,14	ELJPA1R0MB	INDUCTION COIL	2	
L8217	ELJNAR56KF	INDUCTION COIL	1	
L8218	J0JHC0000045	CHIP INDUCTOR	1	
L8219,20	ELJPA1R0MB	INDUCTION COIL	2	
L8221-25	J0JHC0000045	CHIP INDUCTOR	5	
L8231,32	J0JHC0000035	CHIP INDUCTOR	2	
L8235	J0JHC0000045	CHIP INDUCTOR	1	
L8236,37	J0JHC0000035	CHIP INDUCTOR	2	
L8239	J0JCC0000241	CHIP INDUCTOR	1	
L8240	J0JHC0000045	CHIP INDUCTOR	1	
L8242	J0JCC0000078	CHIP INDUCTOR	1	
L8243,44	J0JHC0000045	CHIP INDUCTOR	2	
L8252	ELJPA1R0MB	INDUCTION COIL	1	
L8253-56	EXC3BB221H	BEAD CHOKE	4	
L8258	J0JHC0000045	CHIP INDUCTOR	1	
L8264-68	J0JHC0000045	CHIP INDUCTOR	5	
L8269	J0JGC0000036	CHIP INDUCTOR	1	
L8270	G1C100MA0078	INDUCTION COIL	1	
L8271	G1C6R8MA0078	INDUCTION COIL	1	
L8273	G1C100MA0077	INDUCTION COIL	1	
L8274	ELJNA2R7JB	INDUCTION COIL	1	
L8276	J0JBC0000080	CHIP INDUCTOR	1	
L8277	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,01	J0JHC0000078	CHIP INDUCTOR	2	
L9700	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009	CHIP INDUCTOR	1	
PA7	K1KA08AA0192	8P CONNECTOR	1	
PA10	K1KA06AA00452	6P CONNECTOR	1	
PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,02	K5H4022A0023	FUSE	2	
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7	K1KA08AA0192	8P CONNECTOR	1	
PB30	K1KA05AA0150	5P CONNECTOR	1	
PB31-34	K1KA03AA0192	3P CONNECTOR	4	
PC6434	B3PBA0000223	IC	1	
PC6458	B3PBA0000223	IC	1	
PC6467	B3PBA0000223	IC	1	
PC6469	B3PBA0000223	IC	1	
PC6474	B3PBA0000223	IC	1	
PC6480	B3PBA0000223	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
PC6501,02	B3PBA0000234	IC	2	
PC6503	B3PBA0000233	IC	1	
PC6505	B3PBA0000233	IC	1	
PC6507	B3PBA0000233	IC	1	
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314-17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2510,11	2SD601A	TRANSISTOR	2	
Q2519	2SB709A	TRANSISTOR	1	
Q2609	2SD601A	TRANSISTOR	1	
Q2611	2SD601A	TRANSISTOR	1	
Q2612	2SB709A	TRANSISTOR	1	
Q2618,19	2SD601A	TRANSISTOR	2	
Q4001	2SA207700L	TRANSISTOR	1	
Q4004	2SD601A	TRANSISTOR	1	
Q4006-09	2SD601A	TRANSISTOR	4	
Q4012	2SD601A	TRANSISTOR	1	
Q4015-17	2SD601A	TRANSISTOR	3	
Q4019-21	2SD601A	TRANSISTOR	3	
Q4022	2SC584500L	TRANSISTOR	1	
Q4024	2SC584500L	TRANSISTOR	1	
Q4026	2SC584500L	TRANSISTOR	1	
Q4039	2SD0601A	TRANSISTOR	1	
Q4043,44	2SD0601A	TRANSISTOR	2	
Q4045	2SA207700L	TRANSISTOR	1	
Q4049	2SA207700L	TRANSISTOR	1	
Q4051-54	2SD601A	TRANSISTOR	4	
Q4055	2SA207700L	TRANSISTOR	1	
Q4056-59	2SD601A	TRANSISTOR	4	
Q4062	2SD601A	TRANSISTOR	1	
Q4066,67	2SK2731T146	TRANSISTOR	2	
Q4068	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,05	2SC584500L	TRANSISTOR	2	
Q5606	B1DHDC000028	TRANSISTOR	1	
Q5607	2SC584500L	TRANSISTOR	1	
Q5610	2SC584500L	TRANSISTOR	1	
Q5613	2SC584500L	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-43	2SA207700L	TRANSISTOR	3	
Q5644	2SC584500L	TRANSISTOR	1	
Q6001	2SK3997000VE	TRANSISTOR	1	
Q6005	2SK3999000VH	FET	1	
Q6010-12	B1JADN000001	TRANSISTOR	3	
Q6101	B1ABNF000006	TRANSISTOR	1	
Q6102	B1ADNF000006	TRANSISTOR	1	
Q6115-17	B1JADN000001	TRANSISTOR	3	
Q6127,28	B1DFKM000002	TRANSISTOR	2	
Q6132	B1ABNF000006	TRANSISTOR	1	
Q6133	B1ADNF000006	TRANSISTOR	1	
Q6134	B1ABNF000006	TRANSISTOR	1	
Q6135	B1ADNF000006	TRANSISTOR	1	
Q6138	2SC1473A	TRANSISTOR	1	
Q6141	2SD601A	TRANSISTOR	1	
Q6144	B1ABNF000006	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6145	B1ADNF000006	TRANSISTOR	1	
Q6431	B1BBCJ000004	TRANSISTOR	1	
Q6432	2SB0709A	TRANSISTOR	1	
Q6435	2SD601A	TRANSISTOR	1	
Q6451	2SD1263A	TRANSISTOR	1	
Q6455	2SD814A	TRANSISTOR	1	
Q6471	B1BAEJ000014	TRANSISTOR	1	
Q6472	2SB0709A	TRANSISTOR	1	
Q6474	2SD814A	TRANSISTOR	1	
Q6475-77	2SD601A	TRANSISTOR	3	
Q6491	2SD1263A	TRANSISTOR	1	
Q6492	2SC1473A	TRANSISTOR	1	
Q6501-05	2SK620	FET	5	
Q6511,12	B1DFFM000003	TRANSISTOR	2	
Q6520	2SD601A	TRANSISTOR	1	
Q6521	B1DFES000002	TRANSISTOR	1	
Q6523	B1ADNF000006	TRANSISTOR	1	
Q6524,25	B1ABNF000006	TRANSISTOR	2	
Q6526	B1ADNF000006	TRANSISTOR	1	
Q6530-40	B1DFHN000001	TRANSISTOR	11	
Q6551	2SD601A	TRANSISTOR	1	
Q6552	B1DEET000002	TRANSISTOR	1	
Q6554	2SD601A	TRANSISTOR	1	
Q6560-68	B1DFKM000002	TRANSISTOR	9	
Q6581	2SD601A	TRANSISTOR	1	
Q6582,83	B1DFET000001	TRANSISTOR	2	
Q6586	B1ADNF000006	TRANSISTOR	1	
Q6601-03	B1JADN000001	TRANSISTOR	3	
Q6608	B1ABNF000006	TRANSISTOR	1	
Q6609	B1ADNF000006	TRANSISTOR	1	
Q6611-13	B1JADN000001	TRANSISTOR	3	
Q6619	B1ABNF000006	TRANSISTOR	1	
Q6620	B1ADNF000006	TRANSISTOR	1	
Q6627	B1ABNF000006	TRANSISTOR	1	
Q6628	B1ADNF000006	TRANSISTOR	1	
Q6629	B1ABNF000006	TRANSISTOR	1	
Q6630	B1ADNF000006	TRANSISTOR	1	
Q6634	2SK3997000VE	TRANSISTOR	1	
Q6639,40	2SK620	FET	2	
Q6649	2SK3999000VH	FET	1	
Q6731	2SD1263A	TRANSISTOR	1	
Q8200	B1BBAB000039	TRANSISTOR	1	
Q8201	2SD601A	TRANSISTOR	1	
Q8203	B1BBAB000039	TRANSISTOR	1	
Q8209	2SA207700L	TRANSISTOR	1	
Q8216	2SC584500L	TRANSISTOR	1	
Q8217-20	2SD601A	TRANSISTOR	4	
Q8221,22	B1MBDDA000003	TRANSISTOR	2	
Q9000,01	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,09	2SK2731T146	TRANSISTOR	2	
Q9010,11	2SD601A	TRANSISTOR	2	
Q9012,13	2SK2731T146	TRANSISTOR	2	
Q9020-23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	TRANSISTOR	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,02	B1MBCDA000002	TRANSISTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q9703,04	2SD601A	TRANSISTOR	2	
Q9800,01	2SD601A	TRANSISTOR	2	
Q9900,01	2SD601A	TRANSISTOR	2	
R2302	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2308,09	ERJ3GEYJ392	M 3.9KOHM, J, 1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM, J, 1/16W	1	
R2311	ERJ12YJ821	M 820 OHM, J, 1/2W	1	
R2312,13	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2316-19	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2320	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2324	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2342,43	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2349	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2350	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2351	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2352,53	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2357	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2358,59	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2360	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2363	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2364	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2365,66	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2367	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2368	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2369,70	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2388,89	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2395,96	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2397,98	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R2436	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,38	ERDS2TJ103	C 10KOHM, J, 1/4W	2	
R2444,45	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2448,49	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2451,52	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,65	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2468,69	ERJ6GEYJ331	M 330 OHM, J, 1/10W	2	
R2488,89	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2499	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2501	ERJ6GEY0R00	M 0 OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2516	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2557	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R2607	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2640,41	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R2645	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2646	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2647	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2648	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2649	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2650	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2651	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2652	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2655	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R2659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2673	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2680,81	ERJ3GEYJ184	M 180KOHM,J,1/16W	2	
R2682	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2686	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2687	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2690	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R2693	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2695	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2696	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R2698	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R2699	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2700	ERJ3GEYJ274	M 270KOHM,J,1/16W	1	
R2702	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2708	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2723,24	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2725	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2726,27	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2729-31	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R2733-36	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2737	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2738	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2739	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2741	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2744	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2746	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2747	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2751	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2753	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2754	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2755	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2756	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2758	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2759	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2761-64	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2767	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2769,70	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2772	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2775	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2777-79	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R2793-95	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2797-00	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2801,02	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2804	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2807,08	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2810,11	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2814,15	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2817,18	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2820	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2821	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2822-25	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2830	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R2832,33	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2835	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2837	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2838	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2848-51	ERJ6GEYJ393	M 39KOHM,J,1/10W	4	
R2854,55	ERJ6GEYJ393	M 39KOHM,J,1/10W	2	
R2856	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2858	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2859-61	ERJ6GEYJ393	M 39KOHM,J,1/10W	3	
R2863	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2864	ERJ6GEYJ393	M 39KOHM,J,1/10W	1	
R2866	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2868,69	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R2881	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2887	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2891-94	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2899	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3751	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3753	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3755	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R3756	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R4001,02	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4003	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4004	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4006	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4007	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4008	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4010	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4015	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4016	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4017	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4018	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4021	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4022	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4023	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4024,25	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4026	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4028,29	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4035	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4039	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4045	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4047	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4048	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4050	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R4052	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4053	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4055	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4056	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4059	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4063	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4064-66	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R4068, 69	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4070	ERJ3GEYJ154	M 150KOHM, J, 1/16W	1	
R4071-76	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
R4077	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4078, 79	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4082	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4083	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4086	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4088-90	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R4091	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4092	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4094	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4095	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4098, 99	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R4101	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4102	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4104	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4105	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4106	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4108	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4109	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4110, 11	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4114	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4118	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4119	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4121	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4122	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4123	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4124	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4125	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4126	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4128	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4129	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4130	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4134	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4135	ERJ3EKF1801	M 1.8KOHM, 1/16W	1	
R4138	ERJ3GEYJ682	M 6.8KOHM, J, 1/16W	1	
R4139	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4141, 42	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R4144	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4145	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4146	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R4148, 49	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4151-53	ERJ3GEYJ102	M 1KOHM, J, 1/16W	3	
R4155	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4158	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4162	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R4169	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4171-73	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4174	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4175	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4176	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4177	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4179	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4181	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4182, 83	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4184	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4185	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4188	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4192	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4193	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4197	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4199, 00	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4201	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4202	ERJ3EKF7151	M7.15KOHM, 1/16W	1	
R4203	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4205	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4208	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4214	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4218	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4219	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4223	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4224	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4225	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4226	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4230, 31	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4237	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4238	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4252, 53	ERJ3GEYJ823	M 82KOHM, J, 1/16W	2	
R4254	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4255	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4256, 57	ERJ3GEYJ104	M 100KOHM, J, 1/16W	2	
R4259	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R4260, 61	ERJ3GEYJ682	M 6.8KOHM, J, 1/16W	2	
R4262, 63	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R4264	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4266	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4267, 68	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R4269	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R4281	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4282	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R4284	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4286	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R4289	ERJ3GEYJ241	M 240 OHM, J, 1/16W	1	
R4291	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4292	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4298	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4327, 28	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4329	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4339	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R4344, 45	ERJ3EKF1301	M 1.3KOHM, 1/16W	2	
R4346	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4347	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4349, 50	ERJ3EKF1801	M 1.8KOHM, 1/16W	2	
R4351	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R4356, 57	ERJ6GEYJ471	M 470 OHM, J, 1/10W	2	
R4358	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R4359	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4361	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R4365	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4367	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4370	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4371	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R4375	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4379, 80	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	2	
R4382	ERJ3EKF1600	M 160 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4383	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4388,89	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4391	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4392	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4408	ERJ3EKF1741	M 17.4 OHM, 1/16W	1	
R4409	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4411	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4414	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4416	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4421	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4423	EXB38V220J	RESISTOR ARRAY	1	
R4426	EXB38V220J	RESISTOR ARRAY	1	
R4427	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4428	EXB38V220J	RESISTOR ARRAY	1	
R4433,34	EXB38V220J	RESISTOR ARRAY	2	
R4435-37	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R4441,42	D1HG5608A002	NETWORK RESISTER	2	
R4443	EXB38V560J	RESISTOR ARRAY	1	
R4444	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4445-47	ERJ3GEYJ560	M 56 OHM,J,1/16W	3	
R4448,49	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4450-54	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4456,57	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4458,59	ERJ3EKF3302	M 33KOHM, 1/16W	2	
R4460	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4461,62	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4463	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4464	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4465	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4466	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4469	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4471	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4472	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4473	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4474	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4480	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4481	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4482,83	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4484	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R4485,86	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4487	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R4488,89	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4490,91	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4492,93	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R4494	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4495,96	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4497,98	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R4516	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4522	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4527	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R4528	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R4529	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R4530	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4531,32	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4533-37	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4540,41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4543,44	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4545,46	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R4547-50	EXB2HV680J	RESISTOR ARRAY	4	
R4551,52	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4557	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
R4558	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4559	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R4560,61	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4562	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4564-66	TAJAAH0680JV	M 68 OHM,J,1/16W	3	
R4569	EXB38V680J	RESISTOR ARRAY	1	
R4570	EXB2HV680J	RESISTOR ARRAY	1	
R4571	EXB38V680J	RESISTOR ARRAY	1	
R4572,73	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4575-77	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4578,79	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4581-85	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4590	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4592	ERJ3GEYJ820	M 82 OHM,J,1/16W	1	
R4593	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4594	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4596	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4597	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4600	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4602	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4603-22	ERJ3GEYJ820	M 82 OHM,J,1/16W	20	
R4623	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R4624-26	EXB38V820J	RESISTOR ARRAY	3	
R4627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4630	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4632,33	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4636	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4638	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4639,40	EXB2HV680J	RESISTOR ARRAY	2	
R4643,44	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4650	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4651	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4652	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4653-55	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4657	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4658	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4660,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4666	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R4667,68	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4674	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4676,77	ERJ3GEYJ474	M 470KOHM,J,1/16W	2	
R4678	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4682,83	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4684	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4685	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4686	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4690	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4703	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4706	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4708-47	ERJ6GEY0R00	M 0 OHM, 1/10W	40	
R4748	ERJ6ENF7151	M7.15KOHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4749	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4750	ERJ3EKF6801	M 6.8KOHM, 1/16W	1	
R4751,52	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4754	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4756	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4757	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4758	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4759,60	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4761,62	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4765	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R4767	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4771	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4775	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4780-87	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
R5601	ERJ6ENF4532	M4.53KOHM, 1/10W	1	
R5603	ERJ6ENF2550	M 255 OHM, 1/10W	1	
R5605	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5606	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5607	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R5609	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5610	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1652	M16.5KOHM, 1/10W	1	
R5615,16	ERJ6GEYJ223	M 22KOHM,J,1/10W	2	
R5617,18	ERJ6GEYJ221	M 220 OHM,J,1/10W	2	
R5619	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5620	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R5621	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5623,24	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R5625-27	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	3	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5635	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5637,38	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R5639	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5643	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R5644	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R5645,46	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R5647	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM,J,1/10W	1	
R5649	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R5650	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R5651	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5653-56	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R5657,58	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R5659	ERJ6ENF4700	M 470 OHM, 1/10W	1	
R5660	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5662	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5670	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5672	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5675	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R5676	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5679	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R5680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5692	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R5693	ERJ6GEYJ333	M 33KOHM,J,1/10W	1	
R5694,95	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R5696	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R5801	ERJ6ENF9100	M 910 OHM, 1/10W	1	
R5802	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R5803	ERJ6ENF2741	M2.74KOHM, 1/10W	1	
R5804	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5805-08	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	4	
R5809	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R5812	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R5815	ERJ6ENF3900	M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R5822-24	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R5826	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6002,03	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6005,06	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6020-25	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6081-83	ERJ6ENF8202	M 82KOHM, 1/10W	3	
R6100,01	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6102	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6106-11	ERJ14YJ150U	M 15 OHM, J,1/4W	6	
R6112	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6113	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6114,15	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6116	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6117-20	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R6121,22	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6123	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6124-27	ERJ6GEYJ101	M 100 OHM,J,1/10W	4	
R6129	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6134	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6135	ERG1FJS472D	M 4.7KOHM, J, 1W	1	
R6136	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6140	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
R6141	ERJ6GEYJ243	M 24KOHM,J,1/10W	1	
R6142	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6144	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6145	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6147	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6148,49	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6150	ERJ6GEYJ243	M 24KOHM,J,1/10W	1	
R6151	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6152,53	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6154	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6155,56	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6157	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6158	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6159	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6160	EXB38V470J	RESISTOR ARRAY	1	
R6161	EXB38V472J	RESISTOR ARRAY	1	
R6162	EXB38V470J	RESISTOR ARRAY	1	
R6163	EXB38V472J	RESISTOR ARRAY	1	
R6164,65	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6166,67	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6171,72	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6175	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6176,77	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6181	ERG2FJS221D	M 220 OHM, J, 2W	1	
R6183	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6187	ERX2FJSR22D	M0.22 OHM, J, 2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6188	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6189	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6191	ERX2FJSR22D	M0.22 OHM, J, 2W	1	
R6193	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6195	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6197	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6198, 9	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6214	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6431, 3	ERJ12YJ1R0	M 1 OHM, J, 1/2W	2	
R6433	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6434	ERDS1FJ221	C 220 OHM, J, 1/2W	1	
R6435	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6436	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6437	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6438	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6439-41	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	3	
R6442	ERJ6ENF9531	M9.53KOHM, 1/10W	1	
R6443	ERJ6ENF2491	M2.49KOHM, 1/10W	1	
R6444, 4	ERJ6GEYJ563	M 56KOHM, J, 1/10W	2	
R6446	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6448	ERJ6ENF9101	M 9.1KOHM, 1/10W	1	
R6450, 5	ERX1FJSR22D	M0.22 OHM, J, 1W	2	
R6452	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6453	ERJ6GEYJ513	M 51KOHM, J, 1/10W	1	
R6454	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6455	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6456	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6457, 5	ERJ6ENF2491	M2.49KOHM, 1/10W	2	
R6459	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6460, 6	ERJ6GEYJ513	M 51KOHM, J, 1/10W	2	
R6464	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6465	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
R6466	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6467	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6468	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6469	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R6470	ERJ14YJ203U	M 20KOHM, 1/2W	1	
R6472	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6473	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R6474	ERG2FJS680D	M 680 OHM, J, 2W	1	
R6475	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R6476	ERJ6ENF2403	M 240KOHM, 1/10W	1	
R6478	ERJ6ENF5601	M 5.6KOHM, 1/10W	1	
R6479	ERJ6GEYJ513	M 51KOHM, J, 1/10W	1	
R6480	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6481	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R6482	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6483	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R6484	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6485, 8	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6487	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6488	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6489	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6491	ERJ12YJ104U	M 100KOHM, 1/2W	1	
R6492	ERJ6ENF2153	M 215KOHM, 1/10W	1	
R6493	ERJ6ENF2703	M 270KOHM, 1/10W	1	
R6494	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
R6495	ERJ6ENF5231	M5.23KOHM, 1/10W	1	
R6496	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6497	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6498, 9	ERX1FJS8R2D	M 8.2 OHM, J, 1W	2	
R6500	ERJ6GEYJ122	M 1.2KOHM, J, 1/10W	1	
R6501-09	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	9	
R6510	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6511, 1	ERX3FJS2R2D	M 2.2 OHM, J, 3W	2	
R6513	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6514	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6515	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6516	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6517	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R6518	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6519	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6520	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6521	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6522	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6523	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6524	ERJ6ENF5621	M5.62KOHM, 1/10W	1	
R6525	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6526	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6527	ERJ14YJ102	M 1KOHM, J, 1/4W	1	
R6528	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6529	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6530-40	ERJ6GEYJ470	M 47 OHM, J, 1/10W	11	
R6542	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6543	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R6544	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6545	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6546	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6547, 4	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	2	
R6549	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6550	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6551	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6552	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6553	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6554, 5	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6556	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6557	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R6558	ERJ6ENF5621	M5.62KOHM, 1/10W	1	
R6559	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6560-68	ERJ6GEYJ100	M 10 OHM, J, 1/10W	9	
R6570	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6571-78	ERJ6GEYJ471	M 470 OHM, J, 1/10W	8	
R6579	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6580	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6581	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6582, 8	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6584	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6585, 8	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	2	
R6587	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6588	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6589	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6590, 9	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6592, 9	ERJ6GEYJ105	M 1MOHM, J, 1/10W	2	
R6594	ERG1FJS104D	M 100KOHM, J, 1W	1	
R6595-98	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	4	
R6599	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6600	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6602	ERG1FJS471D	M 470 OHM, J, 1W	1	
R6603	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6604	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6605-07	ERJ6GEYJ224	M 220KOHM, J, 1/10W	3	
R6608	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6609, 1	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6611-16	ERJ14YJ150U	M 15 OHM, J, 1/4W	6	
R6625-30	ERJ14YJ150U	M 15 OHM, J, 1/4W	6	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6633	ERJ6GEYJ151	M 150 OHM, J, 1/10W	1	
R6634, 35	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6636-38	ERJ6GEYJ151	M 150 OHM, J, 1/10W	3	
R6639	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6640	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6641, 42	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6643	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R6644	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6645, 46	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6647	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6648-50	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6651	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6654, 55	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6657-59	ERJ6GEYJ102	M 1KOHM, J, 1/10W	3	
R6660	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6663, 64	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6665	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6666-69	ERJ6GEYJ104	M 100KOHM, J, 1/10W	4	
R6670, 71	ERJ6GEYJ154	M 150KOHM, J, 1/10W	2	
R6672	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6675, 76	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6677	ERGLFJS101D	M 100 OHM, J, 1W	1	
R6687, 88	ERX2FJSR22D	M 0.22 OHM, J, 2W	2	
R6691	EXB38V470J	RESISTOR ARRAY	1	
R6692	EXB38V472J	RESISTOR ARRAY	1	
R6693	EXB38V470J	RESISTOR ARRAY	1	
R6694	EXB38V472J	RESISTOR ARRAY	1	
R6695	EXB38V470J	RESISTOR ARRAY	1	
R6696	EXB38V472J	RESISTOR ARRAY	1	
R6697	EXB38V470J	RESISTOR ARRAY	1	
R6698	EXB38V472J	RESISTOR ARRAY	1	
R6701-03	ERJ6ENF8202	M 82KOHM, 1/10W	3	
R6801, 02	EXB38V680J	RESISTOR ARRAY	2	
R6815	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R6828, 29	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6852, 53	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6901	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6902-06	ERJ6GEYJ221	M 220 OHM, J, 1/10W	5	
R6911-14	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R6915, 16	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6971	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6972-76	ERJ6GEYJ221	M 220 OHM, J, 1/10W	5	
R6981-84	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R6985, 86	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R7100	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7102	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7103	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R7104-07	ERJ12YJ220	M 22 OHM, J, 1/2W	4	
R7108, 09	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7111	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7114-19	EXB38V470J	RESISTOR ARRAY	6	
R7120	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7122	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7123	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R7124	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R7125-27	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7128	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7129	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7131	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7132-35	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7137	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7140	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7142	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7143	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7145-47	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7148	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7149	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7151-57	TAJAAH0470JV	M 47 OHM, J, 1/16W	7	
R7158	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7160	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7162	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7163	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7165-67	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7168	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7169	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7171	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7172, 73	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7200	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7202	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7205-07	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7208	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7209	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7211	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7212, 13	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7214-19	TAJAAH0470JV	M 47 OHM, J, 1/16W	6	
R7220	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7222	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7224	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7225-27	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7228	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7229	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7231	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7232-37	EXB38V470J	RESISTOR ARRAY	6	
R7238	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R7240	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7242	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7244	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7245-47	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7248	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7249	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7251	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7252	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R7253	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R7254-57	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7260	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7262	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7265-67	ERJ12YJ220	M 22 OHM, J, 1/2W	3	
R7268	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7269	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R7271	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R7272, 73	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7274	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7300	ERJ8GEY0R00	M 0 OHM, 1/8W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7301,02	EXB38V470J	RESISTOR ARRAY	2	
R7303	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7305-07	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7308	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7309	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7310	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7311	EXB38V470J	RESISTOR ARRAY	1	
R7312	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7314-17	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7318	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7319	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7320	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7321,22	EXB38V470J	RESISTOR ARRAY	2	
R7323	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7325-27	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7328	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7329	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7330	EXB38V470J	RESISTOR ARRAY	1	
R7331	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7332	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7339	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7340	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7341,42	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7343	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7345-47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7348	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7349	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7350-52	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R7354-57	TAJAAH0470JV	M 47 OHM,J,1/16W	4	
R7358,59	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7360	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7363	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7365-67	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7368	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7369	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7370,71	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7372	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7400	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7401	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7403	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7405-07	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7408	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7409	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7410	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7412	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7414-17	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7418	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R7419	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R7420	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7423	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7425-27	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7428	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7429	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7430	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R7432	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7434-39	EXB38V470J	RESISTOR ARRAY	6	
R7440	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7441	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7443	TAJAAH0470JV	M 47 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7445-47	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7448	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7449	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7452	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7460	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
R7463	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7465-67	ERJ12YJ220	M 22 OHM,J, 1/2W	3	
R7468	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7469	ERJ12YJ220	M 22 OHM,J, 1/2W	1	
R7470,71	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7472	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R7483-88	TAJAAH0470JV	M 47 OHM,J,1/16W	6	
R7489,90	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R8137	ERJ2GEJ121	M 120 OHM, J,0.063W	1	
R8140,41	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R8144-47	DIHG5608A002	NETWORK RESISTER	4	
R8148,49	DIHG3908A002	NETWORK RESISTER	2	
R8150-62	ERJ2GEJ390	M 39 OHM, J,0.063W	13	
R8163-66	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8200-03	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8206	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8207	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8208	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8209	ERJ2GEJ273	M 27KOHM, J,0.063W	1	
R8210	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8211	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8215	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8216	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8217	ERJ2GEJ561	M 60 OHM, J,0.063W	1	
R8218	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8219	ERJ2GEJ153	M 15KOHM, J,0.063W	1	
R8220	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8221	ERJ3GEYJ391	M 390 OHM,J,1/16W	1	
R8222	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8223	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8224	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8228	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8229	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8230	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8231	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8232	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8233	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R8234	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8237	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8240	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8241	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8242	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R8243	ERJ3GEYJ330	M 33 OHM, J,1/16W	1	
R8244	ERJ3GEYJ150	M 15 OHM,J,1/16W	1	
R8245,46	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8248	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8250	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8251	ERJ2GEJ122	M 1.2KOHM, J,0.063W	1	
R8258	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8262-65	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8266,67	ERJ2GEJ821	M 820 OHM, J,0.063W	2	
R8268,69	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R8270	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8272	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8273,74	ERJ3GEYJ560	M 56 OHM,J,1/16W	2	
R8275	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8276	ERJ2GEJ183	M 18KOHM ,J,0.063W	1	
R8277	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R8278	ERJ3EKF1201	M 1.2KOHM, 1/16W	1	
R8279,80	ERJ2GEJ102	M 1KOHM, J,0.063W	2	
R8281	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8282-84	ERJ2GEJ102	M 1KOHM, J,0.063W	3	
R8285	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8286	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8287	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8288	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8289,90	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8291	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8292	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8293	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8297	ERJ2GEJ102	M 1KOHM, J,0.063W	1	
R8300	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8301	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8303	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8304,05	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8306	EXB38V472J	RESISTOR ARRAY	1	
R8307	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8313	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8314,15	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8316-18	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8322-36	ERJ2GEJ101	M 100 OHM, J,0.063W	15	
R8339	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8341	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8343	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8345	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8347	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
R8349	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
R8351	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8354	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8355	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8356,57	ERJ2GEJ390	M 39 OHM, J,0.063W	2	
R8358	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8370	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8372	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8373-79	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
R8381,82	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8383	D1HG5608A002	NETWORK RESISTER	1	
R8384	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8385	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8386	D1HG5608A002	NETWORK RESISTER	1	
R8387	EXB38V560J	RESISTOR ARRAY	1	
R8388	D1HG5608A002	NETWORK RESISTER	1	
R8390	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8391	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8392	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8393,94	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8395	EXB38V560J	RESISTOR ARRAY	1	
R8396-98	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8399	EXB2HV223JV	NETWORK RESISTER	1	
R8407,08	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8409,10	EXB38V560J	RESISTOR ARRAY	2	
R8411,12	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8414	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8415	EXB38V560J	RESISTOR ARRAY	1	
R8416	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8419	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8420	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8421	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8422,23	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8435	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8436	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
R8460	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8464,65	EXB2HV104JV	RESISTOR ARRAY	2	
R8467	D1HG1008A002	NETWORK RESISTER	1	
R8468	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8470	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8471,72	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8474	D1HG1008A002	NETWORK RESISTER	1	
R8475	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8476	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8477	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8478	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R8479,80	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8481	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8483-87	ERJ2GEJ560	M 56 OHM, J,0.063W	5	
R8488	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8489	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8491-94	ERJ2GEJ101	M 100 OHM, J,0.063W	4	
R8495	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8497,98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8500	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8501	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8503	ERJ2GEJ562	M 5.6KOHM,J,0.063W	1	
R8504,05	ERJ2GEJ103	M 10KOHM, J,0.063W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8507	ERJ2GEJ562	M 5.6KOHM, J, 0.063W	1	
R8508, 09	ERJ2GEJ203	M 20KOHM, J, 0.063W	2	
R8510	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8511	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8512-18	ERJ2GEJ103	M 10KOHM, J, 0.063W	7	
R8519	ERJ2GEJ392	M 3.9KOHM, J, 0.063W	1	
R8524	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8525, 26	ERJ2GEJ103	M 10KOHM, J, 0.063W	2	
R8527	ERJ2GEJ392	M 3.9KOHM, J, 0.063W	1	
R8528-30	ERJ2GEJ103	M 10KOHM, J, 0.063W	3	
R8531	EXB38V560J	RESISTOR ARRAY	1	
R8532-35	ERJ2GEJ560	M 56 OHM, J, 0.063W	4	
R8536	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8537	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8538	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
R8539	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8540	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8541-47	ERJ2GEJ560	M 56 OHM, J, 0.063W	7	
R8548	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8551	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8552	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8554-56	ERJ2GEJ560	M 56 OHM, J, 0.063W	3	
R8557	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8558	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8559	EXB38V560J	RESISTOR ARRAY	1	
R8560, 61	ERJ2GEJ560	M 56 OHM, J, 0.063W	2	
R8562	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
R8564	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8565	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8566, 67	ERJ2GEJ560	M 56 OHM, J, 0.063W	2	
R8568, 69	ERJ2GEJ103	M 10KOHM, J, 0.063W	2	
R8570-73	ERJ2GEJ560	M 56 OHM, J, 0.063W	4	
R8574	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R857502	ERJ2GEJ330	M 33 OHM, J, 0.063W	1	
R8575	ERJ3GEYJ181	M 180 OHM, J, 1/16W	1	
R8576-80	ERJ2GEJ330	M 33 OHM, J, 0.063W	5	
R8582-95	ERJ2GEJ330	M 33 OHM, J, 0.063W	14	
R8596, 97	D1HG33080001	NETWORK RESISTER	2	
R8598-00	D1HG5608A002	NETWORK RESISTER	3	
R8601	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8602	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8605-15	ERJ2GEJ103	M 10KOHM, J, 0.063W	11	
R8617	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8629	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8630, 31	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8632-37	ERJ2GEJ560	M 56 OHM, J, 0.063W	6	
R8640	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8641	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8643, 44	ERJ2GEJ560	M 56 OHM, J, 0.063W	2	
R8645, 46	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8647	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8648, 49	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8650	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8651	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
R8652	ERJ2GEJ332	M 3.3KOHM, J, 0.063W	1	
R8653	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8654, 55	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R8656	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8657	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8658	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8659	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8661	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8665	D1HG1218A002	NETWORK RESISTER	1	
R8666	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8668	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8670	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8673	D1HG1218A002	NETWORK RESISTER	1	
R8674	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8678	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8682	ERJ3EKF1303	M 130KOHM, 1/16W	1	
R8686, 87	ERJ2GEJ103	M 10KOHM, J, 0.063W	2	
R8688, 89	ERJ2GEJ560	M 56 OHM, J, 0.063W	2	
R8690	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
R8691	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8692	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8693	ERJ2GEJ333	M 33KOHM, J, 0.063W	1	
R8694	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8695	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
R8696	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8697	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
R8698	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
R8700	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
R8702	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
R8703	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
R8704	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
R8705	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8706	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8707	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8708	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8709	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8710	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8711	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8712	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
R8713, 14	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R8715	ERJ2GEJ473	M 47KOHM, J, 0.063W	1	
R8716	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8719, 20	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R8722-25	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	4	
R8727	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8731	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8733	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8734	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8736	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8737	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8738	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R8741	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8748	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8749	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8751-53	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	
R8755-58	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8765	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8770	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8774	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8776	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8777	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8778,79	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8780,81	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8782-87	EXB38VR000	RESISTOR ARRAY	6	
R8788	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8790	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8791	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
R8792,93	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8795-98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8799-02	ERJ2GEJ103	M 10KOHM, J,0.063W	4	
R8817,18	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
R9000	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9002	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9004	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9006	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9007	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9015-18	ERJ3GEYJ103	M 10KOHM, J,1/16W	4	
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,21	ERJ3GEYJ102	M 1KOHM, J,1/16W	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM, J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM, J,1/16W	1	
R9029,30	ERJ3GEYJ220	M 22 OHM, J,1/16W	2	
R9031,32	ERJ3GEYJ562	M 5.6KOHM, J,1/16W	2	
R9033,34	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9035,36	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM, J,1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM, J,1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	1	
R9042	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9043,44	TAJAAH0101JV	M 100 OHM, J,1/16W	2	
R9045	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9046	ERJ3GEYJ123	M 12KOHM, J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9047-50	TAJAAH0101JV	M 100 OHM, J,1/16W	4	
R9052	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	1	
R9054,55	ERJ3GEYJ272	M 2.7KOHM, J,1/16W	2	
R9056,57	ERJ3GEYJ220	M 22 OHM, J,1/16W	2	
R9058,59	ERJ3GEYJ562	M 5.6KOHM, J,1/16W	2	
R9060-67	TAJAAH0101JV	M 100 OHM, J,1/16W	8	
R9068-72	ERJ3GEYJ103	M 10KOHM, J,1/16W	5	
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM, J,1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM, J,1/16W	1	
R9077-79	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9080	ERJ3GEYJ223	M 22KOHM, J,1/16W	1	
R9081	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9082-89	TAJAAH0101JV	M 100 OHM, J,1/16W	8	
R9090	ERJ3GEYJ562	M 5.6KOHM, J,1/16W	1	
R9091,92	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9093	ERJ3GEYJ473	M 47KOHM, J,1/16W	1	
R9094	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9095-98	ERJ3GEYJ103	M 10KOHM, J,1/16W	4	
R9102-04	TAJAAH0101JV	M 100 OHM, J,1/16W	3	
R9105	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9107-09	ERJ3GEYJ393	M 39KOHM, J,1/16W	3	
R9110	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9111,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9113	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9114-16	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9117,18	EXB38VR000	RESISTOR ARRAY	2	
R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,21	TAJAAH0101JV	M 100 OHM, J,1/16W	2	
R9122-24	ERJ3GEYJ103	M 10KOHM, J,1/16W	3	
R9125,26	ERJ3GEYJ102	M 1KOHM, J,1/16W	2	
R9127,28	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9130	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9131-33	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	3	
R9134-36	TAJAAH0101JV	M 100 OHM, J,1/16W	3	
R9137	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	1	
R9140-42	ERJ3GEYJ103	M 10KOHM, J,1/16W	3	
R9145-47	ERJ3GEYJ103	M 10KOHM, J,1/16W	3	
R9160,61	ERJ3GEYJ220	M 22 OHM, J,1/16W	2	
R9162,63	ERJ3GEYJ562	M 5.6KOHM, J,1/16W	2	
R9164,65	TAJAAH0101JV	M 100 OHM, J,1/16W	2	
R9200-02	TAJAAH0470JV	M 47 OHM, J,1/16W	3	
R9204	TAJAAH0470JV	M 47 OHM, J,1/16W	1	
R9206,07	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9210	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300-04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9306,07	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9313-16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,19	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9324-28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R9329	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9330-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9335,36	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339-42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500-03	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9505-10	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,17	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519-21	EXB38V470J	RESISTOR ARRAY	3	
R9522,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9524-26	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,29	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R9531	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9533,34	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9536	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R9537,38	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM, J, 1/16W	1	
R9543	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702-04	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9706,07	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,17	ERJL14KJ33M	M 33 OHM, J, 1/4W	2	
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,23	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9724	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9726,27	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9728,29	ERJ6ENF2002	M 20KOHM, 1/10W	2	
R9738,39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9800	EXB38V470J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9802-04	EXB2HV470JV	RESISTOR ARRAY	3	
R9806,07	EXB38V470J	RESISTOR ARRAY	2	
R9808,09	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9810	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9811	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9812	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9813	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9814	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9815	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9816,17	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9819	EXB2HV470JV	RESISTOR ARRAY	1	
R9820,21	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9822,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9824	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9900	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9901	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9902	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9903	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9904	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9905	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9906	EXB2HV470JV	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9908,09	EXB38V470J	RESISTOR ARRAY	2	
R9910,11	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9913	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R9914	EXB38V470J	RESISTOR ARRAY	1	
R9915,16	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9917-19	EXB2HV470JV	RESISTOR ARRAY	3	
R9922	EXB2HV470JV	RESISTOR ARRAY	1	
R9923	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNAG146	CIRCUIT BOARD DT	1	PAVCA 
RTL	TNPA3598AC	CIRCUIT BOARD H	1	
RTL	TNPA3620	CIRCUIT BOARD PA	1	
RTL	TNPA3621AB	CIRCUIT BOARD Z	1	
RTL	TNPA3625AC	CIRCUIT BOARD DG	1	
RTL	TNPA3626	CIRCUIT BOARD DV	1	
RTL	TNPA3553	CIRCUIT BOARD C1	1	
RTL	TNPA3554	CIRCUIT BOARD C2	1	
RTL	TNPA3555	CIRCUIT BOARD C3	1	
RTL	TNPA3556	CIRCUIT BOARD C4	1	
RTL	TZTNP010YDS	CIRCUIT BOARD D	1	
RTL	ETXMM563MDK	CIRCUIT BOARD P	1	
RTL	TNPA3643AC	CIRCUIT BOARD PB	1	
RTL	TNPA3557	CIRCUIT BOARD SC	1	
RTL	TNPA3190AB	CIRCUIT BOARD SD	1	
RTL	TNPA3675	CIRCUIT BOARD SS2	1	
RTL	TNPA3558	CIRCUIT BOARD SS	1	
RTL	TNPA3676	CIRCUIT BOARD SS3	1	
RTL	TNPA3189AB	CIRCUIT BOARD SU	1	
RTL	TNPA3603	CIRCUIT BOARD K	1	
RTL	TNPA3604	CIRCUIT BOARD S	1	
S1	K1KA03AA0193	3P CONNECTOR	1	
S2	K1KA02AA0193	2P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC41,42	K1ML80B00001	80P CONNECTOR	2	
SC45,46	K1KA10A00431	10P CONNECTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
SC90	K1KA06AA0192	6P CONNECTOR	1	
SD1-D4	K1MN96B00004	96P CONNECTOR	4	
SD46	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	
SS20,21	K1KA07A00170	7P CONNECTOR	2	
SS22,23	K1KB07AA0087	7P CONNECTOR	2	
SS24	K1KA04AA0193	4P CONNECTOR	1	
SS32	K1KA12AA0194	12P CONNECTOR	1	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS52,53	K1MN13B00020	13P CONNECTOR	2	
SS55,56	K1MN13B00020	13P CONNECTOR	2	
SU1-U4	K1MN96B00004	96P CONNECTOR	4	
SU45	K1KA10B00209	10P CONNECTOR	1	
SW2500	K0F122A00172	SWITCREMOTE CONTROLH	1	
SW3751-55	EVQ11G05R	SWITCH	5	
T6431	ETS13TB139AP	SWITCHING TRANS	1	
T6471	ETS22AE2F9AC	SWITCHING TRANS	1	
TU8200	ENG6302DF	TUNER	1	△
VR6145	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6477	EVMEASA00B13	CONTROL 1KOHMB 0.3W	1	
VR6523	EVMEASA00B53	CONTROL 5KOHMB 0.3W	1	
VR6557	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
X4001	TSSA101	CRYSTAL	1	
X4002	H0J400400017	CRYSTAL	1	
X4004	H0J270500087	CRYSTAL	1	
X8005	H0J270500061	CRYSTAL	1	
X8200	H0J250500050	CRYSTAL	1	
X9000	H2D2705A0004	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
XF8200	J0C4405B0004	LC FILTER	1	
XF8201	J0C4405B0006	LC FILTER	1	
XF8202	J0C4405B0005	LC FILTER	1	
Z2	K1KA05AA0192	5P CONNECTOR	1	
Z50	K1MN35A00013	35P CONNECTOR	1	
ZA5001	K4CD01000011	TERMINAL	1	
ZA5003	TESA169	SHIELD CLIP	1	
ZA5601-04	K9ZZ00000424	CONNECTOR	4	
ZA5801-04	K9ZZ00000424	CONNECTOR	4	
ZA6101-03	K4CD01000013	TERMINAL	3	
ZA6401-03	K4CD01000013	TERMINAL	3	
ZA7101-03	K4CD01000013	TERMINAL	3	
ZA7201-03	K4CD01000013	TERMINAL	3	
ZA7301-03	K4CD01000013	TERMINAL	3	
ZA7401-03	K4CD01000013	TERMINAL	3	
ZA9001	K4CD01000013	TERMINAL	1	
ZA9002-06	K4ZZ01000179	TERMINAL	5	
D305,06	ST3D170	CLAMPER	2	
D501	ST3D200	CLAMPER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
A601,02	RA362MSV7T	ARRESTOR	2	△
C301	RR3AD681KP	CERAMIC CAPACITOR	1	
C302	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C303	KZE1E470P	ELECTROLYTIC CAPACITOR	1	
C305	ECJ2XC1H101J	C 100PF, J, 50V	1	
C307	TBB224K5	CERAMIC CHIP CAPACITOR	1	
C332	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C335	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C341	RR3AD332K	CERAMIC CAPACITOR	1	
C352	TCR474K2A	CERAMIC CHIP CAPACITOR	1	
C354	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C355	TCR474K2A	CERAMIC CHIP CAPACITOR	1	
C356	TAB473K2E	CERAMIC CHIP CAPACITOR	1	
C359	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C360,61	KMQ220901Z	ELECTROLYTIC CAPACITOR	2	
C363	RR3DD221K	CERAMIC CAPACITOR	1	
C366,67	KZE2A331L	ELECTROLYTIC CAPACITOR	2	
C369	TAB473K2E	CERAMIC CHIP CAPACITOR	1	
C374	RR3DD221K	CERAMIC CAPACITOR	1	
C401	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C410	ECWH8183HVB	PLASTIC FILM CAPACITOR	1	
C411	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C412	TBB105K1	CERAMIC CHIP CAPACITOR	1	
C451	KZE1E272	ELECTROLYTIC CAPACITOR	1	
C452	KZE1E821L	ELECTROLYTIC CAPACITOR	1	
C454,55	ECJ3YB1E475K	C 4.7UF, K, 25V	2	
C457	KZE1E821L	ELECTROLYTIC CAPACITOR	1	
C458	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C459	KZE1E821L	ELECTROLYTIC CAPACITOR	1	
C460	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C461	KZE1E471L	ELECTROLYTIC CAPACITOR	1	
C462	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C463	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C464	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C465	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C466-69	ECJ2FB1H104K	C 0.1UF, K, 50V	4	
C471	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C472	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C501	KMQ2W161K	ELECTROLYTIC CAPACITOR	1	
C502	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C503	TBB106K1A	CERAMIC CHIP CAPACITOR	1	
C507	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C512	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C515	TBB106K1A	CERAMIC CHIP CAPACITOR	1	
C551	KZE1E471L	ELECTROLYTIC CAPACITOR	1	
C553	TBB475K1	CERAMIC CHIP CAPACITOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C555	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C556	KZE1A471	ELECTROLYTIC CAPACITOR	1	
C557,58	ECJ2FB1H104K	C 0.1UF, K, 50V	2	
C559	CD221K	CERAMIC CAPACITOR	1	△
C560	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C562	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C563	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C601	ECQU2A105ML	PLASTIC FILM CAPACITOR	1	△
C603,04	CD221K	CERAMIC CAPACITOR	2	△
C606	ECQU2A224ML	PLASTIC FILM CAPACITOR	1	△
C610,11	MMXC2W105K	PLASTIC FILM CAPACITOR	2	
C620,21	ECKD3A102KBP	C 1000PF, K, 1KV	2	
C622	ECQE6104KF	P 0.1UF, K, 630V	1	
C623,24	KMQ2W161K	ELECTROLYTIC CAPACITOR	2	
C625	TBB474K2	CERAMIC CHIP CAPACITOR	1	
C626	KMQ2W161K	ELECTROLYTIC CAPACITOR	1	
C627	ECQE6472B45	PLASTIC FILM CAPACITOR	1	
C628	CD331K	CERAMIC CAPACITOR	1	△
C629	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C630	ECQU2A473MN	P 0.047UF, M, 250V	1	△
C633	ECUX1H102KBN	C 1000PF, K, 50V	1	
C634	ECJ2FB1E224K	C 22UF, K, 25V	1	
C701	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C703	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C706	ECQV1H104JL	P 0.1UF, J, 50V	1	
C711	TEB104K2	CERAMIC CHIP CAPACITOR	1	
CNPF C	B2P3-VH-B	CONNECTOR	1	
ZD301,02	MA8360	ZENER DIOED	2	
D302	RU1P	DIODE	1	
ZD303	MA8360	ZENER DIOED	1	
D303	RB550VA-30	DIODE	1	
ZD304-06	MA8360	ZENER DIOED	3	
ZD307	MA8330	ZENER DIODE	1	
D307	RB550VA-30	DIODE	1	
D308	ERA91-02	DIODE	1	
ZD308	MA8330	ZENER DIODE	1	
ZD309	MA4051N	ZENER DIODE	1	
ZD310	MA4020	ZENER DIODE	1	
ZD311,12	MA4270N	ZENER DIODE	2	
D332	RB550VA-30	DIODE	1	
D335	RU1P	DIODE	1	
D351	FCF06A40	DIODE	1	
TH351	PRFCBB471	POSISTOR	1	
D374	MA2C16500H	DIODE	1	
D401	RB550VA-30	DIODE	1	
D402	M1FS6	DIODE	1	
ZD402	PTZ24B	ZENER DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D403	M1FS6	DIODE	1	
ZD403	MA8056	ZENER DIODE	1	
ZD404	MA8360	ZENER DIOED	1	
D405	M1FS6	DIODE	1	
ZD405-09	MA8360	ZENER DIOED	5	
ZD410	MA4220N	ZENER DIODE	1	
ZD413	MA4270N	ZENER DIODE	1	
ZD451	1ZB18	ZENER DIODE	1	
D451-54	RB085T60	DIODE	4	
D455	M1FS6	DIODE	1	
D456,57	MA111	DIODE	2	
Z501	ERZVGAD471	VARISTOR	1	△
D504	ERA91-02	DIODE	1	
ZD510	MA8270	ZENER DIODE	1	
D511	ERA91-02	DIODE	1	
D511	MA2S111	DIODE	1	
D515	ERA91-02	DIODE	1	
D516	MA2S111	DIODE	1	
D551	RK49	DIODE	1	
Z601	ERZVGAD751	VARISTOR	1	△
D601	MA111	DIODE	1	
ZD601	MA4220N	ZENER DIODE	1	
D602	SLWBA80	DIODE	1	△
Z603	ERZVGAD471	VARISTOR	1	△
D603	MA111	DIODE	1	
D605	M1F60	DIODE	1	
D607	S3V60	DIODE	1	
D608,09	RB550VA-30	DIODE	2	
D612	EP01C	DIODE	1	
D613,14	ERA22-10	DIODE	2	
ZD668,69	MA8220	ZENER DIODE	2	
D796	MA2S111	DIODE	1	
IC301	MR4020F2	INTEGRATED CIRCUIT	1	
IC401	F9222L	INTEGRATED CIRCUIT	1	△
IC501	MIP3E30MP	INTEGRATED CIRCUIT	1	
L301,02	EXCELSR35	FERRITE BEAD INDUCTOR	2	
L401,02	EXCELSA35	BEAD CHOKE	2	
L452	EXCELD35	FERRITE BEAD INDUCTOR	1	
L454,55	EXCELD35	FERRITE BEAD INDUCTOR	2	
L501	EXCELSA35	BEAD CHOKE	1	
L503	EXCELD35	FERRITE BEAD INDUCTOR	1	
L601,02	P2570205Z	FILTER CHOKE	2	△
L604	S3783106Z	CHOKE	1	△
L606	ELF15N004A	FILTER CHOKE	1	△
L607,08	EXCELD35	FERRITE BEAD INDUCTOR	2	
L612	EXCELD35	FERRITE BEAD INDUCTOR	1	
L614	EXCELD35	FERRITE BEAD INDUCTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
P2	B6B-EH-A	CONNECTOR	1	
P5	B11B-PH-KS	CONNECTOR	1	
P9	B3P4VH-B-L	CONNECTOR	1	△
P10	B6B-PH-KS	CONNECTOR	1	
P11	B7B-EH-A	CONNECTOR	1	
P12	B10B-PH-KS	CONNECTOR	1	
P23	B3B-PH-KS	CONNECTOR	1	
P25	B20B-PHDS	CONNECTOR	1	
P30	B5B-PH-KS	CONNECTOR	1	
Q332	2SD2098	TRANSISTOR	1	
Q333	2SB1386	TRANSISTOR	1	
Q402	2SB766A	TRANSISTOR	1	
Q451-53	HAT1130R	FIELD EFFECT TRANSISTOR	3	
Q551	HAT1130R	FIELD EFFECT TRANSISTOR	1	
Q553,54	HAT1130R	FIELD EFFECT TRANSISTOR	2	
Q555	2SB709A	TRANSISTOR	1	
Q601	2SK3302	FIELD EFFECT TRANSISTOR	1	△
Q602	2SD2098	TRANSISTOR	1	
Q603	2SB1386	TRANSISTOR	1	
Q605	2SB709A	TRANSISTOR	1	
Q606	2SD601A	TRANSISTOR	1	
R301	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R308	MPC5WR27KS	METAL PLATE RESISTOR	1	
R311	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R312	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R313	ERJ14YJ100	M 10 OHM, J, 1/4W	1	
R314	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R321	MPC5WR47KS	METAL PLATE RESISTOR	1	
R323	MPC5WR47KS	METAL PLATE RESISTOR	1	
R325	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R326,27	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R336	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R339	ERJ12YJ330	M 33 OHM, J, 1/2W	1	
R340,41	ERJ12YJ333	M 33KOHM, J, 1/2W	2	
R342	ERJ6ENF1650	M 165 OHM, 1/10W	1	
R343	ERJ12YJ333	M 33KOHM, J, 1/2W	1	
R345	ERJ12YJ333	M 33KOHM, J, 1/2W	1	
R346,47	ERJ12YJ220	M 22 OHM, J, 1/2W	2	
R350,51	ERJ6ENF6192	M61.9KOHM, 1/10W	2	
VR351	EVMEASA01B54	VARIABLE RESISTOR	1	
R352	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
VR352	EVMEASA01B54	VARIABLE RESISTOR	1	
R353	ERJ6ENF6192	M61.9KOHM, 1/10W	1	
R354,55	ERJ6ENF1303	M 130KOHM, 1/10W	2	
R356	ERJ14YJ753	M 75KOHM, J, 1/2W	1	
R358	ERG2SJ150	M 15 OHM, J, 2W	1	
R359	ERJ14YJ753	M 75KOHM, J, 1/2W	1	
R364	ERG2SJ683	M 68KOHM, J, 2W	1	
R365	ERJ3GSYJ332	M 3.3KOHM, J, 1/16W	1	
R366,67	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	2	
R368	ERJ6ENF7502	M 75KOHM, 1/10W	1	
R369-71	ERJ6GEYJ823	M 82KOHM, J, 1/10W	3	
R373,74	ERJ14YJ753	M 75KOHM, J, 1/2W	2	
R379	ERJ12YJ473	M 47KOHM, J, 1/2W	1	
R381	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R382,83	ERJ6GEYJ333	M 33KOHM, J, 1/10W	2	
R384	ERJ6GEYJ393	M 39KOHM, J, 1/10W	1	
R386-89	ERJ6ENF1052	M10.5KOHM, 1/10W	4	
R394	ERJ6ENF1052	M10.5KOHM, 1/10W	1	
R395,96	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R398,99	ERJ14YJ753	M 75KOHM, J, 1/2W	2	
R401	ERJ3GSYJ103	M 10KOHM, J, 1/16W	1	
R405	MPC5WR39KS	METAL PLATE RESISTOR	1	
R406	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R407	ERJ14YJ334	M 33KOHM, 1/2W	1	
R408	SG734K271	CHIP RESISTOR	1	
R410	ERJ14YJ332	M 33KOHM, J, 1/4W	1	
R411	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R412	ERJ14YJ472	M 4.7KOHM, J, 1/2W	1	
R413,14	ERJ14YJ334	M 33KOHM, 1/2W	2	
R415,16	ERJ6GEYJ563	M 56KOHM, J, 1/10W	2	
R426	ERJ14YJ470	M 47 OHM, J, 1/2W	1	
R429-31	ERJ6GEYJ563	M 56KOHM, J, 1/10W	3	
R432	ERJ6GEYJ4R7	M 4.7 OHM, J, 1/10W	1	
VR451	EVMEASA01B53	VARIABLE RESISTOR	1	
R456	ERJ6ENF4302	M 43KOHM, 1/10W	1	
R457,58	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R459	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R460	ERG2SJ331	METAL OXIDE RESISTOR	1	
R473	ERJ6GEYJ332	M 3.3KOHM, J, 1/10W	1	
R475,76	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R480	ERG2SJ561	M 560 OHM, J, 2W	1	
R481	ERJ6ENF4302	M 43KOHM, 1/10W	1	
R482	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R508,09	ERJ12YJ100	M 10 OHM, J, 1/2W	2	
R510	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R558	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R559	ERJ12YJ151	M 150 OHM, J, 1/2W	1	
R561	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R562	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R563	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R564,65	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
RF601	HUF5K100J14	THERMAL CUTOFF WITH RESISTOR	1	△
R602,03	5K150JA	WIREWOUND RESISTOR	2	
R604,05	ERDS1TJ474	C 4.7KOHM, J, 1/2W	2	
R606	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R607	ERJ6GEYJ334	M 330KOHM, J, 1/10W	1	
R608	ERG3FJS820D	M 82 OHM, J, 3W	1	
R609-12	ERJ6ENF1213	M 121KOHM, 1/10W	4	
R613,14	ERJ6GEYJ154	M 150KOHM, J, 1/10W	2	
R615-17	MPC5WR27KS	METAL PLATE RESISTOR	3	
R618	ERG3FJS820D	M 82 OHM, J, 3W	1	
R620	ERJ12YJ680	M 68 OHM, J, 1/2W	1	
R621	ERJ12YJ151	M 150 OHM, J, 1/2W	1	
R623	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R624	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	
R625	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R626	ERJ12YJ680	M 68 OHM, J, 1/2W	1	
R627	ERJ12YJ151	M 150 OHM, J, 1/2W	1	
R628	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R629	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R630	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R632,33	ERJ6GEYJ154	M 150KOHM, J, 1/10W	2	
R634-37	ERJ6ENF2553	M 255KOHM, 1/10W	4	
R638	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R640,41	ERJ6ENF5493	M 549KOHM, 1/10W	2	
R642	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R644	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R646	ERJ6GEYJ154	M 150KOHM, J, 1/10W	1	
R649	ERJ6ENF5493	M 549KOHM, 1/10W	1	
R653-55	ERJ6GEYJ183	M 18KOHM, J, 1/10W	3	
R656-59	ERJ6GEYJ824	M 820KOHM, J, 1/10W	4	
R681,82	ERJ6GEYJ824	M 820KOHM, J, 1/10W	2	
R683	ERC12GK185	S 1.8MOHM, K, 1/2W	1	
R717	ERJ3GSY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R1301,02	ERJ12YJ333	M 33KOHM,J, 1/2W	2	
R1738	ERJ3GSYJ103	M 10KOHM,J,1/16W	1	
MC301	MP44S1	MODULE	1	△
MC303	IXMM564M-B-9	MODULE	1	△
MC401	IXMM564M-F-9	MODULE	1	△
MC501	IXMM564M-C-9	MODULE	1	△
MC601	MP00P3	MODULE	1	△
MC602	IXMM564M-G-9	MODULE	1	△
MC603	IXMM564M-E-9	MODULE	1	△
MC604	MP00P5	MODULE	1	△
MC701	IXMM564M-D-9	MODULE	1	△
K601	DG12D1-0	RELAY	1	△
K602	DJ12D2-0	RELAY	1	△
T301	ETB28BF1Z1AH	TRANSFORMER	1	△
T401	ETB57LZ135AD	TRANSFORMER	1	△
T501	ETB25KA1A8AD	TRANSFORMER	1	△

15.4. Electrical Replacement Parts List (TH-50PX50U)

Note:

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by AVC-SPC.

Parts mentioned [PAVCA] are supplied by PAVCA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
F603	K5D102BNA007	TIME LAG FUSE HIGH (F603)	1	△
F601.602	K5D103BMA001	TIME LAG FUSE HIGH (F601)	2	△
C10	K1MN50BA0076	50P CONNECTOR	1	
C11	K1KA06BA0107	6P CONNECTOR	1	
C20,21	K1MN50BA0076	50P CONNECTOR	2	
C22,23	K1KA06BA0107	6P CONNECTOR	2	
C24,25	K1MN55BA0076	55P CONNECTOR	2	
C31	K1MN50BA0076	50P CONNECTOR	1	
C33	K1KA06BA0107	6P CONNECTOR	1	
C35	K1KA10AA0153	10P CONNECTOR	1	
C41	K1MN55BA0076	55P CONNECTOR	1	
C42	K1KA10AA0153	10P CONNECTOR	1	
C43	K1KA06BA0107	6P CONNECTOR	1	
C44	K1KA20AA0009	20P CONNECTOR	1	
C50	K1MN50BA0076	50P CONNECTOR	1	
C51	K1MN55BA0076	55P CONNECTOR	1	
C52,53	K1KA06BA0107	6P CONNECTOR	2	
C54,55	K1MN68BA0076	68P CONNECTOR	2	
C60	K1MN50BA0076	50P CONNECTOR	1	
C61	K1KA06BA0107	6P CONNECTOR	1	
C2300	ECJ1VF1H104Z	C 0.1UF, Z, 50V	1	
C2301	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2307	ECA1CMH101	E 100UF, 16V	1	
C2310,11	ERJ8GEY0R00	M 0 OHM, 1/8W	2	
C2335	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C2337	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2338	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2340	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2341	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2342	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2343	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2344	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2346	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2347	ECA1VHG470	E 47UF, 35V	1	
C2348	ECJ1XC1H221J	C 220PF, J, 50V	1	
C2349	ECJ1VB1H152K	C 1500PF, K, 50V	1	
C2350	ECJ2XB1H562K	C 5600PF, K, 50V	1	
C2351	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C2352	ECJ1VB1C473K	C 0.047UF, K, 16V	1	
C2353	ECJ1VB1E104K	C 0.10UF, K, 25V	1	
C2355	ECJ2FB1C274K	C 0.27UF, Z, 16V	1	
C2356	ECJ3YB1A106M	C 10UF, M, 6.3V	1	
C2372	ECA1HHG100	E 10UF, 50V	1	
C2374	ECA1HHG100	E 10UF, 50V	1	
C2376-79	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2384-87	ECJ2XB1H102K	C 1000PF, K, 50V	4	
C2428,29	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C2430	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2433,34	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2437,38	ECJ2FB1A225K	C 2.2UF, K, 10V	2	
C2441,42	ECJ1XC1H221J	C 220PF, J, 50V	2	
C2445,46	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2449,50	ECA1EHG331	E 330UF, 25V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2453,54	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2457,58	ECJ2FB0J335K	C 3.3UF, K, 16V	2	
C2461,62	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2465,66	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2469,70	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2473,74	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2477,78	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2481-84	ECJ2FB1E224K	C 22UF, K, 25V	4	
C2489,90	ECJ2XB1H332K	C 3300PF, K, 50V	2	
C2497,98	ECJ2FB1E105K	C 1UF, K, 25V	2	
C2512	ECJ3XB0J106M	C 10UF, M, 6.3V	1	
C2515	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C2602	ECA1CHG101	E 100UF, 16V	1	
C2603	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2606	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2607	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2608	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2609	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2610-14	ECJ1VF1A105Z	C 1UF, Z, 10V	5	
C2615	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C2616	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C2617	ECJ1VB1H332K	C 3300PF, K, 50V	1	
C2620,21	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2625,26	ECJ3YB1C475K	C 0.047UF, K, 16V	2	
C2633,34	TCUY1C225ZFN	C 2.2UF, 16V	2	
C2637	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2644-50	ECJ1VF1A105Z	C 1UF, Z, 10V	7	
C2651	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2652	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2654,55	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C2656	ECA1CHG101	E 100UF, 16V	1	
C2657	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2660,61	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2662	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2663	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2664	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2665-68	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C2670	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2672	ECA1CHG470	E 47UF, 16V	1	
C2673	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2675	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C2676	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2678	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2684-89	ECJ1VF1A105Z	C 1UF, Z, 10V	6	
C2701	ECA1CHG101	E 100UF, 16V	1	
C2702	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2703	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2705	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2708	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2710	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2712	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2715	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2717	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2718	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2723	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2725	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C2729,30	ECJ1VF1A105Z	C 1UF, Z, 10V	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C2733,34	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2736-44	ECJ1VF1A105Z	C 1UF, Z, 10V	9	
C2747	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C2750	ECA1HHG220	E 22UF, 50V	1	
C2775	ECA1EHG471	E 470UF, 25V	1	
C2776,77	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C2779,80	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C2783	ECA1HHG220	E 22UF, 50V	1	
C4001	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C4002	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4005,06	ECJ1XC1H180J	C 18PF, J, 50V	2	
C4008-11	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4012	ERJ3GEYJ680	M 68 OHM, J, 1/16W	1	
C4013-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4016	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4017,18	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4020	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4021	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4023	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4024	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4025	ECJ1XC1H220J	C 22PF, J, 50V	1	
C4030	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4032	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4033	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4034	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4035	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4038	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4042,43	ECJ1VB1C105K	C 0.01UF, K, 16V	2	
C4051	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4053	ECJ1VB1A224K	C 0.22UF, Z, 50V	1	
C4054	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C4055	ECJ1VB1A105K	C 0.01UF, Z, 50V	1	
C4057	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4059	ECJ3YB0J335K	C 33UF, J, 25V	1	
C4063	ECJ1XC1H561J	C 560PF, J, 50V	1	
C4067	ECJ1VB1C105K	C 0.01UF, K, 16V	1	
C4071	EEHPOJ470P	C 47PF, J, 6.3V	1	
C4074	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4096	EEVHB1E330	E 33UF, 25V	1	
C4098	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4099,00	ECJ1VC1H120J	C 12PF, J, 50V	2	
C4102,03	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4104	ECJ1XC1H680J	C 68PF, J, 50V	1	
C4107	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4120	EEFCD0G560R	56UF,	1	
C4121	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4123	ECJ2FB1C684K	C 68UF, Z, 16V	1	
C4124	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4126	ECJ1XB1C393K	C 0.039UF, K, 16V	1	
C4127	ECJ1VB1H153K	C 0.015UF, K, 50V	1	
C4129	EEVHB0J470R	E 47UF, 6.3V	1	
C4130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4131,32	ECJ3XB0J106M	C 10UF, M, 6.3V	2	
C4133	EEHBB1C100R	C 10PF, J, 16V	1	
C4134	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4135-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4141	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4142	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4143	EEVHB0J470R	E 47UF, 6.3V	1	
C4144	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4145-47	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4148	ECJ1VB1H102K	C 1000PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4149	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4153,54	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4155	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4160	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4161	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4164	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
C4165	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4172	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4181,82	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4184	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4186	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4191	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4203	EEVHB0J470R	E 47UF, 6.3V	1	
C4205	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4208-10	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4215	EEVHB1C470P	E 47UF, 16V	1	
C4216	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4217,18	ECJ1XC1H181J	C 180PF, J, 50V	2	
C4219,20	ECJ1XC1H330J	C 33PF, J, 50V	2	
C4221	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4222	EEVHB1C470P	E 47UF, 16V	1	
C4224	EEHBB1C100R	C 10PF, J, 16V	1	
C4225	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4227	FLJ0J1060004	C 0.010UF, K, 16V	1	
C4229,30	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4231	EEVHB1C470P	E 47UF, 16V	1	
C4232,33	EEHBP1C100R	C 10PF, J, 16V	2	
C4234,35	ECJ1VB1H272K	C 2700PF, K, 50V	2	
C4236	EEVHB0J470R	E 47UF, 6.3V	1	
C4237-48	ECJ1XB1C104K	C 0.1UF, Z, 16V	12	
C4249	EEVHB0J470R	E 47UF, 6.3V	1	
C4250-54	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4257,58	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4259	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4260	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4261	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4262	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4263-65	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4267-69	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C4270	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4271	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4272	EEVHB0J470R	E 47UF, 6.3V	1	
C4273-78	ECJ1XB1C104K	C 0.1UF, Z, 16V	6	
C4279	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4280	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4295	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4296	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4297	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4298	EEHBB0J330R	C 33PF, J, 6.3V	1	
C4299,00	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4301	EEHBB0J220R	C 22PF, J, 6.3V	1	
C4302	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4304	EEVHB0J470R	E 47UF, 6.3V	1	
C4305-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	11	
C4316	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4317-21	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4324,25	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C4326	EEVHB0G221P	E 220UF, 4V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C4327	ECJ1XC1H150J	C 15PF, J, 50V	1	
C4328	ECJ1XC1H180J	C 18PF, J, 50V	1	
C4329	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4330	ECJ2FF1C475Z	C 0.047UF, Z, 16V	1	
C4331	EEVHB0J470R	E 47UF, 6.3V	1	
C4332-35	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4336	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4338	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4339	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C4456	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4457	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4459	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4461	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4463,64	F1K1A1060010	C 0.010UF, K, 6.3V	2	
C4465,66	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4468,69	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C4470-73	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4474-77	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4478-81	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4482-84	ECJ1XC1H102J	C 1000PF, J, 50V	3	
C4486-90	ECJ1XB1C104K	C 0.1UF, Z, 16V	5	
C4492	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4493,94	ECJ1VB1H103K	C 0.001UF, K, 50V	2	
C4495-97	ECJ1XB0J105K	C 1UF, K, 16V	3	
C4498-13	ECJ1XC1H102J	C 1000PF, J, 50V	16	
C4514	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4515	EEFCD0G560R	56UF,	1	
C4516-27	ECJ1VB1H103K	C 0.001UF, K, 50V	12	
C4528	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4534-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C4587	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4588	EEHBB0G221P	C 220PF, J, 4V	1	
C4589	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4590	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C4591	ECJ1XC1H471J	C 470PF, J, 50V	1	
C4780	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4781-84	ECJ1XC1H102J	C 1000PF, J, 50V	4	
C4785	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4787	EEVHB0J470R	E 47UF, 6.3V	1	
C4788	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4789	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4790	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4791	ECJ1XC1H101J	C 100PF, J, 50V	1	
C4792-96	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
C4797	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4798	ECJ1XB0J105K	C 1UF, K, 16V	1	
C4799	EEHBB1C100R	C 10PF, J, 16V	1	
C4800	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C4802	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C4803	ECJ2FB0J225K	C 2.2UF, Z, 16V	1	
C5601	ECA1HM220	E 22UF, 50V	1	
C5604	ECA1HHG100	E 10UF, 50V	1	
C5605	EEUFC1E102	E 1000UF, 25V	1	
C5606	EEUFC1C821	E 820UF, 16V	1	
C5608	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5609	ECA1HM220	E 22UF, 50V	1	
C5611	EEUFC1E102	E 1000UF, 25V	1	
C5612	EEUFC1C821SB	E 820UF, 16V	1	
C5613	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5616	ECJ2XB1E104K	C 0.1UF, K, 25V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C5617	EEUFC1C821SB	E 820UF, 16V	1	
C5618,19	ECJ2XB1E104K	C 0.1UF, K, 25V	2	
C5622	EEUFC1C821	E 820UF, 16V	1	
C5623	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5626	ECJ2VF1C104Z	C 0.1UF, Z, 16V	1	
C5631	EEUFC1C102	E 1000UF, 16V	1	
C5637	ECJ2VF1C474Z	C 0.47UF, Z, 16V	1	
C5641-44	ECJ2VF1C104Z	C 0.1UF, Z, 16V	4	
C5670	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5672	ECA1HM220	E 22UF, 50V	1	
C5673	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5685	ECA1HHG100	E 10UF, 50V	1	
C5686	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C5801,02	EEUFC1E471	E 470UF, 25V	2	
C5803	EEUFC1E470	E 47UF, 25V	1	
C5805	ECJ2VF1C105Z	C 1UF, Z, 16V	1	
C5809	ECJ3XF1E105Z	C 1UF, Z, 25V	1	
C5810	ECA1EHG470	E 47UF, 25V	1	
C5813	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5818	ECA1CM471	E 470UF, 16V	1	
C5820	ECA1CM102	E 1000UF, 16V	1	
C5821	ECJ2XB1E104K	C 0.1UF, K, 25V	1	
C5823	ECA1CM222	E 2200UF, 16V	1	
C6015	TCUY1C105ZFN	C 1UF, 16V	1	
C6016,17	F1L1E4750004	C 4.7UF, 25V	2	
C6019	F1L1E4750004	C 4.7UF, 25V	1	
C6035	TCUY1C105ZFN	C 1UF, 16V	1	
C6036,37	F1L1E4750004	C 4.7UF, 25V	2	
C6039	F1L1E4750004	C 4.7UF, 25V	1	
C6060	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6061,62	EEUFC1E221	E 220UF, 25V	2	
C6063	ECA1EM101	E 100UF, 25V	1	
C6064,65	TCUY1C105ZFN	C 1UF, 16V	2	
C6066-69	ECJ2XB1H103K	C 0.01UF, K, 50V	4	
C6080-82	ECQE2255JF	P 2.5UF, K, 250V	3	
C6085-87	ECQE2255JF	P 2.5UF, K, 250V	3	
C6100	F1L2J562A022	C 5600UF, K, 6.3V	1	
C6130	TCUY1C105ZFN	C 1UF, 16V	1	
C6131,32	F1L1E4750004	C 4.7UF, 25V	2	
C6134	F1L1E4750004	C 4.7UF, 25V	1	
C6140	F1L2J562A022	C 5600UF, K, 6.3V	1	
C6170-75	F2A2D221A022	E 220UF, 200V	6	
C6185	ECQE2255JF	P 2.5UF, K, 250V	1	
C6200,01	ECA2CM101	E 100UF, 160V	2	
C6202	EEUFC1E221	E 220UF, 25V	1	
C6206	ECA2CM101	E 100UF, 160V	1	
C6209	ECA2CM101	E 100UF, 160V	1	
C6210-12	ECQE2255JF	P 2.5UF, K, 250V	3	
C6214	F1L1E4750004	C 4.7UF, 25V	1	
C6215	EEUFC1E221	E 220UF, 25V	1	
C6217,18	F1L1E4750004	C 4.7UF, 25V	2	
C6221	F1L1E4750004	C 4.7UF, 25V	1	
C6223	F1L1E4750004	C 4.7UF, 25V	1	
C6224	EEUFC1E221	E 220UF, 25V	1	
C6225	F1L1E4750004	C 4.7UF, 25V	1	
C6226	TCUY1C105ZFN	C 1UF, 16V	1	
C6233	F1L1E4750004	C 4.7UF, 25V	1	
C6234	EEUFC1E221	E 220UF, 25V	1	
C6235	F1L1E4750004	C 4.7UF, 25V	1	
C6240	ECA2AHG101	E 100UF, 100V	1	
C6255	ECA2EHG470	E 47UF, 250V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6257	F1L1E4750004	C 4.7UF, 25V	1	
C6258	TCUY1C105ZFN	C 1UF, 16V	1	
C6260	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6262	F1L1E4750004	C 4.7UF, 25V	1	
C6264	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6265	F1L1E4750004	C 4.7UF, 25V	1	
C6266	EEUFC1E102	E 1000UF, 25V	1	
C6269	F2A2D221A022	E 220UF, 200V	1	
C6273	F1L1E4750004	C 4.7UF, 25V	1	
C6275	F1L1E4750004	C 4.7UF, 25V	1	
C6401-06	F2A2D221A022	E 220UF, 200V	6	
C6413,14	ECQE2255JF	P 2.5UF, K,250V	2	
C6421	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6422	EEUFC1E221	E 220UF, 25V	1	
C6425,26	EEUFC1E470	E 47UF, 25V	2	
C6433-35	TCUY1C105ZFN	C 1UF, 16V	3	
C6436	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6437	TCUY1C105ZFN	C 1UF, 16V	1	
C6440	TCUY1C105ZFN	C 1UF, 16V	1	
C6442	TCUY1C105ZFN	C 1UF, 16V	1	
C6444	TCUY1C105ZFN	C 1UF, 16V	1	
C6453	EEUFC1E221	E 220UF, 25V	1	
C6501-06	ECQE2255JF	P 2.5UF, K,250V	6	
C6513	F1L2J222A022	C 2200UF, K,6.3V	1	
C6515,16	F1L2J222A022	C 2200UF, K,6.3V	2	
C6531	F1L2J222A022	C 2200UF, K,6.3V	1	
C6533,34	F1L2J222A022	C 2200UF, K,6.3V	2	
C6536	F1L2J222A022	C 2200UF, K,6.3V	1	
C6559,60	F1L1E4750004	C 4.7UF, 25V	2	
C6562	F1L1E4750004	C 4.7UF, 25V	1	
C6563	TCUY1C105ZFN	C 1UF, 16V	1	
C6582	F1L1E4750004	C 4.7UF, 25V	1	
C6584,85	F1L1E4750004	C 4.7UF, 25V	2	
C6586	TCUY1C105ZFN	C 1UF, 16V	1	
C6587	F1L1E4750004	C 4.7UF, 25V	1	
C6589,90	F1L1E4750004	C 4.7UF, 25V	2	
C6591	TCUY1C105ZFN	C 1UF, 16V	1	
C6611	F1L1E4750004	C 4.7UF, 25V	1	
C6612,13	F1K2J102A014	C 1000PF,	2	
C6614	ECA2EHG470	E 47UF, 250V	1	
C6615	ECA1VM470	E 47UF, 35V	1	
C6616,17	F1L1E4750004	C 4.7UF, 25V	2	
C6618	TCUY1C105ZFN	C 1UF, 16V	1	
C6619	ECJ3YB1E105K	C 1UF, K, 25V	1	
C6620	TCUY1C105ZFN	C 1UF, 16V	1	
C6621	F1L1E4750004	C 4.7UF, 25V	1	
C6623	ECQE2105RKB	P 1UF, 250V	1	
C6624	F1L1E4750004	C 4.7UF, 25V	1	
C6626	F1L1E4750004	C 4.7UF, 25V	1	
C6627,28	TCUY1C105ZFN	C 1UF, 16V	2	
C6630-32	F1K2J102A014	C 1000PF,	3	
C6634,35	F1L1E4750004	C 4.7UF, 25V	2	
C6636,37	ECA2CM101	E 100UF, 160V	2	
C6638	F1L1E4750004	C 4.7UF, 25V	1	
C6639	TCUY1C105ZFN	C 1UF, 16V	1	
C6651	TCUY1C105ZFN	C 1UF, 16V	1	
C6653	TCUY1C105ZFN	C 1UF, 16V	1	
C6655,56	TCUY1C105ZFN	C 1UF, 16V	2	
C6657	ECJ2XC1H102J	C 1000PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C6658	ECA1HM101	E 100UF, 50V	1	
C6659-62	F1L1E4750004	C 4.7UF, 25V	4	
C6801	ECA2CM101	E 100UF, 160V	1	
C6806	ECA2EHG470	E 47UF, 250V	1	
C6807	ECA1HM221	E 220UF, 50V	1	
C6808,09	ECA2CM101	E 100UF, 160V	2	
C6812-14	F1K2J332A014	C 3300UF, K,6.3V	3	
C6816	F2A2G100A017	E 100UF, 400V	1	
C6818	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C6819	TCUY1C105ZFN	C 1UF, 16V	1	
C6820	ECJ2XB1H472K	C 4700PF, K, 50V	1	
C6821	EEUFC1E221	E 220UF, 25V	1	
C6822	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6823	F1K2J222A014	C 2200UF, K,6.3V	1	
C6824	ECA2EHG470	E 47UF, 250V	1	
C6825	ECQE6223KF	P 0.022UF, K,400V	1	
C6826	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
C6828	EEUFC1V151	E 150UF, 35V	1	
C6829	ECA2DHG330	E 33UF, 200V	1	
C6830	F1L1E4750004	C 4.7UF, 25V	1	
C6831	EEUFC1E470	E 47UF, 25V	1	
C6833	F1L1E4750004	C 4.7UF, 25V	1	
C6834	ECJ2XC1H102J	C 1000PF, J, 50V	1	
C6835	ECJ2XC1H471J	C 470PF, J, 50V	1	
C6836	ECKD3D221KBP	C 220PF, K, 2KV	1	
C6900	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6901-06	TCUY1C105ZFN	C 1UF, 16V	6	
C6908	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6909,10	F1L2E1040002	E 1000UF, 25V	2	
C6917,18	F1L2E1040002	E 1000UF, 25V	2	
C6920	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6921-26	TCUY1C105ZFN	C 1UF, 16V	6	
C6927,28	F1L2E1040002	E 1000UF, 25V	2	
C6930	ECJ2XB1H222K	C 2200PF, K, 50V	1	
C6937,38	F1L2E1040002	E 1000UF, 25V	2	
C7101,02	TCUY1C105ZFN	C 1UF, 16V	2	
C7103,04	ECJ3XB2A474K	C 0.47UF, 6.3V	2	
C7107	ECJ3XB2A474K	C 0.47UF, 6.3V	1	
C7111	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7125	TCUY1C105ZFN	C 1UF, 16V	1	
C7130	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7136-38	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C7139	TCUY1C105ZFN	C 1UF, 16V	1	
C7150	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7152	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7201	TCUY1C105ZFN	C 1UF, 16V	1	
C7203,04	TCUY1C105ZFN	C 1UF, 16V	2	
C7208	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7212	TCUY1C105ZFN	C 1UF, 16V	1	
C7216	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7221	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7224	TCUY1C105ZFN	C 1UF, 16V	1	
C7225	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7231	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7232-35	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
C7238	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7240	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7250	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7274	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7301	TCUY1C105ZFN	C 1UF, 16V	1	
C7304	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C7308,09	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7311,12	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C7315,16	TCUY1C105ZFN	C 1UF, 16V	2	
C7323	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7326	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7329	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7339,40	TCUY1C105ZFN	C 1UF, 16V	2	
C7351	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7359-62	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
C7401	TCUY1C105ZFN	C 1UF, 16V	1	
C7406	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7412-15	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C7418,19	TCUY1C105ZFN	C 1UF, 16V	2	
C7420-23	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
C7428,29	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7440,41	TCUY1C105ZFN	C 1UF, 16V	2	
C7452,53	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7502	TCUY1C105ZFN	C 1UF, 16V	1	
C7511	TCUY1C105ZFN	C 1UF, 16V	1	
C7513	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7519	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7520	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7521	TCUY1C105ZFN	C 1UF, 16V	1	
C7522	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7527	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7530	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7538	TCUY1C105ZFN	C 1UF, 16V	1	
C7540,41	ECJ1XC1H101J	C 100PF, J, 50V	2	
C7543	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7546	ECJ1XC1H101J	C 100PF, J, 50V	1	
C7561-64	ECJ3XB2A474K	C 0.47UF, 6.3V	4	
C7601,02	TCUY1C105ZFN	C 1UF, 16V	2	
C7611-13	ECJ1XC1H101J	C 100PF, J, 50V	3	
C7624	TCUY1C105ZFN	C 1UF, 16V	1	
C7630	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C7635-37	ECJ1XB1C104K	C 0.1UF, Z, 16V	3	
C7640	TCUY1C105ZFN	C 1UF, 16V	1	
C7653-55	ECJ3XB2A474K	C 0.47UF, 6.3V	3	
C8099,00	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8101,02	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8103,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8105	EEEBB0G101R	C 100PF, J, 4V	1	
C8106,07	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8108	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8109	EEEBB0G101R	C 100PF, J, 4V	1	
C8110,11	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8112	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8113-18	ECJ0EB1A104K	C 0.1UF, K, 10V	6	
C8120,21	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8128,29	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8144	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8145	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8162	ECJ0EB1C103K	C0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8164	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8200	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8201	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8202,03	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8204	EEEBB0J221P	C 220PF, J, 6.3V	1	
C8205	EEEBB1H220P	C 22PF, J, 50V	1	
C8206,07	EEEBB0J221P	C 220PF, J, 6.3V	2	
C8208	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8209	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8210	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8211	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8214	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8215	ECJ0EC1H200J	C 200PF, K, 50V	1	
C8216	ECJ0EB1H271K	C 270PF, D, 50V	1	
C8217	ECJ0EC1H560J	C 560PF, K, 50V	1	
C8218,19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8220	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8221	ECJ0EC1H270J	C 270PF, K, 50V	1	
C8222	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8223	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8224,25	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8226	EEEBB1C470P	C 47PF, J, 16V	1	
C8227	ECJ0EC1H101J	C 100PF, K, 50V	1	
C8228,29	ECJ0EF1H103Z	C 0.01UF, Z, 50V	2	
C8230	ECJ0EC1H120J	C 120PF, K, 50V	1	
C8231	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8233	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8234,35	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8237	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8238,39	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8240	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8241-43	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8244	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8245	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8246	EEEBB0G470R	C 47PF, J, 4V	1	
C8247	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8248	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8249-51	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8252	ECJ0EB1H222K	C 2200UF, Z, 50V	1	
C8253-55	ECJ0EB1C103K	C0.010UF, K, 16V	3	
C8256	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8257	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8258,59	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8262	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8263	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8264,65	ECJ0EB1H102K	C 1000PF, K, 50V	2	
C8266	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8267	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8270	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8271	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8272	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8273	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8275,76	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8277	ECJ0EC1H220J	C 220PF, K, 50V	1	
C8278,79	ECJ0EB1C103K	C0.010UF, K, 16V	2	
C8280,81	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8282	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8286-88	ECJ0EB1H102K	C 1000PF, K, 50V	3	
C8289	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8290	ECJ0EC1H101J	C 100PF, K, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8291	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8292,93	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8294-97	ECJ0EB1H102K	C 1000PF, K, 50V	4	
C8298-01	ECJ0EB1A104K	C 0.1UF, K, 10V	4	
C8302	ECJ0EF1H103Z	C 0.01UF, Z, 50V	1	
C8303	EEH1C470P	C 47PF, J, 16V	1	
C8304,05	ECJ0EC1H150J	C 150PF, K, 50V	2	
C8306	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8308-10	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8311,12	ECJ1VF1A105Z	C 1UF, Z, 10V	2	
C8313-15	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8316	EEH1C100R	C 10PF, J, 16V	1	
C8317-19	ECJ0EF1C104Z	C 0.10UF, Z, 16V	3	
C8320	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
C8321-26	ECJ0EF1C104Z	C 0.10UF, Z, 16V	6	
C8327	EEH1C100R	C 10PF, J, 16V	1	
C8328-31	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
C8332	ECJ1XB1C153K	C 0.015UF, Z, 16V	1	
C8333-36	ECJ0EF1C104Z	C 0.10UF, Z, 16V	4	
C8337	EEH1C100R	C 10PF, J, 16V	1	
C8338-53	ECJ0EF1C104Z	C 0.10UF, Z, 16V	16	
C8355,56	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8357,58	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8360	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8362	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8365	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8368-74	ECJ0EF1C104Z	C 0.10UF, Z, 16V	7	
C8375	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8377	ECGRL0G680R	C 68PF, J, 4V	1	
C8378	EEH1C101R	C 100PF, J, 4V	1	
C8379	EEH1C101P	C 100PF, J, 6.3V	1	
C8380-84	ECJ0EF1C104Z	C 0.10UF, Z, 16V	5	
C8386	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8390,91	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8408	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8409	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8410	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8413	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8414	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8415	ECGRL0G680R	C 68PF, J, 4V	1	
C8416	EEFUD0J101R	E 100UF	1	
C8417	EEH1C470P	C 47PF, J, 16V	1	
C8418	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8425	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C8426	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8427	ECJ2FF1A106Z	C 0.001UF, Z, 10V	1	
C8428	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8437	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8440,41	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8445	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8446	ECJ1VB1C683K	C 0.068UF, K, 16V	1	
C8449	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8450-52	ECJ2FF1A475Z	C 4.7UF, Z, 10V	3	
C8453	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8456,57	FLJ0J475A035	C 4.7UF, K, 16V	2	
C8458	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8461	ECJ0EB1A104K	C 0.1UF, K, 10V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8467	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8468	ECJ0EB1H102K	C 1000PF, K, 50V	1	
C8469	ECJ1VB0J334K	C 0.33UF, K, 6.3V	1	
C8474	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8475,76	ECJ1VB0J105K	C 1UF, K, 6.3V	2	
C8477	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8478	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8479,80	ECJ0EB1C103K	C 0.010UF, K, 16V	2	
C8482	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8484-86	EEH1C470P	C 47PF, J, 16V	3	
C8492	ECJ0EB1H471K	C 470PF, K, 50V	1	
C8496	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8500	ECJ2FF1A475Z	C 4.7UF, Z, 10V	1	
C8501	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8503,04	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8507,08	ECJ2FF1A475Z	C 4.7UF, Z, 10V	2	
C8509	EEH1C470P	C 47PF, J, 16V	1	
C8511	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8515	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8516	EEH1C470P	C 47PF, J, 16V	1	
C8518	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8520,21	ECJ0EC1H181J	C 180PF, K, 50V	2	
C8522,23	ECJ0EC1H390J	C 390PF, K, 50V	2	
C8529	ECJ0EC1H080C	C 8PF, D, 50V	1	
C8530	ECJ0EC1H221J	C 220PF, K, 50V	1	
C8531	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8532	ECJ0EB1H182K	C 1800UF, Z, 50V	1	
C8533	ECJ0EF1C104Z	C 0.10UF, Z, 16V	1	
C8534	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C8535	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8536	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
C8537	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8542	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8546,47	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8551	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8552	ECJ1VB0J225K	C 2.2UF, K, 6.3V	1	
C8554	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8555	ECJ0EC1H390J	C 390PF, K, 50V	1	
C8556	ECJ0EB1H821K	C 820PF, D, 50V	1	
C8557	ECJ1VB1H123K	C 0.012UF, K, 50V	1	
C8558	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8559	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8561	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8562	FLJ1A106A043	C 0.010UF, K, 16V	1	
C8563	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8564	FLJ1A106A043	C 0.010UF, K, 16V	1	
C8567	ECGRL0G680R	C 68PF, J, 4V	1	
C8568	ECJ2FB0J106M	C 10UF, Z, 6.3V	1	
C8572	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8573	ECJ2FB0J106M	C 10UF, Z, 6.3V	1	
C8578	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8584	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8590	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8592	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8594	ECGRL0G680R	C 68PF, J, 4V	1	
C8595,96	ECJ0EB1C103K	C 0.010UF, K, 16V	2	
C8597	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8598	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8600	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8601	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8602-04	ECJ0EB1C103K	C 0.010UF, K, 16V	3	
C8605	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8606	ECJ0EB1C103K	C 0.010UF, K, 16V	1	
C8607	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8608	ECJ0EB1C103K	C 0.010UF, K, 16V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C8609	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8610	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8611,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8613	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
C8614	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8615,1	ECJ0EB1A104K	C 0.1UF, K, 10V	2	
C8617	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8620	ECJ0EB1A104K	C 0.1UF, K, 10V	1	
C8621	ECJ0EB1C103K	C0.010UF, K, 16V	1	
C8622	ECGRL0G680R	C 68PF, J, 4V	1	
C8629,3	ECJ0EF1C104Z	C 0.10UF, Z, 16V	2	
C8633,3	ECJ0EC1H820J	C 820PF, K, 50V	2	
C8638	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
C8640,4	ECJ0EC1H150J	C 150PF, K, 50V	2	
C9000	EEH1B1C470P	C 47PF, J, 16V	1	
C9001	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9004,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9006	F1J0J1060004	C 0.010UF, K, 16V	1	
C9007	EEH1B1C470P	C 47PF, J, 16V	1	
C9008	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9009	F1J0J1060004	C 0.010UF, K, 16V	1	
C9010-12	ECJ1XF1C104Z	C 0.1UF, Z, 16V	3	
C9013	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9014	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9015-22	ECJ1XF1C104Z	C 0.1UF, Z, 16V	8	
C9023	EEH1B1C470P	C 47PF, J, 16V	1	
C9024	ECJ1XC1H271J	C 270PF, J, 50V	1	
C9025	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9026,2	ECJ2VF1C105Z	C 1UF, Z, 16V	2	
C9028-31	ECJ1XF1C104Z	C 0.1UF, Z, 16V	4	
C9033	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9035,3	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9201,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9203	ECJ1XC1H150J	C 15PF, J, 50V	1	
C9204	ECJ1VC1H080C	C 8PF, C, 50V	1	
C9205	F1J0J1060004	C 0.010UF, K, 16V	1	
C9206,0	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9303	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9304-57	ECJ1XB1C104K	C 0.1UF, Z, 16V	54	
C9358	EEH1B0G221P	C 220PF, J, 4V	1	
C9359	ECJ1XB1C104K	C 0.1UF, Z, 16V	1	
C9360	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9500-02	ECJ2VF1C105Z	C 1UF, Z, 16V	3	
C9503-12	ECJ1XB1C104K	C 0.1UF, Z, 16V	10	
C9513	EEH1B1C470P	C 47PF, J, 16V	1	
C9514-17	ECJ1XB1C104K	C 0.1UF, Z, 16V	4	
C9518	EEH1B1C470P	C 47PF, J, 16V	1	
C9519	ECJ1XC1H101K	C 100PF, K, 50V	1	
C9701,0	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9703	F1J0J1060004	C 0.010UF, K, 16V	1	
C9705,0	F1J0J1060004	C 0.010UF, K, 16V	2	
C9707	EEH1B1C470P	C 47PF, J, 16V	1	
C9712,1	F1J0J1060004	C 0.010UF, K, 16V	2	
C9714,1	ECGRL0G680R	C 68PF, J, 4V	2	
C9716	ECJ1XC1H220J	C 22PF, J, 50V	1	
C9718	ECJ1XC1H220J	C 22PF, J, 50V	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C9719,2	ECJ1XC1H102J	C 1000PF, J, 50V	2	
C9721,2	ECJ1XF1C104Z	C 0.1UF, Z, 16V	2	
C9723,2	ECJ2XB1H104K	C 0.1UF, K, 50V	2	
C9725	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9727	ECJ1XC1H102J	C 1000PF, J, 50V	1	
C9728,2	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9730,3	EEH1B1C470P	C 47PF, J, 16V	2	
C9732	ECJ1VF1H103Z	C 0.010UF, Z, 50V	1	
C9733	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9734,3	EEH1B1C470P	C 47PF, J, 16V	2	
C9736	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9739,4	ECJ1XB1C104K	C 0.1UF, Z, 16V	2	
C9741	ECJ3XF1C475Z	C 4.7UF, Z, 16V	1	
C9742	ECJ1XF1C104Z	C 0.1UF, Z, 16V	1	
C9743,4	ECJ3XF1C475Z	C 4.7UF, Z, 16V	2	
C9800,0	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
C9900,0	ECJ1VF1H103Z	C 0.010UF, Z, 50V	2	
CA1-11	K1MN68BA0002	68P CONNECTOR	11	
CB1-11	K1MN68BA0002	68P CONNECTOR	11	
D3	K1KA30AA0009	30P CONNECTOR	1	
D4	K1KA14A00248	14P CONNECTOR	1	
D5	K1KA31A00007	31P CONNECTOR	1	
D6	K1KA20A00310	20P CONNECTOR	1	
D8	K1KA08AA0104	8P CONNECTOR	1	
D20	K1KA20AA0008	20P CONNECTOR	1	
D25	K1KA20AA0009	20P CONNECTOR	1	
D31,32	K1MN55BA0076	55P CONNECTOR	2	
D33,34	K1MN68BA0076	68P CONNECTOR	2	
D2300,0	MA111	DIODE	2	
D2303,0	MA111	DIODE	2	
D2315,1	B0JCDD000002	DIODE	2	
D2319,2	B0JCDD000002	DIODE	2	
D2332	MA111	DIODE	1	
D2512	MA8056M	ZENER DIODE	1	
D2513,1	MA152K	DIODE	2	
D2520	B3AAA0000770	DIODE	1	
D2523	MA152K	DIODE	1	
D2524	MA8056M	ZENER DIODE	1	
D2615	B0BC01100001	DIODE	1	
D2617	MA152	DIODE	1	
D2619-24	MA8140M	ZENER DIODE	6	
D2640-60	MA8140M	ZENER DIODE	21	
D4012-14	MA729	DIODE	3	
D4016	MA728	DIODE	1	
D4025-27	MA111	DIODE	3	
D4029	MA3036L	DIODE	1	
D5610	MA3X78900L	ZENER DIODE	1	
D5614	B0BC3R700006	DIODE	1	
D5615	B0BC4R700007	DIODE	1	
D5616	B0BC6R600005	DIODE	1	
D5617	B0BC01100001	DIODE	1	
D5618	B0BC03900015	DIODE	1	
D5637,3	MA152	DIODE	2	
D5639	MA3047H	ZENER DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D5640	MA3039H	ZENER DIODE	1	
D5641	MA152	DIODE	1	
D5642	MA3100H	ZENER DIODE	1	
D5643	MA152	DIODE	1	
D5644	MA3068M	ZENER DIODE	1	
D5645-47	MA152	DIODE	3	
D5649	MA111	DIODE	1	
D5801	B0JCME000037	DIODE	1	
D5804	MA3120M	ZENER DIODE	1	
D5805,06	MA152	DIODE	2	
D5807	MA111	DIODE	1	
D6000,01	B0HBSN000008	DIODE	2	
D6002	B0HDSM000005	DIODE	1	
D6010,11	B0HBSN000008	DIODE	2	
D6012	B0ECHP000003	DIODE	1	
D6013,14	B0HCMM000014	DIODE	2	
D6015	B0ECHP000003	DIODE	1	
D6016	B0HBSN000008	DIODE	1	
D6020,21	B0HBSN000008	DIODE	2	
D6030,31	B0HBSN000008	DIODE	2	
D6035,36	B0ECHP000003	DIODE	2	
D6060	MA111	DIODE	1	
D6061,62	MA8330M	ZENER DIODE	2	
D6063	LNJ301MPUJA	LED	1	
D6064	MA8051L	ZENER DIODE	1	
D6065,66	MA152	DIODE	2	
D6145-47	B0HBSN000008	DIODE	3	
D6190	B0ECHP000003	DIODE	1	
D6200	B0HDSM000005	DIODE	1	
D6203	B0HDSM000005	DIODE	1	
D6206-09	B0ECHP000003	DIODE	4	
D6210-12	B0HDSM000005	DIODE	3	
D6215	B0HDSM000005	DIODE	1	
D6221	B0JCME000037	DIODE	1	
D6225	B0JCME000037	DIODE	1	
D6226,27	B0ECHP000003	DIODE	2	
D6228	B0HDSM000005	DIODE	1	
D6240	B0HDSM000005	DIODE	1	
D6241,42	B0ECHP000003	DIODE	2	
D6250,51	B0JCME000037	DIODE	2	
D6257-59	B0ECHP000003	DIODE	3	
D6262	B0JCME000037	DIODE	1	
D6263,64	MA111	DIODE	2	
D6271	MA111	DIODE	1	
D6411	MA111	DIODE	1	
D6412	MA8051L	ZENER DIODE	1	
D6413,14	MA8330M	ZENER DIODE	2	
D6415	LNJ301MPUJA	LED	1	
D6416	MA111	DIODE	1	
D6417,18	MA8330M	ZENER DIODE	2	
D6419-21	MA111	DIODE	3	
D6422,23	MA8200M	ZENER DIODE	2	
D6501-04	B0HBSN000008	DIODE	4	
D6505	B0HCMM000014	DIODE	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6506	B0ECHP000003	DIODE	1	
D6511,12	B0HBSN000008	DIODE	2	
D6517	MA8330M	ZENER DIODE	1	
D6518,19	MA111	DIODE	2	
D6521,22	B0HBSN000008	DIODE	2	
D6525-27	B0HBSN000008	DIODE	3	
D6561,62	B0ECHP000003	DIODE	2	
D6563	B0HBSN000008	DIODE	1	
D6564,65	B0ECHP000003	DIODE	2	
D6611,12	B0ECHP000003	DIODE	2	
D6613	MA8240M	ZENER DIODE	1	
D6615,16	MA111	DIODE	2	
D6617	MA8051L	ZENER DIODE	1	
D6618	B0HCMM000014	DIODE	1	
D6619	MA111	DIODE	1	
D6620	B0ECHP000003	DIODE	1	
D6622	MA8240M	ZENER DIODE	1	
D6623	B0JCME000037	DIODE	1	
D6624	MA111	DIODE	1	
D6625	B0HCKS000002	DIODE	1	
D6627	MA111	DIODE	1	
D6629,30	B0HCKS000002	DIODE	2	
D6631	MA111	DIODE	1	
D6632	B0JCME000037	DIODE	1	
D6633	MA111	DIODE	1	
D6634	MA8051L	ZENER DIODE	1	
D6635-37	MA8330M	ZENER DIODE	3	
D6638	MA111	DIODE	1	
D6639	B0HCMM000014	DIODE	1	
D6640-42	MA111	DIODE	3	
D6643	B0HCMM000014	DIODE	1	
D6644-51	MA8056H	ZENER DIODE	8	
D6652	MA111	DIODE	1	
D6653	MA8056H	ZENER DIODE	1	
D6654-57	B0JCME000037	DIODE	4	
D6658	B0HCKS000002	DIODE	1	
D6813,14	B0ECHP000003	DIODE	2	
D6815	MA111	DIODE	1	
D6817	MA111	DIODE	1	
D6818	B0JCKG000002	DIODE	1	
D6819	B0ECHP000003	DIODE	1	
D6820	MA111	DIODE	1	
D6821	B0JCME000037	DIODE	1	
D6822,23	B0HCKS000002	DIODE	2	
D6824	B0HCMM000014	DIODE	1	
D6825	B0BC01000044	DIODE	1	
D6826	B0ECHP000003	DIODE	1	
D6827	MA111	DIODE	1	
D6828	B0HCKS000002	DIODE	1	
D6829	MA111	DIODE	1	
D6830	B0HCKS000002	DIODE	1	
D6831,32	MA111	DIODE	2	
D6833-35	B0HCMM000014	DIODE	3	
D6840	B0ECHP000003	DIODE	1	
D6901,02	MA8056H	ZENER DIODE	2	
D6908,09	B0ECHP000003	DIODE	2	
D6911,12	MA8056H	ZENER DIODE	2	MAZ80560H

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D6918,19	B0ECHP000003	DIODE	2	
D7101-04	B0HCMM000014	DIODE	4	
D7107,08	B0HCMM000014	DIODE	2	
D7201-08	B0HCMM000014	DIODE	8	
D7209	B0HDSM000005	DIODE	1	
D7301-08	B0HCMM000014	DIODE	8	
D7405-12	B0HCMM000014	DIODE	8	
D7501-08	B0HCMM000014	DIODE	8	
D7509	B0HDSM000005	DIODE	1	
D7601-06	B0HCMM000014	DIODE	6	
D8200	B0DBG000002	DIODE	1	
D8203,04	LNJ208R8ARA	LED	2	
D8207	MA728	DIODE	1	
D8208	K7JAAAA00001	DIODE	1	
D8210	MA728	DIODE	1	
D8215	MA8039L	ZENER DIODE	1	
D8217	B0JCDD000002	DIODE	1	
D8219	B0JCDD000002	DIODE	1	
D8221	MA8024LTX	ZENER DIODE	1	
D9000-02	MA3033	ZENER DIODE	3	
D9011,12	MA728	DIODE	2	
D9015,16	MA152K	DIODE	2	
D9700,01	MA728	DIODE	2	
D9800,01	MA152K	DIODE	2	
D9900,01	MA152K	DIODE	2	
DG1,G2	K1MN40A00024	40P CONNECTOR	2	
DG3	K1KA20B00155	20P CONNECTOR	1	
DG5	K1KA21B00008	21P CONNECTOR	1	
DG15	K1KA60A00156	60P CONNECTOR	1	
DG20	K1MN30A00068	30P CONNECTOR	1	
DG22	K1KBB0A00006	CONNECTOR	1	
DT04	K1NA68B00037	68P CONNECTOR	1	
DT07	K1KA04BA0050	4P CONNECTOR	1	
DT09	K1NA09D00004	9P CONNECTOR	1	
DT12	K1KAB0A00011	CONNECTOR	1	
FL4003-10	J0HABH000012	LC FILTER	8	
FL4012	J0HABH000012	LC FILTER	1	
FL4014-17	J0HABB000004	LC FILTER	4	
FL4018-20	EXB38VR000	RESISTOR ARRAY	3	
FL4021-23	J0HABH000012	LC FILTER	3	
FL7201,02	J0HABH000013	LC FILTER	2	
FL7501,02	J0HABH000013	LC FILTER	2	
FL8202,03	J0HAAA000013	LC FILTER	2	
FL8215	J0HAAB000004	LC FILTER	1	
FL8224-40	J0HAAB000004	LC FILTER	17	
FL8258	J0HAAB000004	LC FILTER	1	
FL8260	J0HAAB000004	LC FILTER	1	
FL8262,63	J0MAB0000164	LC FILTER	2	
FL9000-04	J0HABH000013	LC FILTER	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
FL9300-02	J0HABH000013	LC FILTER	3	
FL9701,02	J0HABH000012	LC FILTER	2	
FL9703,04	J0HABH000013	LC FILTER	2	
FL9800,01	J0HABH000013	LC FILTER	2	
FL9900,01	J0HABH000013	LC FILTER	2	
H1,H2	K1MN40B00045	40P CONNECTOR	2	
H7	K1KA12AA0178	12P CONNECTOR	1	
H21	K1KA10AA0194	10P CONNECTOR	1	
H22	K1KA11AA0194	11P CONNECTOR	1	
H30	K1MN30A00068	30P CONNECTOR	1	
H50	K1MN35A00013	35P CONNECTOR	1	
HMM1-M4	TMM25401	CLAMPER	4	
IC2301	C1BB00000969	IC	1	
IC2305,06	C1BB00000818	IC	2	
IC2602	C1AB00002123	IC	1	
IC2605	AN15861A-VT	IC	1	
IC2608	C1BB00001017	IC	1	
IC4001	C0ABBB000289	IC	1	
IC4002	C0FBBK000038	IC	1	
IC4004	TC74HC4066TL	IC	1	
IC4005	MN102H90MTZ1	IC	1	
IC4006	TVRN467	IC	1	
IC4008	TVRN471	IC	1	
IC4010	C0EBF0000431	IC	1	
IC4011	C0CBCAC00275	IC	1	
IC4012	C0CBCBF00009	IC	1	
IC4015	C0EBE0000336	IC	1	
IC4016	C0CBCAC00275	IC	1	
IC4018	C1AB00002298	IC	1	
IC4020	C0CBCAC00136	IC	1	
IC4022	C0DBEJG00001	IC	1	
IC4024	C1ZBZ0002790	IC	1	
IC4025	C0JBAP000020	IC	1	
IC4026	C1AB00002234	IC	1	
IC4027	C3ABQJ000040	IC	1	
IC4028	C0DBZF000055	IC	1	
IC4030	C0EBF0000335	IC	1	
IC4031	C0CBCAC00136	IC	1	
IC5601,02	N0BF2DE00001	DC-DC CONVERTER	2	
IC5603	C0DBAJB00004	IC	1	
IC5801	C0DBAZG00034	IC	1	
IC5803	C0DAEZH00017	IC	1	
IC6000	AN16016A-VF	IC	1	
IC6020	AN16016A-VF	IC	1	
IC6060	C0JBAZ000005	IC	1	
IC6061,62	NJM2903M	INTEGRATED CIRCUIT	2	
IC6100	AN16016A-VF	IC	1	
IC6200,01	C0ZBZ0000895	IC	2	
IC6220,21	C0ZBZ0000895	IC	2	
IC6240	C0JBAZ000005	IC	1	
IC6250	AN16016A-VF	IC	1	
IC6251	C0ZBZ0001033	IC	1	
IC6252	AN1431M	LINEAR IC	1	
IC6411,12	C0JBAZ000005	IC	2	
IC6413	C0JBAA000174	IC	1	
IC6421	NJM2903M	INTEGRATED CIRCUIT	1	
IC6501-03	AN16016A-VF	IC	3	
IC6610	C0ZBZ0001033	IC	1	
IC6611	C0CBADC00075	IC	1	
IC6620	C0ZBZ0001033	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC6621	C0CBADC00075	IC	1	
IC6630	C0ZBZ0001033	IC	1	
IC6640	C0ZBZ0001033	IC	1	
IC6650, 51	C0JBAZ000994	IC	2	
IC6652	C0CBALC00010	IC	1	
IC6653, 54	C0CBADC00075	IC	2	
IC6801	C0DAAMH00005	IC	1	
IC6812	AN1431M	LINEAR IC	1	
IC6814, 15	AN1431M	LINEAR IC	2	
IC6816	C0CBALC00010	IC	1	
IC6817, 18	AN1431M	LINEAR IC	2	
IC6901-06	C0HBC0000007	IC	6	
IC6911-16	C0HBC0000007	IC	6	
IC7102	C0JBAZ001120	IC	1	
IC7104-06	C0JBAZ001120	IC	3	
IC7201-05	C0JBAZ001120	IC	5	
IC7301-05	C0JBAZ001120	IC	5	
IC7401-05	C0JBAZ001120	IC	5	
IC7501-05	C0JBAZ001120	IC	5	
IC7602-04	C0JBAZ001120	IC	3	
IC7606	C0JBAZ001120	IC	1	
IC8009, 10	C3ABRG000061	IC	2	
IC8022	C0ZBZ0001052	IC	1	
IC8200	C0FBBK000038	IC	1	
IC8201	C0ABBB000190	IC	1	
IC8202	C0JBAS000245	IC	1	
IC8203, 04	C0JBAS000223	IC	2	
IC8205	NJM2904V	INTEGRATED CIRCUIT	1	
IC8206, 07	C1AB00002221	IC	2	
IC8209	C1AB00001860	IC	1	
IC8211	MN84321A	IC	1	
IC8216	C1ZBZ0002437	IC	1	
IC8219	C0ZBZ0000782	IC	1	
IC8220	C0CBCAC00161	IC	1	
IC8222	C3FBRG000004	IC	1	
IC8223	C3ZBP0000019	IC	1	
IC8227	C0EBE0000336	IC	1	
IC8228	C0EBM0000027	IC	1	
IC8229	C3EBKC000014	IC	1	
IC8230	C0JBAZ002183	IC	1	
IC8232	MC14066BF	MOS IC (LOGIC)	1	
IC8235	C0DBZFF00004	IC	1	
IC8240	MN2WS0025A-A	IC	1	
IC8241, 42	C0DBAZZ00122	IC	2	
IC8244	C0FBAK000019	IC	1	
IC8245	C1AB00002221	IC	1	
IC9001	TVRN571	IC	1	
IC9003	TVRN568	IC	1	
IC9004	C0EBE0000120	IC	1	
IC9005, 06	C0JBAZ000856	IC	2	
IC9007	TVRN466	IC	1	
IC9008	C0DBEJG000001	IC	1	
IC9200	C1ZBZ0002769	IC	1	
IC9300	MN84512-A	IC	1	
IC9301	PST9128NR	IC (LOGIC)	1	
IC9302	C3ABQJ000031	IC	1	
IC9303	TVRN513	IC	1	
IC9500	C1ZBZ0002599	IC	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
IC9502-04	C0JBAZ000856	IC	3	
IC9700	C0DBEJG000001	IC	1	
IC9702	C0DBAZH00020	IC	1	
JK2601	K1U939A00001	CONNECTOR	1	
JK2605	K2HA204A0041	JACK	1	
JS2304-11	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2312	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2317-24	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2329-32	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2606, 07	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS2614-17	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS2620, 21	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2624	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2627, 28	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2630-37	ERJ3GEY0R00	M 0 OHM, 1/16W	8	
JS2645	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2652-63	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2672-87	ERJ6GEY0R00	M 0 OHM, 1/10W	16	
JS2692-03	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2705-12	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS2714-25	ERJ6GEY0R00	M 0 OHM, 1/10W	12	
JS2726	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2729	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS2737, 38	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS2740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
JS2744-49	ERJ6GEY0R00	M 0 OHM, 1/10W	6	
JS2760-68	ERJ6GEY0R00	M 0 OHM, 1/10W	9	
JS4003	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4013-15	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4019-21	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4023-26	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
JS4033-35	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
JS4038, 39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
JS4041	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4044-50	ERJ3GEY0R00	M 0 OHM, 1/16W	7	
JS4053	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS4059-63	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
JS4067	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5601	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
JS5609-12	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5801, 02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
JS5805-08	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
JS5810-17	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
JS5819	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6200	ERD25V0T	M OHM, 1/10W	1	
JS6402	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
JS6801	ERD25V0T	M OHM, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
K1	K1KA12BA0053	12P CONNECTOR	1	
K2	K1KA02BA0061	2P CONNECTOR	1	
L2305,06	G0A100ZA0033	CHOKE COIL	2	
L2312,13	G0A100ZA0033	CHOKE COIL	2	
L2316-19	J0JJC0000011	CHIP INDUCTOR	4	
L2615	J0JHC0000078	CHIP INDUCTOR	1	
L2617	J0JHC0000078	CHIP INDUCTOR	1	
L4002,03	J0JHC0000078	CHIP INDUCTOR	2	
L4006	J0JHC0000078	CHIP INDUCTOR	1	
L4008	J0JHC0000078	CHIP INDUCTOR	1	
L4012	J0JCC0000241	CHIP INDUCTOR	1	
L4013	J0JHC0000078	CHIP INDUCTOR	1	
L4019	J0JHC0000078	CHIP INDUCTOR	1	
L4021,22	J0JHC0000045	CHIP INDUCTOR	2	
L4024,25	J0JHC0000078	CHIP INDUCTOR	2	
L4027	J0JHC0000078	CHIP INDUCTOR	1	
L4028	J0JCC0000241	CHIP INDUCTOR	1	
L4031	J0JHC0000078	CHIP INDUCTOR	1	
L4035	J0JHC0000078	CHIP INDUCTOR	1	
L4036	J0JCC0000241	CHIP INDUCTOR	1	
L4037-39	J0JHC0000078	CHIP INDUCTOR	3	
L4040,41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
L4043	J0JCC0000241	CHIP INDUCTOR	1	
L4044	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L4047,48	J0JHC0000078	CHIP INDUCTOR	2	
L5604	G0A470GA0002	CHOKE COIL	1	
L5605	G1C1R0MA0072	CHOKE COIL	1	
L5606	G0A220GA0002	CHOKE COIL	1	
L5607	G0C101K00023	PEAKING COIL	1	
L5608	G1C100MA0072	CHOKE COIL	1	
L5609	TALL08N120KA	INDUCTION COIL	1	
L5610	G1C470MA0077	INDUCTION COIL	1	
L5611	G1A150ZA0007	CHOKE COIL	1	
L5612	G0A220GA0002	CHOKE COIL	1	
L5613,14	G1A150ZA0007	CHOKE COIL	2	
L5615	G0A220GA0002	CHOKE COIL	1	
L5616	G1A150ZA0007	CHOKE COIL	1	
L5801	G0C101K00023	PEAKING COIL	1	
L5802	TALL08N101KA	INDUCTION COIL	1	
L5803	G0A220GA0002	CHOKE COIL	1	
L5808	G0A100GA0013	CHOKE COIL	1	
L5810	G0A100GA0013	CHOKE COIL	1	
L6000,01	J0JJC0000021	CHIP INDUCTOR	2	
L6010-12	G0AR60MA0003	CHOKE COIL	3	
L6014	G0ZZ00002183	PEAKING COIL	1	
L6020	J0JJC0000021	CHIP INDUCTOR	1	
L6030-33	G0A1R4MA0003	CHOKE COIL	4	
L6040	G0ZZ00002183	PEAKING COIL	1	
L6042	G0ZZ00002183	PEAKING COIL	1	
L6044	G0ZZ00002183	PEAKING COIL	1	
L6046	G0ZZ00002183	PEAKING COIL	1	
L6068	J0JJC0000021	CHIP INDUCTOR	1	
L6070	G0ZZ00002183	PEAKING COIL	1	
L6072	G0ZZ00002183	PEAKING COIL	1	
L6074	G0ZZ00002183	PEAKING COIL	1	
L6076	G0ZZ00002183	PEAKING COIL	1	
L6098	J0JJC0000021	CHIP INDUCTOR	1	
L6180-82	G0ZZ00002183	PEAKING COIL	3	
L6183,84	J0JJC0000021	CHIP INDUCTOR	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L6190	J0JJC0000021	CHIP INDUCTOR	1	
L6200-04	G0AR60MA0003	CHOKE COIL	5	
L6210-19	J0JJC0000021	CHIP INDUCTOR	10	
L6223-26	J0JJC0000021	CHIP INDUCTOR	4	
L6231-33	J0JJC0000021	CHIP INDUCTOR	3	
L6235,36	J0JJC0000021	CHIP INDUCTOR	2	
L6239-41	G0ZZ00002183	PEAKING COIL	3	
L6250	G0ZZ00002183	PEAKING COIL	1	
L6251,52	J0JJC0000021	CHIP INDUCTOR	2	
L6411,12	G0ZZ00002183	PEAKING COIL	2	
L6501-03	G0AR60MA0003	CHOKE COIL	3	
L6507-10	G0A1R4MA0003	CHOKE COIL	4	
L6522	G0ZZ00002183	PEAKING COIL	1	
L6524	G0ZZ00002183	PEAKING COIL	1	
L6526	G0ZZ00002183	PEAKING COIL	1	
L6528	G0ZZ00002183	PEAKING COIL	1	
L6546	G0ZZ00002183	PEAKING COIL	1	
L6548	G0ZZ00002183	PEAKING COIL	1	
L6550	G0ZZ00002183	PEAKING COIL	1	
L6552	G0ZZ00002183	PEAKING COIL	1	
L6677-79	J0JJC0000021	CHIP INDUCTOR	3	
L6693	J0JJC0000021	CHIP INDUCTOR	1	
L6698,99	J0JJC0000021	CHIP INDUCTOR	2	
L6812,13	G0ZZ00002183	PEAKING COIL	2	
L6814-16	J0JJC0000021	CHIP INDUCTOR	3	
L7101-06	J0JJC0000011	CHIP INDUCTOR	6	
L7201-08	J0JJC0000011	CHIP INDUCTOR	8	
L7301-08	J0JJC0000011	CHIP INDUCTOR	8	
L7401-08	J0JJC0000011	CHIP INDUCTOR	8	
L7501-08	J0JJC0000011	CHIP INDUCTOR	8	
L7601-06	J0JJC0000011	CHIP INDUCTOR	6	
L8096	J0JHC0000045	CHIP INDUCTOR	1	
L8141-43	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
L8200-03	ELJPA270KB	INDUCTION COIL	4	
L8204	ELJNA82NMB	INDUCTION COIL	1	
L8205	ELJNA47NMB	INDUCTION COIL	1	
L8206	ELJNA56NMB	INDUCTION COIL	1	
L8207	ELJNA47NMB	INDUCTION COIL	1	
L8208	ELJNAR10MF	INDUCTION COIL	1	
L8209	J0JHC0000045	CHIP INDUCTOR	1	
L8211	ELJNA1R5JF	INDUCTION COIL	1	
L8212	ELJNA1R0JF	INDUCTION COIL	1	
L8213,14	ELJPA1R0MB	INDUCTION COIL	2	
L8217	ELJNAR56KF	INDUCTION COIL	1	
L8218	J0JHC0000045	CHIP INDUCTOR	1	
L8219,20	ELJPA1R0MB	INDUCTION COIL	2	
L8221-25	J0JHC0000045	CHIP INDUCTOR	5	
L8231,32	J0JHC0000035	CHIP INDUCTOR	2	
L8235	J0JHC0000045	CHIP INDUCTOR	1	
L8236,37	J0JHC0000035	CHIP INDUCTOR	2	
L8239	J0JCC0000241	CHIP INDUCTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
L8240	J0JHC0000045	CHIP INDUCTOR	1	
L8242	J0JCC0000078	CHIP INDUCTOR	1	
L8243,4	J0JHC0000045	CHIP INDUCTOR	2	
L8252	ELJPA1R0MB	INDUCTION COIL	1	
L8253-56	EXC3BB221H	BEAD CHOKE	4	
L8258	J0JHC0000045	CHIP INDUCTOR	1	
L8264-68	J0JHC0000045	CHIP INDUCTOR	5	
L8269	J0JGC0000036	CHIP INDUCTOR	1	
L8270	G1C100MA0078	INDUCTION COIL	1	
L8271	G1C6R8MA0078	INDUCTION COIL	1	
L8273	G1C100MA0077	INDUCTION COIL	1	
L8274	ELJNA2R7JB	INDUCTION COIL	1	
L8276	J0JBC0000080	CHIP INDUCTOR	1	
L8277	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
L9200	G1C150KA0038	INDUCTION COIL	1	
L9500,0	J0JHC0000078	CHIP INDUCTOR	2	
L9700	G1C4R3M00003	CHIP INDUCTOR	1	
L9701	G1C6R8M00009	CHIP INDUCTOR	1	
PA7	K1KA08AA0192	8P CONNECTOR	1	
PA10	K1KA06A00452	6P CONNECTOR	1	
PA20	K1MN30A00068	30P CONNECTOR	1	
PA30	K1MN30A00068	30P CONNECTOR	1	
PA5601,02	K5H4022A0023	FUSE	2	
PB5	K1KA11AA0194	11P CONNECTOR	1	
PB7	K1KA08AA0192	8P CONNECTOR	1	
PB30	K1KA05AA0150	5P CONNECTOR	1	
PB31-34	K1KA03AA0192	3P CONNECTOR	4	
PC6422-25	B3PBA0000223	IC	4	
PC6601	B3PBA0000234	IC	1	
PC6602	B3PBA0000233	IC	1	
PC6604	B3PBA0000234	IC	1	
PC6605	B3PBA0000233	IC	1	
PC6607	B3PBA0000233	IC	1	
PC6813	B3PBA0000223	IC	1	
PC6819	B3PBA0000223	IC	1	
Q2300	2SC584500L	TRANSISTOR	1	
Q2301	2SD601A	TRANSISTOR	1	
Q2302	2SC584500L	TRANSISTOR	1	
Q2314-17	2SC584500L	TRANSISTOR	4	
Q2323	2SA207700L	TRANSISTOR	1	
Q2510,1	2SD601A	TRANSISTOR	2	
Q2519	2SB709A	TRANSISTOR	1	
Q2609	2SD601A	TRANSISTOR	1	
Q2611	2SD601A	TRANSISTOR	1	
Q2612	2SB709A	TRANSISTOR	1	
Q2618,1	2SD601A	TRANSISTOR	2	
Q4001	2SA207700L	TRANSISTOR	1	
Q4004	2SD601A	TRANSISTOR	1	
Q4006-09	2SD601A	TRANSISTOR	4	
Q4012	2SD601A	TRANSISTOR	1	
Q4015-17	2SD601A	TRANSISTOR	3	
Q4019-21	2SD601A	TRANSISTOR	3	
Q4022	2SC584500L	TRANSISTOR	1	
Q4024	2SC584500L	TRANSISTOR	1	
Q4026	2SC584500L	TRANSISTOR	1	
Q4039	2SD0601A	TRANSISTOR	1	
Q4043,4	2SD0601A	TRANSISTOR	2	
Q4045	2SA207700L	TRANSISTOR	1	
Q4049	2SA207700L	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q4051-54	2SD601A	TRANSISTOR	4	
Q4055	2SA207700L	TRANSISTOR	1	
Q4056-59	2SD601A	TRANSISTOR	4	
Q4062	2SD601A	TRANSISTOR	1	
Q4066,6	2SK2731T146	TRANSISTOR	2	
Q4068	2SD601A	TRANSISTOR	1	
Q5601	B1DHDC000028	TRANSISTOR	1	
Q5602	2SC584500L	TRANSISTOR	1	
Q5603	B1DHDC000028	TRANSISTOR	1	
Q5604,0	2SC584500L	TRANSISTOR	2	
Q5606	B1DHDC000028	TRANSISTOR	1	
Q5607	2SC584500L	TRANSISTOR	1	
Q5610	2SC584500L	TRANSISTOR	1	
Q5613	2SC584500L	TRANSISTOR	1	
Q5614	2SK3065T100	FET	1	
Q5641-43	2SA207700L	TRANSISTOR	3	
Q5644	2SC584500L	TRANSISTOR	1	
Q6000,0	2SK3997000VE	TRANSISTOR	2	
Q6010	B1ABNF000006	TRANSISTOR	1	
Q6011	B1ADNF000006	TRANSISTOR	1	
Q6020	2SK3997000VE	TRANSISTOR	1	
Q6030	B1ABNF000006	TRANSISTOR	1	
Q6031	B1ADNF000006	TRANSISTOR	1	
Q6060	2SD601A	TRANSISTOR	1	
Q6100-02	B1JADN000001	TRANSISTOR	3	
Q6120	B1ABNF000006	TRANSISTOR	1	
Q6121	B1ADNF000006	TRANSISTOR	1	
Q6140-42	B1JADN000001	TRANSISTOR	3	
Q6160	B1ABNF000006	TRANSISTOR	1	
Q6161	B1ADNF000006	TRANSISTOR	1	
Q6200	2SK326900L	FET	1	
Q6202	2SK326900L	FET	1	
Q6210	B1ABNF000006	TRANSISTOR	1	
Q6211	B1ADNF000006	TRANSISTOR	1	
Q6212	B1ABNF000006	TRANSISTOR	1	
Q6213	B1ADNF000006	TRANSISTOR	1	
Q6221	B1DFKL000001	TRANSISTOR	1	
Q6223	B1DFKL000001	TRANSISTOR	1	
Q6225	B1DFKL000001	TRANSISTOR	1	
Q6230	B1ABNF000006	TRANSISTOR	1	
Q6231	B1ADNF000006	TRANSISTOR	1	
Q6232	B1ABNF000006	TRANSISTOR	1	
Q6233	B1ADNF000006	TRANSISTOR	1	
Q6240	2SB1193000LB	TRANSISTOR	1	
Q6250,5	B1DFKM000002	TRANSISTOR	2	
Q6256	2SD1263A	TRANSISTOR	1	
Q6257	2SC1473A	TRANSISTOR	1	
Q6259	2SK326800L	FET	1	
Q6260	B1DFKM000002	TRANSISTOR	1	
Q6261	2SK620	FET	1	
Q6411	2SD601A	TRANSISTOR	1	
Q6412,1	2SK620	FET	2	
Q6501-03	B1JADN000001	TRANSISTOR	3	
Q6513-15	B1JADN000001	TRANSISTOR	3	
Q6531,3	2SK3997000VE	TRANSISTOR	2	
Q6537	2SK3997000VE	TRANSISTOR	1	
Q6551	B1ABNF000006	TRANSISTOR	1	
Q6552	B1ADNF000006	TRANSISTOR	1	
Q6559	B1ABNF000006	TRANSISTOR	1	
Q6560	B1ADNF000006	TRANSISTOR	1	
Q6567	B1ABNF000006	TRANSISTOR	1	
Q6568	B1ADNF000006	TRANSISTOR	1	
Q6571	B1ABNF000006	TRANSISTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
Q6572	B1ADNF000006	TRANSISTOR	1	
Q6577	2SD601A	TRANSISTOR	1	
Q6601	B1DEDS000001	TRANSISTOR	1	
Q6602	B1DEET000002	TRANSISTOR	1	
Q6604	B1DFFM000003	TRANSISTOR	1	
Q6611-18	B1DFJM000003	TRANSISTOR	8	
Q6630-35	B1DFKM000001	TRANSISTOR	6	
Q6650-52	B1DEDS000001	TRANSISTOR	3	
Q6654	B1DFFM000003	TRANSISTOR	1	
Q6655	2SD601A	TRANSISTOR	1	
Q6656	B1ADNF000006	TRANSISTOR	1	
Q6658,59	2SK620	FET	2	
Q6660	B1ABNF000006	TRANSISTOR	1	
Q6661	B1ADNF000006	TRANSISTOR	1	
Q6664	2SD601A	TRANSISTOR	1	
Q6665	B1ABNF000006	TRANSISTOR	1	
Q6666,67	2SK620	FET	2	
Q6668	B1ABNF000006	TRANSISTOR	1	
Q6669	B1ADNF000006	TRANSISTOR	1	
Q6670	2SK620	FET	1	
Q6814	2SD1263A	TRANSISTOR	1	
Q6815	2SC1473A	TRANSISTOR	1	
Q6816	B1BBCJ000004	TRANSISTOR	1	
Q6817	2SD601A	TRANSISTOR	1	
Q6818	2SB0709A	TRANSISTOR	1	
Q6819	2SD1263A	TRANSISTOR	1	
Q6820	2SC1473A	TRANSISTOR	1	
Q6821	2SD814A	TRANSISTOR	1	
Q6822,23	2SD601A	TRANSISTOR	2	
Q8200	B1BBAB000039	TRANSISTOR	1	
Q8201	2SD601A	TRANSISTOR	1	
Q8203	B1BBAB000039	TRANSISTOR	1	
Q8209	2SA207700L	TRANSISTOR	1	
Q8216	2SC584500L	TRANSISTOR	1	
Q8217-20	2SD601A	TRANSISTOR	4	
Q8221,22	B1MBDDA000003	TRANSISTOR	2	
Q9000,01	2SD601A	TRANSISTOR	2	
Q9003	B1DHCC000034	TRANSISTOR	1	
Q9004	2SB709A	TRANSISTOR	1	
Q9008,09	2SK2731T146	TRANSISTOR	2	
Q9010,11	2SD601A	TRANSISTOR	2	
Q9012,13	2SK2731T146	TRANSISTOR	2	
Q9020-23	2SD601A	TRANSISTOR	4	
Q9500	2SK2731T146	TRANSISTOR	1	
Q9700	2SD601A	TRANSISTOR	1	
Q9701,02	B1MBCDA000002	TRANSISTOR	2	
Q9703,04	2SD601A	TRANSISTOR	2	
Q9800,01	2SD601A	TRANSISTOR	2	
Q9900,01	2SD601A	TRANSISTOR	2	
R2302	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2303	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2304	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2305	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R2306	ERJ6GEYJ821	M 820 OHM, J, 1/10W	1	
R2307	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R2308,09	ERJ3GEYJ392	M 3.9KOHM, J, 1/16W	2	
R2310	ERJ3GEYJ184	M 180KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2311	ERJ12YJ821	M 820 OHM, J, 1/2W	1	
R2312,13	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2316-19	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2320	ERJ3GEYJ222	M 2.2KOHM, J, 1/16W	1	
R2322	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2324	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R2331	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R2338	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2342,43	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R2349	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R2350	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2351	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2352,53	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2357	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2358,59	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2360	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2363	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2364	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R2365,66	ERJ3GEYJ683	M 68KOHM, J, 1/16W	2	
R2367	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2368	ERJ3GEYJ563	M 56KOHM, J, 1/16W	1	
R2369,70	ERJ3GEYJ223	M 22KOHM, J, 1/16W	2	
R2388,89	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2390	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2391	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2392	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R2393	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R2394	ERJ3GEYJ203	M 20KOHM, J, 1/16W	1	
R2395,96	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R2397,98	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R2436	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2437,38	ERDS2TJ103	C 10KOHM, J, 1/4W	2	
R2444,45	ERJ6GEYJ102	M 1KOHM, J, 1/10W	2	
R2448,49	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2450	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2451,52	ERJ6GEYJ510	M 51 OHM, J, 1/10W	2	
R2453	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2460	ERJ6ENF1373	M 137KOHM, 1/10W	1	
R2461	ERJ6ENF1103	M 110KOHM, 1/10W	1	
R2464,65	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2468,69	ERJ6GEYJ331	M 330 OHM, J, 1/10W	2	
R2488,89	ERJ6GEYJ120	M 12 OHM, J, 1/10W	2	
R2499	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R2501	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2516	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2517	ERJ6GEYJ470	M 47 OHM, J, 1/10W	1	
R2520	ERJ6GEYJ224	M 220KOHM, J, 1/10W	1	
R2524	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R2525	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R2526	ERJ6GEYJ562	M 5.6KOHM, J, 1/10W	1	
R2542	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2545	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R2550	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2553	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R2557	ERJ6ENF8200	M 820 OHM, 1/10W	1	
R2607	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2640,41	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R2645	ERJ6GEYJ183	M 18KOHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2646	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2647	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2648	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2649	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2650	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R2651	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
R2652	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R2655	ERJ6ENF3001	M 3KOHM, 1/10W	1	
R2659,60	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2673	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R2680,81	ERJ3GEYJ184	M 180KOHM,J,1/16W	2	
R2682	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2686	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2687	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2690	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R2693	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2695	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R2696	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R2698	ERJ3GEYJ182	M 1.8KOHM,J,1/16W	1	
R2699	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2700	ERJ3GEYJ274	M 270KOHM,J,1/16W	1	
R2702	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R2708	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2723,24	ERJ3GEYJ104	M 100KOHM,J,1/16W	2	
R2725	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2726,27	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2729-31	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R2733-36	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2737	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2738	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2739	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2741	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2744	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R2746	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2747	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2751	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2753	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2754	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2755	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2756	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2758	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2759	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2761-64	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2767	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2769,70	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2772	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2775	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2777-79	ERJ6ENF75R0	M 75 OHM, 1/10W	3	
R2793-95	ERJ3GEYJ221	M 220 OHM,J,1/16W	3	
R2797-00	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	
R2801,02	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R2804	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2807,08	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2810,11	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2814,15	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2817,18	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2820	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R2821	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R2822-25	ERJ3GEYJ221	M 220 OHM,J,1/16W	4	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R2830	ERJ3GEYJ823	M 82KOHM,J,1/16W	1	
R2832,33	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R2835	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2837	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R2838	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R2848-51	ERJ6GEYJ393	M 39KOHM,J,1/10W	4	
R2854,55	ERJ6GEYJ393	M 39KOHM,J,1/10W	2	
R2856	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2858	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2859-61	ERJ6GEYJ393	M 39KOHM,J,1/10W	3	
R2863	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2864	ERJ6GEYJ393	M 39KOHM,J,1/10W	1	
R2866	ERJ6ENF75R0	M 75 OHM, 1/10W	1	
R2868,69	ERJ6ENF75R0	M 75 OHM, 1/10W	2	
R2881	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2883	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2887	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2891-94	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R2896	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R2899	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R3751	ERJ6ENF1621	M1.62KOHM, 1/10W	1	
R3753	ERJ6ENF3161	M3.16KOHM, 1/10W	1	
R3755	ERJ6ENF2321	M2.32KOHM, 1/10W	1	
R3756	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
R3758	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
R4001,02	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4003	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4004	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4005	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4006	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4007	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4008	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4009	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4010	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4015	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4016	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4017	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4018	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4020	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4021	ERJ3GEYJ273	M 27KOHM,J,1/16W	1	
R4022	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4023	ERJ3GEYJ563	M 56KOHM,J,1/16W	1	
R4024,25	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4026	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4028,29	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4035	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4039	ERJ3GEYJ123	M 12KOHM,J,1/16W	1	
R4040	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4045	ERJ3GEYJ272	M 2.7KOHM,J,1/16W	1	
R4047	ERJ3GEYJ153	M 15KOHM,J,1/16W	1	
R4048	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4050	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4052	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4053	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4055	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4056	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4059	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4063	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4064-66	TAJAAH0101JV	M 100 OHM,J,1/16W	3	
R4068,69	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4070	ERJ3GEYJ154	M 150KOHM,J,1/16W	1	
R4071-76	TAJAAH0101JV	M 100 OHM,J,1/16W	6	
R4077	ERJ3GEY0R00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4078, 79	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4082	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4083	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4086	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4088-90	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R4091	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4092	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4094	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4095	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4098, 99	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R4101	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4102	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4104	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4105	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4106	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4108	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4109	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4110, 11	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4114	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4118	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4119	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4121	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4122	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4123	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4124	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4125	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4126	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4128	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4129	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R4130	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4134	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4135	ERJ3EKF1801	M 1.8KOHM, 1/16W	1	
R4138	ERJ3GEYJ682	M 6.8KOHM, J, 1/16W	1	
R4139	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4141, 42	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R4144	ERJ3GEYJ333	M 33KOHM, J, 1/16W	1	
R4145	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4146	ERJ3GEYJ681	M 680 OHM, J, 1/16W	1	
R4148, 49	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R4151-53	ERJ3GEYJ102	M 1KOHM, J, 1/16W	3	
R4155	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4158	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4162	ERJ3GEYJ393	M 39KOHM, J, 1/16W	1	
R4169	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4171-73	ERJ3GEYOR00	M 0 OHM, 1/16W	3	
R4174	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4175	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R4176	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4177	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4179	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4181	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4182, 83	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4184	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4185	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4188	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4192	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4193	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4197	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R4199, 00	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4201	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4202	ERJ3EKF7151	M 7.15KOHM, 1/16W	1	
R4203	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4205	ERJ3GEYJ272	M 2.7KOHM, J, 1/16W	1	
R4208	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4212	ERJ3GEYOR00	M 0 OHM, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4214	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4218	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4219	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4223	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4224	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4225	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R4226	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4230, 31	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R4237	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4238	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R4252, 53	ERJ3GEYJ823	M 82KOHM, J, 1/16W	2	
R4254	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4255	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4256, 57	ERJ3GEYJ104	M 100KOHM, J, 1/16W	2	
R4259	ERJ3GEYJ100	M 10 OHM, J, 1/16W	1	
R4260, 61	ERJ3GEYJ682	M 6.8KOHM, J, 1/16W	2	
R4262, 63	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R4264	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	1	
R4266	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4267, 68	ERJ3GEYJ473	M 47KOHM, J, 1/16W	2	
R4269	ERJ3GEYJ153	M 15KOHM, J, 1/16W	1	
R4281	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4282	ERJ3GEYJ471	M 470 OHM, J, 1/16W	1	
R4284	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4286	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R4289	ERJ3GEYJ241	M 240 OHM, J, 1/16W	1	
R4291	ERJ3GEYJ123	M 12KOHM, J, 1/16W	1	
R4292	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4298	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4322	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4327, 28	ERJ3GEYOR00	M 0 OHM, 1/16W	2	
R4329	ERJ3EKF1500	M 150 OHM, 1/16W	1	
R4339	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R4344, 45	ERJ3EKF1301	M 1.3KOHM, 1/16W	2	
R4346	ERJ3EKF1001	M 1KOHM, 1/16W	1	
R4347	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4349, 50	ERJ3EKF1801	M 1.8KOHM, 1/16W	2	
R4351	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R4356, 57	ERJ6GEYJ471	M 470 OHM, J, 1/10W	2	
R4358	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R4359	ERJ3EKF2201	M 2.2KOHM, 1/16W	1	
R4361	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R4365	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4367	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4370	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4371	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R4375	ERJ3GEYOR00	M 0 OHM, 1/16W	1	
R4379, 80	ERJ3GEYJ332	M 3.3KOHM, J, 1/16W	2	
R4382	ERJ3EKF1600	M 160 OHM, 1/16W	1	
R4383	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R4388, 89	ERJ3GEYOR00	M 0 OHM, 1/16W	2	
R4391	ERJ3EKF1371	M 13.7 OHM, 1/16W	1	
R4392	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4408	ERJ3EKF1741	M 17.4 OHM, 1/16W	1	
R4409	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4411	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4414	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4416	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4421	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4423	EXB38V220J	RESISTOR ARRAY	1	
R4426	EXB38V220J	RESISTOR ARRAY	1	
R4427	ERJ3GEYJ220	M 22 OHM, J, 1/16W	1	
R4428	EXB38V220J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4433,34	EXB38V220J	RESISTOR ARRAY	2	
R4435-37	ERJ3GEYJ220	M 22 OHM,J,1/16W	3	
R4441,42	D1HG5608A002	NETWORK RESISTER	2	
R4443	EXB38V560J	RESISTOR ARRAY	1	
R4444	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4445-47	ERJ3GEYJ560	M 56 OHM,J,1/16W	3	
R4448,49	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4450-54	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4456,57	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4458,59	ERJ3EKF3302	M 33KOHM, 1/16W	2	
R4460	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4461,62	ERJ3EKF2202	M 22KOHM, 1/16W	2	
R4463	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4464	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4465	ERJ3EKF6192	M61.9KOHM, 1/16W	1	
R4466	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4469	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4471	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4472	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4473	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4474	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4480	ERJ3GEYJ473	M 47KOHM,J,1/16W	1	
R4481	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4482,83	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4484	ERJ3GEYJ331	M 330 OHM,J,1/16W	1	
R4485,86	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4487	ERJ3GEYJ105	M 1MOHM,J,1/16W	1	
R4488,89	ERJ3GEYJ102	M 1KOHM,J,1/16W	2	
R4490,91	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4492,93	ERJ3GEYJ331	M 330 OHM,J,1/16W	2	
R4494	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4495,96	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4497,98	ERJ3GEYJ471	M 470 OHM,J,1/16W	2	
R4516	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4522	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4524	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4527	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R4528	ERJ3EKF1800	M 180 OHM, 1/16W	1	
R4529	ERJ3EKF2001	M 2KOHM, 1/16W	1	
R4530	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4531,32	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4533-37	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4540,41	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4543,44	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R4545,46	ERJ3GEYJ330	M 33 OHM,J,1/16W	2	
R4547-50	EXB2HV680J	RESISTOR ARRAY	4	
R4551,52	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4557	ERJ3GEYJ750	M 75 OHM,J,1/16W	1	
R4558	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4559	ERJ3GEYJ203	M 20KOHM,J,1/16W	1	
R4560,61	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R4562	TAJAAH0680JV	M 68 OHM,J,1/16W	1	
R4564-66	TAJAAH0680JV	M 68 OHM,J,1/16W	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4569	EXB38V680J	RESISTOR ARRAY	1	
R4570	EXB2HV680J	RESISTOR ARRAY	1	
R4571	EXB38V680J	RESISTOR ARRAY	1	
R4572,73	ERJ3EKF3002	M 30KOHM, 1/16W	2	
R4575-77	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4578,79	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4581-85	ERJ3GEY0R00	M 0 OHM, 1/16W	5	
R4590	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4592	ERJ3GEYJ820	M 82 OHM,J,1/16W	1	
R4593	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4594	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4596	ERJ3GEYJ330	M 33 OHM,J,1/16W	1	
R4597	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4600	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4602	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4603-22	ERJ3GEYJ820	M 82 OHM,J,1/16W	20	
R4623	ERJ3GEYJ151	M 150 OHM,J,1/16W	1	
R4624-26	EXB38V820J	RESISTOR ARRAY	3	
R4627	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4630	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4632,33	ERJ3GEYJ223	M 22KOHM,J,1/16W	2	
R4636	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
R4638	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4639,40	EXB2HV680J	RESISTOR ARRAY	2	
R4643,44	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4650	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4651	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4652	ERJ3GEYJ821	M 820 OHM,J,1/16W	1	
R4653-55	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R4657	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R4658	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4660,61	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R4666	ERJ3GEYJ222	M 2.2KOHM,J,1/16W	1	
R4667,68	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4674	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4676,77	ERJ3GEYJ474	M 470KOHM,J,1/16W	2	
R4678	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R4682,83	ERJ3EKF1741	M 17.4 OHM, 1/16W	2	
R4684	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4685	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R4686	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4690	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4703	ERJ3GEYJ102	M 1KOHM,J,1/16W	1	
R4706	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4708-47	ERJ6GEY0R00	M 0 OHM, 1/10W	40	
R4748	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
R4749	ERJ3EKF4302	M 43KOHM, 1/16W	1	
R4750	ERJ3EKF6801	M 6.8KOHM, 1/16W	1	
R4751,52	ERJ3EKF1800	M 180 OHM, 1/16W	2	
R4754	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R4756	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4757	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R4758	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R4759,60	ERJ3GEYJ473	M 47KOHM,J,1/16W	2	
R4761,62	ERJ3GEYJ103	M 10KOHM,J,1/16W	2	
R4765	ERJ3GEYJ392	M 3.9KOHM,J,1/16W	1	
R4767	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R4771	TAJAAH0101JV	M 100 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R4775	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R4780-87	ERJ6GEY0R00	M 0 OHM, 1/10W	8	
R5601	ERJ6ENF4532	M4.53KOHM, 1/10W	1	
R5603	ERJ6ENF2550	M 255 OHM, 1/10W	1	
R5605	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5606	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5607	ERJ6ENF1502	M 15KOHM, 1/10W	1	
R5609	ERJ6ENF1871	M1.87KOHM, 1/10W	1	
R5610	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5611	ERJ6ENF8202	M 82KOHM, 1/10W	1	
R5612	ERJ6ENF1652	M16.5KOHM, 1/10W	1	
R5615, 16	ERJ6GEYJ223	M 22KOHM, J, 1/10W	2	
R5617, 18	ERJ6GEYJ221	M 220 OHM, J, 1/10W	2	
R5619	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R5620	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5621	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5623, 24	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R5625-27	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	3	
R5630	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5632	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5633	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5634	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5635	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5637, 38	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R5639	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5640	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5641	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5642	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5643	ERJ6GEYJ681	M 680 OHM, J, 1/10W	1	
R5644	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R5645, 46	ERJ6ENF2201	M 2.2KOHM, 1/10W	2	
R5647	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5648	ERJ6GEYJ392	M 3.9KOHM, J, 1/10W	1	
R5649	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R5650	ERJ6GEYJ221	M 220 OHM, J, 1/10W	1	
R5651	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5653-56	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R5657, 58	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	2	
R5659	ERJ6ENF4700	M 470 OHM, 1/10W	1	
R5660	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5662	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5670	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5672	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5675	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
R5676	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5679	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R5680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5692	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R5693	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R5694, 95	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R5696	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	1	
R5801	ERJ6ENF9100	M 910 OHM, 1/10W	1	
R5802	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R5803	ERJ6ENF2741	M2.74KOHM, 1/10W	1	
R5804	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R5805-08	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	4	
R5809	ERJ6GEYJ472	M 4.7KOHM, J, 1/10W	1	
R5812	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R5815	ERJ6ENF3900	M 390 OHM, 1/10W	1	
R5819	ERJ6ENF2941	M2.94KOHM, 1/10W	1	
R5820	ERX3FJSR22D	M 2.2 OHM, J, 3W	1	
R5822-24	ERJ6GEYJ101	M 100 OHM, J, 1/10W	3	
R5826	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6000-03	ERJ14YJ5R6U	M 6.2OHM, 1/4W	4	
R6012	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6013	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6014, 15	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6020, 21	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6032	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6033	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6034, 35	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6040-43	ERJ6GEYJ151	M 150 OHM, J, 1/10W	4	
R6047, 48	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
R6052	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6053-58	ERJ6GEYJ151	M 150 OHM, J, 1/10W	6	
R6060	EXB38V470J	RESISTOR ARRAY	1	
R6061	EXB38V472J	RESISTOR ARRAY	1	
R6062	EXB38V470J	RESISTOR ARRAY	1	
R6063	EXB38V472J	RESISTOR ARRAY	1	
R6064, 65	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6066	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	1	
R6067, 68	ERJ6GEYJ152	M 1.5KOHM, J, 1/10W	2	
R6069	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6070, 71	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6072	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6073, 74	ERJ6GEYJ224	M 220KOHM, J, 1/10W	2	
R6075, 76	ERJ6GEYJ222	M 2.2KOHM, J, 1/10W	2	
R6079	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6080	ERJ6GEYJ474	M 470KOHM, J, 1/10W	1	
R6081, 82	ERJ6GEYJ104	M 100KOHM, J, 1/10W	2	
R6100-05	ERJ14YJ150U	M 15 OHM, J, 1/4W	6	
R6124	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6125	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6126, 27	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6137-39	ERJ6ENF6802	M 68KOHM, 1/10W	3	
R6140-45	ERJ14YJ150U	M 15 OHM, J, 1/4W	6	
R6176	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	
R6177	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6178, 79	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6190, 91	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6195, 96	ERJ6GEYJ151	M 150 OHM, J, 1/10W	2	
R6197, 98	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6199	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6200	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6202	ERJ6GEYJ5R6	M 5.6 OHM, J, 1/10W	1	
R6210	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6211, 12	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6213	ERJ6GEYJ100	M 10 OHM, J, 1/10W	1	
R6214, 15	ERJ6GEYJ103	M 10KOHM, J, 1/10W	2	
R6216, 17	ERJ6GEYJ101	M 100 OHM, J, 1/10W	2	
R6219	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R6221	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6223	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6225	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6227	ERJ6GEYJ220	M 22 OHM, J, 1/10W	1	
R6228	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R6229	ERJ6GEYJ101	M 100 OHM, J, 1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6231	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
R6232	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6233,3 4	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6235	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6236,3 7	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6238,3 9	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6240	ERJ6ENF6982	M69.8KOHM, 1/10W	1	
R6241	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6242	ERJ6ENF4701	M 4.7KOHM, 1/10W	1	
R6243	ERJ6ENF3832	M38.3KOHM, 1/10W	1	
R6244	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6245	ERJ6ENF6981	M6.98KOHM, 1/10W	1	
R6246	ERJ6GEYJ221	M 220 OHM,J,1/10W	1	
R6247,4 8	ERF15ZJ181	W 180 OHM, 15W	2	
R6249	ERJ6ENF1182	M11.8KOHM, 1/10W	1	
R6250,5 1	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6252	ERF15ZJ181	W 180 OHM, 15W	1	
R6253	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6254	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6255	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6257,5 8	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R6259,6 0	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6261	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6263	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6264	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6265	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6266	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6267,6 8	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6269	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6270	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6271,7 2	ERG2FJS101D	M 100 OHM, J, 2W	2	
R6274	ERGLFJS103D	M 10KOHM, J, 1W	1	
R6275	ERG2FJS123D	M 12KOHM, J, 2W	1	
R6276- 78	ERJ6GEYJ223	M 22KOHM,J,1/10W	3	
R6280	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6281	ERJ6ENF1201	M 1.2KOHM, 1/10W	1	
R6282- 84	ERJ6GEYJ273	M 27KOHM,J,1/10W	3	
R6291	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6292	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6293	ERJ6GEYJ562	M 5.6KOHM,J,1/10W	1	
R6298	EXB38V470J	RESISTOR ARRAY	1	
R6299	EXB38V472J	RESISTOR ARRAY	1	
R6361- 64	ERJ6GEYJ151	M 150 OHM,J,1/10W	4	
R6367,6 8	ERJ6GEYJ151	M 150 OHM,J,1/10W	2	
R6375- 77	ERJ6ENF6802	M 68KOHM, 1/10W	3	
R6378	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6379	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R6382,8 3	ERX12SJ1R2	M 1.2 OHM, J, 1/2W	2	
R6385	ERJ6GEYJ681	M 680 OHM,J,1/10W	1	
R6386	ERJ6GEYJ272	M 2.7KOHM,J,1/10W	1	
R6387	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6388	ERG2FJS563D	M 56KOHM, J, 2W	1	
R6390	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6411,1 2	ERX2FJSR22D	M0.22 OHM, J, 2W	2	
R6415	EXB38V470J	RESISTOR ARRAY	1	
R6416	EXB38V472J	RESISTOR ARRAY	1	
R6417	EXB38V470J	RESISTOR ARRAY	1	
R6418	EXB38V472J	RESISTOR ARRAY	1	
R6419	EXB38V470J	RESISTOR ARRAY	1	
R6420	EXB38V472J	RESISTOR ARRAY	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6421	EXB38V470J	RESISTOR ARRAY	1	
R6422	EXB38V472J	RESISTOR ARRAY	1	
R6429,3 0	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6431,3 2	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6433	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6434,3 5	ERJ6GEYJ152	M 1.5KOHM,J,1/10W	2	
R6436	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6437,3 8	ERJ6ENF3902	M 39KOHM, 1/10W	2	
R6439	ERJ6ENF7501	M 7.5KOHM, 1/10W	1	
R6440	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6441	ERJ14YJ203U	M 20KOHM, 1/2W	1	
R6444- 48	ERJ6GEYJ471	M 470 OHM,J,1/10W	5	
R6449	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6450	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6451	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6452,5 3	ERJ6GEYJ471	M 470 OHM,J,1/10W	2	
R6454	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6455	ERJ14YJ163U	M 16KOHM, J, 1/4W	1	
R6458	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6459	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6460	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6461	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6462	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6463	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R6464	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R6465	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6466	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
R6467	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6468	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6469	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6470	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6471,7 2	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6473,7 4	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6475	ERJ6GEYF103	M 10KOHM,F,1/10W	1	
R6476	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6477	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6478- 83	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	6	
R6484	EXB38V470J	RESISTOR ARRAY	1	
R6488	EXB38V470J	RESISTOR ARRAY	1	
R6501- 06	ERJ14YJ150U	M 15 OHM, J, 1/4W	6	
R6525- 30	ERJ14YJ150U	M 15 OHM, J, 1/4W	6	
R6561	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6562	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6569	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6573	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6574	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6581	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6585,8 6	ERJ6GEYJ101	M 100 OHM,J,1/10W	2	
R6601,0 2	ERX3FJS2R2D	M 2.2 OHM, J, 3W	2	
R6603- 05	ERJ6GEYJ101	M 100 OHM,J,1/10W	3	
R6611	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6612	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6613	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6614	ERJ6ENF1801	M 1.8KOHM, 1/10W	1	
R6615,1 6	ERJ6GEYJ102	M 1KOHM,J,1/10W	2	
R6617	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6618	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6619,2 0	ERJ6GEYJ105	M 1MOHM,J,1/10W	2	
R6621	ERJ6GEYJ680	M 68 OHM,J,1/10W	1	
R6622	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6625-32	ERJ6GEYJ470	M 47 OHM,J,1/10W	8	
R6662	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6664	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6667	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6668	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6669	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R6671	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6674	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6675	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6686,87	ERJ14YJ5R6U	M 6.2OHM, 1/4W	2	
R6696-99	ERJ14YJ5R6U	M 6.2OHM, 1/4W	4	
R6711	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6712	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6713	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6716-21	ERJ6GEYJ100	M 10 OHM,J,1/10W	6	
R6735-37	ERJ6GEYJ224	M 220KOHM,J,1/10W	3	
R6738	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6739	ERJ6GEYJ202	M 2KOHM,J,1/10W	1	
R6740	ERJ6GEYJ203	M 20KOHM,J,1/10W	1	
R6741	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6742	ERJ6GEYJ470	M 47 OHM,J,1/10W	1	
R6743	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6744,45	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	2	
R6746	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6747,48	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6751-53	ERJ6GEYJ5R6	M 5.6 OHM,J,1/10W	3	
R6755	ERJ6GEYJ151	M 150 OHM,J,1/10W	1	
R6756	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6757	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6758	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6759	ERJ6GEYJ100	M 10 OHM,J,1/10W	1	
R6760	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
R6761	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6762	ERG1FJS101D	M 100 OHM, J, 1W	1	
R6763,64	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R6804,05	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
R6806	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6807-09	ERJ6GEYJ104	M 100KOHM,J,1/10W	3	
R6810	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6823	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6824	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6825,26	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6827	ERG1FJS471D	M 470 OHM, J, 1W	1	
R6828,29	ERJ12YJ104U	M 100KOHM, 1/2W	2	
R6830	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6831,32	ERJ6ENF2203	M 220KOHM, 1/10W	2	
R6833	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
R6834	ERJ6ENF5101	M 5.1KOHM, 1/10W	1	
R6835,36	ERJ12YJ1R0	M 1 OHM, J,1/2W	2	
R6837	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6838	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6839	ERDS1FJ221	C 220 OHM, J,1/2W	1	
R6840,41	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	2	
R6842	ERJ6ENF1543	M 154KOHM, 1/10W	1	
R6843	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6844	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6845	ERX1FJS8R2D	M 8.2 OHM, J, 1W	1	
R6846	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
R6847	ERG2FJS683D	M 68KOHM, J, 2W	1	
R6848	ERDS1FJ4R7	C 4.7 OHM, J,1/2W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R6851	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6852	ERG2FJS101D	M 100 OHM, J, 2W	1	
R6853	ERJ12YJ153U	M 15KOHM, 1/2W	1	
R6854	ERJ14YJ433U	M 43KOHM, 1/2W	1	
R6855	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R6856	ERJ6ENF6202	M 62KOHM, 1/10W	1	
R6857,58	ERJ6ENF2491	M2.49KOHM, 1/10W	2	
R6859	ERJ6GEYJ222	M 2.2KOHM,J,1/10W	1	
R6860	ERX3FJS8R2D	M 8.2 OHM, J, 3W	1	
R6861	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R6862	ERJ6GEYJ153	M 15KOHM,J,1/10W	1	
R6863	ERJ6GEYJ123	M 12KOHM,J,1/10W	1	
R6864	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6866	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R6867	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R6869	ERJ6ENF2202	M 2.2KOHM, 1/10W	1	
R6870	ERJ6ENF1002	M 10KOHM, 1/10W	1	
R6871	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6872,73	ERJ6GEYJ104	M 100KOHM,J,1/10W	2	
R6874	ERJ6GEYJ563	M 56KOHM,J,1/10W	1	
R6876	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R6886	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R6901-06	ERJ6GEYJ221	M 220 OHM,J,1/10W	6	
R6907,08	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R6909	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6910	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6911	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
R6912	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R6921-26	ERJ6GEYJ221	M 220 OHM,J,1/10W	6	
R6927-30	ERJ6GEYJ103	M 10KOHM,J,1/10W	4	
R6931,32	ERJ6GEYJ224	M 220KOHM,J,1/10W	2	
R7101	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R7102	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R7104	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R7107	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
R7109	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7111	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7113	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7115	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7116,17	ERJ3GEYJ221	M 220 OHM,J,1/16W	2	
R7123	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7127	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7131	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7133	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7134-37	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7138-40	TAJAAH0470JV	M 47 OHM,J,1/16W	3	
R7141-46	EXB38V102J	RESISTOR ARRAY	6	
R7159-64	EXB38V470J	RESISTOR ARRAY	6	
R7171	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7184,85	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7186	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
R7187	ERJ6GEYJ104	M 100KOHM,J,1/10W	1	
R7205,06	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	2	
R7208	TAJAAH0101JV	M 100 OHM,J,1/16W	1	
R7210,11	TAJAAH0101JV	M 100 OHM,J,1/16W	2	
R7215	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7225	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7227	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7230	ERJ12YJ2R2	M 2.2 OHM, J,1/2W	1	
R7235	TAJAAH0101JV	M 100 OHM,J,1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7236,37	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7238	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7244	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7250	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7251	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7252-55	EXB38V102J	RESISTOR ARRAY	4	
R7256	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7257-60	EXB38V102J	RESISTOR ARRAY	4	
R7262	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7263	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7266	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7267	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7268	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7270,71	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R7272,73	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7274,75	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7276,77	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7280,81	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7282,83	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7288,89	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7290,91	EXB38V470J	RESISTOR ARRAY	2	
R7294-99	EXB38V470J	RESISTOR ARRAY	6	
R7301,02	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7303-10	EXB38V470J	RESISTOR ARRAY	8	
R7337-40	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7341,42	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7343	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R7345,46	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7347	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7354,55	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7360,61	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7364,65	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7366,67	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7373,74	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7377,78	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7381,82	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7383,84	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7385	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7386	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7387	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7392-99	EXB38V102J	RESISTOR ARRAY	8	
R7401	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7404	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7405-08	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7409-12	TAJAAH0470JV	M 47 OHM, J, 1/16W	4	
R7413-20	EXB38V470J	RESISTOR ARRAY	8	
R7444	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7446	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R7460,61	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7464,65	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7468,69	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7470,71	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7472	ERJ6GEYJ102	M 1KOHM, J, 1/10W	1	
R7477,78	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7481,82	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7485,86	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	2	
R7487,88	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7490	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7491	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R7492-99	EXB38V102J	RESISTOR ARRAY	8	
R7502	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R7503	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7504	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7506	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7507,08	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R7509	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7511	ERJ12Y0R00	M 0 OHM, J, 1/2W	1	
R7514	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7516	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7517	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7522,23	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R7525	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7527	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7528	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7530	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7532	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7533	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7534-41	EXB38V102J	RESISTOR ARRAY	8	
R7542-45	ERJ6GEY0R00	M 0 OHM, 1/10W	4	
R7546,47	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R7550-53	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7554,55	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R7556-63	EXB38V470J	RESISTOR ARRAY	8	
R7564	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7566	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7568	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7569	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7592,93	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R7604	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7605	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R7606	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R7607	ERJ3GEYJ221	M 220 OHM, J, 1/16W	1	
R7609	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7611	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7613	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7615	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7616,17	ERJ3GEYJ221	M 220 OHM, J, 1/16W	2	
R7624	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7628	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7632	ERJ12YJ2R2	M 2.2 OHM, J, 1/2W	1	
R7634	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R7637-42	EXB38V470J	RESISTOR ARRAY	6	
R7643-46	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R7647-49	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R7650-55	EXB38V102J	RESISTOR ARRAY	6	
R7677	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7680	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7685	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R7686	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R7687	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R8137	ERJ2GEJ121	M 120 OHM, J, 0.063W	1	
R8140, 41	ERJ3EKF1001	M 1KOHM, 1/16W	2	
R8144-47	D1HG5608A002	NETWORK RESISTER	4	
R8148, 49	D1HG3908A002	NETWORK RESISTER	2	
R8150-62	ERJ2GEJ390	M 39 OHM, J, 0.063W	13	
R8163-66	ERJ2GEJ560	M 56 OHM, J, 0.063W	4	
R8200-03	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	4	
R8206	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8207	ERJ2GEJ561	M 60 OHM, J, 0.063W	1	
R8208	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8209	ERJ2GEJ273	M 27KOHM, J, 0.063W	1	
R8210	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8211	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8215	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8216	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8217	ERJ2GEJ561	M 60 OHM, J, 0.063W	1	
R8218	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8219	ERJ2GEJ153	M 15KOHM, J, 0.063W	1	
R8220	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8221	ERJ3GEYJ391	M 390 OHM, J, 1/16W	1	
R8222	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8223	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8224	ERJ2GEJ101	M 100 OHM, J, 0.063W	1	
R8228	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8229	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8230	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8231	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8232	ERJ2GEJ272	M 2.7KOHM, J, 0.063W	1	
R8233	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R8234	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8237	ERJ3GEYJ150	M 15 OHM, J, 1/16W	1	
R8240	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8241	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8242	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R8243	ERJ3GEYJ330	M 33 OHM, J, 1/16W	1	
R8244	ERJ3GEYJ150	M 15 OHM, J, 1/16W	1	
R8245, 46	ERJ2GEJ392	M 3.9KOHM, J, 0.063W	2	
R8248	ERJ2GEJ272	M 2.7KOHM, J, 0.063W	1	
R8250	ERJ2GEJ222	M 2.2KOHM, J, 0.063W	1	
R8251	ERJ2GEJ122	M 1.2KOHM, J, 0.063W	1	
R8258	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8262-65	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	4	
R8266, 67	ERJ2GEJ821	M 820 OHM, J, 0.063W	2	
R8268, 69	ERJ3GEYJ471	M 470 OHM, J, 1/16W	2	
R8270	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8272	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8273, 74	ERJ3GEYJ560	M 56 OHM, J, 1/16W	2	
R8275	ERJ3EKF2702V	M 27.0KOHM, 1/16W	1	
R8276	ERJ2GEJ183	M 18KOHM, J, 0.063W	1	
R8277	ERJ3EKF1202	M 12KOHM, 1/16W	1	
R8278	ERJ3EKF1201	M 1.2KOHM, 1/16W	1	
R8279, 80	ERJ2GEJ102	M 1KOHM, J, 0.063W	2	
R8281	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8282-84	ERJ2GEJ102	M 1KOHM, J, 0.063W	3	
R8285	ERJ2GEJ272	M 2.7KOHM, J, 0.063W	1	
R8286	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8287	ERJ2GEJ272	M 2.7KOHM, J, 0.063W	1	
R8288	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8289, 90	ERJ2GEJ103	M 10KOHM, J, 0.063W	2	
R8291	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8292	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8293	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8297	ERJ2GEJ102	M 1KOHM, J, 0.063W	1	
R8300	ERJ2GEJ272	M 2.7KOHM, J, 0.063W	1	
R8301	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8303	ERJ2GEJ272	M 2.7KOHM, J, 0.063W	1	
R8304, 05	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R8306	EXB38V472J	RESISTOR ARRAY	1	
R8307	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
R8313	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8314, 15	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	2	
R8316-18	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	3	
R8322-36	ERJ2GEJ101	M 100 OHM, J, 0.063W	15	
R8339	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8341	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8343	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	
R8345	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
R8347	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
R8349	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
R8351	ERJ2GEJ392	M 3.9KOHM, J, 0.063W	1	
R8354	ERJ2GEJ392	M 3.9KOHM, J, 0.063W	1	
R8355	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8356, 57	ERJ2GEJ390	M 39 OHM, J, 0.063W	2	
R8358	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8370	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8372	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	1	
R8373-79	ERJ2GEJ560	M 56 OHM, J, 0.063W	7	
R8381, 82	ERJ2GE0R00	M 0.0 OHM, J, 0.063W	2	
R8383	D1HG5608A002	NETWORK RESISTER	1	
R8384	ERJ2GEJ472	M 4.7KOHM, J, 0.063W	1	
R8385	ERJ2GEJ223	M 22KOHM, J, 0.063W	1	
R8386	D1HG5608A002	NETWORK RESISTER	1	
R8387	EXB38V560J	RESISTOR ARRAY	1	
R8388	D1HG5608A002	NETWORK RESISTER	1	
R8390	ERJ2GEJ560	M 56 OHM, J, 0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8391	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8392	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8393,94	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8395	EXB38V560J	RESISTOR ARRAY	1	
R8396-98	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8399	EXB2HV223JV	NETWORK RESISTER	1	
R8407,08	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8409,10	EXB38V560J	RESISTOR ARRAY	2	
R8411,12	ERJ2GEJ392	M 3.9KOHM, J,0.063W	2	
R8414	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8415	EXB38V560J	RESISTOR ARRAY	1	
R8416	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8419	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8420	ERJ2GEJ272	M 2.7KOHM, J,0.063W	1	
R8421	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8422,23	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8435	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8436	ERJ3EKF4992	M 49.9KOHM, 1/16W	1	
R8460	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8464,65	EXB2HV104JV	RESISTOR ARRAY	2	
R8467	D1HG1008A002	NETWORK RESISTER	1	
R8468	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8470	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8471,72	ERJ2GEJ472	M 4.7KOHM, J,0.063W	2	
R8474	D1HG1008A002	NETWORK RESISTER	1	
R8475	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8476	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8477	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8478	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
R8479,80	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8481	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8483-87	ERJ2GEJ560	M 56 OHM, J,0.063W	5	
R8488	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8489	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8491-94	ERJ2GEJ101	M 100 OHM, J,0.063W	4	
R8495	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8497,98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8500	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8501	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8503	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
R8504,05	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8507	ERJ2GEJ562	M 5.6KOHM, J,0.063W	1	
R8508,09	ERJ2GEJ203	M 20KOHM, J,0.063W	2	
R8510	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8511	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8512-18	ERJ2GEJ103	M 10KOHM, J,0.063W	7	
R8519	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8524	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8525,26	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8527	ERJ2GEJ392	M 3.9KOHM, J,0.063W	1	
R8528-30	ERJ2GEJ103	M 10KOHM, J,0.063W	3	
R8531	EXB38V560J	RESISTOR ARRAY	1	
R8532-35	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8536	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8537	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8538	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8539	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8540	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8541-47	ERJ2GEJ560	M 56 OHM, J,0.063W	7	
R8548	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8551	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8552	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8554-56	ERJ2GEJ560	M 56 OHM, J,0.063W	3	
R8557	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8558	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8559	EXB38V560J	RESISTOR ARRAY	1	
R8560,61	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8562	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8564	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8565	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8566,67	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8568,69	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8570-73	ERJ2GEJ560	M 56 OHM, J,0.063W	4	
R8574	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8575	ERJ2GEJ330	M 33 OHM, J,0.063W	1	
R857502	ERJ3GEYJ181	M 180 OHM, J,1/16W	1	
R8576-80	ERJ2GEJ330	M 33 OHM, J,0.063W	5	
R8582-95	ERJ2GEJ330	M 33 OHM, J,0.063W	14	
R8596,97	D1HG33080001	NETWORK RESISTER	2	
R8598-00	D1HG5608A002	NETWORK RESISTER	3	
R8601	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8602	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8605-15	ERJ2GEJ103	M 10KOHM, J,0.063W	11	
R8617	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8629	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8630,31	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8632-37	ERJ2GEJ560	M 56 OHM, J,0.063W	6	
R8640	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8641	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8643,44	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8645,46	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8647	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8648,49	ERJ3EKF75R0	M 0.75HM, 1/16W	2	
R8650	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8651	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8652	ERJ2GEJ332	M 3.3KOHM, J,0.063W	1	
R8653	ERJ2GEJ103	M 10KOHM, J,0.063W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8654,55	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8656	ERJ3EKF1002	M 10KOHM, 1/16W	1	
R8657	ERJ3EKF2702V	M27.0KOHM, 1/16W	1	
R8658	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8659	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8661	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8665	D1HG1218A002	NETWORK RESISTER	1	
R8666	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8668	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8670	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8673	D1HG1218A002	NETWORK RESISTER	1	
R8674	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8678	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8682	ERJ3EKF1303	M 130KOHM, 1/16W	1	
R8686,87	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8688,89	ERJ2GEJ560	M 56 OHM, J,0.063W	2	
R8690	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8691	ERJ2GEJ560	M 56 OHM, J,0.063W	1	
R8692	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8693	ERJ2GEJ333	M 33KOHM, J,0.063W	1	
R8694	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8695	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8696	ERJ3EKF5102	M51.0KOHM, 1/16W	1	
R8697	ERJ2GEJ223	M 22KOHM, J,0.063W	1	
R8698	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8700	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8702	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8703	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8704	ERJ2GEJ101	M 100 OHM, J,0.063W	1	
R8705	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8706	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8707	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8708	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8709	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8710	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8711	ERJ2GEJ222	M 2.2KOHM, J,0.063W	1	
R8712	ERJ2GEJ472	M 4.7KOHM, J,0.063W	1	
R8713,14	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8715	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
R8716	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8719,20	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8722-25	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8727	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8731	ERJ3EKF1102	M 11KOHM, 1/16W	1	
R8733	ERJ3EKF1501	M 1.5KOHM, 1/16W	1	
R8734	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8736	ERJ3EKF3901	M 3.9KOHM, 1/16W	1	
R8737	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8738	ERJ3EKF3902	M 39KOHM, 1/16W	1	
R8741	ERJ3EKF8872	M88.7KOHM, 1/16W	1	
R8748	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8749	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
R8751-53	ERJ2GE0R00	M 0.0 OHM, J,0.063W	3	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R8755-58	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8765	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8770	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8774	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8776	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8777	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R8778,79	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8780,81	ERJ2GEJ103	M 10KOHM, J,0.063W	2	
R8782-87	EXB38VR000	RESISTOR ARRAY	6	
R8788	ERJ2GE0R00	M 0.0 OHM, J,0.063W	1	
R8790	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R8791	ERJ2GEJ152	M 1.5KOHM, J,0.063W	1	
R8792,93	ERJ2GE0R00	M 0.0 OHM, J,0.063W	2	
R8795-98	ERJ2GE0R00	M 0.0 OHM, J,0.063W	4	
R8799-02	ERJ2GEJ103	M 10KOHM, J,0.063W	4	
R8817,18	ERJ2GEJ473	M 47KOHM, J,0.063W	2	
R9000,01	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9003	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9006	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9007	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9009	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9010	EXB2HV272JV	RESISTOR ARRAY	1	
R9012	EXB2HV272JV	RESISTOR ARRAY	1	
R9013	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9015-18	ERJ3GEYJ103	M 10KOHM, J,1/16W	4	
R9019	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9020,21	ERJ3GEYJ102	M 1KOHM, J,1/16W	2	
R9022	ERJ6ENF1001	M 1KOHM, 1/10W	1	
R9023	ERJ6ENF1601	M 1.6KOHM, 1/10W	1	
R9024	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9026	ERJ3GEYJ100	M 10 OHM, J,1/16W	1	
R9028	ERJ3GEYJ332	M 3.3KOHM, J,1/16W	1	
R9029,30	ERJ3GEYJ220	M 22 OHM, J,1/16W	2	
R9031,32	ERJ3GEYJ562	M 5.6KOHM, J,1/16W	2	
R9033,34	ERJ3GEYJ103	M 10KOHM, J,1/16W	2	
R9035,36	ERJ6GEY0R00	M 0 OHM, 1/10W	2	
R9039	TAJAAH0101JV	M 100 OHM, J,1/16W	1	
R9040	ERJ3GEYJ100	M 10 OHM, J,1/16W	1	
R9041	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	1	
R9042	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9043,44	TAJAAH0101JV	M 100 OHM, J,1/16W	2	
R9045	ERJ3GEYJ102	M 1KOHM, J,1/16W	1	
R9046	ERJ3GEYJ123	M 12KOHM, J,1/16W	1	
R9047-50	TAJAAH0101JV	M 100 OHM, J,1/16W	4	
R9052	ERJ3GEYJ103	M 10KOHM, J,1/16W	1	
R9053	ERJ3GEYJ472	M 4.7KOHM, J,1/16W	1	
R9054,55	ERJ3GEYJ272	M 2.7KOHM, J,1/16W	2	
R9056,57	ERJ3GEYJ220	M 22 OHM, J,1/16W	2	
R9058,59	ERJ3GEYJ562	M 5.6KOHM, J,1/16W	2	
R9060-67	TAJAAH0101JV	M 100 OHM, J,1/16W	8	
R9068-72	ERJ3GEYJ103	M 10KOHM, J,1/16W	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9073	EXB2HV470JV	RESISTOR ARRAY	1	
R9074	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9075	EXB2HV470JV	RESISTOR ARRAY	1	
R9076	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9077-79	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9080	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
R9081	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9082-89	TAJAAH0101JV	M 100 OHM, J, 1/16W	8	
R9090	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	1	
R9091,92	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9093	ERJ3GEYJ473	M 47KOHM, J, 1/16W	1	
R9094	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9095-98	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9102-04	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9105	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9107-09	ERJ3GEYJ393	M 39KOHM, J, 1/16W	3	
R9110	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9111,12	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9113	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9114-16	ERJ3GEY0R00	M 0 OHM, 1/16W	3	
R9117,18	EXB38VR000	RESISTOR ARRAY	2	
R9119	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9120,21	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9122-24	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9125,26	ERJ3GEYJ102	M 1KOHM, J, 1/16W	2	
R9127,28	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9130	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9131-33	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	3	
R9134-36	TAJAAH0101JV	M 100 OHM, J, 1/16W	3	
R9137	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9140-42	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9145-47	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9160,61	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9162,63	ERJ3GEYJ562	M 5.6KOHM, J, 1/16W	2	
R9164,65	TAJAAH0101JV	M 100 OHM, J, 1/16W	2	
R9200-02	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
R9204	TAJAAH0470JV	M 47 OHM, J, 1/16W	1	
R9205,06	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9210	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9212	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9300-04	D1HG33080001	NETWORK RESISTER	5	
R9305	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9306,07	D1HG33080001	NETWORK RESISTER	2	
R9308	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9309	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9313-16	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9318,19	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9321	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9322	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9323	ERJ3GEYJ102	M 1KOHM, J, 1/16W	1	
R9324-28	ERJ3GEY0R00	M 0 OHM, 1/16W	5	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9329	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9330-33	ERJ3GEY0R00	M 0 OHM, 1/16W	4	
R9335,36	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	2	
R9337	ERJ6ENF1101	M 1.1KOHM, 1/10W	1	
R9338	ERJ6ENF1401	M 1.4KOHM, 1/10W	1	
R9339-42	ERJ6ENF1001	M 1KOHM, 1/10W	4	
R9500-03	ERJ3GEYJ103	M 10KOHM, J, 1/16W	4	
R9505-10	TAJAAH0101JV	M 100 OHM, J, 1/16W	6	
R9511	EXB2HV272JV	RESISTOR ARRAY	1	
R9512	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9513	EXB2HV272JV	RESISTOR ARRAY	1	
R9515	EXB2HV272JV	RESISTOR ARRAY	1	
R9516,17	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9518	EXB2HV470JV	RESISTOR ARRAY	1	
R9519-21	EXB38V470J	RESISTOR ARRAY	3	
R9522,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9524-26	TAJAAH0470JV	M 47 OHM, J, 1/16W	3	
R9527	EXB38V470J	RESISTOR ARRAY	1	
R9528,29	TAJAAH0470JV	M 47 OHM, J, 1/16W	2	
R9530	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9532	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9534	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9536	TAJAAH0680JV	M 68 OHM, J, 1/16W	1	
R9537,38	ERJ3GEYJ103	M 10KOHM, J, 1/16W	2	
R9540	ERJ3GEYJ304V	M 300KOHM, J, 1/16W	1	
R9543	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9547	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9700	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9702-04	ERJ3GEYJ103	M 10KOHM, J, 1/16W	3	
R9706,07	ERJ6ENF1001	M 1KOHM, 1/10W	2	
R9708	ERJ6GEY0R00	M 0 OHM, 1/10W	1	
R9709	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9714	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
R9716,17	ERJL14KJ33M	M 33 OHM, J, 1/4W	2	
R9718	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9719	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
R9720	ERJ6ENF6342	M6.34KOHM, 1/10W	1	
R9721	ERJ6ENF2002	M 20KOHM, 1/10W	1	
R9722,23	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9724	TAJAAH0101JV	M 100 OHM, J, 1/16W	1	
R9725	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9726,27	ERJ3GEYJ100	M 10 OHM, J, 1/16W	2	
R9728,29	ERJ6ENF2002	M 20KOHM, 1/10W	2	
R9738,39	ERJ3GEY0R00	M 0 OHM, 1/16W	2	
R9740-42	ERJ6GEY0R00	M 0 OHM, 1/10W	3	
R9800	EXB38V470J	RESISTOR ARRAY	1	
R9801-04	EXB2HV470JV	RESISTOR ARRAY	4	
R9805-07	EXB38V470J	RESISTOR ARRAY	3	
R9808,09	ERJ3GEYJ220	M 22 OHM, J, 1/16W	2	
R9810	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9811	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9812	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	
R9813	ERJ3GEYJ472	M 4.7KOHM, J, 1/16W	1	
R9814	ERJ3GEYJ103	M 10KOHM, J, 1/16W	1	
R9815	ERJ3GEYJ104	M 100KOHM, J, 1/16W	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R9816,17	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9818,19	EXB2HV470JV	RESISTOR ARRAY	2	
R9820,21	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9822,23	EXB2HV470JV	RESISTOR ARRAY	2	
R9824	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9825	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9826	EXB38V470J	RESISTOR ARRAY	1	
R9827	TAJAAH0470JV	M 47 OHM,J,1/16W	1	
R9830	EXB2HV470JV	RESISTOR ARRAY	1	
R9900	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9901	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9902	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9903	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
R9904	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
R9905	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
R9906	EXB2HV470JV	RESISTOR ARRAY	1	
R9907	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9908,09	EXB38V470J	RESISTOR ARRAY	2	
R9910,11	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9912	EXB2HV470JV	RESISTOR ARRAY	1	
R9913	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
R9914	EXB38V470J	RESISTOR ARRAY	1	
R9915,16	ERJ3GEYJ220	M 22 OHM,J,1/16W	2	
R9917-22	EXB2HV470JV	RESISTOR ARRAY	6	
R9923	ERJ3GEYJ103	M 10KOHM,J,1/16W	1	
RM2510	PNA4601M05TV	REMOCO RECEIVER	1	
RTL	TNAG146	CIRCUIT BOARD DT	1	PAVCA △
RTL	TNPA3598AC	CIRCUIT BOARD H	1	△
RTL	TNPA3620	CIRCUIT BOARD PA	1	△
RTL	TNPA3621AB	CIRCUIT BOARD Z	1	△
RTL	TNPA3625AD	CIRCUIT BOARD DG	1	△
RTL	TNPA3626	CIRCUIT BOARD DV	1	△
RTL	TNPA3561	CIRCUIT BOARD C1	1	△
RTL	TNPA3562	CIRCUIT BOARD C2	1	△
RTL	TNPA3563	CIRCUIT BOARD C3	1	△
RTL	TNPA3564	CIRCUIT BOARD C4	1	△
RTL	TNPA3565	CIRCUIT BOARD C5	1	△
RTL	TNPA3566	CIRCUIT BOARD C6	1	PAVCA △
RTL	TZTNP010YCS	CIRCUIT BOARD D	1	△
RTL	ETXMM564MEK	CIRCUIT BOARD P	1	△
RTL	TNPA3643AC	CIRCUIT BOARD PB	1	△
RTL	TNPA3567	CIRCUIT BOARD SC	1	△
RTL	TNPA3220AB	CIRCUIT BOARD SD	1	△
RTL	TNPA3559	CIRCUIT BOARD SS2	1	△
RTL	TNPA3568	CIRCUIT BOARD SS	1	△
RTL	TNPA3560	CIRCUIT BOARD SS3	1	△
RTL	TNPA3219AB	CIRCUIT BOARD SU	1	△
RTL	TNPA3603	CIRCUIT BOARD K	1	△
RTL	TNPA3604	CIRCUIT BOARD S	1	△
S1	K1KA03AA0193	3P CONNECTOR	1	
S2	K1KA02AA0193	2P CONNECTOR	1	
SC2	K1KA06AA0192	6P CONNECTOR	1	
SC20	K1KA20AA0008	20P CONNECTOR	1	
SC23	K1KA03AA0193	3P CONNECTOR	1	
SC41,42	K1ML80BA0001	80P CONNECTOR	2	
SC45,46	K1KA10AA00431	10P CONNECTOR	2	
SC90	K1KA06AA0192	6P CONNECTOR	1	
SD1-D4	K1MN96B00004	96P CONNECTOR	4	
SD46	K1KA10B00209	10P CONNECTOR	1	
SS11	K1KA07AA0192	7P CONNECTOR	1	
SS12	K1KA10AA0194	10P CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
SS20,21	K1KA07AA00170	7P CONNECTOR	2	
SS22,23	K1KB07AA00087	7P CONNECTOR	2	
SS34	K1KA03AA0193	3P CONNECTOR	1	
SS35	K1KA10AA0194	10P CONNECTOR	1	
SS42	K1KA10AA0194	10P CONNECTOR	1	
SS44	K1KA20AA0009	20P CONNECTOR	1	
SS51-56	K1MN13B00020	13P CONNECTOR	6	
SU1-U4	K1MN96B00004	96P CONNECTOR	4	
SU45	K1KA10B00209	10P CONNECTOR	1	
SW2500	K0F122A00172	SWITCREMOTE CONTROLH	1	
SW3751-55	EVQ11G05R	SWITCH	5	
T6801	ETS28AU2S9AC	SWITCHING TRANSFORMER	1	
T6802	ETS13TB199AP	SWITCHING TRANSFORMER	1	
TU8200	ENG6302DF	TUNER	1	△
VR6250	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6602	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
VR6801	EVMEASA00B14	CONTROL 10KOHMB 0.3W	1	
X4001	TSSA101	CRYSTAL	1	
X4002	H0J400400017	CRYSTAL	1	
X4004	H0J270500087	CRYSTAL	1	
X8005	H0J270500061	CRYSTAL	1	
X8200	H0J250500050	CRYSTAL	1	
X9000	H2D2705A0004	CRYSTAL	1	
X9200	H0J200500038	CRYSTAL	1	
XF8200	J0C4405B0004	LC FILTER	1	
XF8201	J0C4405B0006	LC FILTER	1	
XF8202	J0C4405B0005	LC FILTER	1	
Z2	K1KA05AA0192	5P CONNECTOR	1	
Z50	K1MN35A00013	35P CONNECTOR	1	
ZA5001	K4CD01000011	TERMINAL	1	
ZA5003	TESA169	SHIELD CLIP	1	
ZA5601-04	K9ZZ00000424	CONNECTOR	4	
ZA5801-04	K9ZZ00000424	CONNECTOR	4	
ZA6101-03	K4CD01000013	TERMINAL	3	
ZA6401-03	K4CD01000013	TERMINAL	3	
ZA7101-05	K4CD01000013	TERMINAL	5	
ZA7201-05	K4CD01000013	TERMINAL	5	
ZA7301-05	K4CD01000013	TERMINAL	5	
ZA7401-05	K4CD01000013	TERMINAL	5	
ZA7501-05	K4CD01000013	TERMINAL	5	
ZA7601-05	K4CD01000013	TERMINAL	5	
ZA9001	K4CD01000013	TERMINAL	1	
ZA9002-06	K4ZZ01000179	TERMINAL	5	
ZMM1	TMM25401	CLAMPER	1	
D305,06	ST3D170	CLAMPER	2	
D501	ST3D200	CLAMPER	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
A601,02	RA362MSV7T	ARRESTOR	2	△
C301	RR3AD681KP	CERAMIC CAPACITOR	1	
C302	ECJ1VB1H472K	C 4700PF, K, 50V	1	
C303	KZE1E470P	ELECTROLYTIC CAPACITOR	1	
C305	ECJ2XC1H101J	C 100PF, J, 50V	1	
C307	TBB224K5	CERAMIC CHIP CAPACITOR	1	
C332	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C335	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C341	RR3AD332K	CERAMIC CAPACITOR	1	
C352	TCR474K2A	CERAMIC CHIP CAPACITOR	1	
C353	KMQ220901Z	ELECTROLYTIC CAPACITOR	1	
C354	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C355	TCR474K2A	CERAMIC CHIP CAPACITOR	1	
C356	TAB104K2E	CERAMIC CHIP CAPACITOR	1	
C359	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C360,61	KMQ220901Z	ELECTROLYTIC CAPACITOR	2	
C363,64	RR3DD221K	CERAMIC CAPACITOR	2	
C366	KZE2A331L	ELECTROLYTIC CAPACITOR	1	
C369	TAB104K2E	CERAMIC CHIP CAPACITOR	1	
C374,75	RR3DD221K	CERAMIC CAPACITOR	2	
C401	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C410	ECWH8183HVB	PLASTIC FILM CAPACITOR	1	
C411	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C412	TBB105K1	CERAMIC CHIP CAPACITOR	1	
C451	KZE1E272	ELECTROLYTIC CAPACITOR	1	
C452	KZE1E821L	ELECTROLYTIC CAPACITOR	1	
C454,55	ECJ3YB1E475K	C 4.7UF, K, 25V	2	
C457	KZE1E821L	ELECTROLYTIC CAPACITOR	1	
C458	ECJ3YB1E475K	C 4.7UF, K, 25V	1	
C459	KZE1E821L	ELECTROLYTIC CAPACITOR	1	
C460	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C461	KZE1E471L	ELECTROLYTIC CAPACITOR	1	
C462	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C463	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C464	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C465	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C466-69	ECJ2FB1H104K	C 0.1UF, K, 50V	4	
C471	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C472	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C501	KMQ2W161K	ELECTROLYTIC CAPACITOR	1	
C502	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C503	TBB106K1A	CERAMIC CHIP CAPACITOR	1	
C507	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C512	KZE1E101	ELECTROLYTIC CAPACITOR	1	
C551	KZE1E471L	ELECTROLYTIC CAPACITOR	1	
C553	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C555	KZE1E101	ELECTROLYTIC CAPACITOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
C556	KZE1A471	ELECTROLYTIC CAPACITOR	1	
C557,58	ECJ2FB1H104K	C 0.1UF, K, 50V	2	
C559	CD221K	CERAMIC CAPACITOR	1	△
C560	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C562	ECJ2FB1H104K	C 0.1UF, K, 50V	1	
C563	ECJ2XB1H103K	C 0.01UF, K, 50V	1	
C601	ECQU2A105ML	PLASTIC FILM CAPACITOR	1	△
C603,04	CD221K	CERAMIC CAPACITOR	2	△
C606	ECQU2A224ML	PLASTIC FILM CAPACITOR	1	△
C610,11	MMXC2W105K	PLASTIC FILM CAPACITOR	2	
C620,21	ECKD3A102KBP	C 1000PF, K, 1KV	2	
C622	ECQE6104KF	P 0.1UF, K, 630V	1	
C623,24	KMQ2W221L	ELECTROLYTIC CAPACITOR	2	
C625	TBB474K2	CERAMIC CHIP CAPACITOR	1	
C626	KMQ2W221L	ELECTROLYTIC CAPACITOR	1	
C627	ECQE6472B45	PLASTIC FILM CAPACITOR	1	
C628	CD331K	CERAMIC CAPACITOR	1	△
C629	KZE1E470	ELECTROLYTIC CAPACITOR	1	
C630	ECQU2A473MN	P 0.047UF, M, 250V	1	△
C633	ECJ2XB1H102K	C 1000PF, K, 50V	1	
C634	ECJ2FB1E224K	C 22UF, K, 25V	1	
C701	TBB475K1	CERAMIC CHIP CAPACITOR	1	
C703	TEB104K5	CERAMIC CHIP CAPACITOR	1	
C711	TEB104K2	CERAMIC CHIP CAPACITOR	1	
CNPF	B2P3-VH-B	CONNECTOR	1	
ZD301,02	MA8360	ZENER DIOED	2	
D302	RU1P	DIODE	1	
ZD303	MA8360	ZENER DIOED	1	
D303	RB550VA-30	DIODE	1	
ZD304-06	MA8360	ZENER DIOED	3	
ZD307	MA8330	ZENER DIODE	1	
D307	RB550VA-30	DIODE	1	
D308	ERA91-02	DIODE	1	
ZD308	MA8330	ZENER DIODE	1	
ZD309	MA4051N	ZENER DIODE	1	
ZD310	MA4020	ZENER DIODE	1	
ZD311,12	MA4270N	ZENER DIODE	2	
D332	RB550VA-30	DIODE	1	
D334	RB550VA-30	DIODE	1	
D335	RU1P	DIODE	1	
D337	RU1P	DIODE	1	
D351	FCF06A40	DIODE	1	
D374	MA165	DIODE	1	
D401	RB550VA-30	DIODE	1	
D402	M1FS6	DIODE	1	
ZD402	PTZ24B	ZENER DIODE	1	
D403	M1FS6	DIODE	1	
ZD403	MA8056	ZENER DIODE	1	
ZD404	MA8360	ZENER DIOED	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
D405	M1FS6	DIODE	1	
ZD405-09	MA8360	ZENER DIODE	5	
ZD410	MA4220N	ZENER DIODE	1	
ZD413	MA4270N	ZENER DIODE	1	
ZD451	1ZB18	ZENER DIODE	1	
D451-54	RB085T60	DIODE	4	
D455	M1FS6	DIODE	1	
D456,57	MA111	DIODE	2	
Z501	ERZVGAD471	VARISTOR	1	△
D504	ERA91-02	DIODE	1	
ZD510	MA8270	ZENER DIODE	1	
D511	ERA91-02	DIODE	1	
D511	MA2S111	DIODE	1	
D515	ERA91-02	DIODE	1	
D516	MA2S111	DIODE	1	
D551	RK49	DIODE	1	
Z601	ERZVGAD751	VARISTOR	1	△
D601	MA111	DIODE	1	
ZD601	MA4220N	ZENER DIODE	1	
D602	S1WBA80	DIODE	1	△
Z603	ERZVGAD471	VARISTOR	1	△
D603	MA111	DIODE	1	
D605	M1F60	DIODE	1	
D606	RB550VA-30	DIODE	1	
D607	S3V60	DIODE	1	
D608,09	RB550VA-30	DIODE	2	
D612	EP01C	DIODE	1	
D613,14	ERA22-10	DIODE	2	
ZD669	MA8220	ZENER DIODE	1	
D796	MA2S111	DIODE	1	
IC301	MR4020F2	INTEGRATED CIRCUIT	1	
IC401	F9222L	INTEGRATED CIRCUIT	1	△
IC501	MIP3E30MP	INTEGRATED CIRCUIT	1	
L301-04	EXCELSR35	FERRITE BEAD INDUCTOR	4	
L401,02	EXCELSA35	BEAD CHOKE	2	
L452	EXCELD35	FERRITE BEAD INDUCTOR	1	
L454,55	EXCELD35	FERRITE BEAD INDUCTOR	2	
L501	EXCELSA35	BEAD CHOKE	1	
L503	EXCELD35	FERRITE BEAD INDUCTOR	1	
L601,02	P3180207Z	FILTER CHOKE	2	△
L604	S3783106Z	CHOKE	1	△
L606	ELF15N004A	FILTER CHOKE	1	△
L607,08	EXCELD35	FERRITE BEAD INDUCTOR	2	
L611	EXCELD35	FERRITE BEAD INDUCTOR	1	
P2	B6B-EH-A	CONNECTOR	1	
P5	B11B-PH-KS	CONNECTOR	1	
P9	B3P4VH-B-L	CONNECTOR	1	△
P10	B6B-PH-KS	CONNECTOR	1	
P11	B7B-EH-A	CONNECTOR	1	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
P12	B10B-PH-KS	CONNECTOR	1	
P23	B3B-PH-KS	CONNECTOR	1	
P25	B20B-PHDSS	CONNECTOR	1	
P30	B5B-PH-KS	CONNECTOR	1	
Q332	2SD2098	TRANSISTOR	1	
Q333	2SB1386	TRANSISTOR	1	
Q402	2SB766A	TRANSISTOR	1	
Q451-53	HAT1130R	FIELD EFFECT TRANSISTOR	3	
Q551	HAT1130R	FIELD EFFECT TRANSISTOR	1	
Q553,54	HAT1130R	FIELD EFFECT TRANSISTOR	2	
Q555	2SB709A	TRANSISTOR	1	
Q601	2SK3302	FIELD EFFECT TRANSISTOR	1	△
Q602	2SD2098	TRANSISTOR	1	
Q603	2SB1386	TRANSISTOR	1	
Q605	2SB709A	TRANSISTOR	1	
Q606	2SD601A	TRANSISTOR	1	
R301	ERJ6GEYJ473	M 47KOHM, J, 1/10W	1	
R308	MPC5WR27KS	METAL PLATE RESISTOR	1	
R311	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R312	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R313	ERJ14YJ100	M 10 OHM, J, 1/4W	1	
R314	ERJ6GEYJ2R2	M 2.2 OHM, J, 1/10W	1	
R320	ERJ14YJ753	M 75KOHM, J, 1/2W	1	
R321-23	MPC5WR68KS	METAL PLATE RESISTOR	3	
R325	ERJ6GEYJ333	M 33KOHM, J, 1/10W	1	
R326-29	ERJ6GEYJ103	M 10KOHM, J, 1/10W	4	
R330	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R339	ERJ12YJ330	M 33 OHM, J, 1/2W	1	
R340,41	ERJ12YJ333	M 33KOHM, J, 1/2W	2	
R342	ERJ6ENF5620	M 562 OHM, 1/10W	1	
R343	ERJ12YJ333	M 33KOHM, J, 1/2W	1	
R344	ERJ12YJ330	M 33 OHM, J, 1/2W	1	
R345	ERJ12YJ333	M 33KOHM, J, 1/2W	1	
R346,47	ERJ12YJ220	M 22 OHM, J, 1/2W	2	
R349	ERJ12YJ220	M 22 OHM, J, 1/2W	1	
R350-53	ERJ6ENF6192	M61.9KOHM, 1/10W	4	
R354,55	ERJ6ENF1303	M 130KOHM, 1/10W	2	
R356,57	ERJ14YJ753	M 75KOHM, J, 1/2W	2	
R358	ERG2SJ150	M 15 OHM, J, 2W	1	
R359	ERJ14YJ753	M 75KOHM, J, 1/2W	1	
R360	ERG2SJ150	M 15 OHM, J, 2W	1	
R361	ERJ14YJ753	M 75KOHM, J, 1/2W	1	
R364	ERG2SJ683	M 68KOHM, J, 2W	1	
R365	ERJ3GSYJ332	M 3.3KOHM, J, 1/16W	1	
R366,67	ERJ6GEYJ682	M 6.8KOHM, J, 1/10W	2	
R368	ERJ6ENF4702	M 47KOHM, 1/10W	1	
R369-71	ERJ6GEYJ823	M 82KOHM, J, 1/10W	3	
R373-76	ERJ14YJ753	M 75KOHM, J, 1/2W	4	
R379	ERJ12YJ473	M 47KOHM, J, 1/2W	1	
R381	ERJ6GEYJ103	M 10KOHM, J, 1/10W	1	
R382,83	ERJ6GEYJ333	M 33KOHM, J, 1/10W	2	
R384	ERJ6GEYJ393	M 39KOHM, J, 1/10W	1	
R386-89	ERJ6ENF1052	M10.5KOHM, 1/10W	4	
R394	ERJ6ENF1052	M10.5KOHM, 1/10W	1	
R395,96	ERJ6GEYJ473	M 47KOHM, J, 1/10W	2	
R397-99	ERJ14YJ753	M 75KOHM, J, 1/2W	3	
R401	ERJ3GSYJ103	M 10KOHM, J, 1/16W	1	
R405	MPC5WR39KS	METAL PLATE RESISTOR	1	
R406	ERJ6GEYJ223	M 22KOHM, J, 1/10W	1	
R407	ERJ14YJ334	M 330KOHM, 1/2W	1	
R408	SG734K271	CHIP RESISTOR	1	
R410	ERJ14YJ332	M 33KOHM, J, 1/4W	1	
R411	ERJ6GEYJ104	M 100KOHM, J, 1/10W	1	
R412	ERJ14YJ472	M 4.7KOHM, J, 1/2W	1	
R413,14	ERJ14YJ334	M 330KOHM, 1/2W	2	

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
R415,16	ERJ6GEYJ563	M 56KOHM,J,1/10W	2	
R426	ERJ14YJ470	M 47 OHM,J, 1/2W	1	
R429-31	ERJ6GEYJ563	M 56KOHM,J,1/10W	3	
R432	ERJ6GEYJ4R7	M 4.7 OHM,J,1/10W	1	
R456	ERJ6ENF4302	M 43KOHM, 1/10W	1	
R457,58	ERJ6GEYJ473	M 47KOHM,J,1/10W	2	
R459	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R460	ERG2SJ331	METAL OXIDE RESISTOR	1	
R473	ERJ6GEYJ332	M 3.3KOHM,J,1/10W	1	
R475,76	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
R480	ERG2SJ561	M 560 OHM, J, 2W	1	
R481	ERJ6ENF4302	M 43KOHM, 1/10W	1	
R482	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R508,09	ERJ12YJ100	M 10 OHM,J, 1/2W	2	
R510	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R558	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R559	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R561	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R562	ERJ6GEYJ472	M 4.7KOHM,J,1/10W	1	
R563	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R564,65	ERJ6GEYJ103	M 10KOHM,J,1/10W	2	
RF601	HUF5K100J14	THERMAL RESISTOR	1	△
R602,03	5K150JA	WIREWOUND RESISTOR	2	
R604,05	ERDS1TJ474	C 4.7KOHM, J,1/2W	2	
R606	ERJ6GEYJ102	M 1KOHM,J,1/10W	1	
R607	ERJ6GEYJ334	M 330KOHM,J,1/10W	1	
R608	ERG3FJS820D	M 82 OHM, J, 3W	1	
R609-12	ERJ6ENF1213	M 121KOHM, 1/10W	4	
R613,14	ERJ6GEYJ154	M 150KOHM,J,1/10W	2	
R615-17	MPC5WR22KS	METAL PLATE RESISTOR	3	
R618	ERG3FJS820D	M 82 OHM, J, 3W	1	
R620	ERJ12YJ680	M 68 OHM,J, 1/2W	1	
R621	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R623	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R624	ERJ6GEYJ183	M 18KOHM,J,1/10W	1	
R625	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R626	ERJ12YJ680	M 68 OHM,J, 1/2W	1	
R627	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R628	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R629	ERJ6GEYJ473	M 47KOHM,J,1/10W	1	
R630	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R631	MPC5WR22KS	METAL PLATE RESISTOR	1	
R632,33	ERJ6GEYJ154	M 150KOHM,J,1/10W	2	
R634-37	ERJ6ENF2553	M 255KOHM, 1/10W	4	
R638	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R640,41	ERJ6ENF5493	M 549KOHM, 1/10W	2	
R642	ERJ6ENF2493	M 249KOHM, 1/10W	1	
R644	ERJ6GEYJ101	M 100 OHM,J,1/10W	1	
R646	ERJ6GEYJ154	M 150KOHM,J,1/10W	1	
R649	ERJ6ENF5493	M 549KOHM, 1/10W	1	
R653-55	ERJ6GEYJ183	M 18KOHM,J,1/10W	3	
R656-59	ERJ6GEYJ824	M 820KOHM,J,1/10W	4	
R677	ERJ6GEYJ103	M 10KOHM,J,1/10W	1	
R678	ERJ12YJ680	M 68 OHM,J, 1/2W	1	
R679	ERJ12YJ151	M 150 OHM,J, 1/2W	1	
R681,82	ERJ6GEYJ824	M 820KOHM,J,1/10W	2	
R683	ERC12GK185	S 1.8MOHM, K,1/2W	1	
R1301,02	ERJ12YJ333	M 33KOHM,J, 1/2W	2	
MC301-02	MP44S1	MODULE	2	△
MC303	IXMM564M-B-9	MODULE	1	△
MC401	IXMM564M-F-9	MODULE	1	△
MC501	IXMM564M-C-9	MODULE	1	△
MC601	MP00P4	MODULE	1	△
MC602	IXMM564M-G-9	MODULE	1	△
MC603	IXMM564M-E-9	MODULE	1	△
MC604	MP00P5	MODULE	1	△
MC701	IXMM564M-D-9	MODULE	1	△

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
K601	DG12D1-0	RELAY	1	△
K602	DJ12D2-0	RELAY	1	△
T301	ETB28BF1Z1AH	TRANSFORMER	1	△
T401	ETB57LZ135AD	TRANSFORMER	1	△
T501	ETB25KA1A8AD	TRANSFORMER	1	△
TH351	PRFCBB471	POSISTOR	1	
VR351,52	EVMEASA01B54	VARIABLE RESISTOR	2	
VR451	EVMEASA01B53	VARIABLE RESISTOR	1	

If you need more information on Computer and Electronic Repair, please visit these websites to improve yourself.

<http://www.fastrepairguide.com>


<http://www.protech2u.com>

<http://www.plasma-television-repair.com>

<http://www.lcd-television-repair.com>

Happy Repairing!!

Highly Recommended Repair Ebook:




If you're a LCD Monitor repairer, then this is the best guide for you. Why? Because, the author revealed all his LCD Monitor Repairing secrets for you. I think, with just few Repair tips you learned from this guide you will get back your investment!

[Click Here to read](#) more.



This eBook will show you how to test the electronic component correctly and accurately. Some of you may say that I don't need this eBook because it is too simple! Do you know that, in fact there is lots of testing electronic components secrets I have learned from this guide? Do you know how to test a 'TRIAC' correctly and accurately? If you answer no then I guess you have to get this eBook. [Click Here to read more.](#)



Are you tired of searching the service manuals to look for the value of a burnt resistor? If the answer is YES, then this eBook is a 'must have' guide for you. You can save a lot of time and be able to repair customer's Electronic equipment with burnt resistors in it.

[Click here to read more.](#)